

CALL FREE ON 0800 05 999 07 or EMAIL sales@mattingltd.co.uk



Heronrib Wet Area Matting

Warm, Hygienic and Self Draining Safety Matting



Heronrib wet area matting is the ultimate sports and leisure matting system for wet areas where barefoot traffic is extensive. Warm and comfortable, slip, bacterial and fungal resistant. Heronrib is self-draining, manufactured from non-porous PVC and is the perfect non-slip solution for swimming pools, saunas and Jacuzzis

Main Benefits

- High slip resistance
- Warm under foot
- Comfortable for bare feet
- Anti-bacterial and anti-fungal
- Loose lay yet stable underfoot
- Easy to clean and maintain
- Long lasting
- UV resistant
- Very good drainage
- Suitable for many indoor and outdoor uses






Heronrib wet area matting is available in three roll widths 50cm, 100cm or 122cm. All the rolls are 10 metres long and the grid stands at 10mm high. Heronrib matting is available in homogenous standard colours of Oxford blue, Ocean blue, Charcoal grey, Forest Green or Mulberry red.



Matting Ltd
Company reg – 08599377
Vat – 166 4588 70
Call:0800 0599907 email: sales@mattingltd.co.uk

CALL FREE ON 0800 05 999 07 or EMAIL sales@mattingltd.co.uk

Technical data sheet Heronrib wet area matting

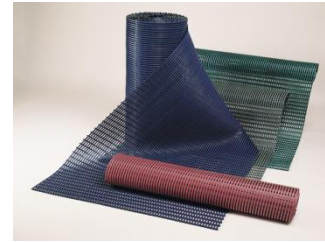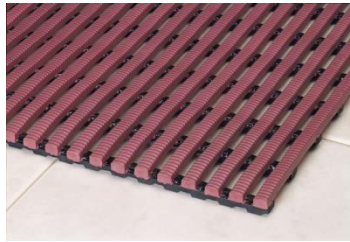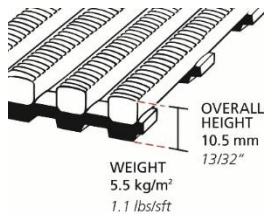

Size and weight Heronrib wet area matting	Length 0+.03	Height +/- 0.5	Widths in cm			Weight
	Metres	Millimetres	+/- 1			Kg/m ²
	10	10	50	100	122	5.5

General

APPEARANCES	Open grid "duckboard" design with textured surface and castellated base bars.
COLOURS	Available in homogenous standard colours: Oxford blue, Ocean blue, Charcoal grey, Forest green and Mulberry red. Please note Red colour is not colour fast in direct sunlight. Other colours available on request. All on black bars.
DURABILITY	One piece welded construction for long life and minimal maintenance
INSTALLATION	Loose laid. PVC ramp edging available in 5cm width. Flexible vinyl snap track available in dark grey.
WORKABILITY	Available in rolls for easy installation. Flexible Construction, is easy to cut and shape on site
USES	For poolside, changing rooms or where barefoot traffic is extensive, both inside and out.

Technical Data

ACOUSTIC	Excellent sound absorption properties
CHEMICAL	Resistant to most acids, alkalines and oils. (For detailed chemical resistance analysis please see www.plastexmatting.com/matfax/doc.php?doc_id=154&action=inline)
COMPOSITION	Flexible DINP plasticised Polyvinyl Chloride (PVC)
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC (substances of Very High Concern) list under R.E.A.C.H. in any matting products. All PVC grid products are 100% recyclable.
FIRE	EN13501-1:2007-Cfl 1-S1
HYGIENE	Non-porous 100% Virgin PVC – Inhibits the growth of bacteria
Anti-bacterial	SteriTouch additive; Test JIS Z 2801:2000 –Determination of the antibacterial effect against: 1) Staphylococcus aureus – Result: Antimicrobial pass of >99% 2) E.Coli – Result: Antimicrobial pass of >99.99%
Anti-Fungal	SteriTouch additive; Test ASTM G21-96 –Determining resistance to Fungi. Result:Nil growth at 4 weeks
REVERSION	Thermoplastic shrinkage can result in size reductions of up to 2%. Accelerated in hot environments
SLIP RESISTANCE	ASTM F 1677 (Dry/Wet) (0.6/0.5) DIN 51097 Classification C
THERMAL	Functional -23°C + 60°C (slight size variation may occur at temperature extremes).
UV Light	Resistant to PVC degradation; uncoloured PVC material BS EN607=Delta E1.02
WARRANTY	3 years manufactures warranty – Please ask for further details and terms