


CALL FREE ON 0800 05 999 07 or EMAIL sales@mattingltd.co.uk



Herontile Wet Area Tiling

Slip resistant, Hygienic & Self Draining Safety Tiling

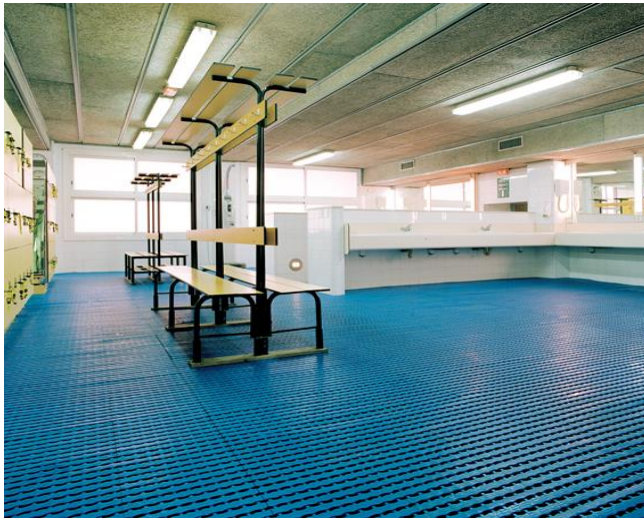


The Herontile system has a simple click joining mechanism designed to cover large floor areas seamlessly and easily. It provides a hygienic, safe and attractive surface with permanent anti-fungal and anti-bacterial additives.

Herontile provides a soft and comfortable surface. With a circular embossed surface it provides enhanced slip resistance

Main Benefits

- Warm underfoot
- Comfortable for bare feet
- Anti-bacterial and anti-fungal
- Easy to install
- Easy to clean and maintain
- Long lasting
- Enhanced slip resistance
- Very good drainage
- Indoor use only



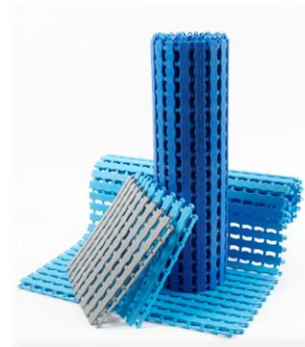


Herontile wet area tiling is available in a standard tile size of 33cm x 33cm. The tiles are supplied in a quantity of 27 tiles per box. The tiles stand at 15mm high on strong support legs for good water dispersment. Herontile wet area tiles are available in homogenous standard colours of Ocean Blue, Light Blue, Light Grey and Beige.



Matting Ltd
Company reg – 08599377
Vat – 166 4588 70
Call:0800 0599907 email: sales@mattingltd.co.uk

Technical data sheet Floorline wet area matting

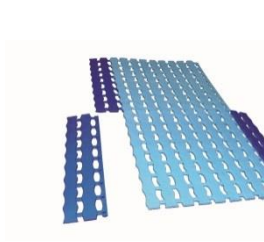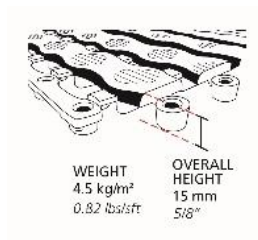

Size and weight Herontile wet area tiling	Height +/- 0.5	Dimensions in cm	Weight
	Millimetres	+/- 1	Kg/m ²
	15	33 x 33	4.5

General

APPEARANCES	Open grid with circular surface embossing.
COLOURS	Ocean Blue, Light Blue, Light Grey and Beige
INSTALLATION	Simple click together system with the option of ramped edges.
WORKABILITY	Grid tiles with secure lock fit connection.
USES	Tile format for wet areas. For use inside only.

Technical Data

ACOUSTIC	Excellent sound absorption properties
CHEMICAL	Resistant to most acids, alkalines and oils. (For detailed chemical resistance analysis please see www.plastexmatting.com/matfax/doc.php?doc_id=154&action=inline)
COMPOSITION	Moulded Ethylene-Vinyl Acetate (EVA)
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC (substances of Very High Concern) list under R.E.A.C.H. in any matting products. All PVC grid products are 100% recyclable.
HYGIENE	<p>Anti-bacterial Sanitized additive; Test SN195 920 -Determination of the antibacterial effect against: 1) Staphylococcus aureus ATCC 6538 – Result: Nil Growth, 1mm halo, good effect.</p> <p>Anti-Fungal Sanitized additive; Test ASTM G21-96 -Determining resistance to Fungi. Result: Nil growth at 4 weeks</p>
SLIP RESISTANCE	DIN 51097 Classification C