


CALL FREE ON 0800 05 999 07 or EMAIL sales@mattingltd.com



Track Grip Matting

Train Maintenance Matting Solution

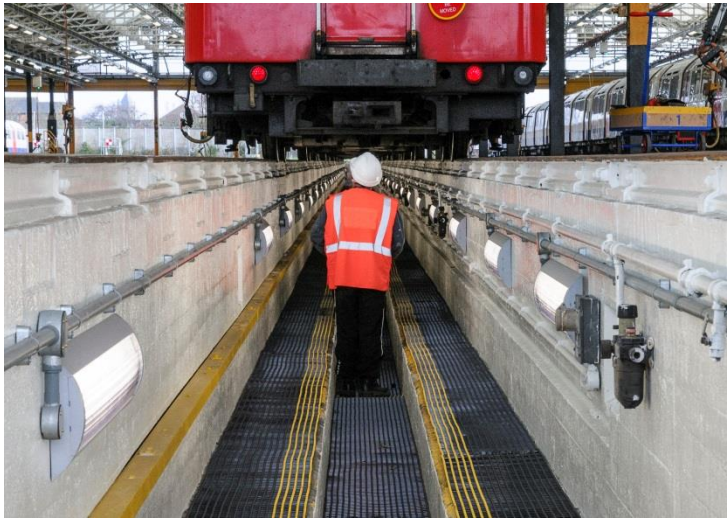

Track Grip is a unique product designed specifically for the train maintenance environment.

It is a high performance slip resistant matting, which is hard wearing, but provides comfort to personnel against standing fatigue. The open grip design allows water and oil to dissipate removing slip hazards which is enhanced by the additional anti-slip surface.

Main Benefits

- Heavy duty uses
- High slip resistance
- Reduces fatigue
- Hi-Vis yellow edging
- Chemical, oil and acid resistant
- Exceptionally hard wearing
- Loose lay yet stable underfoot
- Easy to clean and maintain





Track Grip is available in rolls 10mtrs (or longer if required) and widths of either 60cm, 91cm or 122cm. Track Grip is available in the standard colours of Black or Black with Yellow edging (other colours available on request).



Matting Ltd
Company reg – 08599377
Vat – 166 4588 70
Call:0800 0599907 email: sales@mattingltd.com

Technical data sheet Track Grip matting



Size and weight Track Grip	Length 0+.03	Height +/- 0.5	Widths in cm	Weight
	Metres	Millimetres	+/- 1	Kg/m ²
	10	15	60cm, 91cm or 122cm	4.6

General

APPEARANCES	Open grid "duckboard" design with textured surface
COLOURS	Available in homogenous standard colour; Black. Other colours available on request.
DURABILITY	One piece welded construction for low maintenance.
INSTALLATION	Loose laid
WORKABILITY	Available in rolls for easy installation. Flexible Construction, is easy to cut and shape on site
USES	Heavy duty applications, both indoor and outside

Technical Data

ACOUSTIC	Excellent sound absorption properties
CHEMICAL	resistant to most acids, alkalines and oils. (For detailed chemical resistance analysis please see www.plastexmatting.com/matfax/doc.php?doc_id=154&action=inline)
COMPOSITION	Flexible animal fat resistant DINP plasticised Polyvinyl Chloride (PVC) with Steritouch additives.
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC (substances of Very High Concern) list under R.E.A.C.H. in any matting products
HYGIENE	Non-porous 100% Virgin PVC – Inhibits the growth of bacteria
REVERSION	Thermoplastic shrinkage can result in size reductions of up to 2%. Accelerated in hot environments
SLIP RESISTANCE	DIN 51130: R11, V10
THERMAL	Functional -23°C + 60°C (slight size variation may occur at temperature extremes).
UV LIGHT	Resistant to PVC degradation.