
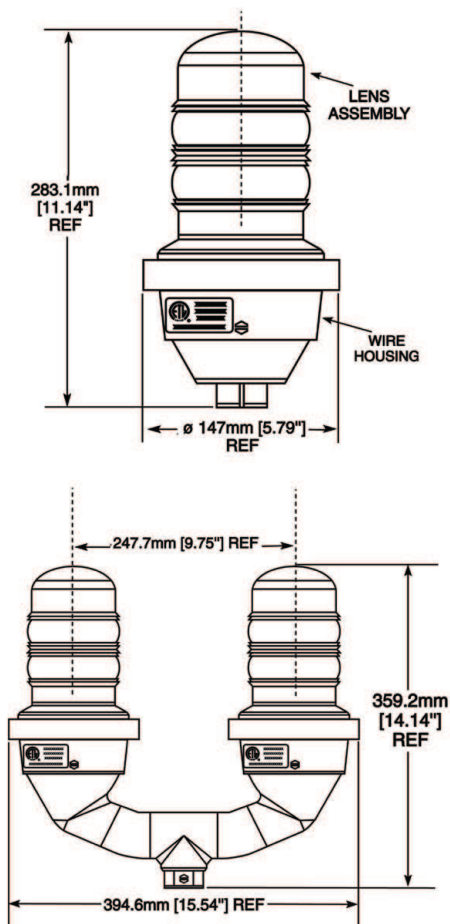


Vigilant LED Based L-810

Low Intensity (Red) Light

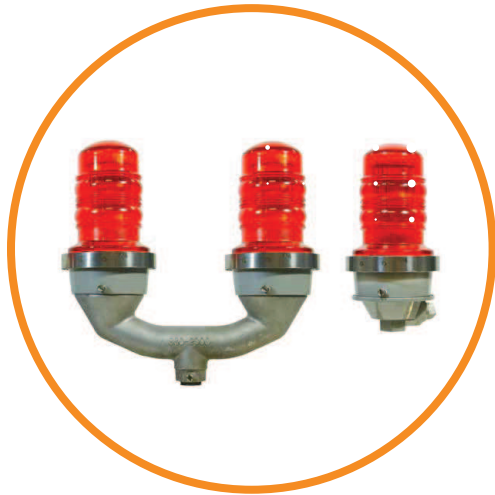

Dimensions in inches [mm]

Certifications & Compliance

- FAA AC 150 / 5345 - 43G
- FAA EB No. 67D
- IP66
- German Air Traffic Control Notices for Pilots Part I 6, January 2005
- Transport Canada CAR 621.19
- ICAO Annex 14
- DGAC Mexico
- CASA
- Nachrichten für Luftfahrer Teil I Langen, 6. Januar 2005

Features & Benefits

- ETL verified to FAA standards
- Superior surge and lightning protection
- Controllers available for all applications
- Ideal for towers, stacks, wind turbines, buildings, etc.
- 360 degree coverage for each flash head
- Shock and vibration resistant
- Lighting kits available for standard towers
- 6kV of surge protection

Mechanical Information:

Unit weight:	7.14 lbs (3.23 kg) (Single unit) 16.06 lbs (7.28 kg) (Dual unit)
Wattages:	15W / 120mA (120V AC) +/-10% 16W / 120mA (230V AC-60Hz) +/-15% 16W / (230V AC - 50 Hz) 24W / 2.0A (12V DC - Standard) 20W / 920mA (24V DC) 13W / 275mA (48V DC)
Voltage amp:	44 VA (120V AC) +/-10% 67 VA (230V AC) +/-15%
Operating temperature:	-67°F to +131°F (-55°F to +55°F)

All values typical unless otherwise stated (tolerance +/- 10%)

US Patent #6,425,678 (other patents pending)