
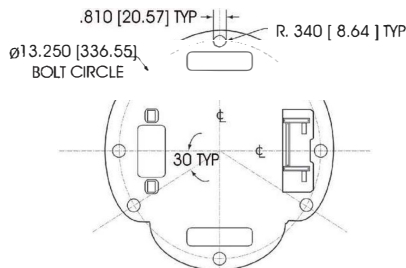


# L-864 Red LED Beacon

Class I, Div 2 model

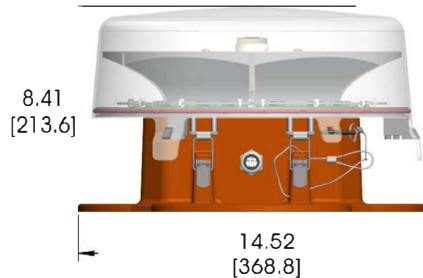

## Certifications & Compliance

- FAA AC 150 / 5345-43G
- FAA EB No. 67D
- Class I, Div 2, Groups A, B, C, D
- UL1598
- UL844
- IP66
- NEMA 4X
- DGAC Mexico
- ICAO (Annex 14 - Fourth Edition, July 2004)
- Canadian aviation regulation CAR 621.9 (Transport Canada)

## Features & Benefits

- ETL verified to FAA standards
- 5 year warranty
- Uses 90% less energy than an incandescent
- Resistant to shock and vibration
- Drastically reduces maintenance costs
- Flash or steady burn

<b>Fixture weight:</b>	<b>20lbs</b>
<b>Operating Voltage:</b>	120 - 240V AC 50/60Hz power factor corrected supply
<b>Supply Voltage Ranges:</b>	Nominal +/- 10%
<b>Effective Intensity:</b>	Red Night 2,000 cd
<b>Wattage:</b>	Red Night 20W (Steady Burn) 3.3W (16.7% duty cycle) 20 flashes per minute with 0.5 second on time
<b>Power Factor:</b>	>0.9
<b>Operating Temp:</b>	-40°F to +131°F (-40°C to +55°C)
<b>Synchronization:</b>	Multiple unit sync from single controller (Operates with other manufacturers of GPS sync devices)

All values typical unless otherwise stated (tolerance +/- 10%)

US Patent # 7,281,821

## Temperature Ratings

Ambient Temperature Range T4A  
-40°F to +131°F (-40°C to +55°C)