



LED Based L-864 / L-865

Flashing Dual (White / Red) - Class I, Div. 2


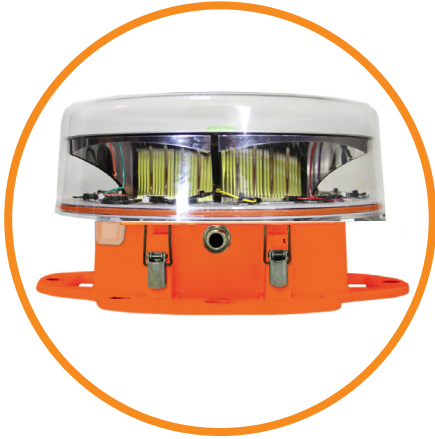


Certifications & Compliance

- FAA approved (Check FAA Website for current certification)
- Class I, Div 2, Groups A, B, C, D
- Class II, Div 2, Groups F, G
- UL1598
- UL8750
- CSA C22.2
- IP66
- ICAO Annex 14, July 2009
- ICAO Aerodromes Design Manual, Chapter 18
- Canadian Aviation Regulation CAR 621 (Transport Canada)

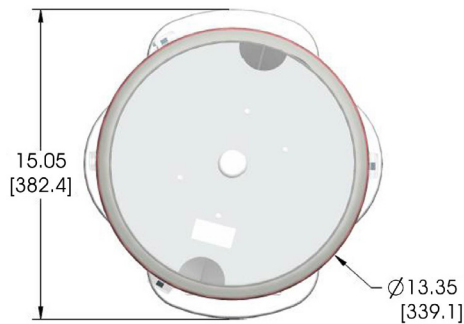

Dimensions in inches [mm]

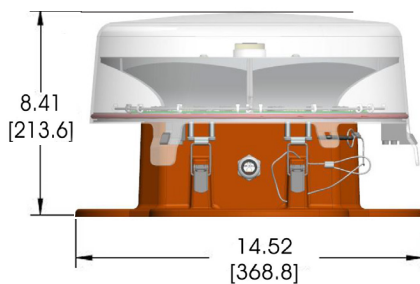

Mechanical / Electrical Information:

Unit weight:	26 lbs (11.8 kg)
Operating voltage:	White - 150V DC (through Controller) Red - 75V DC (through Controller)
Effective intensity:	White Day - 20,000 cd White Night - 2,000 cd Red Night - 2,000 cd
Synchronization:	Multiple unit sync from single controller (operates with other units via RS485)

All values typical unless otherwise stated (tolerance +/- 10%)

US Patents #7,208,881 #7,568,821 7,604,380 #7,777,424

Temperature Ratings

Ambient Temperature Range T5
-40°F to +131°F (-40°C to +55°C)