

Triple Chamber Units

Blanket & Fluid Warming Cabinets

TWC183078 (D-Series only)

Overall Dimensions
20.5"D x 30"W x 78.75"H
(520.7mm x 762mm x 2000mm)
10.36 Cubic Feet Storage, 1 Adjustable Shelf

Upper Chamber I.D.
17"D x 26"W x 11.25"H
(431.8mm x 660.4mm x 285.7mm)
2.88 Cubic Feet Storage
Temperature Range 90°-110° F (Tolerance +/- 1° F)

Intermediate Chamber I.D.
17"D x 26"W x 10.75"H
(431.8mm x 660.4mm x 273mm)
2.75 Cubic Feet Storage
Temperature Range 90°-150° F (Tolerance +/- 1° F)

Lower Chamber I.D.
17"D x 26"W x 18.5"H
(431.8mm x 660.4mm x 469.9mm)
4.73 Cubic Feet Storage
Temperature Range 90°-160° F (Tolerance +/- 1° F)

Electrical
120V, 12.9 Amp, 50/60 Hz, .90 kWh (Avg.),
3071 BTU/hr (Avg.)

Approximate Capacity
62 Blankets or 54 Solution Bottles (1 Liter Each)*



TWC183078-G-4B
4" base (4B) standard for this model

Additional items available for this model (sold separately):
• Mobile Base (MB1830)
• Roll Out Basket (WB1830)

TWC243078 (D-Series only)

Overall Dimensions
26.5"D x 30"W x 78.75"H
(673.1mm x 762mm x 2000mm)
14.01 Cubic Feet Storage, 1 Adjustable Shelf

Upper Chamber I.D.
23"D x 26"W x 11.25"H
(584.2mm x 660.4mm x 285.7mm)
3.89 Cubic Feet Storage
Temperature Range 90°-110° F (Tolerance +/- 1° F)

Intermediate Chamber I.D.
23"D x 26"W x 10.75"H
(584.2mm x 660.4mm x 273mm)
3.72 Cubic Feet Storage
Temperature Range 90°-150° F (Tolerance +/- 1° F)

Lower Chamber I.D.
23"D x 26"W x 18.5"H
(584.2mm x 660.4mm x 469.9mm)
6.4 Cubic Feet Storage
Temperature Range 90°-160° F (Tolerance +/- 1° F)

Electrical
120V, 12.9 Amp, 50/60 Hz, .90 kWh (Avg.),
3071 BTU/hr (Avg.)

Approximate Capacity
62 Blankets or 90 Solution Bottles (1 Liter Each)*



TWC243078-G-4B
4" base (4B) standard for this model

Additional items available for this model (sold separately):
• Mobile Base (MB2430)
• Roll Out Basket (WB2430)

Warming Cabinet Options

Door Types

- Stainless Steel (Standard)
- Glass

Door Hinges

- Right (Standard) • Left


Base Styles

- 2" • 4" • 6" • No Base

Note: Additional shelving available for purchase

Options & Accessories

- CuVerro Antimicrobial Copper Alloy Handle
- 220/240V Power Supply
- Celsius
- Two (2) Recessed Unit Options:
R1 = Insulation Wrap, No Top Panel, No Side Panels, and No Trim Kit
R2 = Top Panel, Side Panels, and Trim Kit
- Seismic Braces
- Mobile Stand
- Mobile Cabinet Stand
- Mobile Base
- Roll Out Basket
- Pass Through Chamber
- Electronic Keypad Lock
- Sloping Top
- Intermediate Chamber Door Lock (only available for Triple Chamber Units)
- Lower Chamber Door Lock (only available for Dual and Triple Chamber Units)

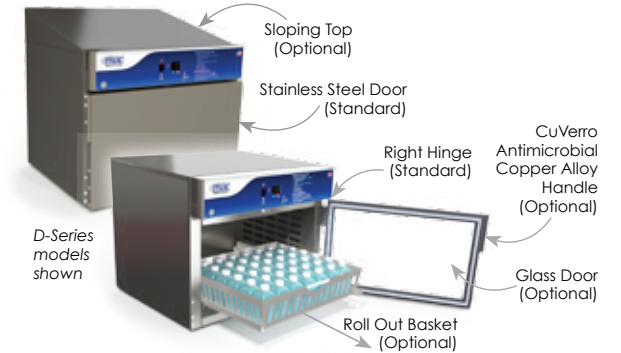

How to Order Warming Cabinets (Touch Screen Models add a "-TS" on the end of the model #)

Base Model #	Overall Size	Chambers	Door Type	Door Hinge	Base Style	Options & Accessories
SWC151822	17.25"D x 18"W x 22"H	Single	G = Glass Door	LH = Left Hinge	2B = 2" Base	CH = CuVerro® Antimicrobial Copper Alloy Handle 220 = 220/240V Power Supply C = Celsius R1 = Recessed Unit with Insulation Wrap, No Top Panel, No Side Panels, and No Trim Kit R2 = Recessed Unit with Top Panel, Side Panels, and Trim Kit SB = Seismic Braces MS = Mobile Stand WBC = Mobile Cabinet Stand MB = Mobile Base WB = Roll Out Basket P = Pass Through Chamber EL = Electronic Keypad Lock ST = Sloping Top IDL = Intermediate Chamber Door Lock (Only available for Triple Chamber Units) LDL = Lower Chamber Door Lock (Only available for Dual & Triple Chamber Units)
SWC182424	20.5"D x 24"W x 24.5"H	Single	Blank = Stainless Steel Door (Standard)	Blank = Right Hinge (Standard)	4B = 4" Base	
SWC242424	26.5"D x 24"W x 24.5"H	Single			6B = 6" Base	
SWC183024	20.5"D x 30"W x 24.5"H	Single			NB = No Base	
SWC243024	26.5"D x 30"W x 24.5"H	Single				
SWC182436	20.5"D x 24"W x 36" H	Single				
SWC183036	20.5"D x 30"W x 36" H	Single				
SWC242436	26.5"D x 24"W x 36" H	Single				
SWC243036	26.5"D x 30"W x 36" H	Single				
SWC182464	20.5"D x 24"W x 64.75" H	Single				
SWC242464	26.5"D x 24"W x 64.75" H	Single				
SWC183064	20.5"D x 30"W x 64.75" H	Single				
SWC243064	26.5"D x 30"W x 64.75" H	Single				
SWC182474	20.5"D x 24"W x 74.5" H	Single				
SWC183074	20.5"D x 30"W x 74.5" H	Single				
SWC242474	26.5"D x 24"W x 74.5" H	Single				
SWC243074	26.5"D x 30"W x 74.5" H	Single				
DWC182464T*	20.5"D x 24"W x 64.75" H	Dual				
DWC242464T*	26.5"D x 24"W x 64.75" H	Dual				
DWC183064T*	20.5"D x 30"W x 64.75" H	Dual				
DWC243064T*	26.5"D x 30"W x 64.75" H	Dual				
DWC182474T*	20.5"D x 24"W x 74.5" H	Dual				
DWC242474T*	26.5"D x 24"W x 74.5" H	Dual				
DWC183074T*	20.5"D x 30"W x 74.5" H	Dual				
DWC243074T*	26.5"D x 30"W x 74.5" H	Dual				
DWC182474E**	20.5"D x 24"W x 74.5" H	Dual				
DWC183074E**	20.5"D x 30"W x 74.5" H	Dual				
DWC242474E**	26.5"D x 24"W x 74.5" H	Dual				
DWC243074E**	26.5"D x 30"W x 74.5" H	Dual				
TWC183078	20.5"D x 30"W x 78.75" H	Triple				
TWC243078	26.5"D x 30"W x 78.75" H	Triple				

Warming Cabinet Accessories



Model #	Overall Dimensions
MS1518	18"D x 21"W x 34"H
MS1824	20"D x 28"W x 34"H
MS1830	20"D x 34"W x 34"H
MS2424	26"D x 26"W x 34"H
MS2430	26"D x 34"W x 34"H


Model #	Overall Dimensions
WBC1518	18"D x 21"W x 34"H
WBC1824	20"D x 28"W x 34"H
WBC1830	20"D x 34"W x 34"H
WBC2424	26"D x 26"W x 34"H
WBC2430	26"D x 34"W x 34"H

Model #	Overall Dimensions
MB1824	22"D x 27"W x 6.75"H
MB1830	22"D x 33"W x 6.75"H
MB2424	28"D x 27"W x 6.75"H
MB2430	28"D x 33"W x 6.75"H

Model #	Overall Dimensions
WB1518	11.88"D x 10.25"W x 5"H
WB1824	16"D x 16.92"W x 5"H
WB1830	15.88"D x 22.98"W x 5"H
WB2424	21.75"D x 16.98"W x 5"H
WB2430	21.75"D x 23.10"W x 5"H

Note: All warming cabinet mobile stands, mobile cabinet stands, mobile bases, and roll out baskets are sold separately.

*Capacity will vary based on the types of blankets and bottles used.

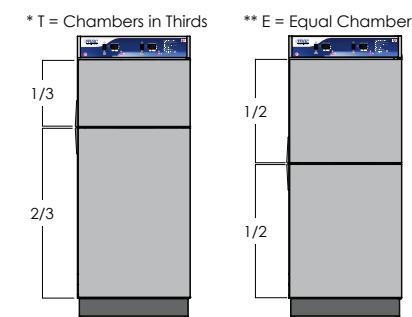

Example 1: Model # DWC243074E, Stainless Steel Door, Right Hinge, 4" Base, Celsius, Lower Chamber Door Lock = Order Model # DWC243074E-4B-C-LDL

Example 2: Model # SWC182464, Glass Door, Left Hinge, Sloping Top, Mobile Base = Order Model # SWC182464-G-LH-ST-MB

Additional sizes available for specific requirements, please contact us for further assistance

Note: Model # will change based on features added

