


## Instructions (Dust Blocker Installation):

### TOOLS NEEDED:

- 1/2" Wrench

1.) Remove the (2) wing nuts and remove the guard from your mower. Set the guard on a table upside down and use a 1/2" wrench to remove the lock nuts. Replace the (4) 1/2" Carriage bolts with the supplied longer (3/4") Carriage bolts.

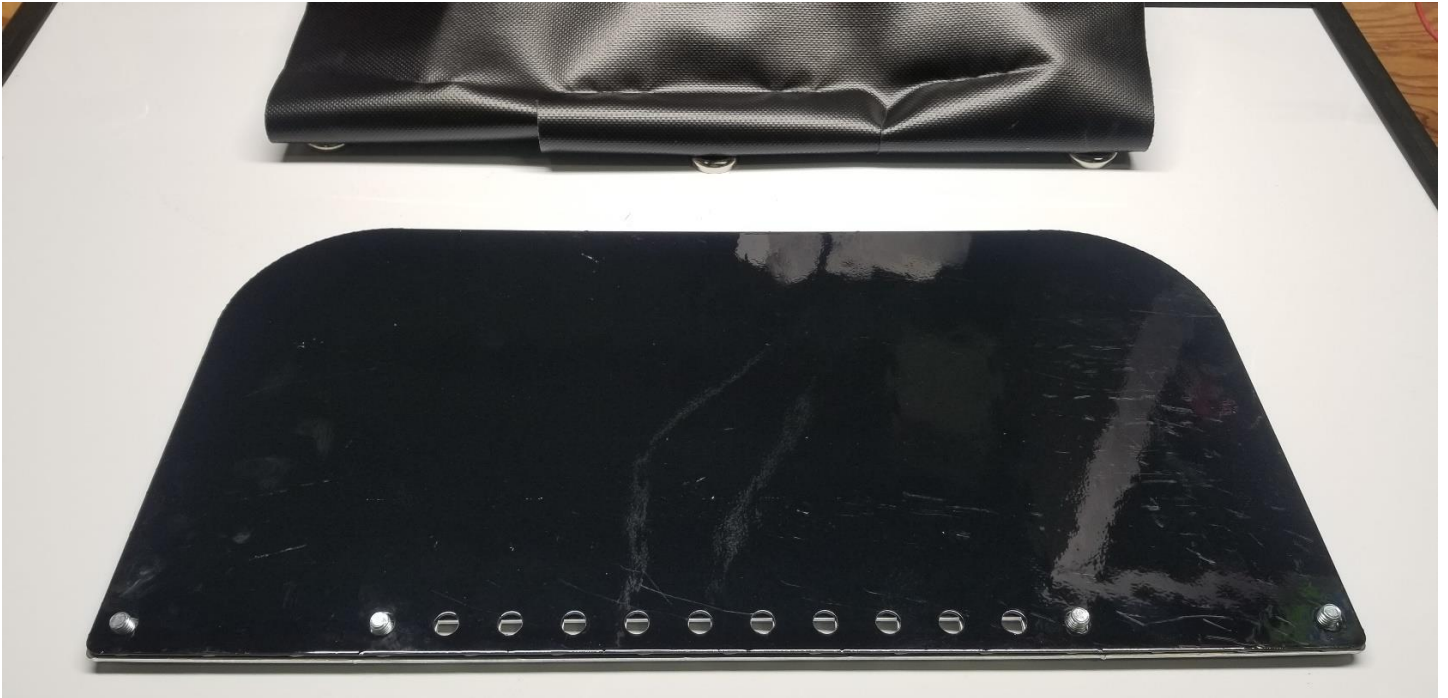

2.) Lay the Dust Blocker over the guard (with the magnet side down), and line the holes up. Install the supplied washers and reinstall the lock nuts. Tighten with a 1/2" wrench.



3.) Position The Green Guard in the ½ Open Position, and reinstall the guard back on your mower and secure.



4.) Pull the magnetic end of the dust blocker up over the mower chute opening and stick the magnets to the top of the mower deck. Line up the slits in the dust blocker with the uprights on the green guard base, and secure the middle magnet to the green guard base. If you can't line up the existing slits, you can cut additional slits with a scissors.



5.) Pull the magnets back from the edge as much as you can. Allow enough slack that the guard can open all the way, but tight enough that the excess material (when the guard is closed) won't enter the mower chute.