
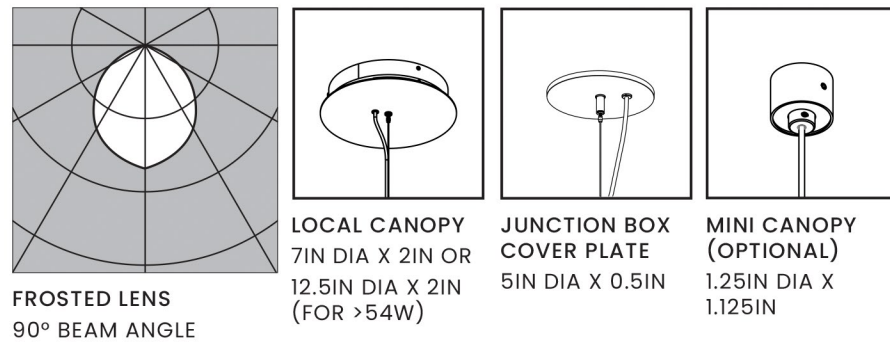
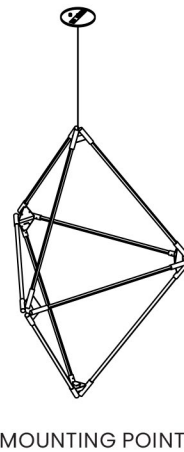


TECHNICAL | THIN Solids Diamond

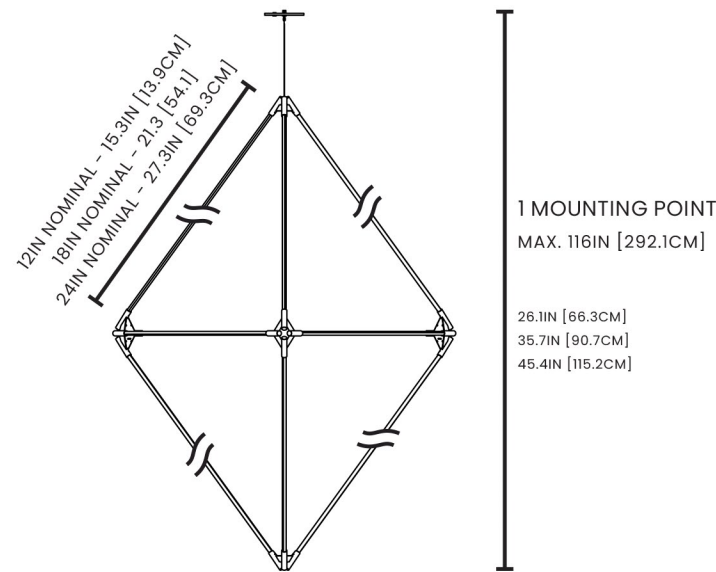

ILLUMINATION

CRI 95+, R9 90+ standard
 2700K, 3000K, 3500K, 4000K options

12" segment 2700LM delivered/30.6W
18" segment 4050LM delivered/45.9W
24" segment 5400LM delivered/61.2W
 90LM/W
 50,000 hrs LED life L80

POWER

24VDC output Class 2 constant
 voltage power supply
 120VAC input voltage
 Contact Juniper for alternate inputs

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MATERIALS

Solid brass, PMMA

DIMMING

2-Wire/TRIAC/Forward Phase
 0-10V
 3-Wire
 See Power Supply section for details
 Contact Juniper for alternate
 requirements

MOUNTING

(x1 or x3) 1/16" aircraft cables, field
 adjustable
 16ft Clear-jacketed 22AWG co-axial
 silver cord, field adjustable
 1, 2, or 4 mounting point options

SYSTEM RUN

Limited by power supply wattage

BUILD A SPECIFICATION | THIN Solids Diamond



SAMPLE SKU: JPR-THES-03-DIA-18-35-F-R-01

Satin Nickel, 18" segments, 3500K, frosted lens, remote power
 supply, suspended from one corner

CODE DEFINITIONS

FINISHES



SEGMENTS

12 12 inch - 2700LM delivered / 30.6W
18 18 inch - 4050LM delivered / 45.9W
24 24 inch - 5400LM delivered / 61.2W

Contact Juniper for custom segment lengths

COLOR TEMPERATURE

27 2700K
30 3000K
35 3500K
40 4000K

LENS

F Frosted - 90° beam angle

MOUNTING POINTS

01 1 Mounting Point
 Suspended from 1 corner

POWER SUPPLY OPTIONS

R. REMOTE

STANDARD 120-277V INPUT - 2-WIRE/TRIAC/FORWARD
 PHASE/ELV

STANDARD 120-277V INPUT - 0-10V

LUTRON 120V INPUT - TRIAC DIMMING (40W) (UPCHARGE)

LUTRON 120-277V INPUT - 3-WIRE (UPCHARGE)

L. LOCAL

STANDARD 120-277V INPUT - TRIAC/0-10V/ELV DIMMING

Our team will determine correct wattages for power supplies
 based on chosen configuration. Contact Juniper for custom
 requirements or further power supply specifications.

Project	Type
Notes	