CL10






Universal model with rectangular base suitable for lifting, moving and repositioning most of manhole covers, drains, cast iron grates and ferrous materials.



Use 4: lifting with handle locked horizontally.

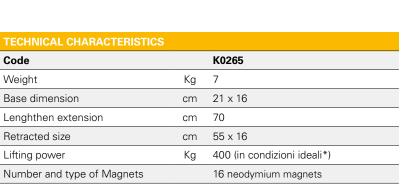

^{*} Attraction force tests performed on a C36 iron base with a thickness of 18 mm. The forces of attraction can vary according to the thickness and material of the base to be lifted. Tolerance \pm 5



Use 1: manual Opening.



Use 2: opening with wheeled lever APS90 or APS80.



Use 3: opening with two plates in parallel position.

ACCESSORIES

Anti-magnetic protective sack Cod. A221006



It prevents accidental contact between the magnetic plate and metal objects and for safety transport or storage.