

Yale UNOplus - Series A RATCHET LEVER HOIST




Yale's best selling lever hoist just got a bit better!

The NEW and improved Yale UNOplus-Series A is the upgraded version of the best selling UNOplus. It is a versatile ratchet lever hoist designed for pulling, lifting, and lashing of loads. Its features include a compact design, robust stamped steel construction, and a favourable price / efficiency ratio.

The new unit is even lighter in weight and comes complete with a free chaining device as standard that serves to quickly attach the load or to pull the chain through the hoist in both directions.

The UNOplus-Series A is available as a 'Standard' lever hoist, an ATEX unit, or a UTILITY version specifically for overhead line construction.

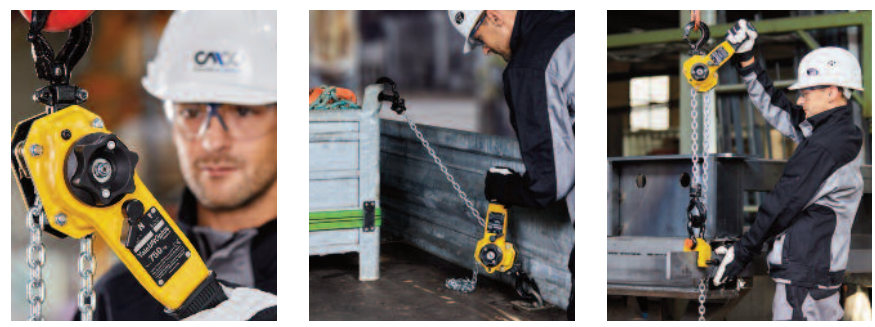

Utility Version

Special applications such as overhead line construction require specialist lifting equipment.

In accordance with EN 1808 - Safety requirements for suspended access equipment, 8.9.2, the new UNOplus-Series A UT is supplied fitted with an automatically acting safety device, which offers even more security when used in overhead line construction or similar areas.

The automatic locking safety device prevents a sudden drop (patent pending). It guarantees permanent monitoring and is active during operation as well as during inactive moments without the user having to activate it. In case of emergency, i.e. after failure of the load pressure brake and consequently exceeding the specified speed, the safety gear will automatically activate. It safely absorbs the load, preventing the creation of larger dynamic forces which could cause further damage.



ATEX
 BASIC II 3 G Ex h IIA T4 Gc
 BASIC II 3 D Ex h IIIA T135° Dc

Type	Capacity (WLL) kg	Falls of load chain	Chain dimensions mm	Lifting height mtr	Closed height mm	Weight @ std. HOL kg
Standard	750	1	5.6 x 17.1	1.5	312	6.3
Standard	1500	1	7.1 x 21	1.5	375	9.2
Standard	3000	1	10 x 28	1.5	445	16.9
Standard	6000	2	10 x 28	1.5	563	28.6
ATEX	750	1	5.6 x 17.1	1.5	312	6.3
ATEX	1500	1	7.1 x 21	1.5	375	9.2
ATEX	3000	1	10 x 28	1.5	445	16.9
ATEX	6000	2	10 x 28	1.5	563	28.6
Utility	1500	1	7.1 x 21	1.5	375	9.5
Utility	3000	1	10 x 28	1.5	445	17.8
Utility	6000	2	10 x 28	1.5	563	29.5



*Additional heights of lift are sold as complete metres only.
 **UT Version is fitted as standard with chain claw (left).

* Main image shows the UT version