


CRT - Rail Clamp

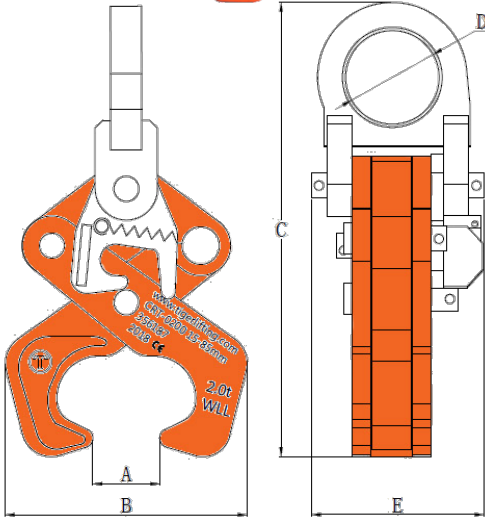


The Tiger CRT rail clamps are designed to lift single rails lengthways and crossways, securely and safely. The clamps are designed to fit most types of rail section currently in use. The clamps are locked onto the rail-head via a lever operated spring mechanism. Very solid, practical design with low dead weight. For rail sizes S49, S54, S60s, UIC60.

Product Code	Capacity (tonne)	Jaw Opening A (mm)	Dimensions (mm)				Net Weight (kg)
			B Max (mm)	C Max (mm)	D (mm)	E (mm)	
CRT-0200	2.0	15-85	170	302	60	111	6.2

4.0t capacity available to order

BCB - Bulb Flat Bar Anchor/Clamp

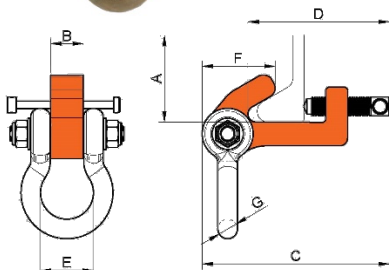

The Tiger BCB bulb bar anchor is designed for attaching to bulb profiles of bulb flat bars approved for lifting applications. These are often found in ship compartments, engine rooms and overhead bridge deck structures. The bulb bar anchor provides a semi-permanent lifting point. The large integrated shackle gives easy connection for all different types of lifting machines. This model must NOT be used for lifting beams. It is a suspension point.

Product Code	Capacity (tonne)	Dimensions (mm)							Net Weight (kg)
		A	B	C	D	E	F	G	
BCB-0150	1.5	160-240	35	173-200	125-151	58	71	22	3.6
BCB-0300	3.0	240-320	42	214-241	155-182	68	94	25	6.4

A=bulb flat width