


Our high quality nylon 6,6 releasable cable ties are available in black and natural and come packed in 100's. They can be tightened by hand or using one of our tensioning tools. Our releasable cable ties are tested before leaving the factory by an outside testing company to ensure the highest levels of quality and strength.

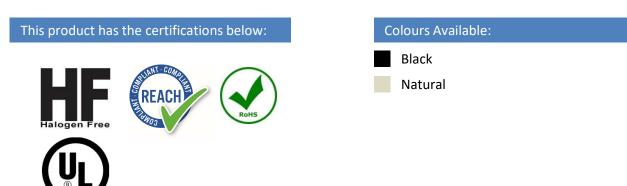

Material Specification:

- Material: Nylon 6,6
- Flammability Rating: UL94-V2
- Installation Temperature: -20°C to +85°C
- Working Temperature: -40°C to +85°C
- RoHS compliant, Low Smoke Generating & Zero Halogen

Strength Specification:

The majority of our releasable cable ties are tensile tested randomly before despatch to ensure they are at least meeting, but in the majority of cases well exceeding the minimum tensile strengths quoted below:

- 4.8mm Wide Cable Ties 22.2kg (50lbs)
- 7.6mm Wide Cable Ties 22.2kg (50lbs)
- 9.0mm Wide Cable Ties 80kg (175lbs)

Releasable Cable Ties					
Part Number	Size (Length & Width)	Box Quantity	Pack Quantity	Max Bundle Diameter	Minimum Loop Tensile Strength
C15076(B)REL	150 x 7.6mm	8,000	100	35mm	22kg
C20048(B)REL	200 x 4.8mm	16,000	100	50mm	22kg
C30048(B)REL	300 x 4.8mm	11,000	100	80mm	22kg
C37048(B)REL	370 x 4.8mm	9,000	100	102mm	22kg
C20076(B)REL	200 x 7.6mm	7,000	100	50mm	22kg
C25076(B)REL	250 x 7.6mm	6,000	100	65mm	22kg
C30076(B)REL	300 x 7.6mm	5,000	100	80mm	22kg
C37076(B)REL	370 x 7.6mm	4,000	100	102mm	22kg
C45090(B)REL	450 x 9.0mm	2,500	100	124mm	79.4kg

All Specifications are Subject to change