12BC1000D-1

Specification

Input Voltage	120 VAC	
Input Frequency	60 Hz	
Output Voltage		
Bulk Charge	14.7 VDC ± -0.2V	
Float Charge	13.6 VDC ± -0.3V	
Output Current		
Bulk Charge	1 A Max.	
Input Power (Watts)	25 W	
Battery Size Range	3 ~ 8 Ah	
Operating Temperature	-10°C ~ +40°C	
Storage Temperature	-20°C ~ +80°C	
Standards	CUL US, E 181260	

Charger

STAY POWERED* Short Circuit Protection, Over Current Protection, Over Voltage Protection, and Polarity Reversal




Due to continuous improvements to our products, product images may vary slightly from depiction.

LED Status Indication

- Charging LED = Red
- Fully Charged LED = Green

Dimensions: in(mm)

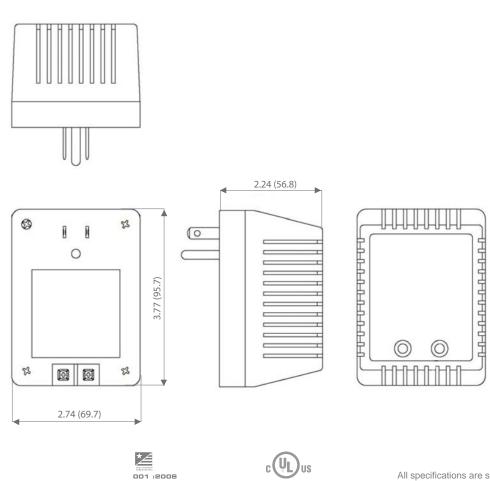

All specifications are subject to change without notice.