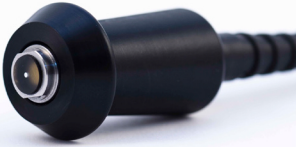
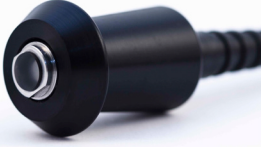
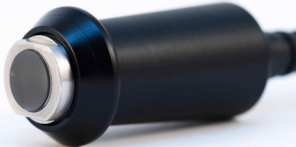


PosiTector® 200 Probe Order Guide


PosiTector 200 Probes	B	C	D
			
Probe Model (Order Code)	PRB200B	PRB200C	PRB200D
Typical Applications	Polymer coating on wood, plastic, etc.	Coatings on concrete, fiberglass, etc.	Thick, soft coatings such as polyurea, asphaltic neoprene, very thick polymers, etc.
Measurement Range*	13 - 1000 μm 0.5 - 40 mils	50 - 3800 μm 2 - 150 mils	50 - 7600 μm 2 - 300 mils
Accuracy	$\pm (2 \mu\text{m} + 3\% \text{ of reading})$ $\pm (0.1 \text{ .mil} + 3\% \text{ of reading})$		$\pm (20 \mu\text{m} + 3\% \text{ of reading})$ $\pm (1 \text{ mil} + 3\% \text{ of reading})$
Minimum Layer Thickness**	13 μm 0.5 mil	50 μm 2 mils	500 μm 20 mils

* Range limits apply to polymer based coatings only. D probe polyurea range is 50 to 5000 μm (2 to 200 mils)

** For multiple layer applications only. Dependent on material to be tested.

Probe Dimensions

PosiTector 200 B & C Probes

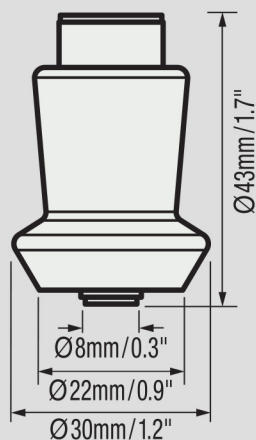

PosiTector 200 D Probes

