

# FTB-2/FTB-2 Pro platform

THE MOST COMPACT MULTITECHNOLOGY  
PLATFORM AVAILABLE FOR THE SUPERTECH



PART OF THE  
EXFO | FTB ecosystem

 EXFO Connect  
compatible

TestFlow

Available in a standard or Pro model, the FTB-2 is the most compact solution on the market for 10M-to-100G multitechnology and multiservice testing.

## KEY FEATURES

**Connects anywhere:** USB, mobile, WiFi, virtual private network (VPN) and Bluetooth

**Loaded with utilities:** equipped with all the tools required to maximize field testing and any third-party application

**Like a PC:** available with a dual- or quad-core processor and Windows-based operating system

**EXFO Connect-compatible:** automated asset management; data goes through the cloud and into a dynamic database

## RELATED PRODUCT



Fiber inspection scope  
FIP-400B (WiFi or USB)

**EXFO**

## THE POWER YOU NEED FOR ADVANCED APPLICATIONS

The FTB-2 delivers all the power of a high-end platform in a conveniently sized, go-anywhere field-testing tool.

APPLICATIONS	
<b>Gigabit/10 Gigabit Ethernet configurations</b>	Gigabit Ethernet analyzer, OTDR and optical spectrum analyzer with polarization controller.
<b>Fibre Channel</b>	Fibre Channel is the protocol for the communication structure dedicated to carrying different types of traffic for applications that require first-rate capabilities of storage and technologies.
<b>ROADM commissioning</b>	Insert an OSA within this compact, portable solution for fast and accurate DWDM commissioning and turn up of high-speed networks up to 100/200/400 Gbit/s.
<b>Multiservice testing</b>	Easily turn up, validate and troubleshoot DSn/PDH, SONET/SDH and Ethernet services up to 10 Gbit/s in converged optical networks. Delivering IPTV test capabilities and transmission control protocol (TCP) throughput assessment.
<b>Fiber characterization and troubleshooting</b>	OTDR/OLM testing combined with fiber endface inspection and optical power measurement for fiber characterization and troubleshooting of any network, including access, LAN/WAN, data center, FTTx, metro, long-haul and ultra-long-haul.
<b>FTTH testing</b>	With a dynamic range of up to 39 dB and enabling power meter and visual fault locator functionalities, the PON FTTx/MDU OTDR module allows fiber installers to seamlessly characterize splitters in PON FTTx and multiple dwelling unit (MDU) applications.
<b>Ethernet testing from 10 Mbit/s to 100 Gbit/s</b>	100% line-rate testing of IP traffic at up to 100G; RFC 2544 and ITU-T Y.1564 Ethernet service activation with full statistics, and packet capture, traffic filtering, ping and traceroute with clear pass/fail verdicts.
<b>CWDM turn-up testing</b>	Integrate CWDM OTDR to test through CWDM-based MUX/DEMUX at ITU-recommended wavelengths.
<b>DWDM testing</b>	Highly accurate and reliable DWDM network commissioning, troubleshooting and channel analysis.

OPTICAL TEST MODULES		FTB-2	FTB-2 PRO
<b>Optical spectrum analyzer</b>	FTBx-5235 FTBx-5245	• •	• •
<b>Single-ended dispersion analyzer</b>	FTB-5700	•	•
<b>OTDR</b>	FTB-7200D FTB-7300E FTB-7500E FTB-7600E FTBx-720C FTBx-730C FTBx-735C FTBx-750C	• • • • • • • •	• • • • • • • •
<b>OTDR CWDM/DWDM</b>	FTB-7400E FTBx-740C	• •	• •
<b>OLTS</b>	FTB-3930	•	•

TRANSPORT AND DATACOM TEST MODULES		FTB-2	FTB-2 PRO
<b>1G-to-100G high-speed multiservice</b>	FTBx-88260		•
<b>Advanced 100G multiservice</b>	FTBx-88200NGE		•
<b>Versatile 10G multiservice</b>	FTBx-8870/8880		•

**Note:** Some FTB-2/FTB-2 Pro platforms may require a hardware upgrade to support the FTBx module format.

## OPTICAL PLUG-AND-PLAY OPTIONS

The platform features optical plug-and-play options that can be purchased whenever you need them: at the time of your order or later on. In either case, installation is a snap and can be performed by the user without the need for any software update.

### Optical power meter

A high-level power meter (GeX) that can measure up to 27 dBm, the highest in the industry. This is essential for hybrid fiber-coaxial (HFC) networks or high-power signals. If used with an auto-lambda/auto-switching compatible light source, the power meter automatically syncs on the same wavelength, thus avoiding any risk of mismatched measurement.

- Extensive range of connectors
- Auto-lambda and auto-switching
- Offers measurement storage and reporting
- Choice of seven standard or coarse wavelength-division multiplexing (CWDM)-calibrated wavelengths

### Visual fault locator (VFL)

The plug-and-play VFL easily identifies breaks, bends, faulty connectors and splices, in addition to other causes of signal loss. This basic, yet essential, troubleshooting tool should be part of every field technician's toolbox. The VFL visually locates and detects faults over distances of up to 5 km by creating a bright-red glow at the exact location of the fault on singlemode or multimode fibers (available with the Optical Power Meter only).



## DO MORE!

The Windows 10 operating system allows for a wide choice of third-party applications and supports an extensive range of USB devices.

- Start faster and multitask
- Use the Office suite
- Connect to printers, cameras, keyboards, mice, and more

### Bring your own apps



Share your desktop  
(e.g., using  
TeamViewer)



Antivirus  
software



Communicate  
via email and  
over-the-top  
(OTT) apps



Record and  
automate  
actions



Share files via  
cloud-based  
storage

## FIBER CONNECTOR INSPECTION AND CERTIFICATION— THE ESSENTIAL FIRST STEP BEFORE ANY OTDR TESTING

Taking the time to properly inspect a fiber-optic connector using an EXFO fiber inspection scope can prevent a host of issues from arising further down the line, thus saving you time, money and trouble.

### The first fully automated fiber inspection scope for the field

Housing a unique automatic focus adjustment system, the FIP-430B USB and FIP-435B WiFi scopes automate each operation in the connector endface inspection sequence, transforming this critical process into one quick and easy step, which can be performed by technicians of all skill levels.

**100%**  
automated

**1-step**  
process

**57%**  
shorter test time<sup>a</sup>



FEATURES	USB WIRED	WIRELESS	AUTONOMOUS
	FIP-430B	FIP-435B	FIP-500
Image capture	✓	✓	✓
Five-megapixel CMOS capturing device	✓	✓	✓
Automatic fiber image-centering function and focus adjustment	✓	✓	✓
On-board pass/fail analysis	✓	✓	✓
Pass/fail LED indicator	✓	✓	✓
USB connectivity to an EXFO platform or PC	✓	✓	X
Wireless connectivity to an EXFO platform or PC	X	✓	X
Wireless connectivity to a smartphone	X	✓	✓
Manual scanning for multifiber / MPO connectors	✓	✓	X
Semi-automated multifiber / MPO inspection	✓	✓	X
Fully automated multifiber / MPO inspection	X	X	✓
On-board touch screen	X	X	✓
SmarTips with automated thresholds	X	X	✓
Quick-connect mechanism	X	X	✓

For more information, visit [www.EXFO.com/fiberinspection](http://www.EXFO.com/fiberinspection).

a. Data sourced from EXFO's case study, with calculation based on typical analysis time.

## SOFTWARE TEST TOOLS

This series of platform-based software testing tools enhance the value of the FTB-2/FTB-2 Pro platform, providing additional testing capabilities without the need for additional modules or units.

### EXFO Remote ToolBox

The Remote ToolBox application remotely controls T&D modules installed on the FTB-2 and FTB-2 Pro using a remote PC and an Ethernet connection.

### Wireshark—Third-party test tools

This live-network packet-capture utility makes it possible to look *inside* the packets and obtain data, including transmission time, source, destination and protocol type. Users can then diagnose a problem or root out suspicious behavior.

### EXpert Test Tools

#### EXpert VoIP TEST TOOLS

EXpert VoIP generates a voice-over-IP call directly from the test platform to validate performance during service turn-up and troubleshooting.

- Supports a wide range of signaling protocols, including SIP, SCCP, H.248/Megaco and H.323
- Supports mean-opinion-score (MOS) and R-factor quality metrics
- Simplifies testing with configurable pass/fail thresholds and RTP metrics

#### EXpert IP TEST TOOLS

EXpert IP integrates six commonly used datacom test tools into one platform-based application to ensure that field technicians are prepared for a wide range of testing needs.

- Rapidly performs debugging sequences with VLAN scan and LAN discovery
- Validates end-to-end ping and traceroute
- Verifies file-transfer-protocol (FTP) performance and hypertext-transfer-protocol (HTTP) availability

#### EXpert IPTV TEST TOOLS

This powerful Internet-protocol-television (IPTV) quality assessment solution enables set-top box emulation and passive monitoring of IPTV streams, allowing for quick and easy pass/fail verification of IPTV installations.

- Real-time video preview
- Analyzes up to 10 video streams
- Comprehensive quality-of-service (QoS) and quality-of-experience (QoE) metrics, including the MOS score

### Software applications

#### ConnectorMax

Providing lightning-fast results during the first step of fiber-link testing, ConnectorMax2 is a powerful, platform-based automated inspection application that delivers quick pass/fail assessment of connector endfaces, and which is specifically designed to save both time and money in the field.

#### FastReporter


Consolidated data management and post-processing tool designed to increase reporting productivity for connector endface inspection and all types of optical-layer testing: intelligent Optical Link Mapper (iOLM), OTDR, ORL, loss, PMD and chromatic dispersion (CD).

#### EXFO MULTILINK

EXFO Multilink is a multi-user, multimodule and multiplatform client software application for remote controlled access of T&D modules on the FTB-2 and select optical modules (FTBx-1750, FTBx-3500, and FTBx-9150/FTBx-9160), through a centralized dashboard featuring an easy-to-use GUI.

## CONNECTED ANYWHERE, ANYTIME

The value of connectivity resides in the ability to connect your platform anywhere, at any time. This is why we've equipped our platforms with technology offering unprecedented flexibility. Whether you need to transfer data to the cloud or interface with a smart device, you'll have the capability needed.

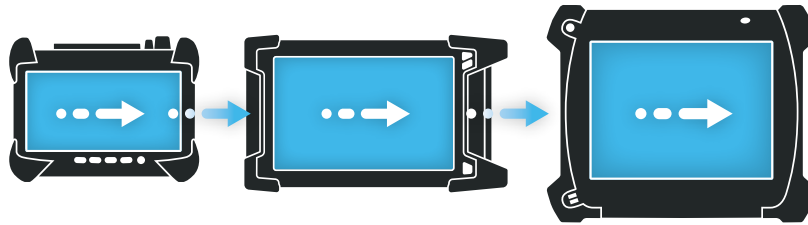

 Bluetooth®  Wi-Fi  3G  LTE  GPS



### Secure VPN communications

With Microsoft VPN on the FTB platforms, or the ability to install and configure any VPN client solution defined by your IT department on it, secure communications are now within your reach.



### 3G/LTE mobility

Get connected wherever you are: choose any Windows-supported 3G/LTE USB dongle and connect to your wireless service provider.



### Remote control

Use remote assistance to troubleshoot units in the field, trigger tests remotely, or help a technician with a problem. Working without it is hard to imagine.



### Instant messaging

Because our platforms are Windows-based, they function just like PCs. You can even use chat tools to quickly communicate with your team members (Skype comes preinstalled).


TestFlow

**CLOUD-BASED FIELD TEST MANAGEMENT SOLUTION—  
GET MORE FROM FastReporter WITH TestFlow**

90-DAY  
FREE TRIAL

**The TestFlow process**

Whether you are a field technician, a site lead or a project manager, you can benefit from TestFlow.

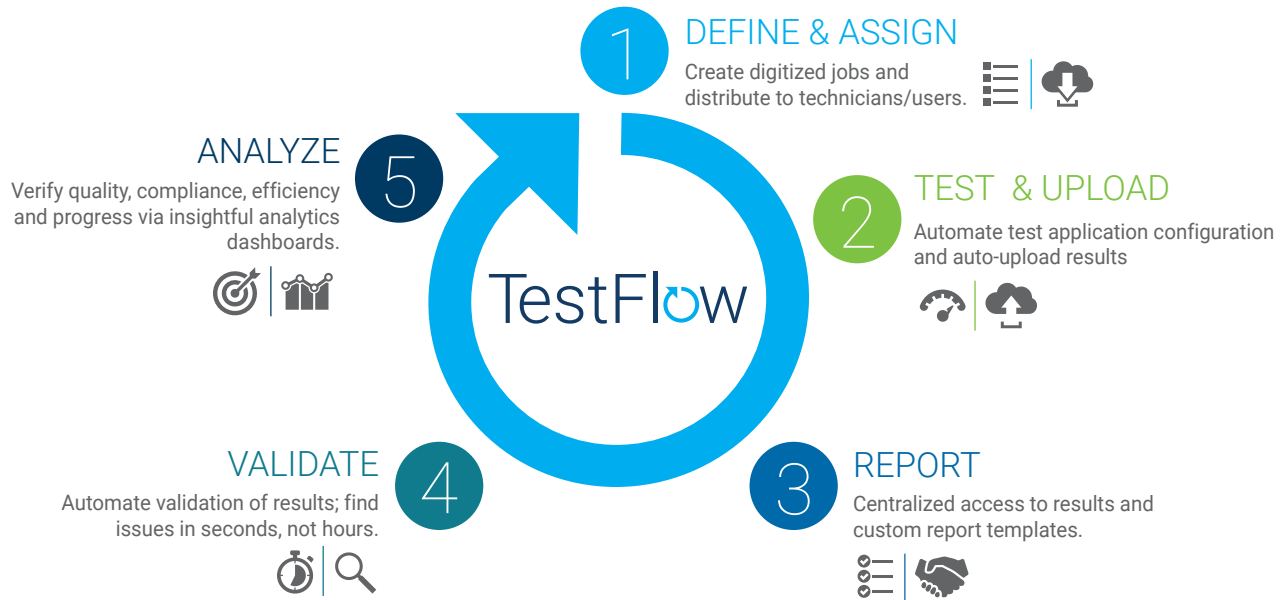

<b>ENSURE 100% COMPLIANCE</b>	<b>RIGHT THE FIRST TIME</b>	<b>AUTOMATE REPORTING AND BATCH AUDITING</b>	<b>FASTER INVOICING AND DEPLOYMENTS</b>	<b>INFORMED BUSINESS DECISIONS</b>
-------------------------------	-----------------------------	--	---	------------------------------------

Get your free trial today or for more info: [EXFO.com/TestFlow](https://EXFO.com/TestFlow)


# EXFO | Connect

## EXFO CONNECT MAKES YOUR DATA MEAN BUSINESS

EXFO Connect completely redefines integrated testing with its cloud-hosted solution. Equipped with powerful database and application technologies, EXFO Connect provides an automated, secure environment that links together your EXFO test instruments and centralizes captured data across your organization. With its powerful correlation engine, EXFO Connect enables you to convert captured data into actionable information through customized test-data reporting and features that streamline test operations from build-out to maintenance.

### Test Equipment Manager

EXFO Connect's Test Equipment Manager is an automated application that centralizes the management of all EXFO test instruments. A repository for software loads, licenses and platform profiles, it helps managers handle constant demand for software updates. It also keeps track of equipment and ensures field technicians are equipped with up-to-date capabilities.

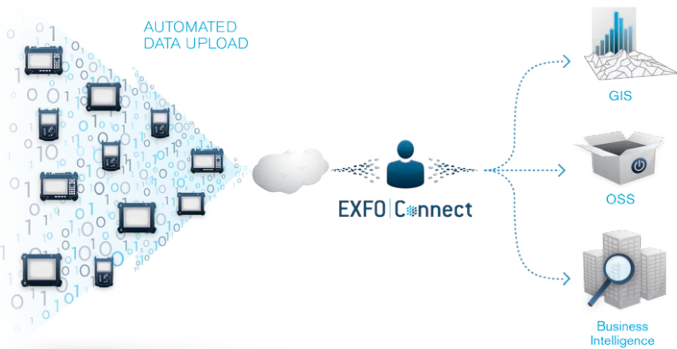


### Test Data Manager

EXFO Connect's Test Data Manager is an automated application that provides a secure and centralized environment in which test data is collected, archived and referenced for future use. With test results at their fingertips, managers can create birth certificates, generate reports and set benchmarks.

### FTB Anywhere: Floating test licenses




FTB Anywhere™ is a shared test-license capability for the award-winning FTB Ecosystem. This unique approach to delivering advanced test applications enables network operators to purchase a specific number of cloud-hosted licenses that can be shared instantly with their technicians, wherever they happen to be.

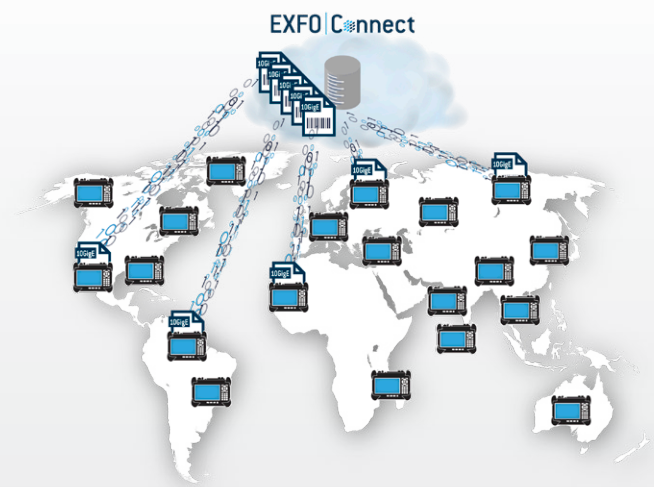



## DESIGNED FOR HIGH-SPEED AND MULTISERVICE

- 1 Power on/off
- 2 Switch application
- 3 Keyboard/screen capture
- 4 Battery LED
- 5 Stylus
- 6 Display port
- 7 Headset jack
- 8 Speaker
- 9 USB 2.0 port
- 10 1 GigE port
- 11 USB 3.0 port
- 12 Power meter and VFL
- 13 Two slots to house modules
- 14 Module screws
- 15 AC adapter
- 16 Kensington security lock slot
- 17 Back stand
- 18 Battery compartment

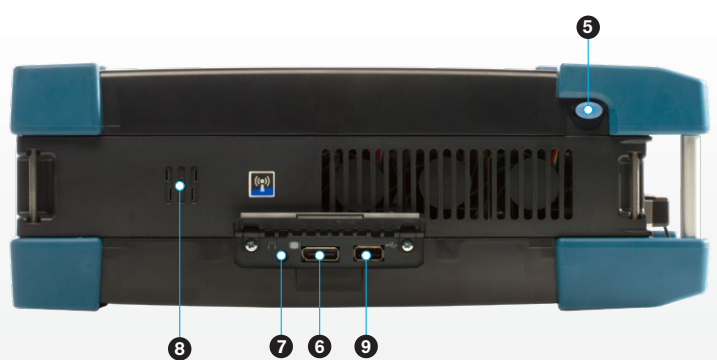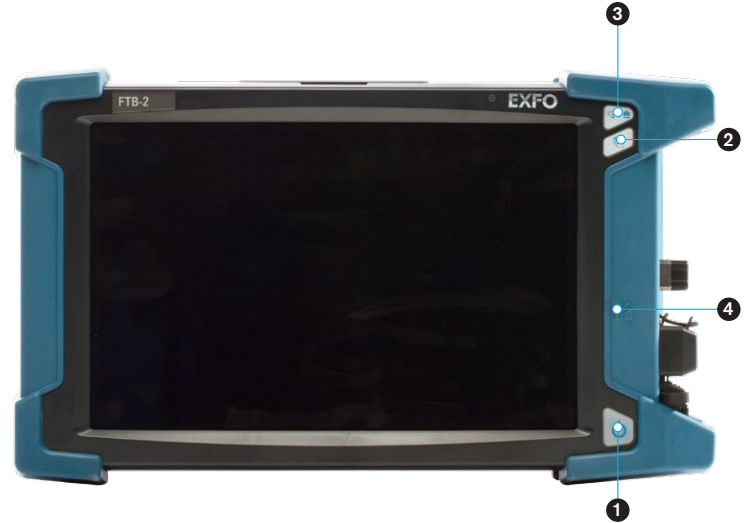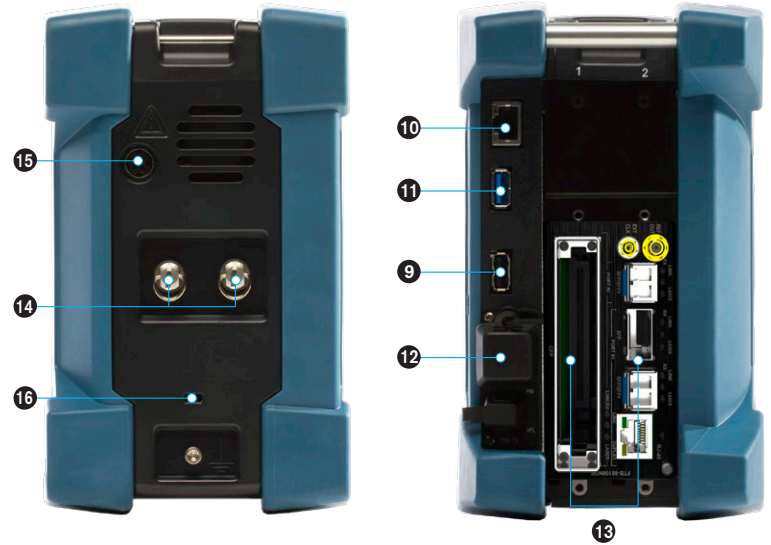


TECHNICAL SPECIFICATIONS <sup>a</sup>	FTB-2	FTB-2 PRO
Mainframe	Dual-core processor / 4 GB RAM / Windows 10	Quad-core processor / 4 GB RAM / Windows 10
Display	Touchscreen, color, 1280 × 800 TFT 256 mm (10.1 in)	Touchscreen, color, 1280 × 800 TFT 256 mm (10.1 in)
Interfaces	RJ45 LAN 10/100/1000 Mbit/s USB 2.0 ports (2) USB 3.0 port (1) Display port Headset jack	RJ45 LAN 10/100/1000 Mbit/s USB 2.0 ports (2) USB 3.0 port (1) Display port Headset jack
Storage (internal flash memory)	128 GB	128 GB
Battery	One rechargeable Li-ion smart battery	Two rechargeable Li-ion smart batteries
Power supply	AC/DC adapter, input: ~ 100 – 240 V; 50/60 Hz; 2.5 A max, output: --- 24 V; 3.75 A	AC/DC adapter, input: ~ 100 – 240 V; 50/60 Hz; 4.0 A max, output: --- 24 V; 8.33 A

GENERAL SPECIFICATIONS	
Size (H x W x D)	199 mm × 333 mm × 119 mm (7 13/16 in × 13 1/8 in × 4 11/16 in)
Weight <sup>b</sup>	3 kg (6.6 lb)
Temperature	
Operating	0 °C to 50 °C (32 °F to 122 °F)
Storage <sup>c</sup>	-40 °C to 60 °C (-40 °F to 140 °F)
Relative humidity	≤95 % non-condensing

BUILT-IN POWER METER SPECIFICATIONS (GeX) (optional) <sup>d</sup>	
Calibrated wavelengths (nm)	850, 1300, 1310, 1490, 1550, 1625, 1650
Optional CWDM calibrated wavelengths (nm)	1270, 1290, 1310, 1330, 1350, 1370, 1390, 1410, 1430, 1450, 1470, 1490, 1510, 1530, 1550, 1570, 1590, 1610, 1383, 1625
Power range (dBm) <sup>e</sup>	27 to -50
Uncertainty (%) <sup>e, f</sup>	±5 % ± 10 nW
Display resolution (dB)	0.01 = max to -40 dBm 0.1 = -40 dBm to -50 dBm

VISUAL FAULT LOCATOR (VFL) (optional)
Laser, 650 nm ± 10 nm
CW/Modulate 1 Hz
Typical P <sub>out</sub> in 62.5/125 μm: > -1.5 dBm (0.7 mW)

LASER SAFETY	
	<p>The test modules that you use with your unit may have different laser classes. Refer to the module's documentation for exact information.</p>

- a. All specifications valid at 23 °C (73 °F).
- b. Platform without batteries or modules. FTB-2 weight with battery: 3.4 kg (7.6 lb); FTB-2 Pro weight with battery: 3.9 kg (8.6 lb).
- c. Not including internal batteries. Battery storage temperatures: -20 °C to 60 °C (-4 °F to 140 °F) for shipping and -20 °C to 45 °C (-4 °F to 113 °F) for long-term storage.
- d. At 23 °C ± 1 °C, 1550 nm and FC connector. With modules in idle mode. Battery-operated after warm-up.
- e. Typical.
- f. At calibration conditions.

**ORDERING INFORMATION**

**FTB-2-XX-XX-XX-XX-XX-XX-XX-XX**

**Display**

- S1 = Standard display
- S2 = Enhanced display for outdoor use

**Memory**

- 128G = 128 GB internal memory (flash)

**WiFi/Bluetooth option**

- 00 = Without RF option enabled
- RF = With RF option/capability
- NRF = Without RF hardware components <sup>a</sup>

**Power meter/VFL**

- 00 = Without power meter
- VPM2X = VFL platform; PM; GeX detector
- VPM2X-CWDM = VFL platform; PM; GeX detector; CWDM wavelengths calibrated

**Connector adapter**

- FOA-12 = Biconic
- FOA-14 = NEC D4: PC, SPC, UPC
- FOA-16 = SMA/905, SMA-906
- FOA-22 = FC/PC, FC/SPC, FC/UPC, FC/APC
- FOA-28 = DIN 47256, DIN 47256/APC
- FOA-32 = ST: ST/PC, ST/SPC, ST/UPC
- FOA-54 = SC: SC/PC, SC/SPC, SC/UPC, SC/APC
- FOA-78 = Radiall EC
- FOA-96B = E-2000 E-2000/APC
- FOA-98 = LC
- FOA-99 = MU

**Software option**

- 00 = Without any software option
- IPT = Ping and traceroute functionalities
- EXpert-VoIP = RTP-based call testing software application, including packet loss analysis, jitter measurement and complete voice quality metrics
- EXpert-IP = IP/Ethernet test suite, with tests including FTP performance, HTTP availability, VLAN scan, LAN discovery, ping, traceroute and IP/Ethernet port statistics (license for a single platform)
- EXpert-IPTV = IPTV test suite
- EXpert-TPP-Bundle = Triple-play bundle for voice, video and data testing; includes EXpert IP Test Tools, EXpert IPTV Test Tools, EXpert VoIP Test Tools and EXpert SIP
- EXpert-SIP = SIP call-signaling support <sup>c</sup>
- EXpert-SCCP = SCCP call-signaling support <sup>c</sup>
- EXpert-H.323 = H.323 call-signaling support <sup>c</sup>
- EXpert-H.248 = H.248/Megaco call-signaling support <sup>c</sup>
- FR2-PL = FastReporter 2 Software  
Fiber characterization package
- FR2-PL-LB = FastReporter 2 Software  
Fiber characterization package and iOLM Loopback mode
- Automation = Support of remote and local access to instrument using SCPi

**Inspection scope base tips**

- APC = Includes FIPT-400-U25MA and FIPT-400-SC-APC
- UPC = Includes FIPT-400-U25M and FIPT-400-FC-SC

**Inspection scope models**

- 00 = Without inspection scope
- FP430B = Automated analysis digital video inspection scope <sup>e</sup>
  - Automated focus
  - Automated pass/fail analysis
  - Triple magnification
  - Autocentering
- FP435B = Wireless analysis digital video inspection scope <sup>e, f</sup>
  - Automated focus
  - Automated pass/fail analysis
  - Triple magnification
  - Autocentering

Example: FTB-2-S1-128G-RF-VPM2X-CWDM-FOA-22-FP430B-APC-FR2-PL-LB

- a. Only available with S1 standard display
- b. Available if EXpert VoIP is selected.
- c. Available if EXpert VoIP is selected.
- d. Available if inspection scope is selected.
- e. Includes ConnectorMax2 software.
- f. Requires RF capability (WiFi and Bluetooth hardware option).

**ORDERING INFORMATION**

**FTB-2-Pro-XX-XX-XX-XX-XX-XX-XX-XX**

**Display**

- S1 = Standard display
- S2 = Enhanced display for outdoor use

**Memory**

- 128G = 128 GB internal memory (flash)

**WiFi/Bluetooth option**

- 00 = Without RF option enabled
- RF = With RF option/capability
- NRF = Without RF hardware components <sup>a</sup>

**Power meter/VFL**

- 00 = Without power meter
- VPM2X = VFL platform; PM; GeX detector
- VPM2X-CWDM = VFL platform; PM; GeX detector; CWDM wavelengths calibrated

**Connector adapter**

- FOA-12 = Biconic
- FOA-14 = NEC D4: PC, SPC, UPC
- FOA-16 = SMA/905, SMA-906
- FOA-22 = FC/PC, FC/SPC, FC/UPC, FC/APC
- FOA-28 = DIN 47256, DIN 47256/APC
- FOA-32 = ST: ST/PC, ST/SPC, ST/UPC
- FOA-54 = SC: SC/PC, SC/SPC, SC/UPC, SC/APC)
- FOA-78 = Radiall EC
- FOA-96B = E-2000 E-2000/APC
- FOA-98 = LC
- FOA-99 = MU

**Software option**

- 00 = Without any software option
- IPT = Ping and traceroute functionalities
- EXpert-VoIP = RTP-based call testing software application, including packet loss analysis, jitter measurement and complete voice quality metrics
- EXpert-IP = IP/Ethernet test suite, with tests including FTP performance, HTTP availability, VLAN scan, LAN discovery, ping, traceroute and IP/Ethernet port statistics (license for a single platform)
- EXpert-IPTV = IPTV test suite
- EXpert-TPP-Bundle = Triple-play bundle for voice, video and data testing; includes EXpert IP Test Tools, EXpert IPTV Test Tools, EXpert VoIP Test Tools and EXpert SIP
- EXpert-SIP = SIP call-signaling support <sup>c</sup>
- EXpert-SCCP = SCCP call-signaling support <sup>c</sup>
- EXpert-H.323 = H.323 call-signaling support <sup>c</sup>
- EXpert-H.248 = H.248/Megaco call-signaling support <sup>c</sup>
- FR2-PL = FastReporter 2 Software  
Fiber characterization package
- FR2-PL-LB = FastReporter 2 Software  
Fiber characterization package and iOLM Loopback mode

**Inspection scope base tips**

- APC = Includes FIPT-400-U25MA and FIPT-400-SC-APC
- UPC = Includes FIPT-400-U25M and FIPT-400-FC-SC

**Inspection scope models**

- 00 = Without inspection scope
- FP430B = Automated analysis digital video inspection scope <sup>e</sup>
  - Automated focus
  - Automated pass/fail analysis
  - Triple magnification
  - Autocentering
- FP435B = Wireless analysis digital video inspection scope <sup>e, f</sup>
  - Automated focus
  - Automated pass/fail analysis
  - Triple magnification
  - Autocentering

Example: FTB-2-Pro-S1-128G-RF-VPM2X-FOA-54-FP435B-APC-EXPERT-IP

- a. Only available with S1 standard display
- b. Available if power meter is selected.
- c. Available if EXpert VoIP selected.
- d. Available if inspection scope is selected.
- e. Includes ConnectorMax2 software.

**EXFO headquarters** T +1 418 683-0211 **Toll-free** +1 800 663-3936 (USA and Canada)

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to [www.EXFO.com/contact](http://www.EXFO.com/contact).

For the most recent patent marking information, please visit [www.EXFO.com/patent](http://www.EXFO.com/patent). EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit [www.EXFO.com/recycle](http://www.EXFO.com/recycle). **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to [www.EXFO.com/specs](http://www.EXFO.com/specs).

In case of discrepancy, the web version takes precedence over any printed literature.