

Airpura

AIR PURIFIERS

G600DLX

GERMAN CARBON PLUS

TRAPS AIRBORNE CHEMICALS AND VOCS WITH 26 LBS OF PREMIUM GERMAN ACTIVATED CARBON AND PARTICLE REDUCTION WITH A TRUE HEPA BARRIER.

THE AIRPURA G600DLX
Available in White / Black / Cream

THE AIRPURA LIMITED WARRANTY
5 years parts / 10 years labor



THE AIRPURA G600DLX ENHANCED CHEMICAL ABATEMENT UNIT OFFERS YOU:

- **26 LBS OF PREMIUM GERMAN-SOURCED CARBON** that has no odor and is ideal for more sensitive individuals while offering optimal filtration. Offers protection against airborne particles, gases and odors.
REMOVES: Vapors (VOCs) from PVC, vinyls, carpets, ammonias from cleaning materials, pesticides, benzene, and toluene from heating fuels, paints and glues.
- **THE POWERFUL HEPA BARRIER** captures 95% of airborne particles, as small as 1 micron.
- **560 CFM INTEGRATED FAN / MOTOR** which is most CFM available in a portable unit.
- **VARIABLE SPEED CONTROLS** gives you complete control over your air flow and filtration.
- **CAREFULLY CALIBRATED** dwell time over carbon bed and ample bed depth to maximize adsorption.
- Streamlined inlet provides powerful suction of pollutants and provides **360° CLEAN AIR DISTRIBUTION**. Purification for up to 2,000 sq. ft with 2 air exchanges an hour (based on 8-foot ceilings).
- **WHISPER QUIET PERFORMANCE** even at highest speed setting.

SPECIALLY DESIGNED TO REMOVE AIRBORNE CHEMICALS AND VOCS

THE IMPORTANCE OF DWELL TIMES

For effective chemical and gas adsorption, the dwell time over the carbon bed is vital. The 560 CFM impeller/motor combined with the variable speed control and unimpeded airflow allows you to set your ideal level of filtration. This unit offers a 2" deep carbon bed for effective filtration.

FILTER LIFE



HEPA BARRIER
should be replaced every 12 months.




CARBON FILTER
should be replaced every 2 years.



PREFILTER should be replaced every 12 months.

EXPERIENCE THE EVOLUTION OF CLEAN AND HEALTHY AIR

FILTRATION SYSTEM

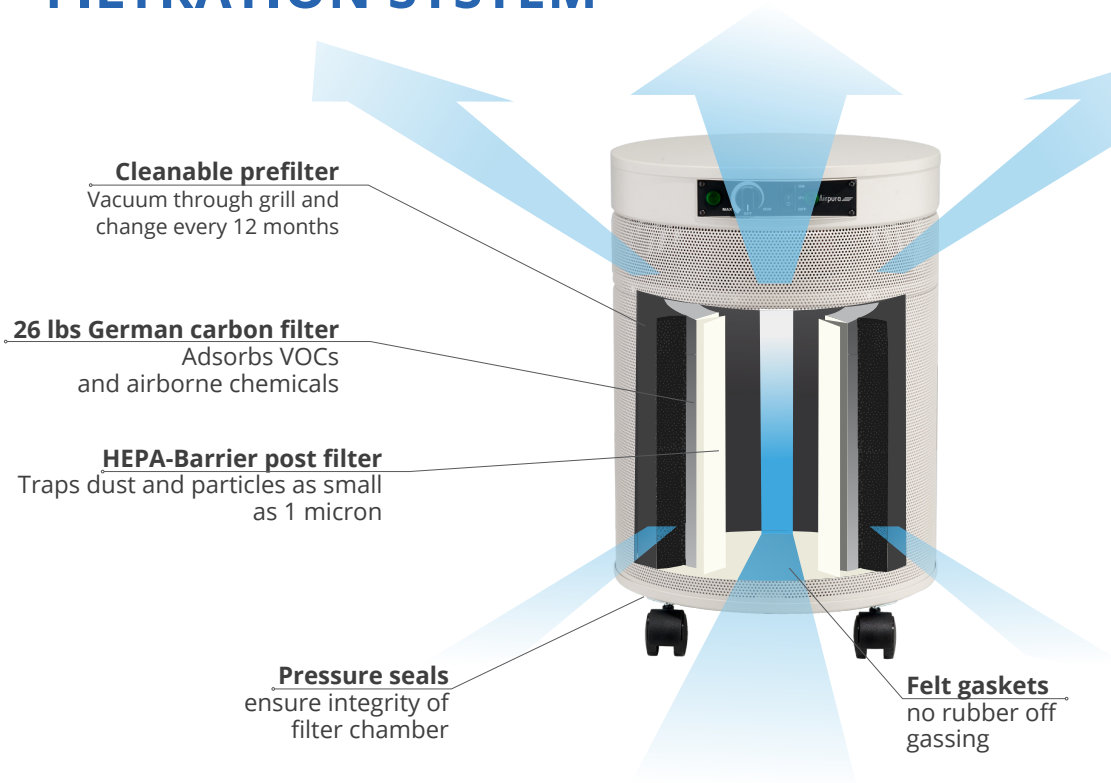

UNIQUE FEATURES

ALL METAL HOUSING ensures no plastic vapors are emitted.

MOTOR OUT OF THE AIR FLOW. Most air purifiers blow the clean air over the motor and pick up impurities, while our purifiers do not.

ELECTRICAL PARTS IN A SEALED CHAMBER OUT OF THE AIRFLOW. Increases safety and prevents off-gassing

PRESSURE SEALED FILTER CHAMBER prevents leakage of polluted air around filters.

FELT GASKETS SEAL THE FILTER CHAMBER. Maximize filtration with no rubber off-gassing found with other filters.

CLEAN MODERN APPEARANCE fits in with any decor.

LOW NOISE LEVEL (at 6 feet) 25 db on low 61 db on high (560 cfm).

TECHNICAL SPECIFICATIONS

ODOR, AIRBORNE CHEMICAL AND VOC CONTROL

26 lbs
activated German carbon

CARBON BED

570 sq in x 3" deep

PREFILTER

570 sq in x 1 in deep

PARTICLE SUPPRESSION

HEPA Barrier filter
306 sq inches

AIR FLOW 560 CFM

More cfm than any other compact unit available

HOUSING

Powder coated steel

SIZE

23" x 15"

WEIGHT

45 lbs total

VOLTAGE OPTIONS

115 or 220 volts

WATTS

120 on high / 40 on low

SOUND LEVEL

25 db on low (at 6 feet)
61 db on high (560 cfm)
(Room level 25.1 db)

ETL CERTIFIED

Conforms to ANSI / UL 507

YOUR
AIRPURA™ DEALER

