

To open the filter chamber



Turn over
the Airpura



Remove the 4
retaining screws



Take off
the cover



Remove
the gasket



Position the
Prefilter inside
the filter
chamber




Place a felt gasket at
the bottom of the
filter chamber



Unfold the filter slider
(Supplied with replacement
filters or on request
Part#6F 001)



Roll it
into a spiral




Insert the tube
into the filter
chamber inside
the Prefilter



Let the spiral
open to fill
the opening




Open the top of the
spiral to make a
slight funnel




Insert the
Carbon canister into
the funnel and hold it
straight



Let the canister
slide down
the filter slider



Pull the filter slider up
out of the cavity using
both hands and let the
canister slide to the
bottom of the cavity



Remove the filter
slider and fold it
for further use



Slide in the
Hepa filter

Airpura 
AIR PURIFIERS


P700

OPERATING
&
FILTER REPLACEMENT
DIRECTIONS

To close the filter chamber



Replace
the gasket



Position the
indentation in the cover
into the center of the
HEPA filter



Replace
the 4 screws
and tighten



Turn the Airpura
back on casters

TO BEGIN USING YOUR AIRPURA

Inspect the exterior of your Airpura to verify there is no damage from shipping. If any damage is noted, please follow the instructions from the distributor returns policy.


Wipe the unit with a damp cloth to remove any dust from packaging

Plug the unit into a regular grounded 110 volt outlet 2 Turn the unit on

Turn on the unit to MAX and allow it to run for at least 30 minutes

Set the variable speed control to the level you wish

Always maintain a humidity level of 40% in your home to ensure the unit is operating at optimal levels. When using purifier with a dehumidifier, please keep dehumidifier at least 6 feet away. It is recommended to run your purifier at low speeds, 24 hours a day, 7 days a week. Running it at a low speed allows for maximum dwell time of chemicals and VOCs in the air through both the carbon and HEPA filters thus delivering superior filtration.

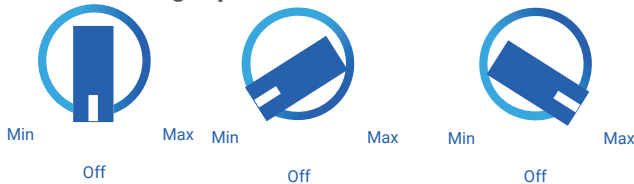

FILTER MAINTENANCE AND REPLACEMENT

The Prefilter

Can be vacuumed from the exterior of the unit once a month or more often. Should be replaced at least after 12 months of use

To vacuum the Prefilter

Use the brush attachment on your vacuum cleaner. Vacuum slowly around the mesh surface of the filter chamber

IMPORTANT SAFETY NOTE

Please ensure air purifier is turned OFF when plugging into a power source. Failure to do so may result in motor potentially stalling and/or burning.



Replacing the UV bulb

Open the filter chamber following the instructions


Push the replacement bulb firmly into the connector

Pull the bulb upward out of the connector


Close the filter chamber following instructions




TitanClean
18-20 months



HEPA 600RVHU Filter
(99.97% efficient @ 0.3 Microns)
3 to 5 years



UV bulb
18-20 months



Poly Prefilter 600 2-pack
12 months

P714: HEPA 14 Filter
(99.99% efficient @ 0.3 Microns)
P700+: HEPA 600 Filter w/ TiO2
(99.97% efficient @ 0.3 Microns)
P714+: HEPA 14 Filter
(99.99% efficient @ 0.3 Microns) + TiO2



18 lbs, Coconut Shell Carbon Filter (100% Blend)
24 months

Technical specifications

Particle removal

Over 100 ft² true HEPA
(Measured only 1 side)
12 pleats per inch
Pleats warm rolled with separators

Size

23 in x 15 in

Weight

35 lbs total

Activated carbon filter

18 lbs carbon filter
13"H X 13.25"OD X 9"ID

Watts

120 on high / 40 on low

Carbon Bed

2" deep X 570 sq. surface

Sound Level

30.2* db on low (at 6 feet)
63.0 db on high (635 cfm)
*at test conditions

Air Flow 635 cfm

More cfm than any other home unit available

Voltage options

115 or 220 volts

Prefilter

570 in² x 1 in

Housing

Powder coat steel



Air purifiers models and filter configurations

	Prefilter	Particulate	Carbon
Alternates	Cotton Prefilter TarBarrier Prefilter		18 lbs anthracite carbon filter (100%)
Upgrade		HEPA 14 Filter (99.99 % efficient @ 0.3 Microns) ULPA Filter (99.9999 % efficient @ 0.1 Microns)	18 lbs impregnated carbon 18 lbs carbon (17% potassium permagnate carbon, 83% coconut shell)

Airpura Industries - 5510 Boul. des Rossignols, Laval, QC, Canada. H7L 5W6
EPA Est.:100723-CAN-1