

INDUSTRIAL PRODUCT CATALOG



LIFE ONTHE RUNGS.

Industrial products require industrial solutions, and that means learning from the people who work on site every day. 40 years of listening later, and we've learned a thing or two about how professionals use a ladder.

EACH PRODUCT IN THIS CATALOG IS PACKED WITH INNOVATIONS FOR ELECTRICIANS, PLUMBERS, HVAC AND TELECOM TECHS, WELDERS AND ANYONE ELSE WHO GETS STUFF DONE ON SITE, AT HEIGHT.



COMBINATION LADDERS 4' INDUSTRIAL MODEL Differs from other sizes with a palm-button hinge and modified V-bar, rather than a Grip-N-Go hinge and Quad Pod.

KING KOMBO®



375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

It's the pro tool that helps you get stuff done faster than ever. The pinnacle of ladder technology, the King Kombo™ from Little Giant Ladder Systems® is tough as nails and versatile enough for any tradesperson. Recognized for its superior safety and innovation, the King Kombo is the most awarded ladder ever, having received awards at the 2019 Pro Tool Innovation Awards, 2019 OH&S New Product of the Year Awards, SAFE Awards from the National Association of Homebuilders and more.

1. ROTATING WALL PAD

Two different positions for leaning on inside corners, outside corners, walls and 2x4 studs.

2. ONE-HANDED GRIP-N-GO™ HINGE

New easy-to-use hinge allows smooth trasition from storage to a-frame to extension positions.

3. GROUND CUE®

Newly redesigned for improved performance. Provides an audible "click" on bottom step that alerts you when you have reached the bottom step of the ladder.

4. RAIL GUARD

Shock-absorbing braces increase ladder lifespan by protecting it during daily use.

5. NON-CONDUCTIVE RAILS

Non-conductive fiberglass rails rated to hold up to 375 lbs.

6. FUNCTIONAL REAR SECTION

Access tight workspaces between wall studs, ceiling trusses and roof or attic access ports.

7. QUAD POD™

For use in the extension position, the Quad $Pod^{\mathbb{M}}$ allows the ladder to be leaned on inside and outside corners, walls, poles and 2x4 studs. Also serves as a tool tray.

DID YOU KNOW?

The King Kombo's legs are wide for stability on the climbing side and narrow on the extension side for ease of access through studs and attic access ports.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	EXTENSION HIGHEST STANDING LEVEL	EXTENSION MAX REACH*	SPREAD	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
13470-071	4'-7'	1′11″	8′ 5″	3, 8,	10′ 3″	2' 8"	1′ 9″	7"	21 lbs
13905-071	5'-8'	2' 10"	9′ 4″	4' 10"	11′ 4″	3' 0"	2' 0.5"	7"	24 lbs
13906-071	6'-10'	3′ 9″	10' 3"	6′ 7″	13′ 1″	3' 8"	2' 1"	7"	27 lbs
13908-071	8'-14'	5' 8"	12' 2"	10′ 8″	17′ 2″	4' 11"	2' 4"	7"	34 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

PART NUMBER 13470-071 HAS 1.0 PALM BUTTON HINGE, V-BAR AND IS MADE IN CHINA



KING KOMBO®



375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

It's the pro tool that helps you get stuff done faster than ever. The pinnacle of ladder technology, the King Kombo® from Little Giant Ladder Systems® is tough as nails and versatile enough for any tradesperson. Recognized for its superior safety and innovation, the King Kombo is the most awarded ladder ever, having received awards at the 2019 Pro Tool Innovation Awards, 2019 OH&S New Product of the Year Awards, SAFE Awards from the National Association of Homebuilders and more.

1. ROTATING WALL PAD

The crowning jewel of the King Kombo is its rotating wall pad, which allows users to safely lean the ladder on inside and outside corners, walls, poles and studs.

2. ONE-HANDED GRIP-N-GO™ HINGE

With its innovative, one-handed Grip-N-Go™ hinge, the King Kombo can transition from position to position in one fluid motion.

3. GROUND CUE®

Newly redesigned for improved performance. Provides an audible "click" on bottom step that alerts you when you have reached the bottom step of the ladder.

4. SURE-SET FEET

The King Kombo Technical uses Little Giant's Sure-Set™ swivel feet for added traction at industrial job sites. These Sure-Set feet can be used in either the pad or spike position.

5. NON-CONDUCTIVE RAILS

Non-conductive fiberglass rails rated to hold up to 375 lbs.

6. DUAL-PURPOSE LEGS

The climbing side of the ladder features wideflared legs for increased side-tip stability. The extension side of the ladder has a functional rear section to access tight workspaces between wall studs, ceiling trusses and roof or attic access ports.

7. V-BAR

The King Kombo Technical features a revolutionary V-bar. When in its extension configuration, the non-marring V-bar can grip outside corners, walls, studs and poles.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	EXTENSION HIGHEST STANDING LEVEL	EXTENSION MAX REACH*	SPREAD	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
13470-071	6'-10'	3' 9"	10' 3"	6' 7"	13′ 1″	3' 8"	2' 1"	7"	23 lbs
13905-071	8'-14'	5' 8"	12' 2"	10′ 4″	17′ 2″	4' 11"	2' 4"	7"	31 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

 $\mathbf{6}$



KING KOMBO®



375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

This 3-in-1 combination ladder easily converts from stepladder to extension and leaning configurations, giving you the perfect tool for any job. With its innovative one-handed, Grip-N-Go™ hinge, the King Kombo® XT can transition from position to position in one fluid motion. This model features an adjustable rear section for work on stairs and even more height in the extension position.

1. ROTATING WALL PAD

The crowning jewel of the King Kombo is its rotating wall pad, which allows users to safely lean the ladder on inside and outside corners, walls, poles and studs.

2. ONE-HANDED GRIP-N-GO™ HINGE

With its innovative, one-handed Grip-N-Go™ hinge, the King Kombo can transition from position to position in one fluid motion.

3. GROUND CUE®

Newly redesigned for improved performance. Provides an audible "click" on bottom step that alerts you when you have reached the bottom step of the ladder.

4. SURE-SET FEET

The King Kombo XT uses Little Giant's Sure-Set™ swivel feet for added traction at industrial job sites. These Sure-Set feet can be used in either the pad or spike position.

5. ADJUSTABLE OUTER SECTION

Adjustable outer section on the backside of the ladder gives you up to three more feet of ladder when used in the extension position and also allows you to use it on stairs in the A-frame position.

6. NON-CONDUCTIVE RAILS

Made from lightweight, ultra-durable fiberglass, the XT lets you work around electricity without fear of conductivity.

7. EASY ATTIC ACCESS

Parallel rails with no outward spread on the extension side mean you never have to hope the XT fits in ceiling trusses or attic access ports. It just does.

8. V-BAR


The non-marring V-bar can grip outside corners, walls, studs and poles in the extension configuration.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	EXTENSION HIGHEST STANDING LEVEL	EXTENSION MAX REACH*	SPREAD	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
13936-071	6'	3' 9"	10' 3"	2' 10" - 9' 5"	15' 11"	3' 8"	2' 1"	8"	35.5 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

ROTATING WALL PAD

Whether you're working on a flat wall, inside corner, outside corner or 2x4 stud, the non-marring, rotating wall pad allows you to lean the ladder to get closer to your work without fear of damaging the surface.

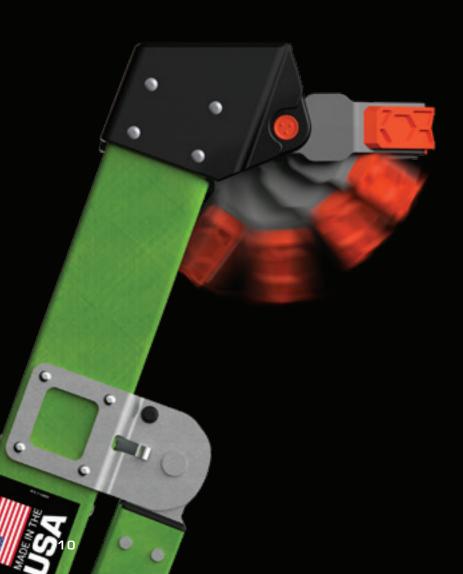



INSIDE CORNER



OUTSIDE CORNER



WALL




STUD

KING KOMBO® SAFETY AWARDS

FUNCTIONAL REAR SECTION

FITS BETWEEN STUDS













COMBINATION LADDERS **RAIL LOCKS** Keep the Sentinel's rails locked securely together while in the leaning position, storage and transit.

SENTINEL



375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

Sometimes, you need to get closer to the task at-hand than a standard A-frame offers, and that's where the Sentinel™ comes in. The Little Giant® Sentinel combines two ladders—an A-frame and leaning—into one, making it a versatile tool to help you get stuff done with confidence. Available in 10' and 12' models, the Sentinel is a Type IAA ladder rated to hold up to 375 lbs. This ladder meets or exceeds all OSHA and ANSI standards.

1. ROTATING WALL PAD

The Sentinel features a rotating wall pad that allows you to safely work on inside corners, outside corners, walls and studs. With its non-marring surface, you can lean your ladder to get closer to your work without fear of damaging the surface you're working on.

2. EXTRA WIDE COMFORT STEPS

At 3.12" wide, the steps on the Sentinel are already comfortable, but the top two standing steps are where the Sentinel really shines. The top steps are set at 6.25" for maximum foot comfort.

3. GROUND CUE®

Many injuries occur when descending and missing the last step of the ladder. On the bottom step of the ladder, the Ground Cue® makes an audible "click," alerting you that you've reached the ground safely.

4. RAIL LOCKS

Keep rails together while in leaning position, storage and transit.

5. NON-CONDUCTIVE FIBERGLASS RAILS

Our Hi-Viz Green fiberglass is lightweight and nonconductive. The vibrant green color is proven to increase visibility, preventing injuries from people or objects bumping the ladder while it's in use. The Sentinel is a great all-around ladder for tasks at home and on the go.

DID YOU KNOW?

The Sentinel is OSHA compliant as a stepladder and leaning ladder.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	SPREAD	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
15910-002	10'	7' 8"	14' 2"	5' 4"	2' 2"	7"	40 lbs
15912-002	12'	9' 7"	16′ 1″	6′ 3″	2' 4"	7"	48 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH





INNOVATIVE TOP CAP

Load it up! This top cap is designed for speed. Keep everything you need within reach.

SPREADER STEP

Press to open, pull to close. It's that easy. It's also extra standing room to provide comfort for your feet.

A-FORCE300



300 LBS RATED | TYPE IA | | OSHA + ANSI COMPLIANT

The A-Force300™ from Little Giant® sets up quickly, transports easily, and performs like a pro. Every. Single. Time. With a patent-pending spreader step**, versatile top cap, and sturdy full-boxed steps, this A-frame will help you get stuff done for years to come. The A-Force300 meets or exceeds all OSHA and ANSI standards, and is rated Type IA to hold 300 lbs.

1. INNOVATIVE TOP CAP

Four ports on the sides and rear of the top cap accept compatible Little Giant accessories. Add drill bit holders, clip holsters for drills and tape measures, friction locks for gallon and quart cans, and a magnetic fastener tray, and you've got a full toolbelt at the top of your ladder.

2. SINGLE-HANDED SPREADER STEP**

Easy setup with built-in comfort. The patentpending spreader step gives you four extra inches of standing room on the final standing step, as well as an easy hand hold for deployment and takedown.

3. COMFORT GRIP CARRY HANDLE

Molded hand grips on both balance points make the C-channel easy to hold and keep the front and rear frames aligned while carrying.

4. NON-CONDUCTIVE, HI-VIZ GREEN FIBERGLASS

Made from durable, lightweight fiberglass, this A-frame lets you work fearlessly around electricity.


5. FIELD-REPLACABLE FEET

Put your ladder where the work is. The A-Force300's thick, treaded feet are made for various terrains and are fully replaceable once worn.

PART NUMBER	MODEL	RATING	HIGHEST STANDING LEVEL	MAX REACH*	SPREAD	STORAGE HEIGHT	STORAGE WIDTH AT BASE	STORAGE DEPTH	WEIGHT
15794-001	4'	IA	1' 11"	8' 5"	30"	48"	21"	7"	16.5 lbs
15796-001	6'	IA	3' 10"	10' 4"	43"	72"	24"	7"	23 lbs
15798-001	8'	IA	5' 9"	12' 3"	56"	96"	27"	7"	29.5 lbs
15800-001	10'	IA	7' 8"	14' 2"	67"	120"	30"	7"	40 lbs
15802-001	12'	IA	9' 7"	16′ 1″	80"	144"	33"	7"	49 lbs

^{*} A 5' 6" PERSON WITH A 12" VERTICAL REACH ** NOT AVAILABLE ON 10' AND 12' MODELS

^{14 15}

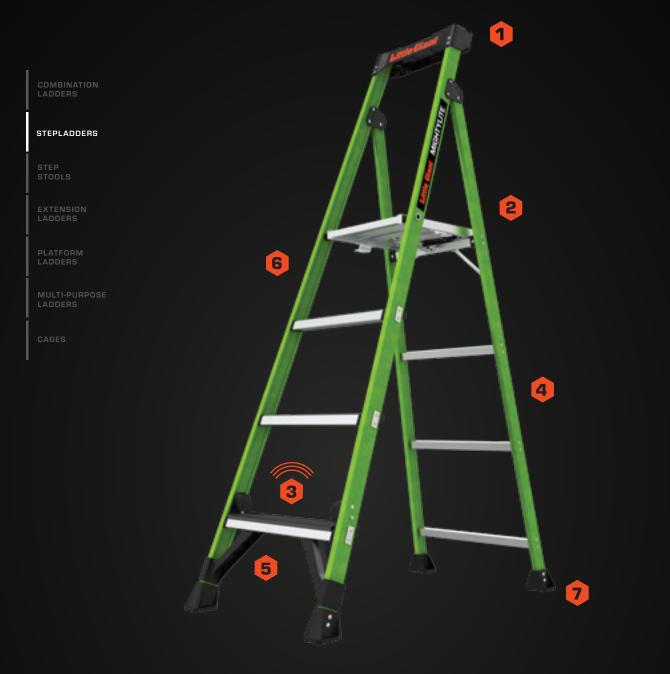



FUNCTIONAL TOP CAP

Load it up! This top cap is designed for speed. Keep everything you need within reach.

GROUND CUE®

Audible "click" on bottom step alerts you when you've reached the bottom step of the ladder.

MIGHTYLITE



375 LBS RATED | TYPE IAA | 300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT

The MightyLite™ 2.0 from Little Giant Ladder Systems® is a sturdy, easy-to-use stepladder that is built to last. This lightweight ladder was engineered with a slim storage profile while still supporting an impressive weight capacity. It's a "get stuff done" ladder built for pros.

1. TOOL TRAY TOP CAP

The MightyLite's innovative top cap features hooks, port holes, slots and grooves to keep your materials within reach while working.

2. STANDING PLATFORM

Extra-wide 3" steps with treads prevent slipping and foot fatigue. At 165 square inches, the comfortable standing platform creates a sturdy workspace that fully supports the feet. Work in comfort for extended periods.

3. GROUND CUE®

Newly redesigned for improved performance. Provides an audible "click" on bottom step that alerts you when you've reached the bottom step of the ladder.

4. SLIM STORAGE PROFILE

With a storage profile of only 4", easily store your MightyLite anywhere.

5. RAIL GUARDS

Shock-absorbing braces increase ladder's lifespan by protecting it during daily use.

6. NON-CONDUCTIVE FIBERGLASS RAILS


Non-conductive fiberglass rails rated to hold up to 375 lbs have been redesigned for added strength.

7. EXTRA-WIDE INDUSTRIAL FEET

Wide industrial feet provide added stability as well as surface area for using the ladder on grated surfaces.

PART NUMBER	MODEL	RATING	HIGHEST STANDING LEVEL	MAX REACH*	SPREAD	STEP WIDTH	STORAGE HEIGHT	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
15404-001	4' (2 step)	IAA	1' 9.5"	8' 3.5"	2' 1.5"	3"	4' 3"	1' 8.25"	5"	15.5 lbs
15405-001	5' (3 step)	IAA	2' 8.5"	9' 2.5"	2' 8"	3"	5' 2.5"	1' 9.5"	5"	19 lbs
15406-001	6' (4 step)	IAA	3' 7.75"	10' 1.75"	3' 2"	3"	6' 3.5"	1' 10.75"	5"	22.5 lbs
15408-001	8' (6 step)	IAA	5' 6.25"	12' 0.25"	4′ 3″	3"	8' 3"	2' 1.25"	5"	30 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH COMFORT PLATFORM 13" X 13"

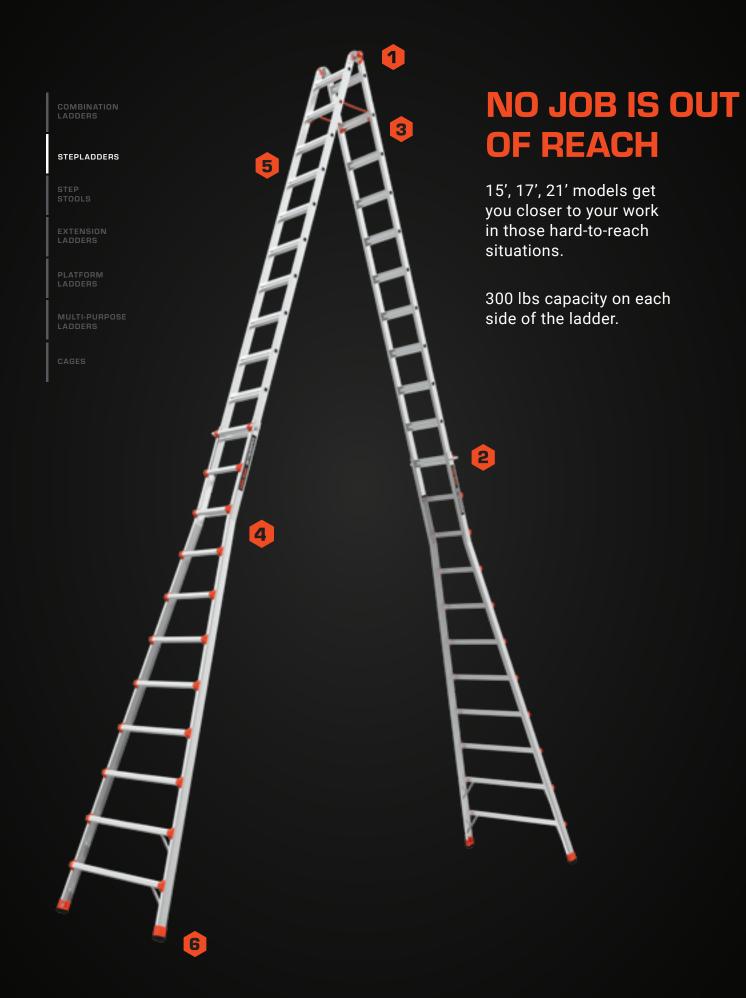

SKYSCRAPER



300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT

High-vaulted ceilings beware: there's no such thing as "hard to reach" with the Little Giant® SkyScraper™. This ladder stores at just over half its maximum extended height, making it the cheaper, simpler and more flexible alternative to a traditional lift. The SkyScraper is rated to hold 300 lbs on both sides and meets or exceeds all OSHA and ANSI standards.

1. PALM BUTTONS

Sturdy, easy-to-use palm buttons make the setup and takedown of your ladder easy.

2. LOCK TABS

Make fast, easy height adjustments with integrated lock tabs.

3. SAFETY STRAPS

Safety straps help keep the ladder spread at the correct distance and promote proper use of the ladder.

4. IDEAL FOR STAIRCASES

Articulating sides extend for safe and convenient use on staircases. Reach the task at hand without issue

5. UNMATCHED HEIGHTS

The SkyScraper is designed to help you reach chandeliers, skylights and other difficult positions in rooms with high vaulted ceilings.

6. REPLACEABLE FEET

With time, you may need to give your ladder a tune-up. The SkyScraper has replaceable feet for a quick, simple repair.

DID YOU KNOW?

The 21' SkyScraper is the tallest double-sided stepladder on the market, allowing you to easily reach the highest tasks on any job site.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	SPREAD	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
10109	15'	12' 3"	18' 9"	10' 10"	3' 1"	8"	71.3 lbs
10110	17'	14' 1"	20' 7"	12' 11"	3' 1"	8"	79 lbs
10121	21'	17' 11"	24' 5"	15' 3"	3' 7"	8"	102 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

STEPLADDERS

ROOM FOR TWO

TWO-PERSON LADDER

WORK FROM BOTH SIDES SIMULTANEOUSLY







375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

The DS-XL™ is designed as a true two-person stepladder. With its wide steps, both users will feel comfortable while working on the ladder. Made with Hi-Viz Green fiberglass, the ladder is non-conductive, and the color promotes safety, as it is the most visible color to the human eye. The DS-XL meets or exceeds all OSHA and ANSI standards, and with a Type IAA rating, it is certified to hold 375 lbs on both sides. It is available in 6' and 8' models.

1. RUBBER IMPACT BUMPERS

Rubber bumpers protect the ladder in transit.

2. DUAL GROUND CUE®

Audible "click" on bottom step alerts you when you have reached the bottom step of the ladder

3. EXTRA DEEP STEPS

Safe and stable comfort steps lessen fatigue during ladder usage.

4. TIP & GLIDE™ WHEELS

Easily move the ladder across the job site with Tip & Glide™ wheels.

5. LONG LIFE FEET

The ladder's heavy-duty feet are built to last, providing a secure foundation you can count on.

DID YOU KNOW?

The DS-XL is ultra shock-absorbing and was designed for airline use on windy tarmacs.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	MAX REACH*	SPREAD	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
15786-001	6'	3' 9.5"	10' 3.5"	5′	6' 2"	10.5"	35.5 lbs
15788-001	8′	5' 8"	12' 2"	6' 5"	8′ 2″	10.5"	47 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

STEP STOOLS

TAKE THE STAIRS...WITH YOU

PORTABLE STAIRCASE





PORTABLE STAIRCASE

Ultra-wide, non-slip steps and almost no overlap mean you can face forward whether you're going up or down-just like a real staircase.

TOOL TRAY

Load it up! This top cap is designed for speed. Keep everything you need within reach.

JUMBO STEP



375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

A compact step stool for not-so-compact jobs. The Little Giant® Jumbo Step™ is the lightweight alternative to grabbing your six-footer when you only need two or three. Ultra-wide steps make walking up the Jumbo Step as easy as walking up a staircase. Available in a 3-step model, this ladder meets or exceeds all OSHA and ANSI standards, and is rated Type IAA to hold 375 lbs.

1. NON-SLIP STAIRCASE STEPS

Ultra-wide, non-slip steps with almost no overlap make this step stool a genuine portable staircase.

2. TOOL TRAY AND HANDRAIL

The rotating safety handrail is both a sturdy lean point for added stability and a versatile tool tray for equipment that needs to be on hand.

3. OVERSIZED FEET

Need to set up over grating? No problem. The Jumbo Step's slip-resistant, oversized feet keep it steady and secure on a variety of industrial surfaces.

4. NON-CONDUCTIVE FIBERGLASS

Made from durable fiberglass, this step stool is designed for sites with electrical safety requirements.

5. SLIM PROFILE

Stop lugging a ladder to do a stool's work. The Jumbo Step is lightweight, easy to carry, and folds into a slim storage profile.

DID YOU KNOW?

The Jumbo Step works as a great way to get in and out of your truck bed. Just three steps up, grab your equipment, and three steps back down-all while facing forward.

PART NUMBER	MODEL	HIGHEST STANDING LEVEL	MAX REACH*	STEP WIDTH	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
11933	3 Step	2' 2"	8' 8"	8.5"	21.5"	4.5"	18 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

STEPL ADDERS

STEP STOOLS

EXTENSION

PLATFORM

MULTI-PURPOS LADDERS

CAGES


BUILT FOR SPEED

SO SIMPLE IT'S...SIMPLE

STAND ON BOTH SIDES OR WORK FROM THE TOP







No hassle, no messing with latches and no pinched fingers.

STAND ON TOP

Our split top step means you have a wide platform when you're furthest from the ground. Steps are climbable on both sides and support a straddle position.*

SURE STEP



375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

When you need a step stool that's as fast as you are, the Little Giant® Sure Step™ has your back. This non-conductive, fiberglass step stool is as sturdy as it is lightweight, and the nylon spreader straps make folding the Sure Step a one-handed, simple process. The Sure Step meets or exceeds all OSHA and ANSI standards, and is rated Type IAA to hold 375 lbs.

1. QUICK SETUP

The Sure Step's nylon spreader straps let gravity do the work: just grab one of the top steps and let the stool fall open or closed.

2. OVERSIZED FEET

Slip-resistant, oversized feet keep the Sure Step exactly where you put it, whether that's on solid ground or a grated surface.

3. FULL-BOX STEPS

These treaded, full-box steps are climbable on either side. Plus, the split top step means you have a wider, more stable standing platform when you're furthest from the ground.

4. COMFORTABLE TO STRADDLE*

The Sure Step supports a straddle position, making it easy to change working directions.

5. NON-CONDUCTIVE FIBERGLASS

Made from durable, lightweight fiberglass, this step stool lets you work fearlessly around electricity.

* Shoes should not exceed 13" for use in this position.

DID YOU KNOW?

During weight testing trials, the Sure Step maxed out the testing machine. In other words, full-box rails and steps are no joke. Plus, this trusty stool also works great with the Little Giant Plank™ products.

PART NUMBER	MODEL	HIGHEST STANDING LEVEL	MAX REACH**	STORAGE WIDTH AT BASE	STORAGE DEPTH	WEIGHT
11953	3 Step	2' 3"	8' 9"	1' 6.5"	8"	8 lbs

^{**} A 5' 6" PERSON WITH A 12" VERTICAL REACH

STEPLADDERS

STEP

EXTENSION LADDERS

PLATFORN LADDERS


MULTI-PURPOS LADDERS

CAGES

LEAN, MEAN AND HI-VIZ GREEN®

WORLD'S LIGHTEST FIBERGLASS EXTENSION LADDER





EASY TO EXTEND

Our double-pulley system means less sweat and more mechanical advantage.



SET UP ON SOFT TERRAIN

The Hyperlite's spring-loaded Sure-Set™ feet let you get stuff done wherever you're working.

HYPERLITE®



375 LBS RATED | TYPE IAA | 300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT*

The Little Giant® HyperLite® is designed with safety and ease of use in mind, so you can focus on the task-at-hand rather than worrying about your ladder. The HyperLite is available in IA and IAA ratings.

1. DOUBLE-PULLEY SYSTEM

By moving the pulley to the side of the ladder, the rope stays away from your feet. Incorporating a double-pulley gives you a mechanical advantage, making adjusting the ladder easier.

2. BUBBLE LEVELS

With bubble levels, you will always know if your ladder is level before you begin climbing. (Bottom level on all models. Side level on IAA models only.)

3. GROUND CUE®

Provides an audible "click" that alerts you when you have reached the bottom step of the ladder. (Only on IAA models.)

4. SURE-SET™ FEET

Securely stays in place, swivels for use in the spike foot position. (Only on IAA models.)

5. V-BAR

Optional add-on: Non-marring, heavy-duty v-bar grips poles and conforms to outside corners.

6. LIGHTWEIGHT FIBERGLASS

Non-conductive fiberglass rails allow you to work safely around electricity.

7. HI-VIZ GREEN

Our Hi-Viz Green coloring is proven to increase ladder visibility and safety.

DID YOU KNOW?

The HyperLite is lighter and stronger than comparable fiberglass extension ladders.

* Complies with all OSHA and ANSI A14 strength and testing standards. Rung/step spacing complies with OSHA and International standards. OSHA 1910.23, OSHA 1926.10.53, CSA Z11, EN131-1, AS/NZS 1892.2.6.2.

For full specs, see page 30.

STEPLADDERS

STEP

EXTENSION


PLATFORN LADDERS

MULTI-PURPOS LADDERS

CAGES

CLIMB WITH CONFIDENCE

ADJUSTS TO KEEP YOU LEVEL IN TOUGH TERRAIN

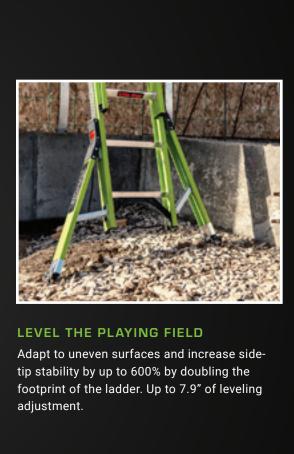







SUMOSTANCE®



375 LBS RATED | TYPE IAA | 300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT*

The SumoStance® is the only extension ladder in the world with Little Giant's patented leveling outrigger system, which more than doubles the ladder's base width and increases side-tip stability. The SumoStance's intuitive safety features give you stability and versatility on the ever-changing job site, all while staying lighter than extension ladders of the same size and duty rating.

1. WIDE-STANCE LEVELERS

Easily adapt to uneven terrain to feel more secure on your ladder.

2. DOUBLE-PULLEY SYSTEM

By moving the pulley to the side of the ladder, the rope stays away from your feet. Incorporating a double-pulley gives you a mechanical advantage, making adjusting the ladder easier.

3. GROUND CUE®

Provides an audible "click" on bottom step that alerts you when you have reached the bottom step of the adder. (Only on IAA models.)

4. BUBBLE LEVELS

With bubble levels, you will always know if your ladder is level and at the right angle. (Bottom level on all models. Side level on IAA models only.)

5. SURE-SET™ FEET

Securely stays in place, swivels for use in the spike foot position. (Only on IAA models.)

6. LIGHTWEIGHT FIBERGLASS

Lightweight, non-conductive fiberglass rails rated to hold up to 375 lbs.

7. HI-VIZ GREEN


Our Hi-Viz Green coloring is proven to increase ladder visibility and safety.

DID YOU KNOW?

The built-in leg levelers stabilize and level your extension ladder for safer, easier use.

* Complies with all OSHA and ANSI A14 strength and testing standards. Rung/step spacing complies with OSHA and International standards. OSHA 1910.23, OSHA 1926.10.53, CSA Z11, EN131-1, AS/NZS 1892.2.6.2.

For full specs, see page 31.

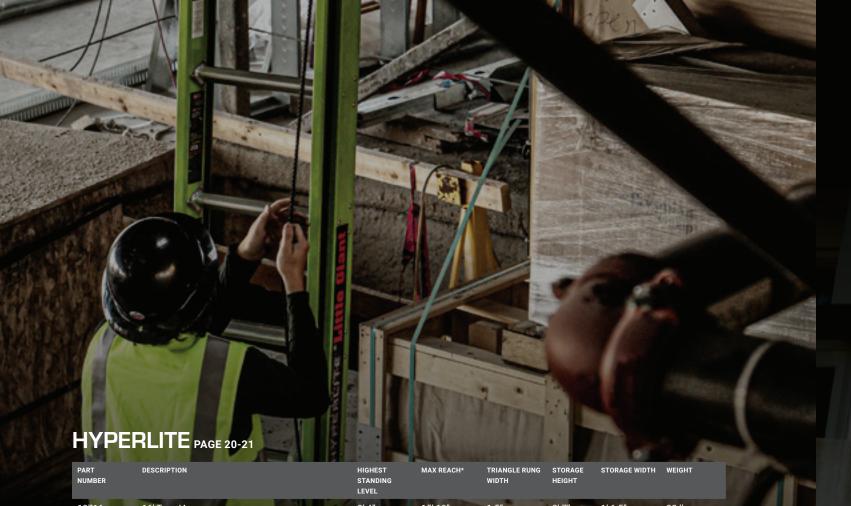

1000	A A SHE	10000	A SCHOOL		100	100000	-
PART NUMBER	DESCRIPTION	HIGHEST STANDING LEVEL	MAX REACH*	TRIANGLE RUNG WIDTH	STORAGE HEIGHT	STORAGE WIDTH	WEIGHT
18716	16' Type IA	9' 4"	15' 10"	1.5"	8′ 7″	1' 6.5"	28 lbs
18316	16' Type IA Claw, Cable Hooks & Pole Strap**	9′ 4″	15' 10"	1.5"	8′ 7″	1' 6.5"	35 lbs
17916	16' Type IAA	9' 5"	15′ 11″	1.5"	8′ 8″	1' 6.5"	31 lbs
17516	16' Type IAA Claw, Cable Hooks & Pole Strap**	9' 5"	15' 11"	1.5"	8′ 8″	1' 6.5"	33 lbs
18720	20' Type IA	13' 2"	19' 8"	1.5"	10′ 7″	1' 6.5"	36 lbs
18320	20' Type IA Claw, Cable Hooks & Pole Strap**	13' 2"	19' 8"	1.5"	10′ 7″	1' 6.5"	39 lbs
17920	20' Type IAA	13' 3"	19' 9"	1.5"	10′ 7″	1' 6.5"	38 lbs
17520	20' Type IAA Claw, Cable Hooks & Pole Strap**	13′ 3″	19' 9"	1.5"	10′ 7″	1' 6.5"	42 lbs
18724	24' Type IA	17' 0"	23′ 6″	1.5"	12' 7"	1' 6.5"	44 lbs
18324	24' Type IA Claw, Cable Hooks & Pole Strap**	17' 0"	23′ 6″	1.5"	12' 7"	1' 6.5"	50 lbs
17924	24' Type IAA	17′ 1″	23′ 7″	1.5"	12' 7"	1' 6.5"	45 lbs
17524	24' Type IAA Claw, Cable Hooks & Pole Strap**	17' 1"	23′ 7″	1.5"	12' 7"	1' 6.5"	48 lbs
18728	28' Type IA	20' 10"	27′ 4″	1.5"	14′ 6″	1' 6.5"	50 lbs
18328	28' Type IA Claw, Cable Hooks & Pole Strap**	20' 10"	27′ 4″	1.5"	14′ 6″	1' 6.5"	52 lbs
17928	28' Type IAA	20' 11"	27′ 5″	1.5"	14′ 7″	1' 6.5"	52 lbs
17528	28' Type IAA Claw, Cable Hooks & Pole Strap**	20′ 11″	27' 5"	1.5"	14' 7"	1' 6.5"	54 lbs
18732	32' Type IA	24′ 7″	31′ 1″	1.5"	16′ 6″	1' 6.5"	63 lbs
18332	32' Type IA Claw, Cable Hooks & Pole Strap**	24' 7"	31' 1"	1.5"	16′ 6″	1' 6.5"	66 lbs
17932	32' Type IAA	24′ 8″	31′ 2″	1.5"	16' 6"	1′ 6.5″	62 lbs
17532	32' Type IAA Claw, Cable Hooks & Pole Strap**	24′ 8″	31′ 2″	1.5"	16' 6"	1' 6.5"	65 lbs
17736	36' Type IA	27' 7"	34′ 1″	1.5"	18′ 6″	1' 6.5"	70 lbs
17336	36' Type IA Claw, Cable Hooks & Pole Strap**	27' 7"	34' 1"	1.5"	18' 6"	1' 6.5"	73 lbs
17740	40' Type IA	30′ 5″	36' 11"	1.5"	20′ 5″	1' 6.5"	77 lbs
17340	40' Type IA Claw, Cable Hooks & Pole Strap**	30′ 5″	36' 11"	1.5"	20' 5"	1' 6.5"	80 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

** ADD V TO THE END OF THE PART NUMBER TO REPLACE THE POLE STRAP WITH A V-BAR.

COMPLIES WITH ALL OSHA, ANSI A14 STRENGTH AND TESTING STANDARDS. RUNG/STEP

SPACING COMPLIES WITH OSHA AND INT'L STANDARDS. OSHA 1910.23, OSHA 1926.10.53, CSA

Z11, EN131-1, AS/NZS 1892.2.6.2.

SUMOSTANCE PAGE 22-23

PART NUMBER	DESCRIPTION	HIGHEST STANDING LEVEL	MAX REACH*	TRIANGLE RUNG WIDTH	STORAGE HEIGHT	STORAGE WIDTH	WEIGHT
18816	16' Type IA	9' 8"	16' 2"	1.5"	8′ 9″	1′ 10″	38 lbs
18416	16' Type IA Claw, Cable Hooks & Pole Strap**	9'8"	16′ 2″	1.5"	8′ 9″	1' 10"	35 lbs
17216	16' Type IAA	9′ 9″	16' 3"	1.5"	8′ 9″	1' 10"	39 lbs
17616	16' Type IAA Claw, Cable Hooks & Pole Strap**	9′ 9″	16' 3"	1.5"	8′ 9″	1' 10"	42 lbs
18820	20' Type IA	13′ 6″	20'	1.5"	10′ 9″	1′ 10″	38 lbs
18420	20' Type IA Claw, Cable Hooks & Pole Strap**	13′ 6″	20'	1.5"	10′ 9″	1' 10"	39 lbs
17220	20' Type IAA	13' 4"	20'	1.5"	10' 9"	1′ 10″	46 lbs
17620	20' Type IAA Claw, Cable Hooks & Pole Strap**	13' 6"	20'	1.5"	10' 9"	1' 10"	49 lbs
18824	24' Type IA	17' 3"	23' 9"	1.5"	12' 9"	1' 10"	52 lbs
18424	24' Type IA Claw, Cable Hooks & Pole Strap**	17' 3"	23' 9"	1.5"	12' 8"	1' 10"	50 lbs
17224	24' Type IAA	17' 4"	23' 10"	1.5"	12' 9"	1' 10"	52 lbs
17624	24' Type IAA Claw, Cable Hooks & Pole Strap**	17' 4"	23' 10"	1.5"	12' 9"	1' 10"	56 lbs
18828	28' Type IA	21' 1"	27' 7"	1.5"	14' 9"	1' 10"	57 lbs
18428	28' Type IA Claw, Cable Hooks & Pole Strap**	21' 1"	27′ 7″	1.5"	14′ 8″	1' 10"	52 lbs
17228	28' Type IAA	21' 2"	27′ 8 <mark>″</mark>	1.5"	14′ 8″	1' 10"	59 lbs
17628	28' Type IAA Claw, Cable Hooks & Pole Strap**	21' 2"	27' 8"	1.5"	14′ 8″	1' 10"	62 lbs
18832	32' Type IA	24' 11"	31′ 5″	1.5"	16′ 8″	1' 10"	72 lbs
18432	32' Type IA Claw, Cable Hooks & Pole Strap**	24' 11"	31′ 5″	1.5"	16′ 8″	1' 10"	66 lbs
17232	32' Type IAA	25'	31′ 6″	1.5"	16′ 8″	1' 10"	73 lbs
17632	32' Type IAA Claw, Cable Hooks & Pole Strap**	25'	31′ 6″	1.5"	16' 8"	1' 10"	76 lbs
17836	36' Type IA	27' 10"	34' 4"	1.5"	18' 8"	1' 10"	74 lbs
17436	36' Type IA Claw, Cable Hooks & Pole Strap**	27' 10"	34' 4"	1.5"	18' 8"	1' 10"	81 lbs
17840	40' Type IA	30' 8"	37′ 2″	1.5"	20' 7"	1' 10"	81 lbs
17440	40' Type IA Claw. Cable Hooks & Pole Strap**	30' 8"	37′ 2″	1.5"	20' 7"	1′ 10″	89 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
** ADD V TO THE END OF THE PART NUMBER TO REPLACE THE POLE STRAP WITH A V-BAR.
COMPLIES WITH ALL OSHA, ANSI A14 STRENGTH AND TESTING STANDARDS. RUNG/STEP
SPACING COMPLIES WITH OSHA AND INT'L STANDARDS. OSHA 1910.23, OSHA 1926.10.53,
CSA 211, EN131-1, AS/NZS 1892.2.6.2.
GROUND CUE AVAILABLE ON IAA MODELS.




EXTENSION LADDERS



RAPID LOCK® FASTENERS

Quickly adjust and fasten the different sized extender sections to your ladder.



SWIVEL FOOT (OPTIONAL)

Provides additional grip in situations that call for the spike foot position.

MIX AND MATCH

The UUA ladder allows you the ability to mix and match different sized bases and upper sections, so you can get the perfect size for the job at hand.



BASE SECTIONS

UNDERGROUND UTILITY ACCESS*



375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT*

Easily access your tasks at the job site with the Underground Utility Access™ ladder. While most manhole ladders are heavy and awkward to carry, this ultra-light utility access ladder is designed to allow one pro to access underground work areas quickly and safely. With ladder extenders in varying sizes, you can customize your ladder to have the right lengths needed for the task at hand.

1. MULTIPLE CONFIGURATIONS

Extend your ladder's length to meet the job's particular needs.

2. NARROW ACCESS

Narrow enough for easy access into manholes and other tight spaces.

3. RAPID LOCK® FASTENERS

Quickly adjust and securely fasten your ladder.

* Special Purpose Ladder. Complies with all applicable OHSA and ANSI A14 Standards, except base width and rung spacing.

VERSATILITY IN REACHING DEPTHS

THE PERFECT LADDER FOR **NARROW ACCESS POINTS**



PART NUMBER	DESCRIPTION	HIGHEST STANDING LEVEL	EXTENSION LADDER SIZE	MAX REACH**	TRIANGLE RUNG WIDTH	STORAGE HEIGHT	STORAGE WIDTH	WEIGHT
18004	4' Base Section	10"	4' 8"	7′ 4″	1"	4′ 8″	4"	16.5 lbs
18004-272	4' Base Section w/ Swivel Feet	10"	4' 8"	7′ 4″	1"	4′ 8″	4"	16.5 lbs
18114	4' Upper Section	10"	4' 8"	7′ 4″	1"	4′ 8″	4"	7 lbs
18008	8' Base Section	4' 10"	8' 8"	11' 4"	1"	8′ 8″	4"	20 lbs
18008-272	8' Base Section w/ Swivel Feet	4' 10"	8' 8"	11' 4"	1"	8' 8"	4"	20 lbs
18118	8' Upper Section	4' 10"	8' 8"	11' 4"	1"	8′ 8″	4"	13 lbs
18002	12' Base Section	8′ 5″	12' 8"	14' 11"	1"	12' 8"	4"	23.5 lbs
18002-272	12' Base Section w/ Swivel Feet	8' 5"	12' 8"	14' 11"	1"	12' 8"	4"	23.5 lbs

^{**} A 5' 6" PERSON WITH A 12" VERTICAL REACH





ROOMY PLATFORM

Work with 360 degrees of freedom. Grated for traction with spaces to release loose or falling debris.



WRAP-AROUND TOOL TRAY

A place for almost everything. Features a closable compartment for fasteners and screws.

FORTRESS



375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

This fortress wasn't made to keep things out—it was made to keep you in. With a large standing platform, wraparound enclosure, and auto-closing gate, the Fortress™ takes the benefits of a platform ladder and combines them with the lightweight, quick-and-easy setup of a stepladder.

1. SIMPE SETUP AND STORAGE

One movement, one person, one second—that's all you need to handle the Fortress like a pro. Just push the platform handle to deploy or pull it to fold.

2. ENCLOSED PLATFORM

The extra-large standing platform features a gated, wraparound enclosure that shuts automatically when you step in.

3. GROUND CUE®


The Ground Cue® is designed with safety as a priority. Up to 20% of ladder accidents come from missing the last step on the way down. With the Ground Cue, putting weight on the bottom step makes an audible and tactile "click," letting you know you've reached the final step.

4. INNOVATIVE TOOL TRAY

Slots, holes, hooks, a magnetic tray, accessory slots, and a closeable container provides the ultimate work center at the top of the Fortress and serves as a safety barrier. Compatible with the Loot Box^{m} , Strap Holder, and future accessories.

PART NUMBER	MODEL	MAX REACH*	HIGHEST STANDING LEVEL MAX	FOOTPRINT	PLATFORM SIZE	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
19303	3'	9' 2"	2' 8"	3' 2"	1′ 7″x 1′ 5″	7' 3"	4.5"	29 lbs
19304	4'	10′ 1″	3′ 7"	3' 8"	1′ 7″x 1′ 5″	8' 3"	4.5"	33 lbs
19305	5'	11'	4′ 6″	4' 2"	1′ 7″x 1′ 5″	9' 3"	4.5"	37 lbs
19306	6'	12'	5′ 6″	4' 8"	1′ 7″x 1′ 5″	10' 3"	4.5"	41 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

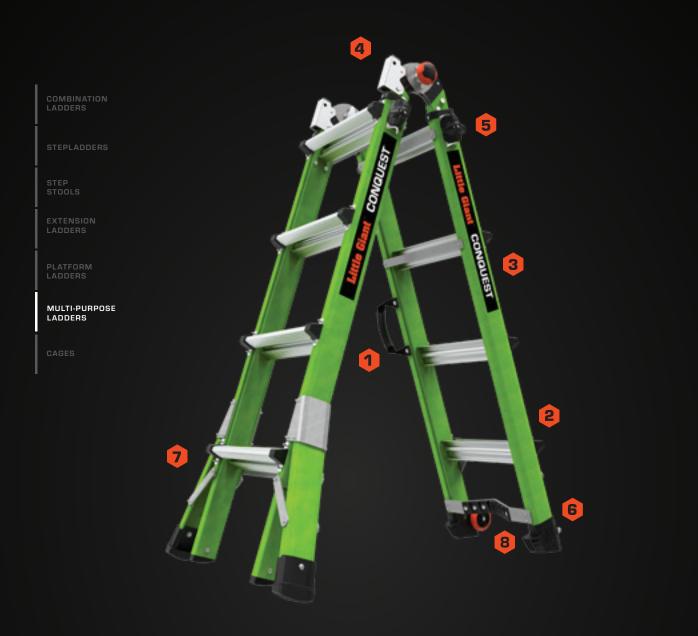



EASY TRANSPORT

Get to the next job without a sore shoulder. The attached carrying handle makes transport quick and simple.



MADE TO LEAN

Specialized corner feet and a non-marring v-bar let you lean safely on inside corners and poles.

CONQUEST



300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT

You need equipment you can count on, no matter where the job takes you. The Conquest™ from Little Giant Ladders® is a lightweight, easy-to-use, fiberglass multi-position ladder with everything you could need to get your work done quickly and efficiently.

1. CARRYING HANDLE

Attached carrying handle improves ladder portability.

2. NARROW ACCESS

Narrow top/back section allows for easier access to roofs, attics and tight spaces.

3. NON-CONDUCTIVE FIBERGLASS

Non-conductive, Hi-Viz Green fiberglass rails rated to hold up to 300 lbs.

4. ACCESSORY PORTS

Ports accept various Little Giant accessories to maximize the use of your ladder.

5. RAPID LOCK® FASTENERS

Quickly adjust and configure your ladder.

6. V-BAR AND CORNER FEET

Non-marring, heavy duty v-bar grips poles. New specialized corner feet allow leaning on inside corners.

7. WIDE-FLARED BASE

Feel safe with a solid foundation, increasing side-tip stability.

8. TIP & GLIDE™ WHEELS

Easily move the ladder across the job site with Tip & Glide™ wheels.

DID YOU KNOW?

This multi-position ladder adjusts to a variety of configurations and also has a carrying handle for ease of use.

PART NUMBER	MODEL	MAX REACH*	STEPLADDER SIZE MIN-MAX	STEPLADDER HIGHEST STANDING LEVEL MIN-MAX	EXTENSION SIZE MIN-MAX	EXT. HIGHEST STANDING LEVEL MIN-MAX	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
17117-001	17'	18' 1"	4' 6" -7' 6"	1' 11.5" - 4' 10"	9' - 15'	5' 9" - 11' 7"	4′ 7"	10"	37.5 lbs
17122-001	22'	22'	5' 6" - 9' 6"	2' 11" - 6' 8"	11' - 19'	7' 10" - 15' 6"	5′ 7″	10"	46 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH





SET UP ANYWHERE

Adjust to unlevel terrain by offsetting the outriggers.



MADE TO LEAN

Specialized corner feet and a non-marring v-bar let you lean safely on inside corners and poles.

CONQUEST ALL-TERRAIN



300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT

It's an uneven world out there. Level the playing field with the Conquest™ All-Terrain from Little Giant Ladders®. This multiposition ladder features leveling outriggers with swivel feet for use on any industrial terrain. Plus, it's Hi-Viz Green now.

1. CARRYING HANDLE

Attached carrying handle improves ladder portability.

2. NARROW ACCESS

Narrow top/back section allows for easier access to roofs, attics and tight spaces.

3. NON-CONDUCTIVE FIBERGLASS

Non-conductive fiberglass rails rated to hold up to 300 lbs.

4. ACCESSORY PORTS

Ports accept various Little Giant accessories to maximize the use of your ladder.

5. RAPID LOCK® FASTENERS

Quickly adjust and configure your ladder.

6. V-BAR AND CORNER FEET

Non-marring, heavy duty v-bar grips poles and conforms to outside corners. Specialized corner feet allow leaning on inside corners.

7. LEVELING OUTRIGGERS

Leveling Outriggers increase side-tip stability by more than doubling the footprint of the ladder while offering the ability to adjust to unlevel terrain.

8. TIP & GLIDE™ WHEELS

Easily move the ladder across the job site with Tip & Glide™ wheels.

DID YOU KNOW?

This multi-position ladder gives you the ability to adjust to unlevel terrain. No matter where the job takes you, you'll be ready.

PART NUMBER	MODEL	MAX REACH*	STEPLADDER SIZE MIN-MAX	STEPLADDER HIGHEST STANDING LEVEL MIN-MAX	EXTENSION SIZE MIN-MAX	EXT. HIGHEST STANDING LEVEL MIN-MAX	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
17107-001	17'	18′ 1″	4′ 6″ -7′ 6″	1' 11.5" - 4' 10"	9' - 15'	5' 9" - 11' 7"	4′ 7″	10"	42 lbs
17102-001	22'	22"	5' 6" - 9' 6"	2′ 11" - 6′ 8"	11' - 19'	7' 10" - 15' 6"	5' 7"	10"	51 lbs

FULLY ENCLOSED PLATFORM

WE SOLVED THE TIE-OFF PROBLEM

STEPLADDERS


STEP

EXTENSIO

PLATFORI

MULTI-PURPOSI LADDERS

CAGES

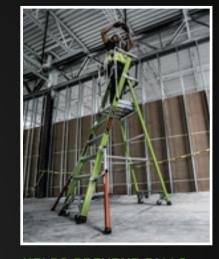

HELPS PREVENT FALLS
DUE TO OVERREACHING

Fully enclosed platform with 5" kick plate and midspan.



EASY TO SET UP AND TRANSPORT

Easy to move and set up. Saves time and money over scaffolding and lifts.

SAFETY CAGE®



375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

It's not a ladder, it's the Little Giant® Safety Cage®. With the Cage, you can access workspaces that would typically require tying off, setting up scaffolding or using a lift, all with less time and labor than other climbing solutions. The Cage has a comfortable standing surface with a fully enclosed toe kick and wraparound enclosure, making it faster, safer and less expensive than many scaffolding or lift options. Plus, because you can work hands-free, the Safety Cage is perfect for jobs like maintaining large HVAC equipment or installing stage lighting.

1. FULLY ENCLOSED PLATFORM

42" handrail plus midspan and toe kick can eliminate the need to tie off in most situations. Enclosed platform promotes comfort while elevated.

2. GROUND CUE®

Audible "click" on bottom step alerts you when you have reached the bottom step.

3. NON-CONDUCTIVE FIBERGLASS

Non-conductive fiberglass rails rated to hold up to 375 lbs.

4. DEPLOYABLE OUTRIGGERS

Outriggers help provide additional side-tip stability while in use. Cage passes all ANSI tests for stability without outriggers deployed.

5. WEIGHT-SENSITIVE CASTER WHEELS

Spring-loaded caster wheels let you reposition the Safety Cage when it isn't loaded. Just step off to move it, step on to secure it and step up to get stuff done

DID YOU KNOW?

The Safety Cage eliminates the tie-off requirement and is easier to use than scaffolding.

PART NUMBER	MODEL	COMPARABLE STEP LADDER SIZE	HIGHEST STANDING LEVEL	MAX REACH*	SPREAD	STEP WIDTH	STORAGE HEIGHT	STORAGE WIDTH AT BASE	WEIGHT
19702**	2'	4'	1′ 10″	8' 4"	2' 10"	3"	6' 5"	2' 3.5"	45 lbs
19704-146	4'	6'	3′ 8″	10′ 2″	3' 11.5"	3"	8' 4"	2' 11.5"	54 lbs
19706-146	6'	8'	5' 7"	12' 1"	5' 1.5"	3"	10′ 4″	3' 2.5"	65 lbs
19708-146	8'	10'	7' 5"	13' 11"	6′ 3″	3"	12' 4"	3' 5.5"	69 lbs
19710-146	10'	12'	9' 4"	15' 10"	7' 5"	3"	14' 3.5"	3' 8"	81 lbs

A 5' 6" PERSON WITH A 12" VERTICAL REACH

STORAGE DEPTH: 6" PLATFORM SIZE: 18" X 22" GUARDRAIL HEIGHT: 42"
**DOES NOT INCLUDE OUTRIGGERS

SAVES TIME AND MONEY

SIMPLE SCAFFOLDING ALTERNATIVE

SAFETY CAGE®

ADJUSTABLE



EXTENSION

PLATFORM


MULTI-PURPOS LADDERS

CAGES



COMPLY WITH TIE-OFF RULES

Self-enclosing platform is a versatile, safe alternative to ordinary stepladders.



FAST AND SAFE
ALTERNATIVE FOR
TEMPORARY SCAFOLDING

Easy to move and set up. Safe over uneven surfaces and stairs.

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

Many industries require professionals to tie off at an anchor point when working at certain heights. This standard helps keep people safe, but it can be a difficult standard to maintain. The OSHA-compliant Little Giant® Adjustable Safety Cage® eliminates the need to tie-off, making jobs faster, safer and less expensive than many scaffolding options. The Adjustable Safety Cage meets or exceeds all OSHA and ANSI standards and is rated IAA to hold 375 lbs.

1. FULLY ENCLOSED PLATFORM

42" handrail plus midspan and toe kick can eliminate the need to tie off in most situations. Enclosed platform promotes comfort while elevated.

2. WHEEL LIFT™ CASTERS

Easily move the Cage while fully deployed.

3. TIP & GLIDE™ WHEELS

Easily move the Cage across the job site with Tip & Glide™ wheels.

4. DEPLOYABLE OUTRIGGERS

Outriggers help provide additional side-tip stability while in use. Cage passes all ANSI tests for stability without outriggers deployed.

5. NON-CONDUCTIVE FIBERGLASS

Non-conductive fiberglass rails rated to hold up to 375 lbs.

6. WIDE-FLARED BASE

Prevent incidents with a solid foundation, increasing side-tip stability.

DID YOU KNOW?

The Adjustable Safety Cage can easily be set up by one person, unlike most scaffolding options.

PART NUMBER	MODEL	HIGHEST STANDING LEVEL MIN-MAX	MAX REACH*	SPREAD MIN-MAX	STORAGE HEIGHT	WEIGHT
18503-240**	3' - 5'	3' - 4' 11"	11′ 5″	3' 9" - 5' 11"	7' 10"	102 lbs
18503-243**	3' - 5'	3' - 4' 11"	11' 5"	3' 9" - 5' 11"	7' 10"	107 lbs
18503-817**	3' - 5'	3' - 4' 11"	11′ 5″	3' 9" - 5' 11"	7' 10"	105 lbs
18509-240	5' - 9'	4' 11" - 8' 8.5"	15′ 2.5″	5' - 7' 5"	9' 10"	129 lbs
18509-243	5' - 9'	4' 11" - 8' 8.5"	15' 2.5"	5' - 7' 5"	9' 10"	133 lbs
18509-817	5' - 9'	4' 11" - 8' 8.5"	15′ 2.5″	5' - 7' 5"	9' 10"	130 lbs
18515-240	8' - 14'	7' 8.5" - 13' 5"	19' 11"	6' 8.5" - 10' 6"	12' 9"	151 lbs
18515-243	8' - 14'	7' 8.5" - 13' 5"	19' 11"	6' 8.5" - 10' 6"	12' 9"	156 lbs
18515-817	8' - 14'	7' 8.5" - 13' 5"	19' 11"	6' 8.5" - 10' 6"	12' 9"	153 lbs

^{*} A 5' 6" PERSON WITH A 12" VERTICAL REACH

AVAILABLE OPTIONS: -240 INCLUDES WHEEL LIFT AND NET, -243 INCLUDES WHEEL LIFT, NET AND ALL TERRAIN WHEELS, -817 INCLUDES WHEEL LIFT AND RATCHET LEVELERS

^{**} OUTRIGGERS NOT AVAILABLE ON 3'-5' MODELS



1198 North Spring Creek Place Springville, Utah 84663 USA

> P: 866.872.5901 F: 801.489.9691

www.LittleGiantLadders.com
PAT. www.LittleGiantLadders.com/patents
©2023 Little Giant Ladder Systems 80328 v24 08.23