




## Derby Cover Application-----VP-IV &SDR

Some of the aftermarket derby covers and Harley -Davidson accessory derby covers will hit the VP clutch. We have made a VP "Template (See below)" to check the clearance between the derby cover and VP Clutch. (See picture)

\*This Template for 1999 and up 5 hole Derby Covers

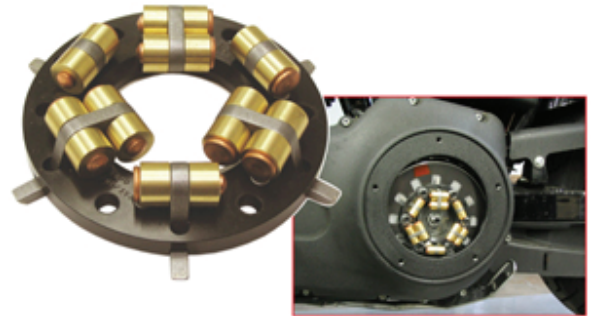

Align template boltmark to the top of the derby cover's bolt hole and inbetween the bottom two holes on the derby cover when checking clearance.



Non-stock derby (including '03 Anniversary cover) cover will require a Derby cover spacer due to less clearance. This list shows what thickness of the spacer is needed on some HD genuine accessory covers.

Most aftermarket derby covers do not have a recess on the back and require a 1/2" thick spacer.

We also recommend using our special .60" thick derby cover gasket (**Part # AM003-001**) for additional clearance.

## Derby Cover Spacers



### **For '99 and later Big Twin (5 holes)**

Parts#AM004-002 ----- 1/4" thick

Parts#AM004-003 ----- 1/2" thick

### **For '70 to '98 Big Twin (3 holes)**

Parts#AM004-004 ----- 1/4" thick

Parts#AM004-006 ----- 1/2" thick

*No spacer required*

Stock



25340-99A  
Live to Ride



25334-99A  
Frame



25338-99  
H-D Motor



25335-99  
V-wing



25713-99  
Twin Cam



*1/4" thick spacer required*

25441-04A  
Skull



25770-99  
Flying Wheel



25001-03  
100th Anniversary



*1/2" thick spacer required*

\*Any aftermarket covers which have no recess on the back of the cover.

25347-02  
Bar&Shield




25345-01  
Slotted



# "5 speed / 6 speed"

TO CHECK THE CLEARANCE BETWEEN THE VPC AND DERBY COVER

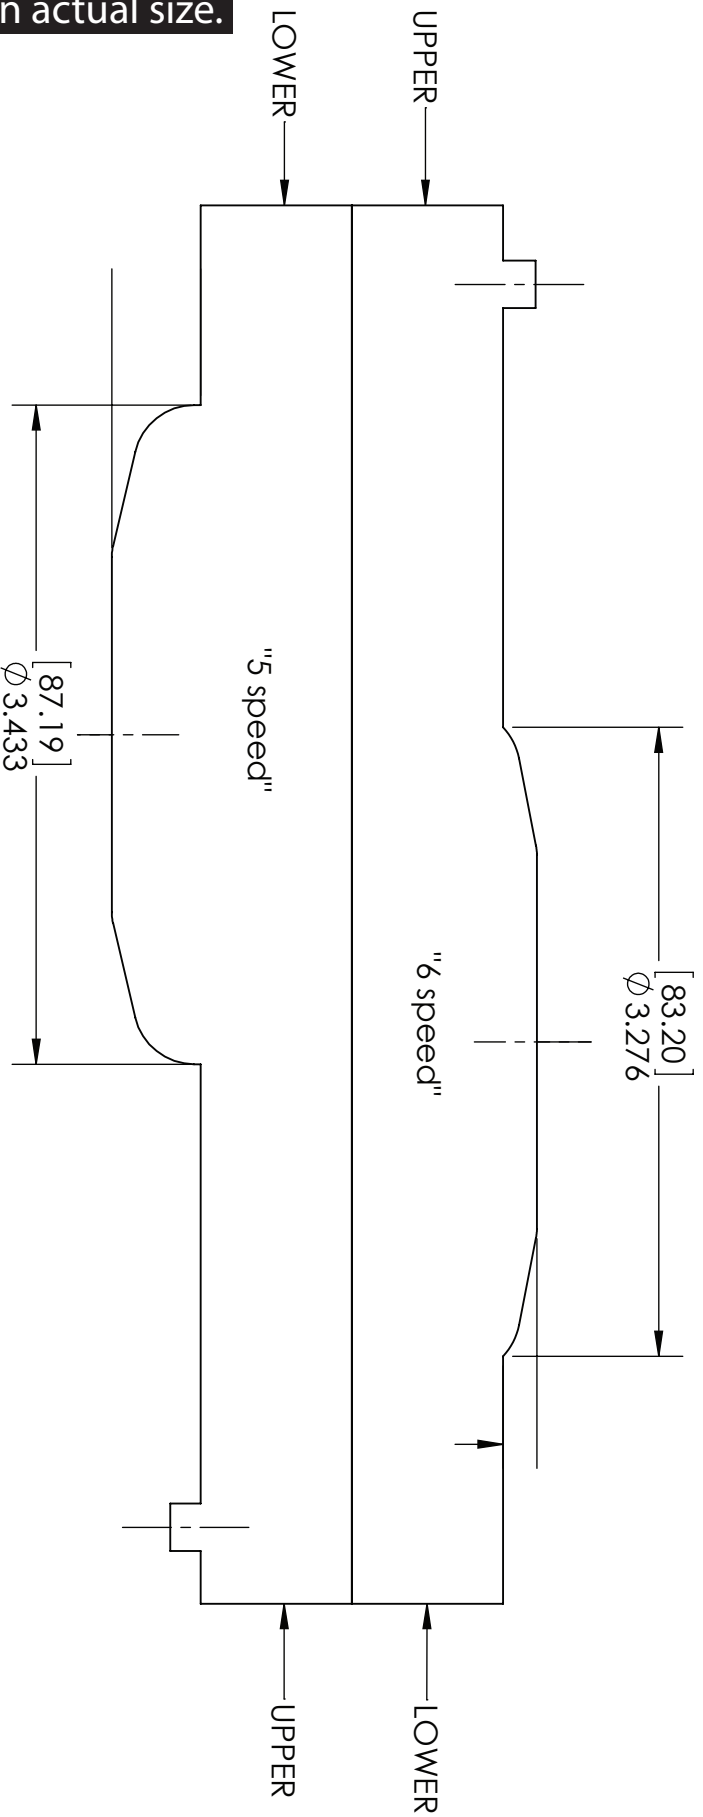

Please Print it in actual size.

Please Print it in actual size.