



CLEANLIFE®
Finding a Better Way®

ULTRALUX®
MODERN LUXURY LIGHTING

AC-Powered LED Lighting

2024 Line-Voltage Catalog



Table of Contents

Section	Page
Introduction	2
LED Light Bulbs	3-4
Smart LED Bulbs & Strips	5
LED Downlights	6
LED Round Panels	7
LED Flush Mounts	8
LED Ceiling Fixtures	9
LED Track Lights	10
Surface Mount LED Panels & Edgelit Undercabinet Fixtures	11-12
LED Pendants	13-16
Modern LED Tube Lights & Smart LED Tube Lights	17
LED Vanity Lights / Sconces	18-24
Outdoor Light Fixtures	25-28
Commercial Light Fixtures	29-34

Color Selection Chart



Finding a Better Way™

CLEANLIFE® and UltraLux® LED solid-state lighting technology provides precise color temperature control (CCT), excellent color consistency and stability, and high color rendition (CRI). With this technology, CLEANLIFE® bulbs can faithfully and accurately reproduce the colors of objects when compared to a natural light source.

LED Filament – LED Technology

- Looks, feels and dims like an original Edison incandescent bulb
- Perfectly balanced illumination in all directions
- LED filament technology
- Ballast compressed to fit in bulb base



All LED's must have a CRI of $80 \pm 10\%$ and fall within the CCT tolerance requirements stated below*

The CLEANLIFE® Standard

Our products have premium quality, high efficacy, licensed white LED chips, manufactured under strict quality control standards. And when it comes to energy efficiency, all of our LED lamps and fixtures are certified to UL or ETL, FCC, and RoHS standards with options available for Energy Star, Title 20 and Title 24.

	Nominal CCT	CCT (K)
	2700 K	2725 \pm 145
Correlated Color Temperature (CCT)	3000 K	3045 \pm 175
	3500 K	3465 \pm 245
	4000 K	3985 \pm 275
	4500 K	4503 \pm 243
	5000 K	5028 \pm 283
	5700 K	5665 \pm 355
	6500 K	6530 \pm 510

*Please note, the above chart excluded RGB, RGBW, and RGB+CCT color temperatures.

G4 and G9 LED Bulbs



Part Number	Lens	Watts	Lumens	Dimmable	CRI	Energy Star	Title 20
CL-LED-G4-2WCXXN	Clear	2W	140lm	No	90+	No	No
CL-LED-G9-5WCXXN	Clear	4.5W	375lm	Yes	90+	No	No

Color Temperatures

2700K

3000K



3-Year Limited Warranty

*Select models only

B11 Glass LED Bulbs



Part Number	Lens	Watts	Lumens	Dimmable	CRI	Energy Star	Title 20
CL-LED-B11-5WCXXD	Clear	4.5W	360lm	Yes	90+	Yes	Yes
CL-LED-B11-5WWXXN	Frosted	4.5W	360lm	Yes	90+	Yes	Yes
CL-LED-B11-6WCXXD	Clear	5.5W	500lm	Yes	90+	Yes	Yes
CL-LED-B11-6WWXXN	Frosted	5.5W	475lm	Yes	90+	Yes	No

Color Temperatures

2700K

3000K



3-Year Limited Warranty

*Frosted model only

S14 Glass LED Bulbs



Part Number	Lens	Watts	Lumens	Dimmable	CRI	Energy Star	Title 20
UL-LED-S14-1WC27N	Clear	1.2W	100lm	No	80+	No	No
UL-LED-S14-2WA22N	Amber	2W	180lm	No	80+	No	No
UL-LED-S14-2WCRN	Red	2W	N/A	No	80+	No	No
UL-LED-S14-2WCGN	Green	2W	N/A	No	80+	No	No
UL-LED-S14-2WCBN	Blue	2W	N/A	No	80+	No	No
UL-LED-S14-2WCYN	Yellow	2W	N/A	No	80+	No	No

Color Temperatures

2200K

2700K



3-Year Limited Warranty

*Does not include Clear Glass Bulb

A15 Glass LED Bulbs



Part Number	Lens	Watts	Lumens	Dimmable	CRI	Energy Star	Title 20
CL-LED-A15-5WCXXD	Clear	5W	450lm	Yes	90+	No	No

Color Temperatures

- 2700K
- 3000K



3-Year Limited Warranty

A19 Glass LED Bulbs



Part Number	Lens	Watts	Lumens	Dimmable	CRI	Energy Star	Title 20
CL-LED-A19-8WWXXD (T20, ES)	Frosted	8W	800lm	Yes	90+	Yes	Yes
CL-LED-A19-11WWXXD (T20, ES)	Frosted	11W	1100lm	Yes	90+	Yes	Yes
CL-LED-A19-9WWXXN	Frosted	9W	1000lm	No	85+	No	No

Color Temperatures

- 2700K
- 3000K



3-Year Limited Warranty

**Select models only*

A21 Glass LED Bulbs



Part Number	Lens	Watts	Lumens	Dimmable	CRI	Energy Star	Title 20
CL-LED-A21-14WWXXD (T20, ES)	Frosted	14W	1600lm	Yes	90+	Yes	Yes
CL-LED-A21-12WWXXN	Frosted	12W	1500lm	No	85+	No	No

Color Temperatures

- 2700K
- 3000K



3-Year Limited Warranty

**Select models only*

ST19 Glass LED Bulbs



Part Number	Lens	Watts	Lumens	Dimmable	CRI	Energy Star	Title 20
CL-LED-ST19-8WCXXD	Clear	8W	800lm	Yes	80+	No	No

Color Temperatures

- 2700K
- 3000K



3-Year Limited Warranty

Smart A19 LED Light Bulbs

CLEANLIFE®
SMART



Part Number	Watts	Average Lumens	CRI	Input Voltage
CL-SMRT-A19-9W-RGB2765-XPB-WBLE-01	9W	840lm	80+	120VAC

Smart Remote Control



CL-SMRT-BCR-BK-RGBT-01
(Sold Separately)




3-Year Limited Warranty

Color Temperature



RGB and Tunable White



Smart LED Downlights

CLEANLIFE®
SMART



Part Number	Watts	Average Lumens	CRI	Input Voltage	Dimensions
CL-SMRT-DL6-12W-RGB2765-XPB-WBLE-01	12W	960lm	80+	120VAC	7.3" W x 2.6" H

Smart Remote Control



CL-SMRT-BCR-BK-RGBT-01
(Sold Separately)

Finish Color



White


Color Temperature



RGB and Tunable White



3-Year Limited Warranty



Smart Indoor USB Light Strip

CLEANLIFE®
SMART



Part Number	Watts	Lumens	CRI	Input Voltage	Strip Length
CL-SMRT-TLK-USB-RGB30-WFB-2M-01	3W	250lm	80+	5VDC	6.6'
CL-SMRT-TLK-USB-RGB30-WFB-2.5M-01	3.5W	260lm	80+	5VDC	8.2'
CL-SMRT-TLK-USB-RGB30-WFB-3.75M-01	4W	280lm	80+	5VDC	12.3'



3-Year Limited Warranty


Color Temperature




3000K

RGB + 3000K

Power Supply and Mounting Hardware Included



Recessed LED Canless Downlights

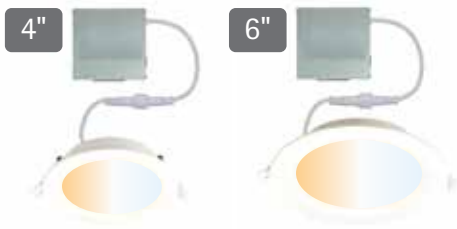

Shown with White

Mounting Plate
Sold Separately
CL-RDMP-01



Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
CL-LED-TDL04-2750-XX	4"	8W	750lm	80+	120VAC	4.8" W x 1.4" H
CL-LED-TDL06-2750-XX	6"	12W	1150lm	80+	120VAC	6.6" W x 1.4" H

Finish Colors



Color Temperature

5 CCT Options with Internal Switch
2700K - 3000K - 3500K - 4000K - 5000K



5-Year Limited Warranty

LED Flush Mount Disc Light



Shown with White

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
CL-LED-FMDL07-XXXX	7"	13W	1100lm	90+	120VAC	7-1/4" W x 7/8" H

Finish Colors



Color Temperatures

3000K 4000K 5000K



5-Year Limited Warranty

Edge-Lit LED Round Panel Lights



Shown with White



Shown with White

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
CL-LED-ERP05-XXXX	5"	12W	860lm	90+	120VAC	5-3/8" W x 3/4" H
CL-LED-ERP07-XXXX	7"	15W	1100lm	90+	120VAC	7" W x 3/4" H

Finish Colors



Color Temperatures

3000K 4000K 5000K



5-Year Limited Warranty




Edgelit Round Panels with Magnetic Trims

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
CL-LED-MRP05-10-WN BG2750	5"	10W	600lm	80+	120VAC	5-3/8" W x 5/8" H
UL-LED-MRP07-12-WN BG2750	7"	12W	600lm	80+	120VAC	7-1/8" W x 5/8" H
UL-LED-MRP12-24-WN BG2750	12"	24W	1750lm	80+	120VAC	11-7/8" W x 5/8" H



Finish Colors



Color Temperature

5 CCT Options with Internal Switch
2700K - 3000K - 3500K - 4000K - 5000K



5-Year Limited Warranty



LED Flush Mount Disc Lights with O-Ring

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-USFM06-WTXX	6"	12W	840lm	80+	120VAC	6" W x 1" H
UL-LED-USFM08-WTXX	8"	15W	1000lm	80+	120VAC	7-3/4" W x 1-1/4" H
UL-LED-USFM12-WTXX	12"	17W	1100lm	80+	120VAC	12" W x 1-3/4" H
UL-LED-USFM16-WTXX	16"	30W	2100lm	80+	120VAC	16" W x 2" H

6"



Shown with White

8"



Shown with White

Finish Color



White

Color Temperatures



5-Year Limited Warranty

ULTRALUX®

12"



Shown with White

16"



Shown with White





Classic LED Ceiling Fixture

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-CLCF-XX30	11"	15W	1500lm	80+	120VAC	11-3/4" W x 7-1/8" H



Shown with Brushed Gold

Finish Colors



Color Temperature

3000K



5-Year Limited Warranty



Free Form LED Ceiling Fixture

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-FFCL-XX30	16"	22W	1200lm	80+	120VAC	16-1/4" W x 13-7/8" H



Shown with Brushed Nickel

Finish Colors



Color Temperature

3000K



5-Year Limited Warranty



Modern LED Track Light

ULTRALUX®

3-Lamp



Shown with Brushed Nickel

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-MTL03-BN30	15W	1000lm	80+	120VAC	24" L x 5" W x 7" H

Finish Color



Brushed Nickel

Color Temperature

3000K



5-Year Limited Warranty

4-Lamp



Shown with Brushed Nickel

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-MTL04-BN30	20W	14000lm	80+	120VAC	36" L x 5" W x 7" H

Finish Color



Brushed Nickel

Color Temperature

3000K



5-Year Limited Warranty



CCT Switchable Surface Mount LED Panel Lights

ULTRALUX®

1'x4'



Shown with Brushed Nickel

2'x2'



Shown with Matte Black


2'x4'



Shown with Matte White

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-IDP-12-48-30W-3050-XX-ACD	1'x4'	30W	3350lm	80+	120VAC	47.7" L x 11.9" W x 1.1" H
UL-IDP-24-24-30W-3050-XX-ACD	2'x2'	30W	3350lm	80+	120VAC	23.7" L x 23.7" W x 1.1" H
UL-IDP-24-48-40W-3050-XX-ACD	2'x4'	40W	4500lm	80+	120VAC	47.7" L x 23.7" W x 1.1" H


Finish Colors



Color Temperature

3 CCT Options with Internal Switch
3000K - 4000K - 5000K

Surface Mount Hardware Included

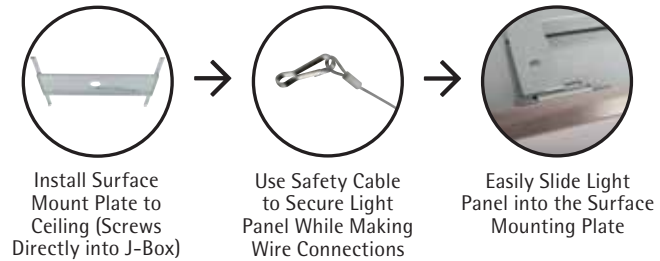


5-Year Limited Warranty


Slim Surface Mount LED Panel with Nightlight

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-SIPD-4-24-10W-2765-XX-ACD	24"	10W	1000lm	80+	120VAC	24" L x 4" W x 1" H
UL-LED-SIPD-4-36-20W-2765-XX-ACD	36"	20W	2000lm	80+	120VAC	36" L x 4" W x 1" H
UL-LED-SIPD-4-48-30W-2765-XX-ACD	48"	30W	3000lm	80+	120VAC	48" L x 4" W x 1" H

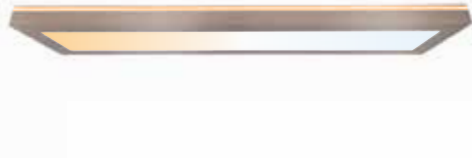

Finish Colors



Color Temperature

2200K
Nightlight

5 CCT Options with External Button
2700K - 3000K - 4000K - 5000K - 6500K

24"




Shown with Brushed Nickel

48"



Shown with Matte Black



5-Year Limited Warranty

LED Surface Mount Panel with Decorative Frame

ULTRALUX®

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
GE-IDP-12-48-40W-2765-XX-ACD-01	40W	4000lm	85+	90~135VAC	49.53" L x 13.7" W x 1.18" H



Shown with White

Finish Colors



Color Temperature

5 CCT Options with Internal Switch
2700K - 3000K - 4000K - 5000K - 6500K



5-Year Limited Warranty

Edgelit LED Undercabinet Light

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-EUCL-12-8W-2765-XX-ACD	12"	8W	800lm	80+	120VAC	12" L x 3.97" W x 0.94" H
UL-LED-EUCL-18-12W-2765-XX-ACD	18"	12W	1200lm	80+	120VAC	18" L x 3.97" W x 0.94" H
UL-LED-EUCL-24-15W-2765-XX-ACD	24"	15W	1500lm	80+	120VAC	24" L x 3.97" W x 0.94" H
UL-LED-EUCL-36-24W-2765-XX-ACD	36"	24W	2400lm	80+	120VAC	36" L x 3.97" W x 0.94" H



Shown with White

Finish Colors



Color Temperature

5 CCT Options with External Button
2700K - 3000K - 4000K - 5000K - 6500K



Mounting Hardware Included



5-Year Limited Warranty



Traditional Mini LED Glass Pendant

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-RMGP-BN30	11"	8W	400lm	80+	120VAC	5-1/2" W x 10-1/2" H



Finish Color



Brushed Nickel

Color Temperature

3000K



5-Year Limited Warranty

Shown with Brushed Nickel



Helix LED Pendant





ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-HLXP-XX30	16"	17W	950lm	80+	120VAC	15-3/4" H (6' Cord Max)



Shown with Brushed Gold

Finish Colors

- 
 Matte White
- 
 Matte Black
- 
 Brushed Nickel
- 
 Brushed Gold

Color Temperature

3000K



5-Year Limited Warranty



Framework Mini LED Pendant



ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-CFMP-XX27	10"	6W	500lm	80+	120VAC	5" W x 10" H (49-5/8" Rod Max)



Shown with Matte Black

Finish Colors

- 
 Matte White
- 
 Matte Black
- 
 Brushed Nickel
- 
 Brushed Gold

Color Temperature

2700K Bulb



5-Year Limited Warranty



Jaiya Mini LED Pendant


ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-JLMP10-XX30	10"	20W	1300lm	80+	120VAC	6" W x 10" H (39" Rod Max)



Shown with Brushed Gold

Finish Colors

- 
Matte White
- 
Matte Black
- 
Brushed Nickel
- 
Brushed Gold

Color Temperature

3000K



5-Year Limited Warranty

Jaiya Orb LED Pendant

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-JLOP10-XX30	10"	20W	1150lm	80+	120VAC	10" W x 10-1/4" H (39" Rod Max)



Shown with Brushed Gold

Finish Colors

- 
Matte White
- 
Matte Black
- 
Brushed Nickel
- 
Brushed Gold

Color Temperature

3000K



5-Year Limited Warranty

Modern LED Tube Lights

ULTRALUX® CCT Switchable

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-MSTL-24-15W-2265-XX-WD	24"	15W	1500lm	80+	120VAC	24" L x 4.1" E x 1.6" Tube Ø
UL-LED-MSTL-36-32W-2265-XX-WD	36"	22W	2200lm	80+	120VAC	36" L x 4.1" E x 1.6" Tube Ø
UL-LED-MSTL-48-30W-2265-XX-WD	48"	30W	3000lm	80+	120VAC	48" L x 4.1" E x 1.6" Tube Ø



Shown with Matte Black

Finish Colors



Color Temperatures

5 CCT Options with External Button
2700K - 3000K - 4000K - 5000K - 6500K



Shown with Brushed Nickel



Shown with Matte Black



5-Year Limited Warranty

CLEANLIFE® SMART

Part Number	Size	Color	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-SMRT-NT24-XX-2265-WFB-01	24"	CCT Tunable	15W	1500lm	80+	120VAC	24" L x 4.1" E x 1.6" Tube Ø
UL-LED-SMRT-NT36-XX-2265-WFB-01	36"	CCT Tunable	22W	2200lm	80+	120VAC	36" L x 4.1" E x 1.6" Tube Ø
UL-LED-SMRT-NT48-XX-2265-WFB-01	48"	CCT Tunable	30W	3000lm	80+	120VAC	48" L x 4.1" E x 1.6" Tube Ø
UL-LED-SMRT-NT24-XX-RGBICT-WFB-01	24"	RGBIC + CCT	15W	1500lm	80+	120VAC	24" L x 4.1" E x 1.6" Tube Ø
UL-LED-SMRT-NT36-XX-RGBICT-WFB-01	36"	RGBIC + CCT	22W	2200lm	80+	120VAC	36" L x 4.1" E x 1.6" Tube Ø
UL-LED-SMRT-NT48-XX-RGBICT-WFB-01	48"	RGBIC + CCT	30W	3000lm	80+	120VAC	48" L x 4.1" E x 1.6" Tube Ø



Works with CLEANLIFE®
Smart Bluetooth Remote
(Included with CCT Tunable)


Finish Colors




Color Temperatures



Works with CLEANLIFE®
Smart Bluetooth Remote
(Included with RGBIC + CCT)



5-Year Limited Warranty





Utility LED Vanity Light Bar

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-UVLB24-XX30	24"	14.5W	1200lm	90+	120VAC	23.9" L x 3.2" W x 4.1" H
UL-LED-UVLB36-XX30	36"	25W	1750lm	90+	120VAC	36" L x 3.4" W x 4.1" H



Shown with Matte Black



Shown with Brushed Nickel

Finish Colors



Color Temperature

3000K




5-Year Limited Warranty



Contemporary LED 2-Ring Vanity Bar

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-CVB2R24-BN30	24"	24W	1680lm	80+	120VAC	24" W x 5-3/4" H x 4-3/4" E
UL-LED-CVB2R36-BN30	36"	28W	2000lm	80+	120VAC	36" W x 5-3/4" H x 4-3/4" E



Shown with Chrome



Shown with Chrome

Finish Colors



Color Temperature

3000K



5-Year Limited Warranty



Transitional Wall Sconce & Vanity Lights

ULTRALUX® 1-Light



Shown with Brushed Gold

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-TSVL01-XX27	6W	500lm	80+	120VAC	10" H x 7" E

Finish Colors



Color Temperature

2700K Bulb



5-Year Limited Warranty

3-Light



Shown with Matte Black

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-TSVL03-XX27	18W	1500lm	80+	120VAC	24" W x 10" H x 7" E

Finish Colors



Color Temperature

2700K Bulbs



5-Year Limited Warranty

Bubble Glass LED Wall Sconce & Vanity Lights

ULTRALUX®

1-Light



Shown with Chrome

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-BVL01-CH30	8W	400lm	80+	120VAC	5" W x 8" H x 6-1/2" E

Finish Color



Chrome

Color Temperature

3000K



2-Light



Shown with Chrome

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-BVL02-CH30	15W	900lm	80+	120VAC	9-1/2" W x 8" H x 6-1/2" E

Finish Color



Chrome

Color Temperature

3000K



3-Light



Shown with Chrome

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-BVL03-CH30	22W	1300lm	80+	120VAC	12-1/2" W x 8" H x 6-1/2" E

Finish Color



Chrome

Color Temperature

3000K





Candle LED Glass Wall Sconce & Vanity Lights

ULTRALUX®

1-Light



Shown with Brushed Nickel

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-NGVL01-BN30	9W	400lm	80+	120VAC	5" L x 6-3/4" W x 7-3/4" H

Finish Color



Brushed Nickel

Color Temperature

3000K



5-Year Limited Warranty

3-Light



Shown with Brushed Nickel

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-NGVL03-BN30	23W	1150lm	80+	120VAC	22" L x 6-3/4" W x 7-3/4" H

Finish Color




Brushed Nickel

Color Temperature

3000K



5-Year Limited Warranty

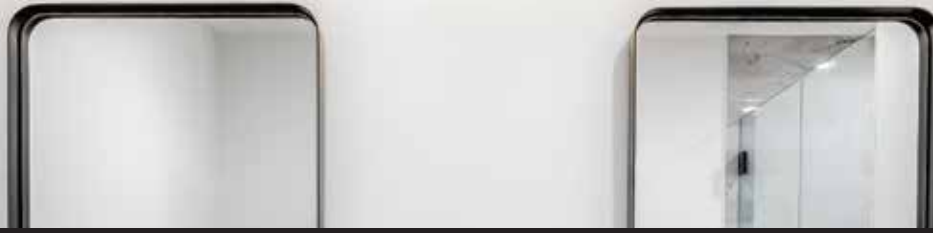

Rustic LED Wall Sconce & Vanity Lights

ULTRALUX®

1-Light



Shown with Oil Rubbed Bronze and Wood Grain

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-RWVL01-ORBW27	6W	500lm	80+	120VAC	7" L x 10" H x 6" E

Finish Color



Oil Rubbed Bronze + Wood Grain

Color Temperature

2700K Bulb



5-Year Limited Warranty

3-Light



Shown with Oil Rubbed Bronze and Wood Grain

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-RWVL03-ORBW27	18W	1500lm	80+	120VAC	23" L x 10" H x 6" E

Finish Color



Oil Rubbed Bronze + Wood Grain

Color Temperature

2700K Bulbs



5-Year Limited Warranty

4-Light



Shown with Oil Rubbed Bronze and Wood Grain

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-RWVL04-ORBW27	24W	2000lm	80+	120VAC	28" L x 10" H x 6" E

Finish Color



Oil Rubbed Bronze + Wood Grain

Color Temperature

2700K Bulbs



5-Year Limited Warranty

Edgelit Bubble Glass Vanity Light

ULTRALUX®

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-BGV24-XX30	25W	1200lm	80+	120VAC	24" L x 2-5/8" W x 4-1/2" H



Shown with Brushed Nickel

Finish Colors



Color Temperature

3000K



5-Year Limited Warranty

Edgelit Wood Grain Vanity Light

ULTRALUX®

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-ELWGV24-XX30	25W	720lm	80+	120VAC	24" L x 2-5/8" W x 4-1/2" H



Shown with Matte Black

Finish Colors



Color Temperature

3000K



5-Year Limited Warranty

Edgelit Etched Acrylic Vanity Light

ULTRALUX®

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-ELV24-XX30-01	25W	1200lm	80+	120VAC	24" L x 2-5/8" W x 4-1/2" H



Shown with Matte Black

Finish Colors



Color Temperature

3000K



5-Year Limited Warranty



Modern LED Glass Wall Sconce

ULTRALUX®

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-MGWS-BN30	11"	15W	1050lm	80+	120VAC	6" W x 10-3/4" H x 3-1/2"D



Shown with Brushed Nickel

Finish Color



Brushed Nickel

Color Temperature

3000K



5-Year Limited Warranty

Helix Wall Sconce / Vanity Light

ULTRALUX®

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-HLXWS-XX30	12W	750lm	80+	120VAC	5-7/8" W x 12" H x 7-1/8" E



Shown with Matte Black

Finish Colors



Matte White



Matte Black



Brushed Nickel



Brushed Gold

Color Temperature


3000K



5-Year Limited Warranty

Contemporary LED Outdoor Wall Sconce

ULTRALUX®

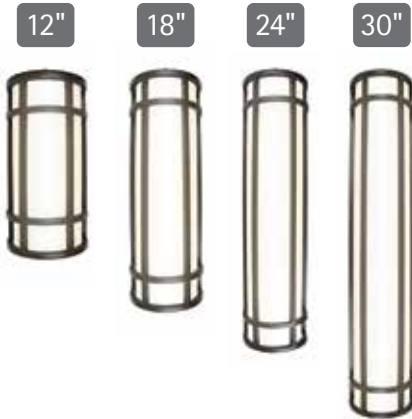

Shown with Oil Rubbed Bronze

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-COWS12-BZ30	12"	15W	800lm	80+	120VAC	6" L x 4" W x 12" H
UL-LED-COWS18-BZ30	18"	20W	1000lm	80+	120VAC	6" L x 4" W x 18" H
UL-LED-COWS24-BZ30	24"	23W	1200lm	80+	120VAC	6" L x 4" W x 24" H
UL-LED-COWS30-BZ30	30"	28W	1500lm	80+	120VAC	6" L x 4" W x 30" H

Finish Color



Oil Rubbed Bronze

Color Temperature

3000K



5-Year Limited Warranty

CCT Switchable Utility LED Outdoor Bulkhead Lights

ULTRALUX®

Oval



Shown with Matte Black

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-UOUBL-XX3050	15W	800lm	80+	120VAC	10.5" L x 6.4" W x 4.5" E

Finish Colors



Matte White



Matte Black



Oil Rubbed Bronze

Color Temperature

3 CCT Options with Internal Switch
3000K - 4000K - 5000K



5-Year Limited Warranty

Round



Shown with Oil Rubbed Bronze

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-UORBL-XX3050	15W	800lm	80+	120VAC	9.5" Ø x 4.65" E

Finish Colors



Matte White



Matte Black



Oil Rubbed Bronze

Color Temperature

3 CCT Options with Internal Switch
3000K - 4000K - 5000K



5-Year Limited Warranty



Modern LED Outdoor Lights

ULTRALUX® Up or Down Wall Light



Shown with Matte Black

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-MWL08-XX30	8"	15W	1100lm	80+	120VAC	4" W x 8" H x 5-1/2" E

Finish Colors



Color Temperature

3000K



5-Year Limited Warranty

Up and Down Wall Light



Shown with Brushed Nickel

Part Number	Size	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-MUDWL12-XX30	12"	30W	2000lm	80+	120VAC	4-1/2" W x 12" H x 5-5/8" E

Finish Colors



Color Temperature

3000K



5-Year Limited Warranty



Lakefront LED Outdoor Wall Sconce

ULTRALUX®

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-LSODS-MB30-P	15W	1200lm	80+	120VAC	11-1/4" W x 9-1/2" H x 12-7/8" E



Shown with Matte Black

Finish Color



Matte Black

Color Temperature

3000K



5-Year Limited Warranty

9" Outdoor Socketed Lantern

CLEANLIFE®

Part Number	Size	Lighting Element	Input Voltage	Dimensions
CL-E26-ODLN09-BK00-01	9"	1 E26 Socket, 40W Max*	120VAC	4" W x 6" H x 8-3/8" E

*ST19 bulb sold separately (PN: CL-LED-ST19-8WCXXD)



Shown with Black

Finish Color



Black





Lakefront LED Outdoor Lights

ULTRALUX® Pendant

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-LFODP-MB27	6W	500lm	80+	120VAC	8-11/16" W x 3-1/4" H (36" Chain)



Shown with Matte Black

Finish Color



Matte Black

Color Temperature

2700K Bulb



5-Year Limited Warranty

Wall Sconce

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
UL-LED-LFODS-MB27	6W	500lm	80+	120VAC	8-11/16" W x 16" H x 9" E



Shown with Matte Black

Finish Color



Matte Black

Color Temperature

2700K Bulb



5-Year Limited Warranty

LED Light Panel with Backlit Technology



1'x4'



2'x2'



2'x4'



Part Number	Size	Watts	Lumens Per Watt	CRI	Input Voltage	Dimensions
CL-14-U-P1	1'x4'	18/24/28W	130LPW	80+	120~277VAC	47.8" L x 11.9" W x 1.5" H
CL-14-U-P1-EL*	1'x4'	18/24/28W	130LPW	80+	120~277VAC	47.8" L x 11.9" W x 1.5" H
CL-14-U-P1-HE	1'x4'	18/24/28W	152LPW	80+	120~277VAC	47.8" L x 11.9" W x 1.5" H
CL-22-U-P1	2'x2'	18/24/40W	130LPW	80+	120~277VAC	23.7" L x 23.7" W x 1.5" H
CL-22-U-P1-EL*	2'x2'	18/24/40W	130LPW	80+	120~277VAC	23.7" L x 23.7" W x 1.5" H
CL-22-U-P1-HE	2'x2'	18/24/40W	152LPW	80+	120~277VAC	23.7" L x 23.7" W x 1.5" H
CL-24-U-P1	2'x4'	30/40/50W	130LPW	80+	120~277VAC	47.8" L x 23.7" W x 1.5" H
CL-24-U-P1-EL*	2'x4'	30/40/50W	130LPW	80+	120~277VAC	47.8" L x 23.7" W x 1.5" H
CL-24-U-P1-HE	2'x4'	30/40/50W	152LPW	80+	120~277VAC	47.8" L x 23.7" W x 1.5" H

*Factory installed 12W battery backup provides 90 minutes of illumination when AC power is removed.

2 Cables Suspension Mounting Kit (Optional)

Accessory Parts List	Quantity	Size	Material
Screw B (KA 4X25)	2	0.16 inches diameter 0.98 inches length	Zinc Coated Iron
Expansion Bolt	2	0.24 inches diameter 1.18 inches length	PVC
Upper Cover	2	0.59 inches diameter 1.67 inches length	Nickel Plated Copper
Lower Cover	2	0.45 inches diameter	Zinc Coated Iron
Cable	2	3.28 foot main cable, 2.30 foot branch cable	Stainless
Connector	2	0.35 inches diameter, 1.02 inches height	Stainless
Suspension Hook	4	0.74 inches width, 1.30 inches height	Zinc Coated Iron
Triangle Hook	4	1.10 inches width, 1.18 inches total height	Zinc Coated Iron

Color Temperature


3 CCT Options with Internal Switch
3000K - 4000K - 5000K

Accessory Parts

Upper Cover



Expansion Bolt




Screw B



Triangle Hook




Lower Cover



Connector

Suspension Hook



5-Year Limited Warranty



Traditional Style LED Vapor Tight Fixture



Part Number	Size	Color		Watts	Lumens	CRI	Input Voltage	Dimensions
		Temperature						
CL-VT-235-20W-840D	24"	4000K		20W	2200lm	80+	100~277VAC	23" L x 3.7" W x 3" H
CL-VT-235-20W-850D	24"	5000K		20W	2200lm	80+	100~277VAC	23" L x 3.7" W x 3" H
CL-VT-465-40W-840D	48"	4000K		40W	4400lm	80+	100~277VAC	46.9" L x 3.7" W x 3" H
CL-VT-465-40W-850D	48"	5000K		40W	4400lm	80+	100~277VAC	46.9" L x 3.7" W x 3" H



Color Temperatures

4000K

5000K



5-Year Limited Warranty

Gen 2 Vapor Tight LED Fixtures




Part Number	Size	Color		Watts	Lumens	CRI	Input Voltage	Dimensions
		Temperature						
CL-A65F4-40-C (NBB)	48"	4000K		40W	5000	85+	100~277VAC	47.2" L x 3.7" W x 3.9" H
CL-A65F4-40-N (NBB)	48"	5000K		40W	5000	85+	100~277VAC	47.2" L x 3.7" W x 3.9" H



Color Temperatures

4000K

5000K



5-Year Limited Warranty

Linear LED Strip Light



Shown with White

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
CL-ST4-4FTXWW-EM-MS-TCP	30/40/50W	3900, 5200, 6500lm	80+	100~277VAC	48.03" L x 2.95" W x 3.26" H
CL-ST4-8FTXWW-EM-MS-TCP	30/40/50W	3900, 5200, 6500lm	80+	100~277VAC	95.98" L x 2.95" W x 3.26" H
CL-ST4-8FTXWW-EM-MS-TCP	50/60/70W	6500, 7800, 9100lm	80+	100~277VAC	95.98" L x 2.95" W x 3.26" H
CL-ST4-4FTXWW-EM-MS-TCP	30/40/50W	3900, 5200, 6500lm	80+	100~347VAC	48.03" L x 2.95" W x 3.26" H
CL-ST4-8FTXWW-EM-MS-TCP	30/40/50W	3900, 5200, 6500lm	80+	100~347VAC	95.98" L x 2.95" W x 3.26" H
CL-ST4-8FTXWW-EM-MS-TCP	50/60/70W	6500, 7800, 9100lm	80+	100~347VAC	95.98" L x 2.95" W x 3.26" H

Finish Color



White

Color Temperatures

3500K

4000K

5000K



5-Year Limited Warranty



Parking Garage LED Canopy Light



Shown with Dark Bronze

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
CL-GCP1040-40W-G-30K	40W	4800lm	80+	120VAC	10" W x 4.69" H
CL-GCP1070-60W-G-30K	60W	7200lm	80+	120VAC	10" W x 4.69" H
CL-GCP1070-70W-G-30K	70W	8400lm	80+	120VAC	10" W x 4.69" H
CL-GCP1040-40W-G-TCP	40/30/25W	4800/3600/3000lm	80+	120VAC	10" W x 4.69" H
CL-GCP1070-40W-G-TCP	70/60/45W	8400/7200/5400lm	80+	120VAC	10" W x 4.69" H

Finish Colors



Matte White



Dark Bronze

Color Temperatures

3000K

4000K

5000K



5-Year Limited Warranty

LED Full Cutoff Wall Pack



Shown with Bronze

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
CL-WP07-28W-H-XXK	28W	3360lm/3640lm	70+	100~277VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-40W-H-XXK	40W	4800lm/5200lm	70+	100~277VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-45W-H-XXK	45W	5400lm/5850lm	70+	100~277VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-60W-H-XXK	60W	7200lm/7800lm	70+	100~277VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-70W-H-XXK	70W	8400lm/9100lm	70+	100~277VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-80W-H-XXK	80W	9600lm/10400lm	70+	100~277VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-28W-H-HV-XXK	28W	3360lm/3640lm	70+	100~480VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-40W-H-HV-XXK	45W	4800lm/5200lm	70+	100~480VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-45W-H-HV-XXK	40W	5400lm/5850lm	70+	100~480VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-60W-H-HV-XXK	60W	7200lm/7800lm	70+	100~480VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-70W-H-HV-XXK	70W	8400lm/9100lm	70+	100~480VAC	12.61" L x 5.1" H x 6.86" D
CL-WP07-80W-H-HV-XXK	80W	9600lm/10400lm	70+	100~480VAC	12.61" L x 5.1" H x 6.86" D

Finish Color



Bronze

Color Temperatures

4000K

5000K

5700K



5-Year Limited Warranty

Traditional LED Wall Pack



Shown with Bronze

Part Number	Watts	Lumens	CRI	Input Voltage	Dimensions
CL-WP15G5-28W-X-XXK(XX)	28W	3360lm	80+	100~277VAC	12.8" L x 10.16" H x 4.83" D
CL-WP15G5-40W-X-XXK(XX)	40W	4800lm	80+	100~277VAC	12.8" L x 10.16" H x 4.83" D
CL-WP15G5-60W-X-XXK(XX)	60W	7200lm	80+	100~277VAC	12.8" L x 10.16" H x 4.83" D
CL-WP15G5-80W-X-XXK(XX)	80W	9600lm	80+	100~277VAC	12.8" L x 10.16" H x 4.83" D
CL-WP15G5-100W-X-XXK(XX)	100W	12000lm	80+	100~277VAC	12.8" L x 10.16" H x 4.83" D
CL-WP15G5-28W-HV-X-XXK	28W	3360lm	80+	100~347VAC	12.8" L x 10.16" H x 4.83" D
CL-WP15G5-40W-HV-X-XXK	40W	4800lm	80+	100~347VAC	12.8" L x 10.16" H x 4.83" D
CL-WP15G5-60W-HV-X-XXK	60W	7200lm	80+	100~347VAC	12.8" L x 10.16" H x 4.83" D
CL-WP15G5-80W-HV-X-XXK	80W	9600lm	80+	100~347VAC	12.8" L x 10.16" H x 4.83" D
CL-WP15G5-100W-HV-X-XXK	100W	12000lm	80+	100~347VAC	12.8" L x 10.16" H x 4.83" D

Finish Color



Bronze

Color Temperatures

4000K

5000K

5700K

6500K



5-Year Limited Warranty

LED Flood Light



Part Number	Color Temperature	Watts	Lumens	CRI	Input Voltage	Dimensions
CL-FL-40-30W-120-50K-A-N	5000K	30W	3300lm	70+	120~277VAC	5.67" L x 3.15" H x 7.95" E
CL-FL-40-50W-120-50K-A-N	5000K	50W	5500lm	70+	120~277VAC	7.17" L x 3.46" H x 9.13" E

Color Temperatures



5-Year Limited Warranty

Gen 1 LED Area Lights



100W / 150W



200W / 240W / 300W

Part Number	Watts	Lumens	CRI	Input Voltage*	Dimensions
CL-AL-100W-120-XXK-XXX-X	100W	13000lm	70+	120~277VAC	17.3" L x 15.3" W x 5.4" H
CL-AL-150W-120-XXK-XXX-X	150W	19500lm	70+	120~277VAC	17.3" L x 15.3" W x 5.4" H
CL-AL-200W-120-XXK-XXX-X	200W	26000lm	70+	120~277VAC	23.3" L x 15.3" W x 5.4" H
CL-AL-240W-120-XXK-XXX-X	240W	31200lm	70+	120~277VAC	23.3" L x 15.3" W x 5.4" H
CL-AL-300W-120-XXK-XXX-X	300W	39000lm	70+	120~277VAC	23.3" L x 15.3" W x 5.4" H

*Additional input voltage options available.

"XXK" can be "40K", "50K", or "57K" to represent color temperature.

"XXX" represents IES Type and Dimming and can be X3D = TYPE 3 Dim 0~10V, X3N = TYPE 3 No Dim, X4D = TYPE 4 Dim 0~10V,

X4N = TYPE 4 No Dim, X5D = TYPE 5 Dim 0~10V, or X5N = TYPE 5 No Dim.

"X" can be P = with Photocell Socket, or N = without Photocell Socket.

Color Temperatures



Mounting Bracket Accessories (Sold Separately)



TYPE A
Slip-Fitter Mount
(CL-AL-MA-A)



TYPE B
Square or
Round Pole Mount
(CL-AL-MA-B)



TYPE C
Trunnion Mount
(CL-AL-MA-C)



TYPE G
Knuckle Wall /
Square Pole Mount
(CL-AL-MA-G)



7-Year Limited Warranty

*Select models only

Gen 2 LED Area Lights



Shown with Bronze

Part Number	Watts	Lumens	CRI	Input Voltage*	Dimensions
CL-XX0810-100W-X-XXX(XXX)	100W	13000/14000lm	80+	100~277VAC	15.9" L x 9.8" W x 2.6" H
CL-XX0815-150W-X-XXX(XXX)	150W	19500/21000lm	80+	100~277VAC	15.9" L x 9.8" W x 2.6" H
CL-XX0820-200W-X-XXX(XXX)	200W	26000/28000lm	80+	100~277VAC	18.2" L x 11.3" W x 2.5" H
CL-XX0824-240W-X-XXX(XXX)	240W	31200/33600lm	80+	100~277VAC	22.7" L x 13.3" W x 2.8" H
CL-XX0830-300W-X-XXX(XXX)	300W	39000/42000lm	80+	100~277VAC	22.7" L x 13.3" W x 2.8" H

*Additional input voltage options available.

"X" can be "SL" or "SL"; X can be "H", "L", or "HY" (Y=number);
 "XXX" can be "40K", "50K", "57K", or "65K" to represent color temperature. Or TCP, which means adjustable power and color temperature;
 "(XXX)" can be (PIR) = PIR Sensor, (PTC) = Photocontrol, (MS) = Microwave Sensor, (PIP) = PIR Sensor and Photocontrol,
 (MSP) = Microwave Sensor and Photocontrol, (PR) = PR Motion Sensor, (PSC) = Photocontrol Socket and Shorting Cap,
 (BT) = Bluetooth Motion Sensor, (BTP) = Bluetooth Motion Sensor and Photocontrol, or blank to indicate without Sensor.

Finish Colors




Color Temperatures



Accessories

- Photocell
- Shorting Cap
- Surge Protector
- PIR Sensor
- Motion Sensor
- Waterproof Cover Plate for Photocell Hole

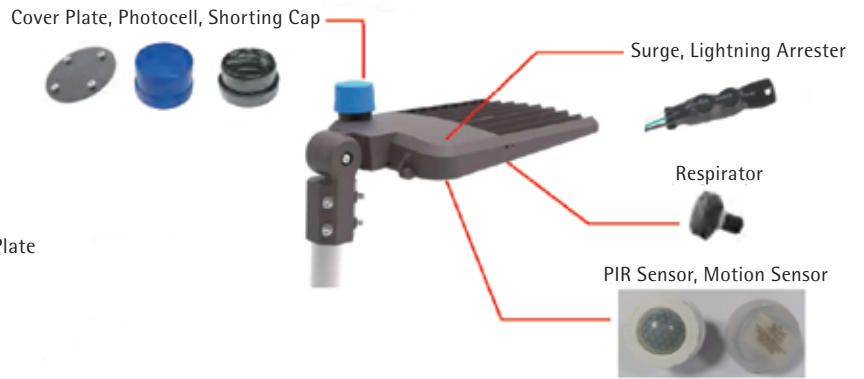

Mounting Bracket Accessories (Sold Separately)

TYPE A (Slip-fitter)	TYPE A2 (Slip-fitter)	TYPE B (Square/Round pole mount with slip-fitter function)	
TYPE B2 (Square/Round pole mount with slip-fitter function)	TYPE C (Square/Round pole mount)	TYPE D (Trunnion)	
TYPE E (Yoke)	TYPE F	TYPE G	TYPE H



5-Year Limited Warranty



UltraLux Lighting, A Division of CLEANLIFE LLC
7620 Hub Parkway, Valley View, Ohio 44125 USA
1-800-316-2532 | ultraluxled.com | info@ultraluxled.com

ULTRALUX® is a registered trademark of SUPERIOR VENTURES LLC.
All Rights Reserved. Not to be reproduced or published without prior permission.