



UTVSTEREO.COM

DESIGNED FOR UTV - POWERSPORTS - MARINE

CONTENTS:

Included Parts List

PERFORMANCE AUDIO

480.616.2299

- Jump Starter Specifications
- Operation Instructions
- Warnings/Precautions

OWNERS MANUAL


Designed in USA utvstereo.com





JÜMP STARTER

The UTV Stereo Jump Starter serves as an emergency power source for all SxS's and vehicles with a 12V battery, to make sure you can always start your vehicle in case of a dead battery. The built-in power bank is equipped with short-circuit, reverse polarity, and overvoltage protection. Included is an emergency flashlight and compass to help get you back to safety.

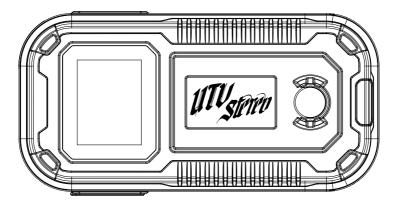

The jump starter is also equipped with dual USB outputs & a 3-IN-1 charge cable to ensure that you can charge any portable electronic devices.

CHARGE DEVICE FOR 3 HOURS BEFORE FIRST USE.

WHAT'S IN THE BOX?





• 3-IN-1 USB Cable



Jumper Cables



• Soft Shell Case





• USB-C Charging Cable







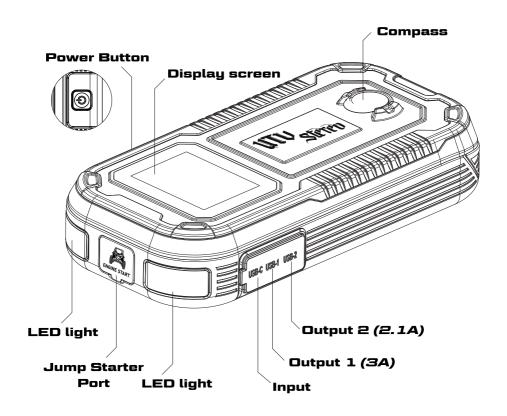

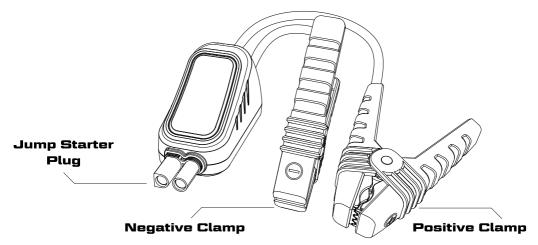







JUMP STARTING A VEHICLE


1. Open the rubber door and insert the blue connector of the jumper cable into the jumper cable port.



- 2. Connect the red clamp to the positive pole
- (+) and the black clamp to the negative pole
- (-) of the car battery.



3. Turn on the car within 30 seconds of connecting the clamps to the car battery.



4. After successful startup, pull the blue connector from the device. Next, remove the clamps from the positive and negative terminals of the car battery.



ATTENTION

The device has an output short-circuit protection function: the output is automatically turned off when short-circuited (after the fault is removed, it needs to be restored by pressing the power button).





CHARGING THE JUMP STARTER


- 1. Open the dust cover on the charging ports.
- 2. Plug the singular charging cable into the USB-C port.
- Connect the other end of the cable to power and look for the charging status to display on sceen. Charge to 100%.



CHARGING MOBILE DEVICES AND SMALL ELECTRONICS








- 1. Plug the USB charging cable into one of the USB slots on the jump starter.
- 2. Insert the other side of the cable into the input port of the mobile phone.
- 3. Press power button to begin the charging cycle.

USING THE LIGHT FUNCTION



- 1. Press and hold power button on the side of the unit for 3 seconds to activate the light feature.
- 2. Subsequent button presses will change to one of three light modes: SOS, flashers, and continuous.
- 3. Press and hold power button again an additional 3 seconds to turn the lights off.

USING THE COMPASS

- 1. Hold It Flat: Keep the compass level in your hand.
- 2. Avoid Metal Objects: These can increase the likelihood of false readings.
- 3. Wait for the Needle: Let the needle settle; the red end points north.
- 4. Find Your Direction: Use the compass to position your path of travel.





△ WARNING

- This product was designed for 12V lead acid/AGM/Gel battery-equipped vehicles ONLY.
- 2. Never short-circuit the jump starter by connecting the Red and Black clamps.
- 3. DO NOT modify or disassemble the jump starter.
- 4. DO NOT use it as a toy for children.
- 5. Store in a dry place. DO NOT submerge the device in water. DO NOT expose it to rain, moisture or corrosive materials.
- 6. Stop use immediately if the jump starter expands, leaks or a foul smell is found.
- 7. Before first use, charge the device for at least 3 hours.
- 8. Please use this jump starter at normal temperatures and avoid using it in extreme weather conditions.
- DO NOT jump start the car engine more than 3 times continuously as it may overheat or damage the product.
 There should be an interval of 60 seconds between each jump start.
- 10. When the battery power of the unit is less than 20%, do not use the jump starter as it may damage the unit.
- 11. Recharge the unit every 3 months to prevent from being over-discharged. If the device has been at idle for OVER 3 MONTHS, charge it completely before use.
- 12. Wait at least 30 minutes after using the jump start feature before charging the device.
- 13. Be sure to use the standard jumper cable that comes with the product to start the vehicle.





ADDITIONAL TECH SUPPORT?

VISIT OUR RESOURCES PAGE ONLINE AT WWW.UTVSTEREO.COM/PAGES/RESOURCES

VIDEOS | INSTRUCTIONS | WIRE DIAGRAMS

SCAN QR CODE WITH YOUR PHONE **CAMERA FOR QUICK LINK**





NEED TO SPEAK WITH A UTV STEREO PERFORMANCE AUDIO PROFESSIONAL?

EMAIL: info@utvstereo.com

We recommend including photos of your project to provide you with faster and more effective support.

OR

GIVE US A CALL: 480-616-2299

|Follow us on Social Media|









WARRANTY

Should your product require service, please consult with the dealer from which it was purchased or contact a local UTV STEREO dealer directly. Units received without an accompanying return authorization number will not be processed. Please contact your UTV Stereo dealer or contact UTV Stereo directly to obtain a return authorization number. Additionally, you must include a copy of your purchase receipt from an authorized UTV Stereo dealer for consideration of an in-warranty service. Units received without a receipt will be held for 30 days. Allowing us time to contact you and obtain a copy of the receipt. After 30 days, all units will be returned. For more information please visit our website.





UTV STEREO and the UTV STEREO logo are registered trademarks. All other brand names are trademarks or registered trademarks of their respective owners. These trademark holders are not affiliated with UTV Stereo. All rights reserved. Designed in USA.

Copyright © 2024 UTV STEREO

Tel. 480-616-2299 Address: 7561 East Baseline Road Mesa, AZ 85209

Designed in USA utvstereo.com