

# Frosted frameless mirror with clip fasteners and $\frac{1}{4}$ " plate glass with polished edges:

#### **Product Materials**

**MIRROR:** first quality  $\frac{1}{4}$ " float glass and thermosetting infrared-cured paint backing. Manufactured in accordance with ASTM C 1036 and ASTM C 1503. Edges ground and polished smooth.

## **Design Option Codes**

Code	Description
-S	Solid acid-etched border
-P	Plaid acid-etched border


#### Installation

Verify all rough-in dimensions prior to installation. Secure mounting clips (metal) to wall with screws included, then engage mirror into clips.


## **Guide Specification**

Frameless mirror shall be of first quality ¼" float glass, guaranteed for 15 years against silver spoilage. Edges ground and polished smooth.

Frosted Frameless Mirror shall be Bradley Model 747F.

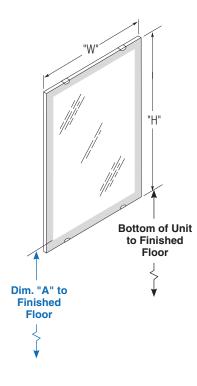

Page 1 of 1 12/19/2012 This information is subject to change without notice. Bradley\_Mirror\_747F

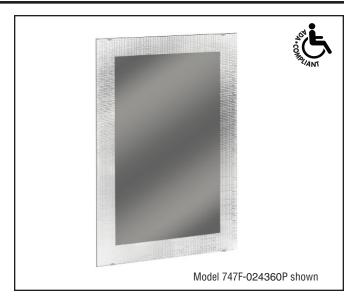

# **ADA** Compliant

- Consult local and national accessibility codes for proper installation quidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

### **Models**

Width (Inches)	Height (Inches)	Design Option	Standard Model Number
18"	30"	S	747F-018300S
18"	36"	S	747F-018360S
24"	36"	S	747F-024360S
18"	30"	Р	747F-018300P
18"	36"	Р	747F-018360P
24"	36"	Р	747F-024360P

# **Mounting Height Guide**

Dim. "A":	For Dim. "A"	Bottom of Unit			
Mirror's bottom edge of the	40" (1016mm)	37" (9406mm)			
reflecting	37" (940mm)	34" (864mm)			
surface to finished floor	34" (864mm)	31" (787mm)			