HyperLight


PORTABLE X-RAY UNIT





- Clinical Imagery








- Sharp, high resolution images with a 0.4 focal spot

Source focal spot Source focal spot



Effect of focal spot size



Engineered for accurate images




- Built-in leaded double shield to protect the operator from leakage radiation
- Locking system to prevent unintentional exposure







Simplify your digital workflow

Compact size and lightweight can make you operate it by one hand only





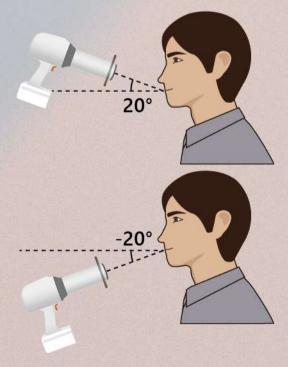

Smart angulation system

Maximize your diagnostic potential





Perfect combination



: HyperLight Model Weight : 1.8 kg

Focal Spot : 2500mAh x 4 Battery : 0.4

Tube Voltage : 65kV Exposure Time Range : 0.02-2 Sec

: 100V-240V, 50Hz/60Hz Tube Current : 2.5mA Line voltage