



## 5280-W

15 Amp, 125 Volt, Decora Plus Surge Protective Duplex Receptacle Outlet, Commercial Grade

Decora Plus Surge Protective Duplex Receptacle Outlet, Commercial Specification Grade, 15 Amp, 125 Volt, Back or Side Wire, NEMA 5-15R, 2-Pole, 3-Wire - White

Leviton's Surge Protection Devices can be used individually or as part of a coordinated application strategy, to protect sensitive electronic equipment, in industrial, commercial and residential locations, from the stress and degradation inflicted by voltage transients. Leviton Surge Protection Devices are compliant with UL 1449 Standards. Leviton's outstanding Surge Protection Devices divert damaging voltage transients, or surges, away from electronic equipment. Transients are diverted away from sensitive micro circuitry, providing protection against catastrophic failure, costly downtime and data disruptions.


Color :  White

UPC Code : 078477008836

Country Of Origin : Mexico

NEMA :  5-15R

### Available Colors :

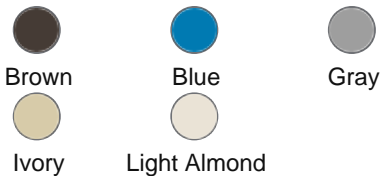

### Technical Information

#### Electrical Specifications

**Amperage** : 15 A

**Current Limiting** : Full Rated Current

**Dielectric Voltage** : Withstands 2000V per UL498

**Pole** : 2

**Temperature Rise** : Max 30C after 250 cycles OL at 200 percent rated current

**Voltage** : 125 VAC

**Wire** : 3

#### Material Specifications

**Body Material** : Thermoplastic Nylon

**Clamp Nuts** : Zinc-Plated Steel

**Face Material** : Thermoplastic Nylon

**Grounding Screw** : Brass-Plated Steel

**Line Contacts** : Brass Triple-Wipe

**Shutter Mechanism** : Delrin® Acetal

**Terminal Screws** : Brass-Plated Steel

**Yoke** : Zinc-Plated Steel

#### Environmental Specifications

**Flammability** : Rated V-2 per UL 94

**Operating Temperature** : -40° C to 60°C

#### Mechanical Specifications

**Product ID** : Ratings are permanently marked on device

**Terminal Accom.** : 14-10 AWG

**Terminal ID** : Brass-Hot, Green-Ground, Silver-Neutral

**Termination** : Back or Side Wire

**Torque Range** : 14-16 inch pounds

Performance Data

**Diagnostics :** Indicator Light

**Joules Rating :** 720

**MCOV :** 150V rms

**Maximum Surge Current, Per Mode (Per Phase) :** 27kA (L-N: 18kA, L-G:9kA)

**Noise Rejection :** -30dB at 500kHz-30MHz

**Nominal Discharge Current Rating :** 3kA

**Short Circuit Current Rating :** 5kA

**VPR :** L-N: 600V, L-G: 700V, N-G: 600V

Product Features

**Body Material :** Thermoplastic Nylon

**Brand :** Decora Plus

**Color :** White

**Device Type :** Duplex Receptacle Outlet

**Face Material :** Thermoplastic Nylon

**Function :** Surge Protective

**Grade :** Commercial Specification Grade

**NEMA :** 5-15R

Standards and Certifications

**ANSI :** C-73

**Agency Certifications :** UL 498, UL 1449 3rd Edition Listed and CSA C22.2 Certified Type 3


**NEMA :** WD-6

**NOM :** 057

Warranty

**Warranty :** 5-Year Limited

### Wiring Diagram



5-15R

### SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/> <input type="text"/>	
	JOB NUMBER: <input type="text"/>	

**Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·  
FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)  
5386- 1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without  
notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/international/contacts](http://www.leviton.com/international/contacts)

**© 2024 Leviton Manufacturing Co., Inc.**