


In-Wall Timer - 24-Hour Heavy-Duty Mechanical In-Wall Timer, Timer Only, 120 VAC, 20A, SPST, 1 Gang, White, Mexico Sales Only

Item KM2ST-1GMX

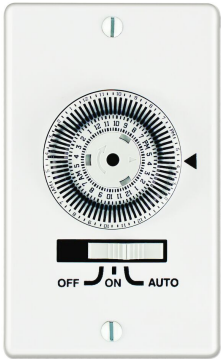

NOM

PRODUCT DESCRIPTION

For installing on circuits up to 20 A, this timer provides automatic 24-hour ON/OFF control of outdoor/indoor lighting, fans, pumps, office equipment and other types of loads.

FEATURES

- ▶ 72 trippers provide 36 ON/OFF events per 24-hour period
- ▶ Captive trippers with 20-minute switching intervals
- ▶ 3-way (SPDT) switch available
- ▶ 3-position ON/OFF/AUTO override provides continuous ON or OFF operation
- ▶ Reliable synchronous timer motor
- ▶ Multiple wall plates available
- ▶ Easy wiring and installation
- ▶ Heavy-Duty 20 A rating
- ▶ Requires neutral connection

APPLICATIONS

- ▶ Indoor Lighting Control
- ▶ Air Movement & Ventilation
- ▶ Outdoor Lighting Control

TECHNICAL DATA

| General                                      |                                                                                                               |
|----------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Model Number                                 | KM2ST-1GMX                                                                                                    |
| Description                                  | 24-Hour Heavy-Duty Mechanical In-Wall Timer, Timer Only, 120 VAC, 20A, SPST, 1 Gang, White, Mexico Sales Only |
| UPC Code                                     | 078275153684                                                                                                  |
| Brand                                        | Intermatic                                                                                                    |
| Country of Origin (Intermatic)               | MEXICO                                                                                                        |
| Warranty Period                              | 1-Year limited                                                                                                |
| Control Specifications                       |                                                                                                               |
| Minimum ON/OFF Times                         | 20 min                                                                                                        |
| Maximum ON/OFF Operations                    | 36                                                                                                            |
| Operation Mode                               | 24 hour                                                                                                       |
| Mechanism Type                               | Analog/Mechanical                                                                                             |
| Application Compatibilities                  | Incandescent; Fluorescent; CFL                                                                                |
| Material Specifications                      |                                                                                                               |
| Color                                        | White                                                                                                         |
| Load Ratings                                 |                                                                                                               |
| Motor Load Ratings Ranges                    | 1 HP, 120 VAC, 60 Hz                                                                                          |
| Inductive Load Ratings Ranges                | 8 A, 120 VAC, 60 Hz                                                                                           |
| Incandescent Load Ratings (Single-Gang)      | 1350 W, 120 VAC, 60 Hz                                                                                        |
| Incandescent Single Gang Load Ratings Ranges | 1350 W, 120 VAC, 60 Hz                                                                                        |

| Electrical Specifications                |                                                            |
|------------------------------------------|------------------------------------------------------------|
| Input Voltage Range(s)                   | 120 VAC, 60 Hz                                             |
| Wiring Configurations                    | Single                                                     |
| Switch Type                              | SPST                                                       |
| Neutral Connection Required              | Yes                                                        |
| Wiring Option                            | SPST (3) #14 AWG color coded; SPDT (4) #14 AWG color coded |
| Environmental Specifications             |                                                            |
| Operating Humidity                       | 0 to 95%, Non-condensing                                   |
| Temperature (operation)                  | -40 - 180 °F / -40 - 82 °C                                 |
| Packaging                                |                                                            |
| Shipping Weight (lbs)                    | 0.379                                                      |
| Unit Carton Dimensions (H x W x D) in    | 3 x 3 x 4 in                                               |
| Standards and Certifications             |                                                            |
| Other Certifications and Compatibilities | NOM                                                        |
| California Proposition 65                | None                                                       |
| RoHS Certification                       | X                                                          |