AXIOM®-TWIN-APS

Height: 23.5" Width: 16.0" Depth: 22.2" (59.7cm) (40.6cm) (56.4cm)



Server(s) sold separately

Specifications

Product #: 38700.0013

Water Access: Plumbed

Finish: Stainless

Funnel: Stainless Steel

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120/240	26	6100	No	-	240	60°F (15.5°C)	1	3	60

Plumbing Requirements

· Adjusts automatically to varying water pressure

- · Electronic diagnostics and built-in tank drain make service easier
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- Large 200oz. (5.9L) tank provides back-to-back brewing capacity
- Ensure coffee quality with programming for brew level, cold brew lock- out and tank temperature, set easily from the front of the machine
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature precision
- Brews directly into 1.9 to 3L airpots
- · Energy-saver mode reduces tank temperature during idle periods
- Hot water faucet
- SplashGard® funnels deflect hot liquids away from the hand
- Twin brew head system
- PROP 65 Warning Decal included in packaging with equipment
- · Servers not included unless otherwise noted

Agency:



Additional Features

DBC

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

Faucet: Upper

CAD Drawings

		O				
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	1/4" Male Flare Fitting	-	•		


WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle



the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:

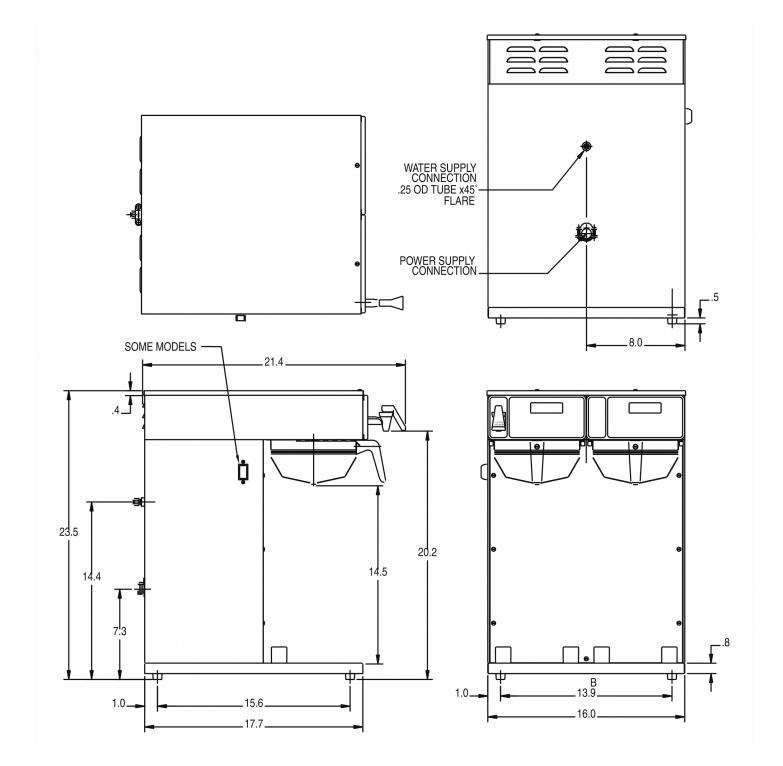

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	23.5 in.	16.0 in.	22.2 in.	28.5 in.	19.9 in.	25.8 in.	52.950 lbs	8.462 ft ³	
Metric	59.7 cm	40.6 cm	56.4 cm	72.4 cm	50.5 cm	65.6 cm	24.018 kgs	0.240 m³	



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 09/23/2021

 For most current specifications and other info visit bunn.com.
 09/23/2021


Related Products & Accessories: AXIOM®-TWIN-APS(38700.0013)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Serving & Holding Options: AXIOM®-TWIN-APS(38700.0013)

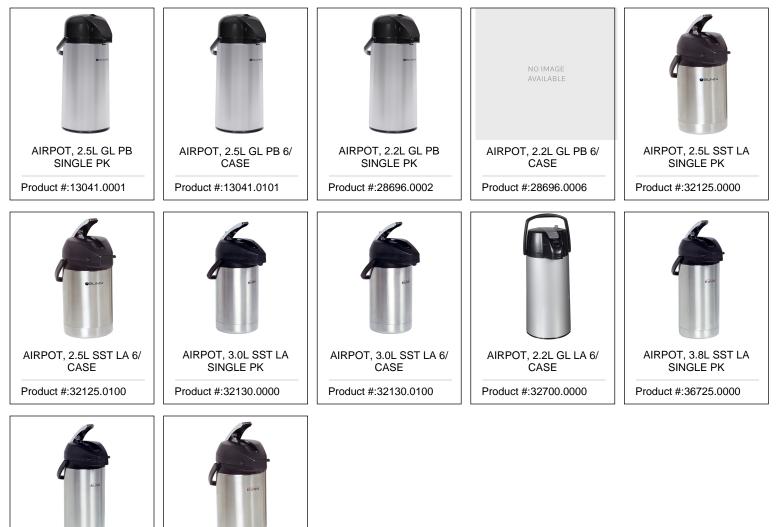

AIRPOT, 3.8L SST LA 6/ CASE Product #:36725.0100

AIRPOT, 2.2L SST LA SINGLE PK Product #:44311.0000



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 09/23/2021 For most current specifications and other info visit bunn.com.