Project #:_

MENUMASTER Commercia

Item #:

Medium Volume



Model MCS10DSE shown

Medium Volume This category of microwave is ideal for...

- **Applications:**
- Coffee shops
- Ethnic restaurants
- Concessions
- Dessert stations

All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.



Menumaster Commercial Microwave Model MCS10DSE

Power Output

- 1000 watts of power.
- Four power levels.

Easy to Use

- User friendly ten minute dial timer lights up for at-a-glance monitoring.
- Timer automatically resets to zero if door is opened during heating. User option allows manual reset to zero.
- See-through door and lighted interior for monitoring without opening the door.
- 1.2 cubic ft. (34 liter) capacity accommodates a 14" (356 mm) platter, prepackaged foods and single servings.
- Stackable to save valuable counter space.

Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a commercial look.
- Constructed to withstand the foodservice environment.
- Non-removable air filter protects oven components.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- ETL Listed.






AIA File #:



Menumaster Commercial Microwave Model MCS10DSE | Medium Volume

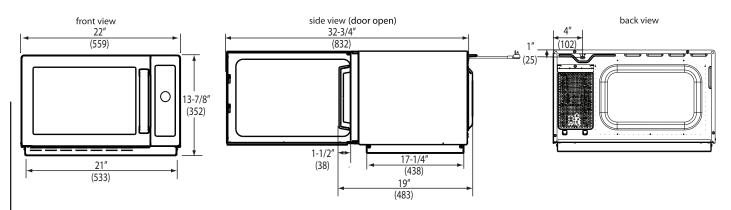

D*19" (483)

D 15" (381)

D 19 ¾" (502)

UPC Code 728028129472

Installation clearance: 2" all sides

MCS10DSE

Countertop

Rotating antenna, top

W 22" (559)

5 ft. (1.5m)

W 25 ½" (660)

W 14 ½" (368)

Dial

10:00

4

1

1

Yes

Yes

Grab & Go

End of cycle

H 13 %" (352)

H 8½" (216)

Stainless steel

Stainless steel 1550 W, 13 A 1000 W** Microwave

NEMA 5-15

2450 MHz

H 17″ (432)

Yes

41 lbs. (18.6 kg.)

47 lbs. (21.3 kg.)

32 ¾″ (832), 90°+ door open

120V, 60 Hz, 15 A single phase

1.2 cubic ft. (34 liter)

Yes

Specifications

Configuration

Power Levels

Magnetron

Stage Cooking

Interior Light

Door Handle

Signal

Stackable

Control System

Max. Cooking Time

Time Entry Option

Microwave Distribution

Model

Drawings available from KCL CADlog - techs@kclcad.com

Specifications

Commercial microwave shall have a user-friendly 10 minute dial timer with illuminated digits and an end of cycle audible signal. Timer shall automatically reset if the door is opened during heating with user option to manually reset to zero. There shall be a four power levels and one cooking stage. Microwave output shall be 1000 watts distributed by one magnetron with a rotating top antenna to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90° + opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 1.2 cubic ft. (34 liter) cavity shall accommodate a 14" (356 mm) platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel exterior and interior and be stackable to save counter and shelf space. The air filter shall be permanently affixed to the front of the oven. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, UL923 for safety and NSF4 for sanitation.



Warranty

Service

Warranty Certificate for this product on the ACP, Inc. website at:

www.acpsolutions.com/warranty



All products are backed by the ACP, Inc. 24/7 ComServ Support Center.



Product of the U.S.A.

Exterior Dimensions
Cavity Dimensions
Door Depth
Usable Cavity Space
Exterior Finish
Interior Finish
Power Consumption
Power Output**
Power Source
Plug Configuration / Cord
Frequency
Product Weight

** IEC 60705 Tested

AIA File #:

Ship weight (approx.)

Shipping Carton Size

UPS Shippable



225 49th Ave. Dr. SW Cedar Rapids, IA 52404 U.S.A. Form # MCO0954 Rev. 8/12 ACP commitment to quality may mean a change in specification without notice

Fax: 319-368-8198

www.acpsolutions.com © 2012 ACP Inc ™

Printed in the U.S.A

Specification #: