

# Cleanware® HT-E

## High Temperature Sanitizing Undercounter Dishwasher



*An efficient and economical warewashing solution for cafes, coffee shops, bars, day care centers, quick service restaurants, small healthcare and senior care facilities, and convenience stores*



### FEATURES

- Recirculating wash design with fresh water rinse
- Push button start with auto-fill
- Two selectable timed cycles
- Built-in booster heater with Sani-Sure™ final rinse system ensures proper rinse temperature
- Delime mode
- Digital LED temperature displays
- Automatic pumped drain for both floor and wall drain installations
- Built-in chemical pumps and priming switches
- Double-wall cabinet for quiet operation and reduced heat loss

### OPTIONS & ACCESSORIES

- Water Hammer Arrestor
- Pressure Regulator
- Drain Water Tempering Kit
- Scale Prevention System (SPS)
- Replacement Cartridge for SPS
- Tie Down
- Machine Stand
  - 6" tall (152 mm)
  - 18" tall (457 mm)
- Combination Rack
- Peg Rack
- 36-Compartment Rack
  - 4 $\frac{1}{8}$ " tall (105 mm)
  - 5 $\frac{5}{8}$ " tall (143 mm)
  - 7" tall (178 mm)



Intertek



Intertek






**LEGEND**

- A - Electrical Connection
- B - Water Inlet (connection actually at end of pre-installed hose)
- C - Drain Connection
- D - Chemical Connection

All dimensions from the floor can be increased 2" using the machine's adjustable feet.

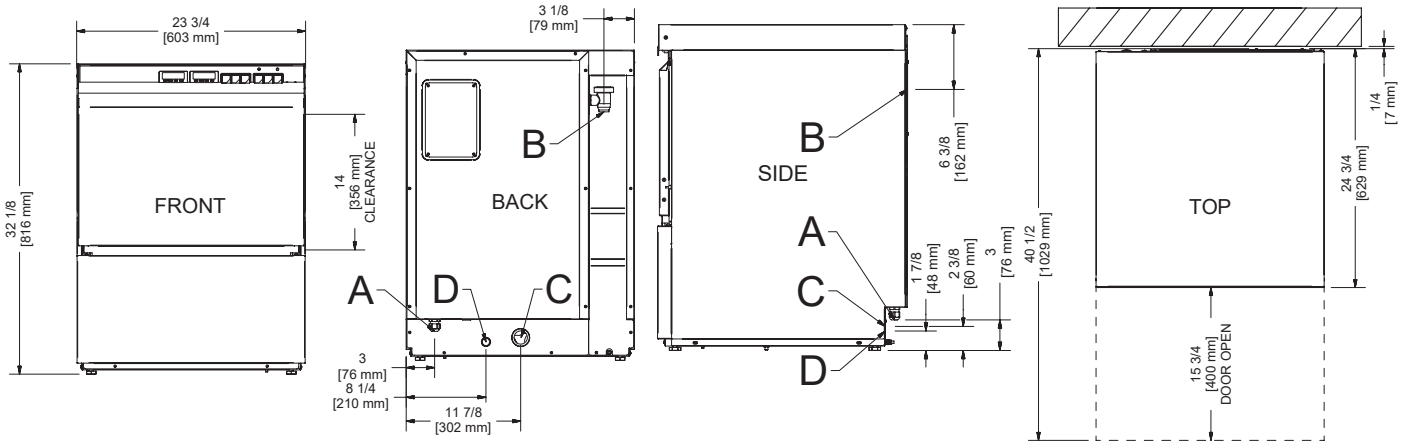

**Operating Capacity**

Racks per Hour (Cycle I)	25 (32*)
Dishes per Hour	625
Glasses per Hour	900

**Operating Temperature**

Wash Temperature (minimum)	150 °F/66 °C
Rinse Temperature (minimum)	180 °F/83 °C

**Operating Cycle (seconds)**

	Wash	Rinse	Dwell	Total Cycle
Normal	92	09	10	111
Heavy	281	09	10	300

**Water Consumption**

Gallons per Rack	0.69 gal (2.61 L)
Gallons per Hour	22.1 gal (83.66 L)

**Water Requirements**

Incoming Water Temperature	110 °F/44 °C
Flow Pressure (PSI)	20 ± 5
Water Inlet Connection	3/4" GHT
Drain Line Connection	1"

Advisory: Cleanware does **NOT** endorse "Tankless On-Demand" water heaters for use with our dishwashers. Cleanware **DOES** endorse, and highly recommends, standard "tank" style water heaters, sized to properly handle the water heating requirements of the facility.

**Electrical Specifications**

Wash Pump Motor (HP)	3/4
Wash Tank Heater (kW)	
208v	3.2
230v	3.9
Rinse Tank Heater (kW)	
208v	4.5
230v	5.5

Model	Power Supply	Total Load	Minimum Circuit Ampacity	Maximum Overcurrent Protection
Cleanware HT-E	208/60/1	25.8	31.8	35.0
	230/60/1	27.8	34.7	35.0

**Dimensions**

Width	23 3/4" (603 mm)
Depth	24 3/4" (629 mm)
Height	32 1/8" (816 mm)
Depth with Door Open	40 1/2" (1029 mm)
Inside Clearance Height	14" (356 mm)
Wall Clearance	1/4" (7 mm)

\*Racks per hour calculated without NSF suggested load time of :30 for front opening dishwashers.

**Contact Cleanware**

CW-SS-0001 [02/26/2020]

<b>Address</b>	<b>Telephone &amp; Fax</b>	<b>Email</b>
6209 N U.S. Highway 25E Gray, Kentucky 40734	T 888.800.5672 F 606.523.1799	customer.service@cleanware.biz