



**SF46HCSA**

## ***Double Solid Door Freezer***

WIDTH <sup>1</sup>	DEPTH <sup>2</sup>	HEIGHT <sup>5</sup>	COLD SPACE™	ENERGY VOLUME	COOLING CAPACITY	ELECTRICAL <sup>7</sup>	SHIPPING WEIGHT
47 1/2" 1207 mm	31" <sup>3</sup> 788 mm	78" 1982 mm	46	35.43 cu. ft. 1003.3 L	1 HP	115V / 60Hz / 7.3A	504 lbs. 229 kg.

<sup>1</sup> Add 19mm (3/4") for casters. <sup>2</sup> Add 26mm (1") for power cord. <sup>3</sup> Add 40mm (1/2") for door handle. <sup>5</sup> Add 121mm (4 3/4") for casters. <sup>7</sup> Commercial refrigerators and freezers are designed for maximum duty and require dedicated 15 amp electrical circuits to maintain warranty.

## SF46HCSA: Designed to enhance the refrigerated storage or display experience to the highest standards of quality and performance.

### Refrigeration:

- Advanced variable speed compressor for extended operational life and improved energy efficiency.
- Split forced-air refrigeration system employs R290 refrigerant within a sealed capillary tube system.
- Condensing unit is bottom-mounted and can be accessed from the front for ease of maintenance.
- Priority, directed air flow provides optimum cooling and energy efficiency through front of unit for optimized heat exchange ventilation.
- Finless, Free&Clear Condenser Coil maximizes air-flow over compressor, reduces energy consumption and is non-clogging.
- Corrosion resistant coated evaporator coil.
- Automatic, stainless steel condensate control system.
- Equipped with Energy Efficient Digital Controller featuring visual/audible product protection alarm. Freezers factory preset for -23.3°C (-10°F) .
- Technologically advanced ProcuTemp™ provides exterior product temperature display. Displays to a resolution within 1°.
- Energy-Saving, Time-Initiated, Temperature-Terminated Defrost System with Evaporator Fan Motor Delay during Defrost and Fan Motor Interrupt on Door Opening. Features Manual Defrost Override.
- Quality, self-lubricating and sealed motors with streamlined air-flow provide quieter yet robust refrigeration.
- Equipped with Digital Thermometer.

### Cabinet:

- Exterior – stainless steel front and sides.
- Stainless Steel Interior stands up to rigours of everyday wear and tear
- Ergonomic raised interior floor.
- Insulation – cabinet is foamed-in-place with eco-conscious, polyurethane insulation.
- Heavy duty thread-in leveler legs.

### Doors:

- Self-Closing Swing Doors feature hold-open position, and spring-back protection.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Stainless steel front with white aluminum interior liner and large grip, recessed handle(s)

### Lighting:



- Energy efficient LED lighting system for sparkling Illuminated Interior Display, on Switch.

### Storage:

- Six (6) white coated shelves 18 1/2"W x 22 3/4"D (470mm x 578mm) are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments.

### Electrical:

- Factory power cord installed for connection to a sole-use (dedicated) 115V/60Hz/1-Phase, 15 Amp circuit.

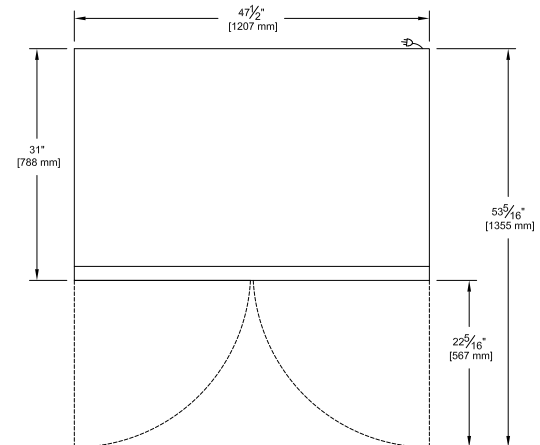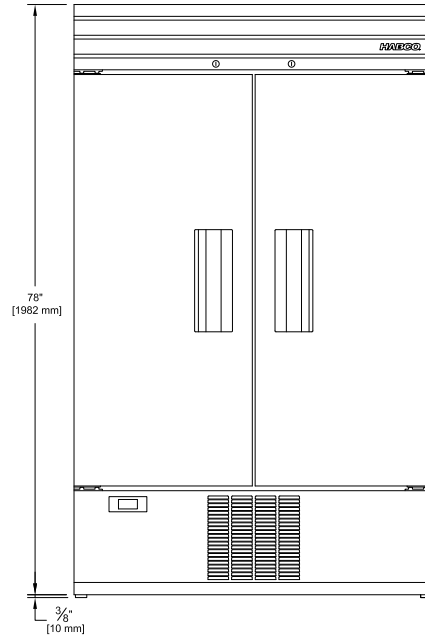

<p><b>Special Inspection by CSA International</b></p>			
---	--	--	--

HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6  
 Toll Free CAN: 1-800-387-5398 USA: 1-800-448-0244 Fax: 416-491-6982 www.habcomfg.com