

RADIANT CONVEYOR TOASTER

MODELS: XTRM-1 (1.5" opening) XTRM-2, 2M* (1.5" opening)
 XTRM-2H, 2HM* (3" opening) XTRM-3, 3M* (1.5" opening)
 XTRM-3H, 3HM* (3" opening) *M denotes Marine option
 Currently available only on X*TRM-2

X*TRM-1



X*TRM-2



X*TRM-3



OPTIONS & ACCESSORIES

- Stacking Kit (XTRM-2 & XTRM-3)
- Gluten Free Top Label-Purple, Covers top, front, rear, and partial areas of the sides.
- Marine Package USPH Compliant:
 - ◊ All External and Food Zone Fasteners are hex head (No Flat or Phillips)
 - ◊ 4" flanged feet for mounting
 - ◊ Available on the 2, 2H, 3, & 3H models

*M denotes Marine option
 Currently available only on X*TRM-2

FEATURES AT A GLANCE

- Small counter space footprint
- "Cool Touch" exteriors prevent injuries
- Power saver switch reduces energy consumption by 50%.
- Removable side panel for service
- High temperature bearings never require lubrication
- Stainless steel housing with powder-coated aluminum front corners
- Metal sheathed heating elements out-perform competitive quartz tube heating
- XTRM-2 and XTRM-3 feature stainless steel conveyor belt
- One inch adjustable legs.

WARRANTY

These units come with a two [2] year warranty for parts and labor.

International or marine package toaster warranty is one [1] year parts only.

TOASTING CAPACITY*

XTRM-1: 350 slices per hour
 XTRM-2,2M: 800 slices per hour
 XTRM-2H,2HM: 600 slices per hour
 XTRM-3,3M: 1050 slices per hour
 XTRM-3H,3HM: 800 slices per hour

CONSTRUCTION

- Stainless steel top skirt, grease trough, grease collector drawer, and front panel. Stainless steel radiant. Aluminized steel sides and back panel. 1" standard leg height. Welded construction.

ELECTRICAL SPECIFICATIONS

- Equipped with a 39" three wire grounded power cord and standard three pronged male plug. U.S. 120V units use a NEMA 5-15P plug. Canadian 120V units use a 5-20P plug, 208V, 240V, and 230V use a NEMA 6-20P plug. CE 230V/50Hz unit uses a European Type "D" plug

CERTIFICATIONS


Certified by the following agencies:



RADIANT CONVEYOR TOASTER

MODELS: XTRM-1 (1.5" opening) XTRM-2, 2M* (1.5" opening)
 XTRM-2H, 2HM* (3" opening) XTRM-3, 3M* (1.5" opening)
 XTRM-3H, 3HM* (3" opening)

EQUIPMENT DIMENSIONS

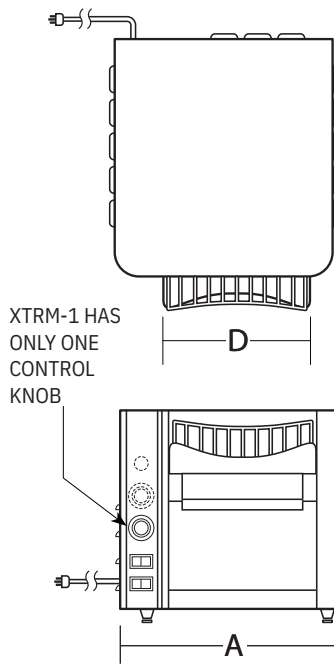


XTRM-1 HAS ONLY ONE CONTROL KNOB

*M denotes Marine option
 Currently available only on X*TRM-2

Model	A (Width)	B (Depth)	C (Height)	D (Opening)
XTRM-1	15.19"	16.75"	12.22"	10.5"
XTRM-2	15.69"	16.75"	15.0"	10.5"
XTRM-2H	15.69"	16.75"	16.5"	10.5"
XTRM-3	18.69"	17.03"	15.0"	13.5"
XTRM-3H	18.69"	17.03"	16.5"	13.5"

Product opening height is 1 1/2" on the XTRM-2 and XTRM-3
 Product opening height is 3" on the XTRM-2H and XTRM-3H

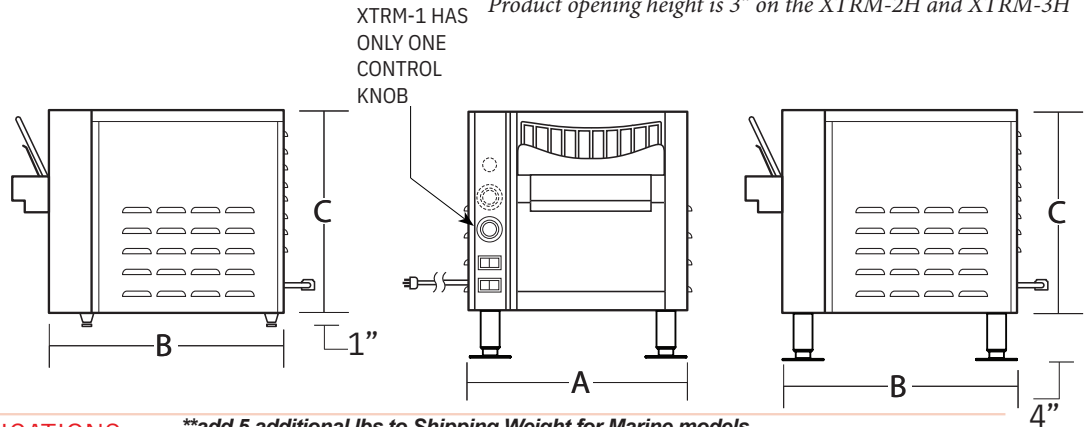

XTRM-1 HAS ONLY ONE CONTROL KNOB

MECHANICAL SPECIFICATIONS

**add 5 additional lbs to Shipping Weight for Marine models

Model #	Watts	Voltage	Phase	Amps	Overall Dimensions			Ship Weight**
					Width (A) x Depth (B) x Height (C)	Opening Height (D)	lbs. (Kilos)	
XTRM-1	1725	120	1	14.4	15.19" x 16.75" x 12.22"	10.5"	45 (15.8)	
XTRM-1	1725	208	1	8.2	15.19" x 16.75" x 12.22"	10.5"	45 (15.8)	
XTRM-1	1725	240	1	7.2	15.19" x 16.75" x 12.22"	10.5"	45 (15.8)	
XTRM-1	1725	230	1	7.5	15.19" x 16.75" x 12.22"	10.5"	45 (15.8)	
XTRM-2, 2M	2840	208	1	13.6	15.69" x 16.75" x 15.0"	10.5"	50 (22.7)	
XTRM-2H, 2HM	2840	208	1	13.6	15.69" x 16.75" x 16.5"	10.5"	54 (24.5)	
XTRM-2, 2M	2840	240	1	11.8	15.69" x 16.75" x 15.0"	10.5"	50 (22.7)	
XTRM-2H, 2HM	2840	240	1	11.8	15.69" x 16.75" x 16.5"	10.5"	54 (24.5)	
XTRM-2, 2M	2840	230	1	12.3	15.69" x 16.75" x 15.0"	10.5"	50 (22.7)	
XTRM-2H, 2HM	2840	230	1	12.3	15.69" x 16.75" x 16.5"	10.5"	54 (24.5)	
XTRM-3, 3M	3340	208	1	16.0	18.69" x 17.03" x 15.0"	13.5"	56 (25.4)	
XTRM-3H, 3HM	3340	208	1	16.0	18.69" x 17.03" x 16.5"	13.5"	61 (27.7)	
XTRM-3, 3M	3340	240	1	14.0	18.69" x 17.03" x 15.0"	13.5"	56 (25.4)	
XTRM-3H, 3HM	3340	240	1	14.0	18.69" x 17.03" x 16.5"	13.5"	61 (27.7)	
XTRM-3, 3M	3340	230	1	14.0	18.69" x 17.03" x 15.0"	13.5"	56 (25.4)	
XTRM-3H, 3HM	3340	230	1	14.0	18.69" x 17.03" x 16.5"	13.5"	61 (27.7)	

Freight Class: 100

FOB: Smithville, 37166

APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.