
## VALVE691

½" Thermostatic Rough-in Valve




## **STANDARDS**

- Compliant with ASME A112.18.1 B125.1 when sold with external trim
- Certified by or IAPMO R&T Lab when sold with external

## **FEATURES**

Thermo control cartridge ½" NPT connections Flows 5.5 GPM @ 60 psi Step-By-Step Installation Instructions Limited Lifetime Warranty Includes Test Plug

## **DIMENSIONS**

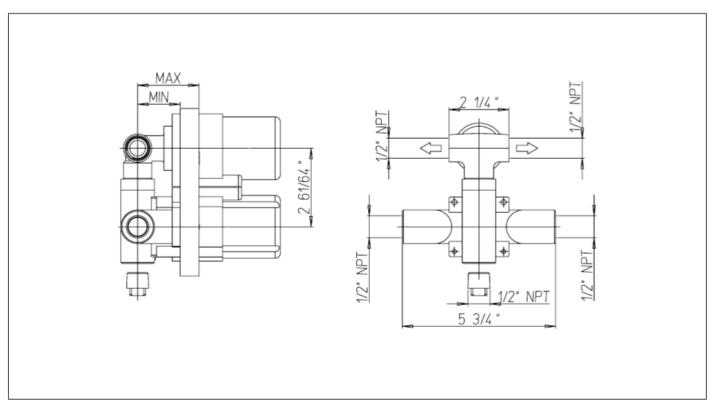

Project	
Contractor	

