MULTI-MODE CABINET (MT, LT, IC) MALTA 145 NAM						
		Medium Temperature IAT*	Low Temperature IAT*	Ice Cream Freezer IAT*		
Net Content	cu.ft	9.10	11.69	13.46		
Total Display Area	sq.ft		9.62			
Adjustment Temperature Range	°F °F	From +28 to 47	From -2.2 to +8.6	From -22 to -5.8		
Nominal Power Consumption Cabinet	W		440			
Nominal Current	А		4.8			
Energy Consumption kWh	kWh/24h	1.54	2.57	4.58		
Refrigerant Type			R290			
Nominal voltage/frequency	V/Hz		110 – 120/60			
Physical dimensions						
Length outside/inside	inch		57.32/52.28			
Depth outside/inside	inch		33.66/28.46			
Front access height/height outside	inch		30.31/32.8			
height inside front/rear	inch		25.79			
Stacking height (is basket height for meat colling)	inch	14.96	19.29	21.65		




#### MULTI-MODE CABINET (MT, LT, IC) MALTA 185 NAM

		Medium Temperature IAT*	Low Temperature IAT*	Ice Cream Freezer IAT*		
Net Content	cu.ft	12.65	16.27	18.60		
Total Display Area	sq.ft		12.48			
Adjustment Temperature Range	°F °F	From +28 to 47	From -2.2 to +8.6	From -22 to -5.8		
Nominal Power Consumption Cabinet	W		450			
Nominal Current	А		5.6			
Energy Consumption kWh	kWh/24h	1.73	2.96	5.68		
Refrigerant Type			R290			
Nominal Voltage/Frequency	V/Hz		110 – 120/60			
Physical dimensions						
Length outside/inside	inch		72.87/67.72			
Depth outside/inside	inch		33.66/28.35			
Front access height/height outside	inch		30.31/32.8			
Height inside front/rear	inch		25.79			
Stacking height (is basket height for meat colling)	inch	14.96	19.29	21.65		

\* Internal Average Temperature



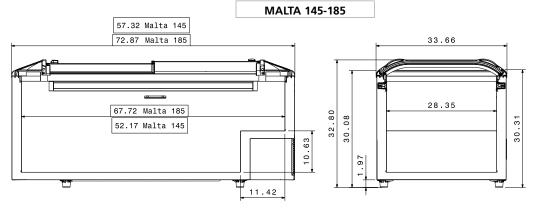





approved according to ANSI/NSF 7 Intertek Intertek approved according to ANSI/UL 471



ion: 01/2018

Sub

AHT Cooling Systems USA Inc. 7058 Weber Blvd. Ladson SC 29456 Tel. 800-905-4768 (toll free) or 843-767-6855 Email sales@us.aht.at www.ahtusa.net

OHSAS 18001	ISO 9001
SA 8000	ISO 14001







www.ahtusa.net

# MALTA VISIBILITY FROM ALL SIDES

This unique and product innovative »Sales Driver« is accessible from all sides and delivers easy viewing. The sturdy design and functionality make it the perfect all-around unit for you to your products.

# KEY BENEFITS

- I Increase energy savings compared with traditional islands
- Energy efficient design
- Environmentally friendly natural refrigerant propane (R290)
- Additional energy saving due to extensive optimization of technology and construction
- Synthetic interior casing for easy cleaning
- I Multi Temp Mode offers different temperature ranges that can be changed easily through the controller
- 100% CFC- and PFC-free
- Plug-in System (120V); no floor drain required
- Smooth-running glass sliding lids combined with elegant glass side panels for perfect visibility
- Low access height for easy loading and removal of products
- Low investment and operating costs
- Little to no maintenance
- Consistent interior temperature ensures product quality
- Adjustable false bottoms reduce labor and allow flexibility in product merchandising
- Frost free\*



### TEMPERATURE RANGES

Refrigerator	≥32 °F
Freezer	<32 °F
Ice Cream Freezer	<-5 °F

### OPTIONS

- Brilliant LED Lighting which enhances product display and drives sales
- Impact protection bumpers
- Skriting prevents water and dirt from getting under the units
- I Optional paint to most RAL color

#### NEW SYNTHETIC INTERIOR CASING



Synthetic interior case for higher product quality, easier cleaning and improved defrost water drain.



## THE PERFECT SOLUTION – BUILT IN AUTOMATIC DEFROST (AD)\*



Regular defrosting ..



... with goods kept at a constant temperature

 $^{\ast}\mbox{Only}$  available in Refrigerator and Ice Cream Freezer Mode