

**Digital Cabinets
Bottle Cooler with Slide Top,
18 cu.ft, 65" (R600a)**


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

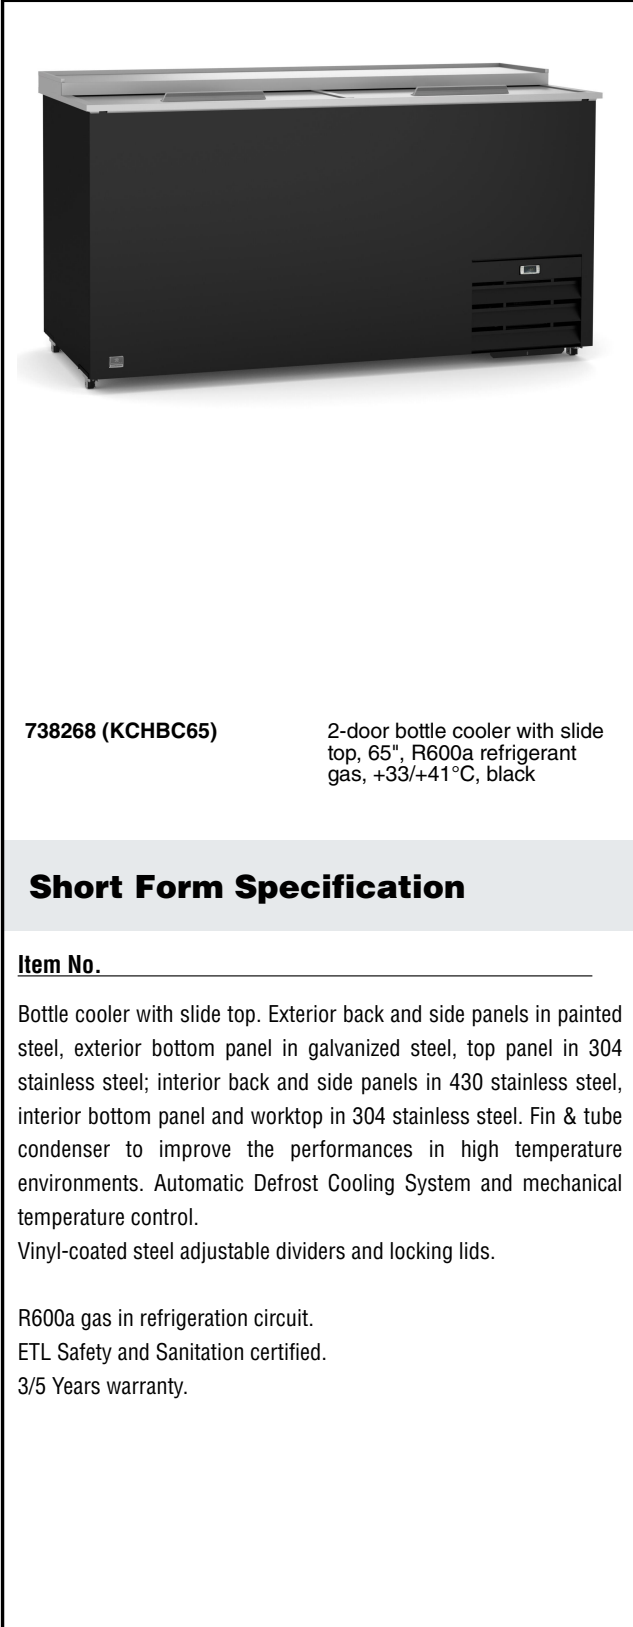

738268 (KCHBC65)

2-door bottle cooler with slide top, 65", R600a refrigerant gas, +33/+41 °C, black

Short Form Specification

Item No. _____

Bottle cooler with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and mechanical temperature control.

Vinyl-coated steel adjustable dividers and locking lids.

R600a gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.


Main Features

- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Vinyl-Coated Steel adjustable dividers to customize bottle storage effortlessly.
- Locking lids.
- External temperature display.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.

Construction

- Mechanical control to select temperatures.
- CFC and HCFC free (ecological refrigerant type: R600a).
- Pre-wired heavy duty power cord.

APPROVAL: _____

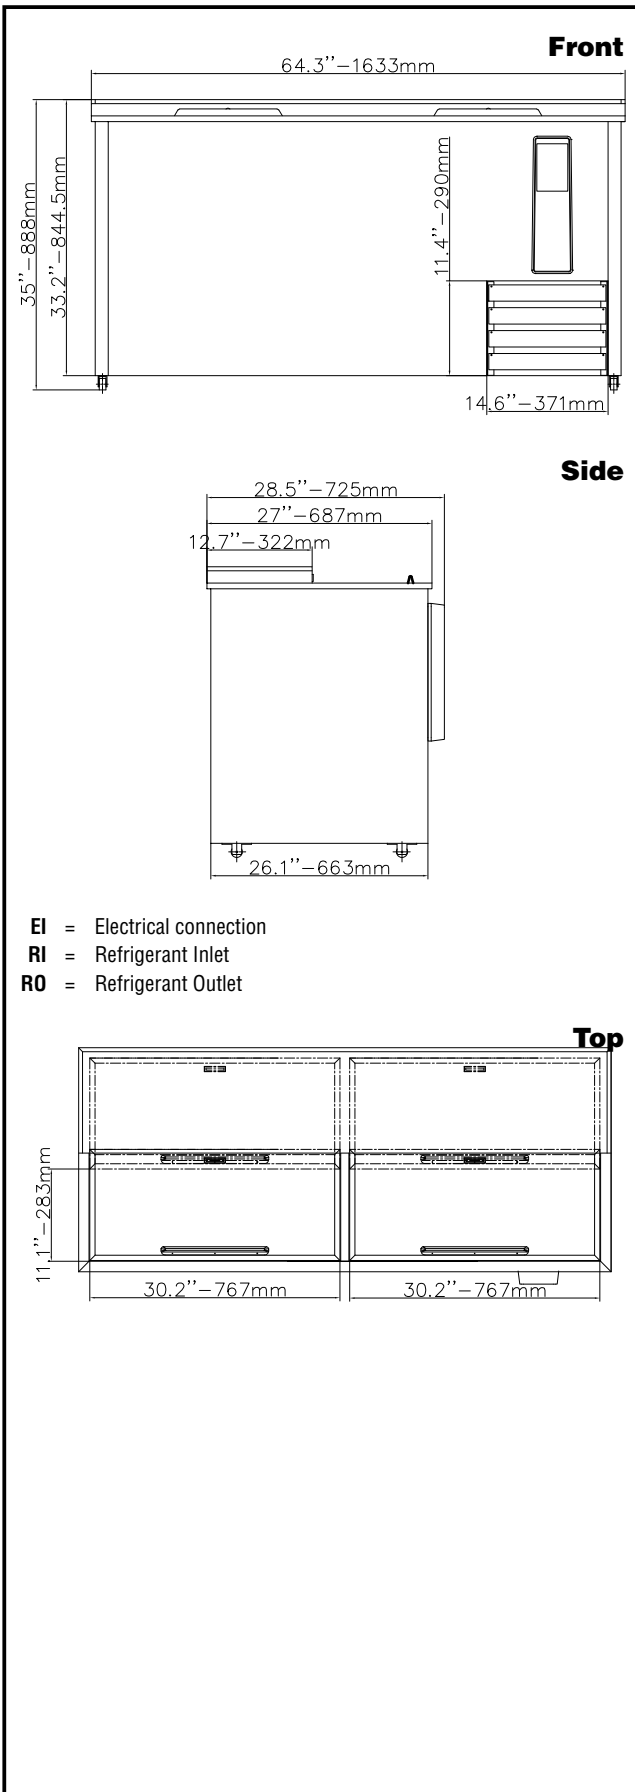

Electric

Supply voltage:

738268 (KCHBC65) 115 V/1 ph/60 Hz

Electrical power, max:

310.5 kW

Plug type:

USA NEMA 5-15P

Key Information:

Capacity (Cu. Ft.)	18.0
External dimensions, Width:	64 5/16" (1633 mm)
External dimensions, Depth:	27 1/64" (686 mm)
External dimensions, Height:	35 " (889 mm)
Type of external material:	Black Prepainted Steel
Type of internal material:	Stainless Steel
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	1/6
Refrigerant type:	R600a
Operating temperature min.:	33.01 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube