

#### COMMERCIAL

### Digital Cabinets Mega Top Table, 60" with 24GN 1/6 containers - Stainless Steel (R290)



Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 79x60x8 in.

Digital control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature. Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

ITEM #	
MODEL #	
MODEL #	
NAME #	
SIS #	
AIA #	

# Ketvinator<sup>\*</sup>

## **Main Features**

- External temperature display.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Digital Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmetal impact.
- Heavy duty Vinyl coated steel shelves.

## Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 24 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

#### APPROVAL:

Kelvinator Commercial www.kelvinatorcommercial.com USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640



# Digital Cabinets Mega Top Table, 60" with 24GN 1/6 containers - Stainless Steel (R290)



Side

Supply voltage:	
738261 (KCHMT60.24)	115 V/1 ph/60 Hz
Electrical power, max:	776.25 kW
Plug type:	USA NEMA 5-15P

## **Key Information:**

Gross capacity: Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Number and type of grids (included): Type of external material: Type of internal material: Warranty: 438.9104 lt

61 1/4" (1555 mm) 34 1/2" (877 mm) 43 1/4" (1098 mm) 2 Full 2 - Vinyl-Coated Steel Stainless Steel


## **Refrigeration Data**

Compressor power:	
Refrigerant type:	R29
Operating temperature min.:	33.0
Operating temperature max.:	41 °
Condenser type:	Fin
Defrost type:	Auto


R290 33.01 °F 41 °F Fin & tube Auto Defrost


Polystyrene

3 / 5 years



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



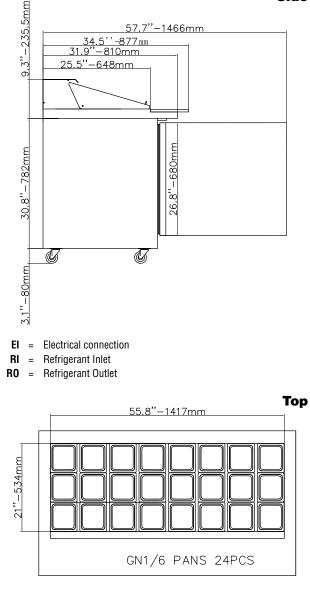

TITETER INTERIER