#### COMMERCIAL

# Digital Cabinets Reach-In Refrigerator, 1 Door, 23 cu.ft - Stainless Steel (R290)

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



738241 (KCHRI27R1DRE)

1-door reach-in digital refrigerator, stainless steel, 23 cubic feet, R290 refrigerant gas, +33/+41°F - Energy star

# **Short Form Specification**

#### Item No.

1 full door refrigerator with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side and top panels in painted aluminium, interior bottom panel in 304 stainelss steel.

Digital control with cabinet temperature display. Self-closing and onsite reversible door feature lock and key.

R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications.

3/5 Years warranty.

#### **Main Features**

- External temperature display.
- · Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Digital Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmetal impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.


#### Construction

- · Reversible door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Lockable door.
- Pre-wired heavy duty power cord.
- · Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

**APPROVAL:** 



# Digital Cabinets Reach-In Refrigerator, 1 Door, 23 cu.ft - Stainless Steel (R290)

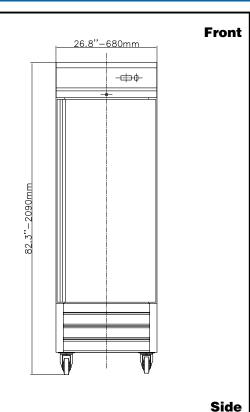

57.5"-1460mm
32.7"-830mm
2.8"-70mm

2.8"-70mm

2.8"-70mm

2.8"-70mm

Electrical connection

Refrigerant Inlet

## **Electric**

Supply voltage:

**738241 (KCHRI27R1DRE)**115 V/1 ph/60 Hz

Electrical power, max:

310.5 kW

Plug type:

USA NEMA 5-15P

## **Key Information:**

Capacity (Cu.Ft.)

23.0

Door hinges:

External dimensions, Width: 26 13/16" (681 mm)
External dimensions, Depth: 32 11/16" (830 mm)
External dimensions, Height: 82 1/4" (2090 mm)

Number and type of doors:

1 Full

Number and type of grids (included):

3 - Vinyl-Coated steel

Type of external material: 430 AISI
Type of internal material: 304 AISI
Warranty: 3 / 5 years

## **Refrigeration Data**

Compressor Horsepower: 1/6
Refrigerant type: R290
Operating temperature min.: 32 °F
Operating temperature max.: 41 °F
Condenser type: Fin & tube
Defrost type: Auto Defrost



RO = Refrigerant Outlet





