

**Digital Cabinets
Undercounter Refrigerator, 72" with
3 Doors - Stainless Steel (R600a)**


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

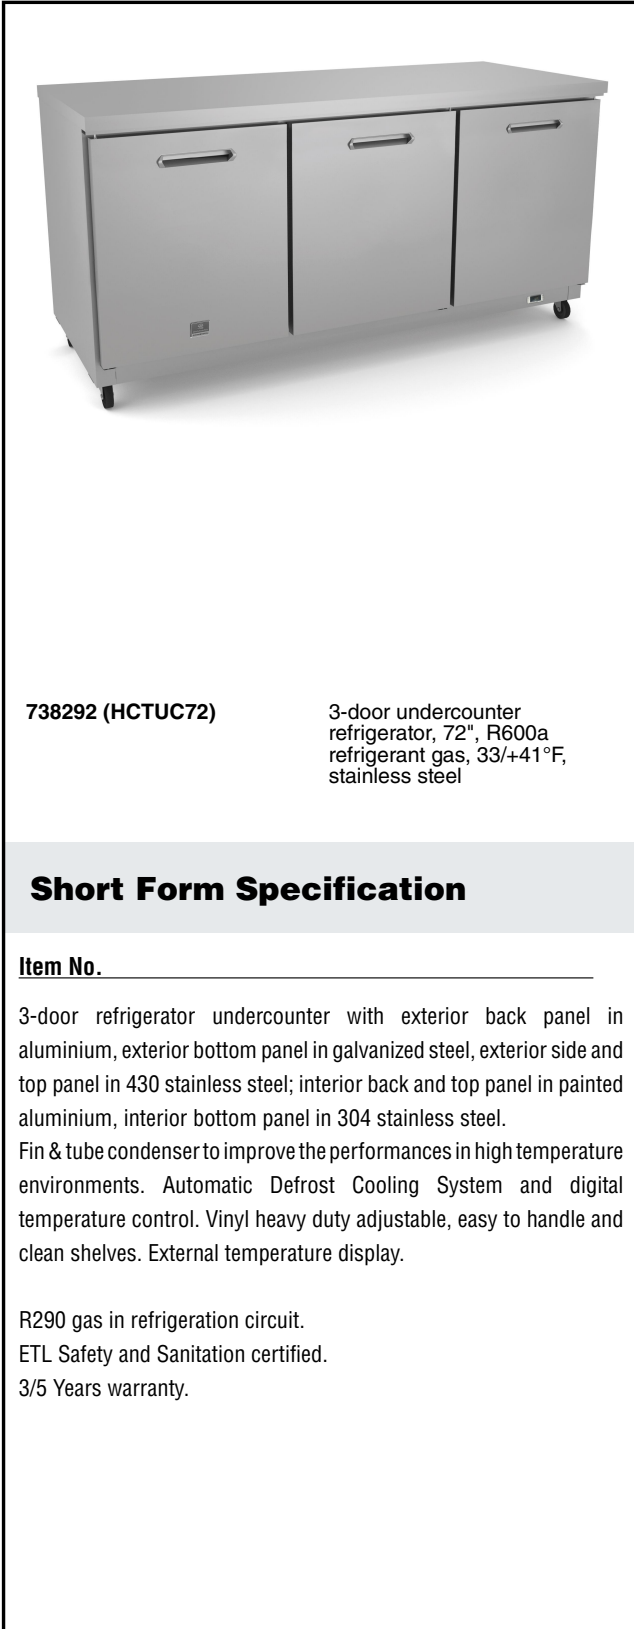

738292 (HCTUC72)

3-door undercounter refrigerator, 72", R600a refrigerant gas, 33/+41°F, stainless steel

Short Form Specification

Item No. _____

3-door refrigerator undercounter with exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back and top panel in painted aluminium, interior bottom panel in 304 stainless steel.

Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and digital temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.


Main Features

- External temperature display.
- Removable door gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Digital Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.

Construction

- Reversible door.
- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- CFC and HCFC free (ecological refrigerant type: R600a).
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

APPROVAL: _____

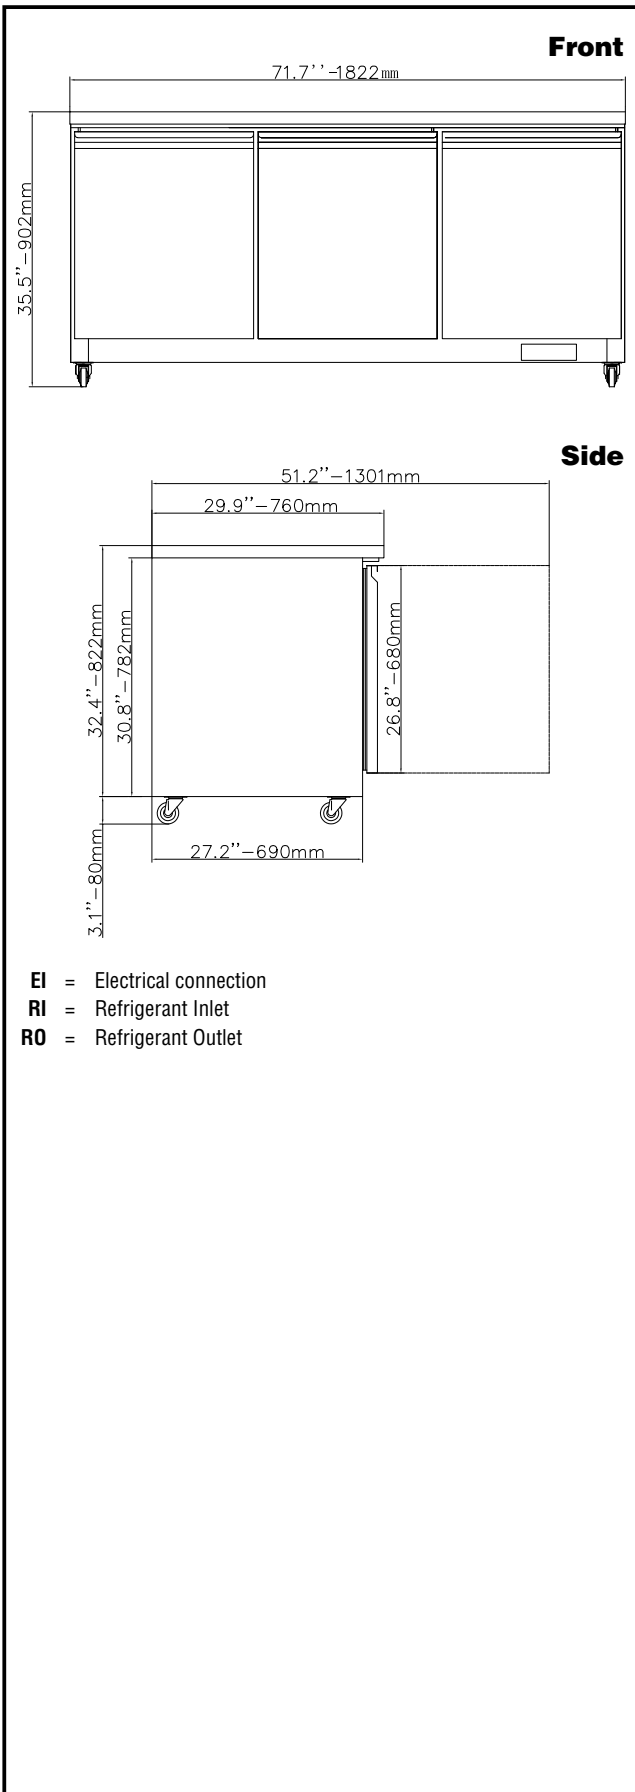

Electric

| | |
|-------------------------------|------------------|
| Supply voltage: | 115 V/1 ph/60 Hz |
| 738292 (HCTUC72) | |
| Electrical power, max: | 362.25 kW |
| Plug type: | USA NEMA 5-15P |

Key Information:

| | |
|---|------------------------|
| Capacity (Cu. Ft.) | 6.0 |
| Door hinges: | |
| External dimensions, Width: | 71 1/2" (1816 mm) |
| External dimensions, Depth: | 29 15/16" (760 mm) |
| External dimensions, Height: | 35 1/2" (902 mm) |
| Number and type of doors: | 3 Full |
| Number and type of grids (included): | 1 - Vinyl-Coated Steel |
| Type of external material: | Stainless Steel |
| Type of internal material: | Polystyrene |
| Warranty: | 3 / 5 years |

Refrigeration Data

| | |
|------------------------------------|--------------|
| Compressor Horsepower: | 1/6 |
| Refrigerant type: | R600a |
| Operating temperature min.: | 32 °F |
| Operating temperature max.: | 41 °F |
| Condenser type: | Fin & tube |
| Defrost type: | Auto Defrost |