



# Preparation Table Back Mount Saladtop models 9000-7 & 9412-32-7

model  9401-7  9412-32-7  9412-32D-7  9801-7  9303-7  9304-7  
 9305-7  9601-7

### Description:

Range from 27" to 60" long models, with a work surface height of 36". The models 9412-32-7 and 9412-32D-7 are 32.75" deep, while the others are 30" deep. Self-contained refrigerated salad top unit with back-mounted removable, replaceable, R-134a refrigeration system. "Front Breathing" system, requiring no side or back clearance. Top openings include sanitary raised rims and recessed adaptor to hold several 1/6 size pans.

### Specifications:

**CABINET EXTERIOR:** Constructed of all metal. The top, sides, and front are stainless steel. Cabinet top to be one piece die-formed 20 gauge stainless steel with 1 1/2" high square nosing. Top to have cutouts with raised rims and recessed adaptor to hold 6" deep pans. Die-formed, removable 20 gauge stainless steel roll cover(s) with covered interior corners and one piece integral handle provided. Bottom & back of unit are corrosion resistant steel. Full length NSF cutting board provided. Door openings to be ABS and to contain magnetic strip for positive sealing of gaskets. Model 9412-32D-7 comes with (2) refrigerated drawers, each opening frame to be stainless steel with ABS breaker strips. Drawer fronts to be 24 gauge stainless steel with 16 gauge stainless handle, magnetic gasket, ABS interior liner and foamed in place insulation. Units ship standard on (4) 6" legs, except for models 9412-32-7 & 9412-32D-7 which ship standard on 2 1/2" high casters (front two with locks).

**CABINET INTERIOR:** Fully covered to meet N.S.F. standard #7. The interior bottom, back, and top are anodized aluminum with covered corners for easy clean-up. The interior ends are ABS. Unit insulated with a minimum of 2.5" of CFC free, foamed in place polyurethane. (Model 9412-32D-7 with two refrigerated drawers below top. Each drawer contains two 12" x 20" x 6" deep polycarbonate pans- pans are removable without removing drawer tracks. Drawer tracks are 14 gauge stainless steel with 1 5/16" stainless steel ball bearings, self-closing and removable).

**DOORS:** Stainless steel front with easy to grasp recessed handles, mounted on heavy duty concealed hinges. Hinges are all stainless steel with bronze pivot pin in nylon bushing, spring loaded to be self-closing. Door with foamed in place insulation, press fit magnetic gaskets - (designed for installation & removal without tools), and deep draw ABS interior liner for maximum insulation value. (Model 9412-32D-7, has refrigerated drawers in lieu of door).

**REFRIGERATION:** CFC free, R-134a back-mounted refrigeration system to be self-contained with evaporator blower coil, compressor, thermostatic control, forced-air condensing coil and capillary tube contained in removable assembly. Condensate evaporator provided. Units totally prewired and to be supplied with 8' cordset(NEMA 5-15P) for 115 V operation. "Front Breathing" refrigeration system, requires no side or back clearance.

This equipment is intended for use in rooms having an ambient temperature of 86°F (30°C) or less.

model 9412-32D-7 shown with non-standard cover and optional backsplash





### Standard Features:

- Self-contained, removable, replaceable refrigeration package that utilizes "CFC free" R-134a refrigerant
- Front Breathing / Down-Draft refrigeration system
- Removable stainless steel roll cover
- Fully adjustable shelves behind self-closing doors (model 9412-32D-7 has (2)drawers in lieu of doors)
- Full length NSF approved composition cutting board
- Stainless steel top, sides, and front
- Hot gas Condensate evaporator

### Options:

- Stainless steel back panel
- Overshelves (double or single tier)
- Export Voltages
- Backsplash
- Casters
- Drawers in lieu of doors



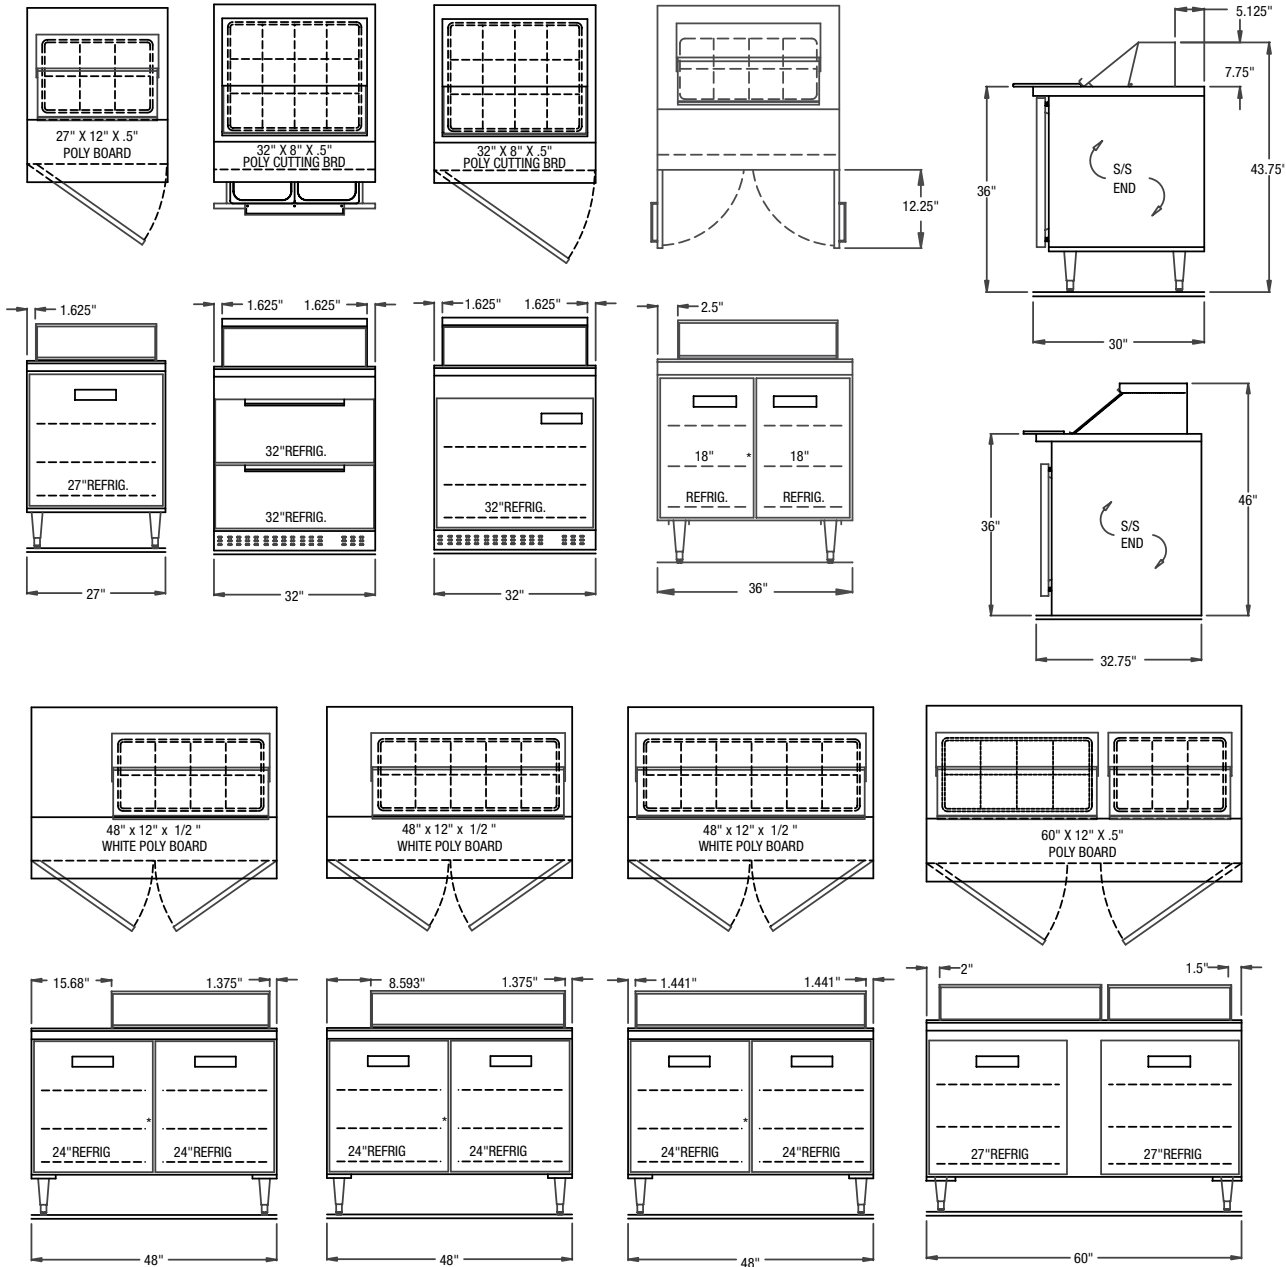

Drawings are to be viewed in the same order as the chart, one drawing to represent refrigerator and freezer units

**NOTE:** When ordering casters, 6" casters equal 35" height; 4" casters equal 33" height

Model	L	D	H	Doors	Storage Cu. Ft.	Pan Capacity	HP	Volt	Amps	NEMA	Ship Wt.
9401-7	27"	30"	36"	(1) 27"	5.66	(6) 1/6	1/4	115/60/1	5.5	5-15P	175
9412-32D-7	32"	32.75"	36"	(2) 32" Drawers	-	(2) 12"x20"x6" per drawer & (2) 1/1	1/4	115/60/1	5.5	5-15P	300
9412-32-7	32"	32.75"	36"	(1) 32"	8.62	(2) 12"x20"	1/4	115/60/1	5.5	5-15P	252
9801-7	36"	30"	36"	(2) 18"	7.87	(8) 1/6	1/4	115/60/1	5.5	5-15P	245
9303-7	48"	30"	36"	(2) 24"	10.82	(8) 1/6	1/4	115/60/1	5.5	5-15P	280
9304-7	48"	30"	36"	(2) 24"	10.82	(10) 1/6	1/4	115/60/1	5.5	5-15P	280
9305-7	48"	30"	36"	(2) 24"	10.82	(12) 1/6	1/4	115/60/1	5.5	5-15P	280
9601-7	60"	30"	36"	(2) 27"	13.77	(14) 1/6	1/4	115/60/1	5.5	5-15P	300

