



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

INSTITUTIONAL TRAY TRANSPORT

Delivery Cart with Straps

“ITT SERIES”



ITT-96-132



ITT-72-104

Designed for nesting, transporting, and serving insulated trays or beverage service for Correctional Facilities.



FWE's heavy-duty Correctional-Institutional Tray Transports provide open access to load and nest trays and beverage dispensers easily. The straps secure the stacked or nested thermal trays and beverage containers during transport. The tight top and bottom seal of the thermal trays keep your hot foods hot and cold foods cold.

Our tubular frame construction and welded construction are designed to endure the most rigorous operations and environments, assuring FWE's transport cart lasts longer than any other – *period!*



Durable stainless steel takes the abuse of transport applications and allows for sanitary maintenance. Casters are mounted to reinforcement plates for added durability and take the impact over thresholds. Built tough from stainless steel for continuous demanding use, FWE is the “Choice of Professionals”.

- ◇ All stainless steel
- ◇ Welded tubular construction
- ◇ 10-gauge corner reinforcements
- ◇ 16-gauge stainless steel reinforced shelves
- ◇ 8" Polyurethane casters
- ◇ Casters rated to hold 900 lbs per caster
- ◇ Stainless steel push bars
- ◇ Durable adjustable straps with buckle



PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

SPECIFICATIONS: INSTITUTIONAL TRAY TRANSPORT

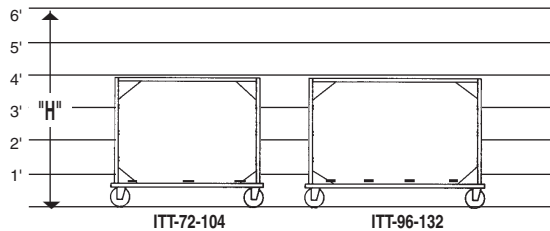

MODEL NUMBER	NUMBER OF STRAPS	SHELF SPACING (mm)	SHELF SIZE (mm)	OVERALL EXTERIOR DIMENSIONS IN. (mm)			CLASS 125	
				HIGH "H"	DEEP "D"	WIDE "W"	CASTER SIZE	SHIP WT. LBS. (KG)
ITT-72-104	3	40" (1016)	49" x 28" (1245 x 711)	47.75" (1213)	28" (711)	49" (1245)	8"	250 (114)
ITT-96-132	4	40" (1016)	64.5" x 28" (1638 x 711)	47.75" (1213)	28" (711)	64.5" (1638)	8"	255 (116)

CONSTRUCTION. Shall be heliarc welded single unit construction. Base frame shall be 1.5" square stainless steel tubing with reinforcing 10-gauge corner plates of stainless steel. Uprights shall be 1.5" x 1.5" x 10-gauge stainless steel.

SHELVES. Shelves shall be heavy-duty 16-gauge stainless steel, die-formed. Underside of each shelf shall be reinforced with extra heavy-gauge, 1.5" x 1.5" stainless steel tubing, welded to 10-gauge stainless steel corner angles. Each shelf shall be capable of carrying up to 200 lbs. of distributed load. Top shelf is flanged up. Bottom shelf is flanged down.

STRAPS. Straps shall be of polyester webbing and shall be washable. Strap length is adjustable. Durable harness buckle-type strap connector.

PUSH BARS. Unit shall be provided with one (1) heavy-duty, stainless steel push handle, welded in place.

CASTERS. 8 inch polyurethane tire casters with Zerk grease (lubrication) fittings; reinforced forged yoke and raceways. Plate mounted and bolted to frame in standard configuration of two (2) rigid, and two (2) swivel with brake.

FWE Products are used by major companies world-wide. We can modify, design, or custom build equipment to fit your special requirements.

Optional Accessories:

- All swivel with brake casters
- Larger casters
- Corner bumpers (set of 4)
- HDM cross bracket
- Corner bumpers



Food Warming Equipment Company, Inc.

P.O. Box 1001
 Crystal Lake, IL 60039 USA
 800-222-4393; 815-459-7500
 Fax: 815-459-7989

Manufacturing Facilities:
 7900 S. Route 31
 Crystal Lake, IL 60014 USA
 www.FWE.com sales@fweco.net

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991.
 All specifications subject to change without notice.
 © 11 FWE Food Warming Equipment Company, Inc.