





NITRILE DIPPED



GL605

Polyester | Nitrile | Sandy + Smooth

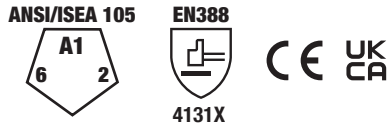

ANSI/ISEA 105 – CUT A1 | ABRASION 6 | PUNCTURE 2
 EN388 – ABRASION 4 | CUT 1 | TEAR 3 | PUNCTURE 1 | CUT TDM-100 X

Double dipped sandy nitrile coating on the palm and fingers provides an effective grip in dry and oily situations // Smooth nitrile full dipped coating keeps hands dry in wet applications // 15 gauge outer polyester cut-resistant liner provides comfort and durability // 10 gauge inner acrylic cut-resistant liner delivers insulation and moisture resistance // Knit cuff creates a snug fit to keep out debris

Suggested Applications

Aerospace // Assembly // Construction // Fisheries // Handling Oily Parts // HVAC // Manufacturing // Utilities

Glove Breakdown

| |
|----------------------------------|
| Type: Dipped Glove |
| Material: Sandy + Smooth Nitrile |
| Outer Liner: 15 Gauge Polyester |
| Cuff: Polyester + Latex Elastic |

This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.

Packaging

| | | |
|---------------|---------------|----------|
| | Outer Polybag | Case |
| GL605 | 12 Pair | 120 Pair |
| Made in China | | |

Product markings may vary // Updated as of 06.23



Glove Sizing

| | | | | |
|------------|-------------|------------|---------------|----------------|
| Small 7 | Medium 8 | Large 9 | X-Large 10 | 2X-Large 11 |
|------------|-------------|------------|---------------|----------------|

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.