





INSULATED NITRILE DIPPED



GL611

Polyester + Acrylic | Nitrile | Sand

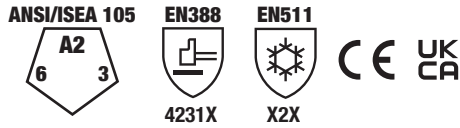

ANSI/ISEA 105 – CUT A2 | ABRASION 6 | PUNCTURE 3
 EN388 – ABRASION 4 | CUT 2 | TEAR 3 | PUNCTURE 1 | CUT TDM-100 X
 EN511 – CONTACT COLD 2

Double dipped // Sandy nitrile coating on the palm and fingers provides an effective grip in dry and oily situations // Smooth nitrile three-quarter dipped coating keeps palm and fingers dry in wet applications // 13 gauge outer polyester liner provides comfort and durability // 10 gauge inner acrylic liner delivers insulation and moisture resistance // Contact cold protection down to as low as -22°F/-30°C // Knit cuff creates a snug fit to keep out debris // Dark liner and coating hide stains

Suggested Applications

Construction // Commercial Fishing // Food Processing // Outdoor Activities // Refrigerated Areas // Utilities

Glove Breakdown

Type: Insulated Dipped Glove
Material: Sandy + Smooth Nitrile
Outer Liner: 13 Gauge Polyester
Inner Liner: 10 Gauge Acrylic
Cuff: Polyester + Acrylic + Latex Elastic

⚠ WARNING: Cancer and Reproductive Harm – P65Warnings.ca.gov
 This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.

Product markings may vary // Updated as of 08.23



Packaging

	Outer Polybag	Case	Made in China
GL611	12 Pair	120 Pair	

Glove Sizing

Small 7	Medium 8	Large 9	X-Large 10	2X-Large 11
------------	-------------	------------	---------------	----------------

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.