




NITRILE DIPPED



GL616C

Para-armid + Steel | Nitrile | Micro-Foam

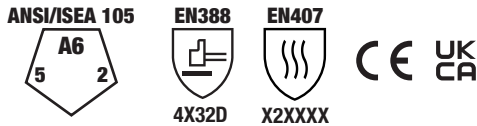

ANSI/ISEA 105 – CUT A6 | ABRASION 5 | PUNCTURE 2
 EN388 – ABRASION 4 | CUT X | TEAR 3 | PUNCTURE 2 | CUT TDM-100 D
 EN407 – CONTACT HEAT 2

Micro-foam nitrile coating on palm and fingers offers an excellent grip on dry or wet surfaces by channeling liquids away // 15 gauge para-amid liner delivers cut resistance and heat resistance // Contact heat protection up to 482°F/250°C // Knit cuff creates a snug fit to keep out debris

Suggested Applications

General Maintenance // Glass Handling // Manufacturing // Metal Fabrication // Steel Handling // Woodworking

Glove Breakdown

| |
|---|
| Type: Dipped Glove |
| Material: Micro-Foam Nitrile |
| Outer Liner: 15 Gauge Para-amid + Steel |
| Cuff: Para-amid + Steel + Latex Elastic |

⚠ WARNING: Cancer and Reproductive Harm – P65Warnings.ca.gov
 This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.

Packaging

| | | |
|------------------|---------------|----------|
| | Outer Polybag | Case |
| GL616C | 12 Pair | 120 Pair |
| Made in Pakistan | | |

Product markings may vary // Updated as of 06.23



Glove Sizing

| | | | | |
|------------|-------------|------------|---------------|----------------|
| Small 7 | Medium 8 | Large 9 | X-Large 10 | 2X-Large 11 |
|------------|-------------|------------|---------------|----------------|

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.