

## GL617DP

ANSI/ISEA 105 – CUT 1 | ABRASION 6 | PUNCTURE 2  
EN388 – 4131X

Nitrile micro-foam palm, fingers + knuckles coating // 15 gauge nylon + spandex liner // Touch sensitivity // Good grip in all conditions

GL617DP XS – 2XL

### Suggested Applications


Handling Oily Parts // Warehousing // General Assembly // Automotive Components // Horticulture // General Duty

### Glove Breakdown

Liner: Nylon + Spandex
Coating: Nitrile
Dots: Nitrile
Thumb Saddle: Nitrile

⚠ WARNING: Cancer and Reproductive Harm – P65Warnings.ca.gov

### Testing Performance

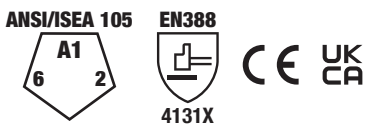

#### ANSI/ISEA 105

Cut	1	2	3	4	5	6	7	8	9	X
Abrasion	1	2	3	4	5	6				
Puncture	1	2	3	4	5					

#### EN388

Abrasion	1	2	3	4			
Circular Blade Cut	1	2	3	4	5	X	
Tear	1	2	3	4			
Puncture	1	2	3	4			
Cut TDM-100	A	B	C	D	E	F	X
Impact Rated	P	F	X				



Nitrile



Abrasion



Tear



Puncture



### Glove Sizing

X-Small 6	Small 7	Medium 8	Large 9	X-Large 10	2X-Large 11
--------------	------------	-------------	------------	---------------	----------------

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.

### Packaging

Polybag: 12 pair
Case: 120 pair
Made in China

Product markings may vary.