




KING FLEX

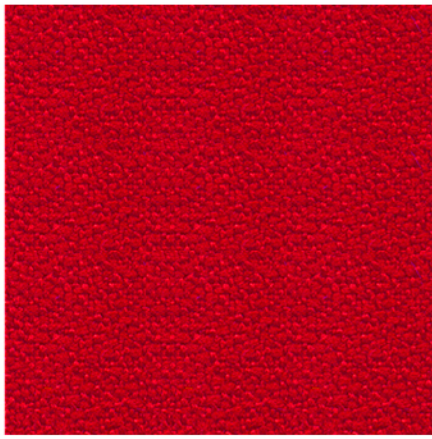


5004




5005




4020




4017




4009




9244




4008




4027



3094




4066




4030



2023



3083



9228



2031




2005




1006




1069




0001




9606




6071




6005




6026




9268




6007




6011




6018




5096




6080




6098




7023




6031




7013




7008




7033



3030



7011




7019




7020




8002




8027




8044




8007



9289



8009



8010



8033

inloom

KING FLEX

Specification

SPECIFICATION	STANDARD	TOLERANCE	ACHEIVED
COMPOSITION	100% TREVIRA CS POLYESTER		
ENVIRONMENTAL	OEKO-TEX Standard 100	EU ECOLABEL	
ABRASION	ISO 12947-2 (Martindale)	± 10%	100,000
WIDTH (cm)	—	± 2%	140
WEIGHT (g/lm)	EN 12127	± 5%	420
PILLING (2000 rubs)	ISO 12945-2	from 4 to 5	5
LIGHT FASTNESS (blue scale)	ISO 105-B02 (Xoenotest)	from 5 to 8	6
FASTNESS TO RUBBING	ISO 105-X12 (Crockmeter)	from 4 to 5	4/5 (grey scale)

Slight colour variation within commercial tolerance may occur between batches due to properties of textiles



Digital fabric image may not be colour accurate. Always request fabric sample before ordering

FLAMMABILITY

EN 1021-1&2 Cigarette & Match
 BS 7176 Low Hazard
 BS 5852 Ignition source/ Crib 5
 BS 7176 Medium Hazard
 EN 13773 Class 1
 UNI 9174 - 8456 Class C1
 UNI 9175 Class 1 IM
 DIN 4102 Class B1
 NF 92501-7 Class M1
 NF D 60013 Class AM18
 OENORM 3800-1 Class B1,Q1,TR1
 California TB117
 USA NFPA 701
 USA NFPA 260
 IMO Part 8 Upholstery

Flammability performance is dependent upon the foam used

CLEANING AND WASHING



inloom
fabrics