

TEST REPORT N° 18/40134

page 1 out of 2

Mod.018 Rev. 2 del 12.10.2015

WEB Request Number	
Receipt Number	18/38115
Receipt date	11/09/18
Test beginning date	13/09/18
Test end date	14/09/18
Document issued on	24/09/18

FIDIVI TESSITURA VERGNANO S.p.A.

Regione Masio, 19 bis
10046 POIRINO (TO)
Phone +39 (011) 9430662
Fax +39 (011) 9461820

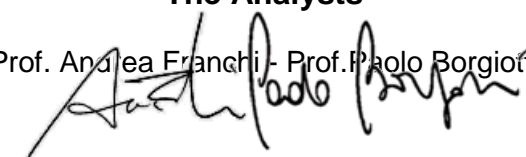

SAMPLE IDENTIFICATION:

A TESSUTO ART. ROCCIA

THIS DOCUMENT CONTAINS THE FOLLOWING TESTS:

Code	Test	Test Method
TT0420	Abrasion Resistance of Fabrics - Martindale Machine Method - Deterioration of the fabric	UNI EN ISO 12947-2:2017

Tests results refer only to tested samples submitted by the customer.
On each page there is the Institute dry stamp.
Tested samples are available for 3 months.

<p>The Analysts</p> <p>Prof. Analea Franchi - Prof. Paolo Borgioffi</p> 	<p>Technical Manager</p> <p>Prof. Giuseppe Bartolini</p> 
--	--

Private document. It is not allowed to publish and spread it without lab's written authorization.

TEST REPORT N° 18/40134

page 2 out of 2

Mod.018 Rev. 2 del 12.10.2015

Beginning of Test Report

TT0420	Abrasion Resistance of Fabrics - Martindale Machine Method - Deterioration of the fabric
<i>Test methods</i>	UNI EN ISO 12947-2:2017
<i>Test environment</i>	<p style="text-align: right;">Rev.01 del 03/09/03</p> Samples acclimatized for 24 hours. Normal atmosphere (Temperature: 20°C; Relative Humidity: 65%) for acclimatisation and testing conditions: UNI EN ISO 139 : 11.
<i>Testing equipment</i>	Martindale Abrasion Tester - James H.Heal & Co. LTD. Gray scale UNI EN 20105 A02 : 96
<i>Testing date</i>	14/09/2018

Test Results :

Sample identification:	TESSUTO ART. ROCCIA
-------------------------------	----------------------------

Pre-treatment *Untreated*
Pressure *12 kPa*

Reached the deterioration (end point).

<i>Average Abrasion</i>	70.000 rubs
<i>Colour change</i>	3 / 4 ISO 105-A02
<i>Final Degradation</i>	Moderate

<i>Degradation History</i>				
<i>Rubs</i>	<i>Damage</i>	<i>Effect</i>	<i>Degradation</i>	<i>Colour change ISO 105-A02</i>
15.000			Light	4/5
45.000			Light	4
70.000	Damage	Finishing effect	Moderate	3/4

NB. The results reported in the tables above refer to a test analysis of the samples submitted.

End of Test Report.