

EXTERNAL CARBONATOR 200L NEW

THE DEVICE IS DESIGNED FOR PRODUCING CHILLED SODA WATER BY MIXING H₂O AND CO₂.



CZECH UP YOUR BEER
COOLING AND DISPENSING SYSTEMS

TECHNOLOGY & BENEFITS

Professional device designed for
producing chilled soda water.





EXTERNAL CARBONATOR 200L NEW

Are you planning to expand dispensing of drinks including chilled soda water? We offer you an elegant solution thanks to this device. The device is designed for producing chilled soda water by mixing H₂O and CO₂. The maker can produce 200 l of soda water per hour. Easy connection to cooler and tap tower.



<< EXTERNAL CARBONATOR 40L NEW
EASY TO CARRY - Easy and safe handling
and transport thanks to handles mounted
on the upper part.

EXTERNAL CARBONATOR 40L NEW >
EASY CONNECTION - Easy installation
thanks to fittings located on the device.

| BENEFITS AND USEFUL FEATURES

INNOVATION – All our devices are constantly evolving and meet all the latest safety standards and certifications (Czech and European).

PERFORMANCE – The soda makers, with their increased continuous output, enable the continuous serving of high-quality chilled beverages in quantities corresponding to their numbering in liters.




CONSTRUCTION AND SERVICE – The modern layout of the cooling technology guarantees easy accessibility for any service and maintenance.

OVERALL COMPACTNESS – soda makers have the best ratio of performance, size and price on the market.

EASY TO CARRY - Easy and safe handling and transport thanks to handles mounted on the upper part.



EXTERNAL CARBONATOR 200L NEW

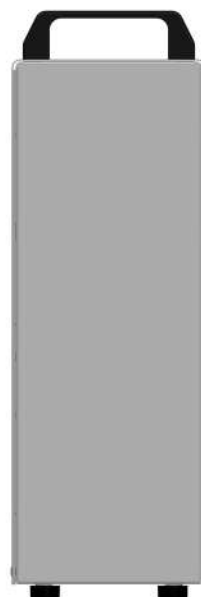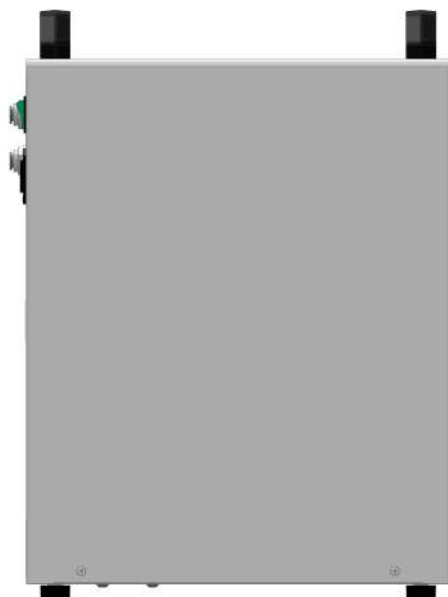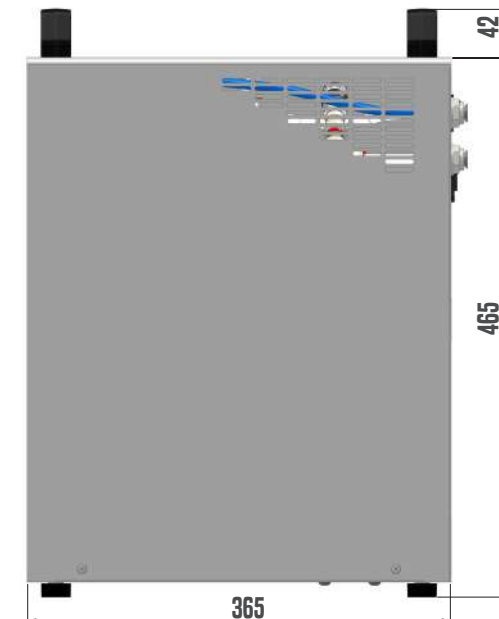

PRODUCT MODEL	EXTERNAL CARBONATOR 200L NEW
COOLING POWER OF THE COMPRESSOR (HP)	-
COOLING POWER OF THE COMPRESSOR (W)	-
MAXIMUM COOLING CAPACITY TO 0°C / TK 45°C (L/HOUR)	-
CONTINUOUS COOLING PERFORMANCE (L/HOUR)	-
THERMAL GRADIENT ΔT (°C)	-
AIR COMPRESSOR	NO
ICE BANK (KG)	-
NUMBER OF TAPS (PCS)	-
NUMBER OF COOLED BEVERAGES	SODA
CARBONATED WATER (L/HOUR)	200
LENGTH OF COOLING COILS (M)	-
POWER (W)	322
AMPERAGE (A)	1,4
NET WEIGHT (KG)	14,0
REFRIGERANT TYPE	-
VOLTAGE (V)	220-240V 50HZ~1
BEVERAGE CONNECTION (FITTINGS)	WATER 3/8
CO2 CONNECTION (FITTINGS)	5/16
OUTPUT (FITTINGS)	SODA 3/8
CUSTOMIZED OPTIONS	
CHOICE OF TAP	NO
CONNECTION - STAINLESS STEEL SCREWING	YES
MOTIVE OF LIGHTING PANEL	NO
POWER CABLE PLUG	YES