


CAR AND DRIVER

6000mAh MINI JUMP STARTER WITH USB POWER BANK & FLASH LIGHT

Models No. LI1006R / LI1006B / LI1006S / LI1006PR

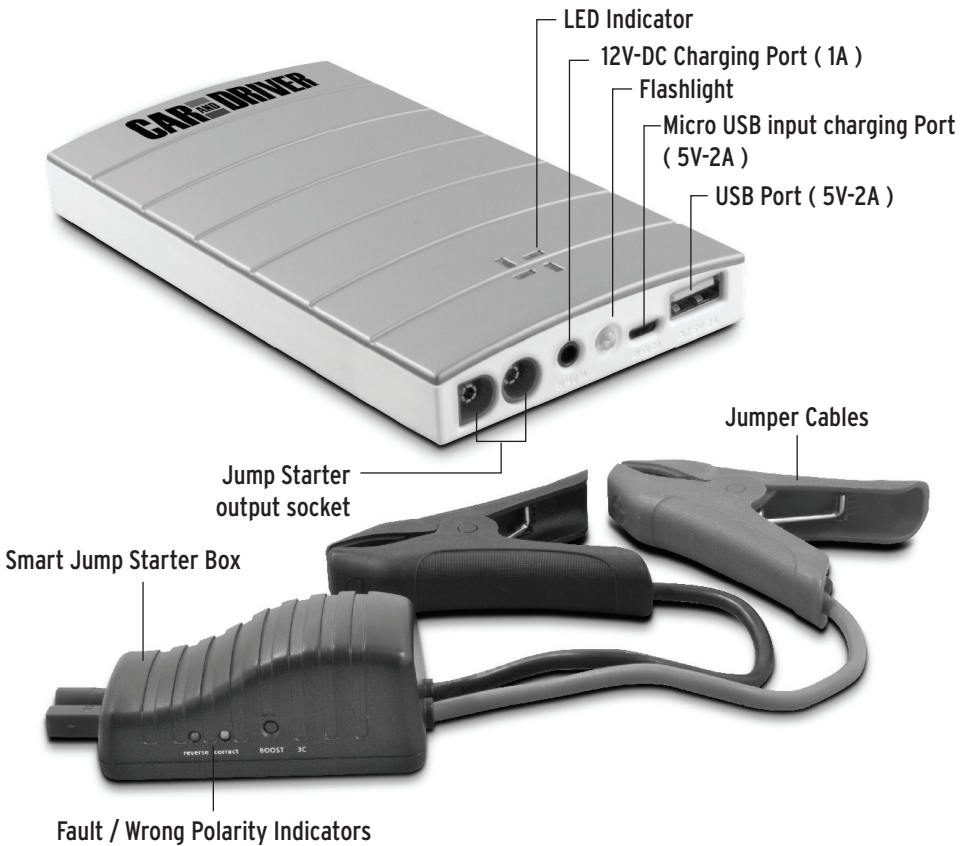

IMPORTANT INFORMATION

READ AND UNDERSTAND ALL WARNINGS AND THE ADVISORY NOTES INCLUDED IN THIS MANUAL. FOLLOW INSTRUCTIONS PROVIDED BY YOUR VEHICLE MANUFACTURER AND MANUFACTURER OF THE DEVICES INTENDED TO BE USED WITH THIS POWER SUPPLY.

MAKE CERTAIN THIS DEVICE IS FULLY CHARGED PRIOR TO FIRST USE.

CAUTION!

THIS PRODUCT CONTAINS A LITHIUM ION BATTERY AND MUST BE DISPOSED OF PROPERLY. YOU MAY CONTACT YOUR LOCAL GOVERNMENT RECYCLING AUTHORITY FOR APPROPRIATE DISPOSAL.

To prevent serious injury or damage:

- DO NOT open, drop, short-circuit, incinerate, expose temperatures higher than 140°F, or change /use if damaged.
- Only use the Charging Adaptors provided with unit. Use of any other adaptors may damage the tool or result in a fire.
- Do not submerge in water or any other liquid.
- Do not operate in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.
- Do not charge the Work Light more than 8 hours. Overcharging will cause overheating and shorten battery life.
- Read warnings on the package before use.
- Do not shine directly into the eyes
- Failure to follow the instruction may cause damage to the product and / or personal injury.

WARNING

Pursuant to California Proposition 65, this product may contain chemicals known to the State of California to cause cancer, birth defects or other reproductive harm; Wash your hands after handling.

IMPORTANT ADVISORY NOTES

- Do not use with dry cell batteries. These batteries may burst and cause injury to person or damage personal property.
- Do not attempt to face the battery being jumped. Stay away as far as possible from the battery when making the final connection.
- DO NOT CONNECT TO or jump start a 6 or 24 Volt battery system.
- DO NOT smoke, use matches, lighters or an open flame near batteries.
- Never allow red (Positive) and black (Negative) clamps to come in contact with each other or contact with metal object at the same time.
- To protect against electrical hazards, do not immerse charger, adapters, or unit in water or otherliquid.

- Close supervision is necessary when working near children.
- Do not use unit for applications other than its intended use.
- Always connect the red (+) clamp to the positive battery terminal first. Connect black (-) clamp to the negative battery terminal as final connection.
- Jumpstart vehicles in a well ventilated area only.
- Do not expose the Li-ion Jumper to moisture and use it in extremely hot conditions.
- Never work alone with this product. Make sure that someone is available to give assistance if needed.
- Wear complete eye and clothing protection. Do not touch eyes while working near battery.
- Do not attempt to remove or replace the battery used in this device. When the battery has reached the end of its useful lifetime, take the entire unit to a battery recycling facility.
- For proper and safe operation of the 5 Volt USB power port, do not place anything into it except the plug of the accessory to be used.
- Remove metal, personal jewelry, such as: rings, bracelets, necklaces and watches, while working with a lead acid battery. This can produce a short-circuit that may cause severe burns.
- Never charge or jump-start a frozen battery.
- Do not operate this device while wearing vinyl clothing. Static electricity may be generated when vinyl clothing is rubbed.
- This product is not intended for use in the rain or temperatures above 150°F.
- Use only the provided chargers, cables and clamps. Unauthorized parts may damage the unit.
- This product has no consumer serviceable parts except the replaceable fuses.
- Keep out of the reach of children.
- Keep battery terminals clean. Be careful to keep corrosion from coming in contact with eyes.
- Do not let the cords of the Li-ion Jumper or clamps get wet.
- Prevent water to get into the Li-ion Jumper housing. Water will damage the internal electronics board.
- This unit has a built-in Li-ion Battery. Although the unit arrives partially charged from the factory, it **MUST** be fully charged before the first use.
- Recharge the unit after each use or every 3 months preventing the battery voltage to become extremely low.

PRODUCT DESCRIPTION

Compact 3 in 1 multipurpose Li-ion Mini Vehicle Jump Starter with 5Volt power supply and flashlight.

The unit provides: 300A Peak to Jump Start small to mid-size Vehicles, 2A USB Power Port and an area light for emergencies.

Battery Capacity6000mAh Li-ion
USB output5V DC - 2A
Jump Starter12V DC - 150A / 300A peak
Input12V DC - 1A; 5V DC - 1Amp

OPERATION GUIDE

Battery Status Indicator

Press the power button once to check the battery status, the LED indicator will display the level of charge as follow:

INDICATOR	1 Flashing LED	1 Solid LED	2 Solid LED	3 Solid LED	4 Solid LED
BATTERY LEVEL	LOW	25%	50%	75%	100%

Vehicle Jump Starting Instructions

WARNING!

Vehicles equipped with on-board computers may be damaged if the vehicle is jump started. Review and understand your vehicle owner’s manual instructions before attempting to jump-start your vehicle. Failure to follow these advisory instructions may result in personal injury and property damage. Use Safety Glasses to protect your eyes while working near batteries during jump-starting a vehicle. Jump start a vehicle in an open area without any type of obstructions.

1. Turn off the vehicle ignition and all the accessories (Such as radios, lights, and air conditioners).
2. Apply the emergency brake and put those vehicles with automatic transmission in park position.
3. Determine the polarity of the vehicle battery terminals. The positive (+) battery terminal normally is larger in diameter than the negative (-) terminal. If you are unsure, you must refer to the vehicle owner’s manual.
4. Connect the RED CLAMP (positive +) to the positive terminal of the vehicle battery or the remote positive terminal if available.
5. Connect the BLACK CLAMP (negative -) to the negative battery terminal.
6. Connect Jumper Cables to the unit’s Jump Starter socket.

7. The Polarity Protection System GREEN LED is illuminated if the proper connections have been made.
WARNING: If RED LED is illuminated, DISCONNECT the booster clamps from battery terminals. Reconnect the booster clamps by reversing the connections to the proper battery polarity.
8. Start the engine. Stop if the vehicle does not start after 2 to 3 seconds of engine cranking. Wait 2 to 3 minutes then try again.
9. After Vehicle starts, disconnect the clamps by disconnecting the BLACK CLAMP Negative first and then the RED CLAMP Positive.

Using The USB Charging Port

1. Connect USB portable device into the unit's USB port using the Power Bank Micro USB cable provided or charging cable provided with USB device.
2. Press the Power switch and the Power Bank will start the charging process, (The LED indicators will turn ON).

Using The Flashlight

To turn the area light ON, press and hold the power button for 3 seconds.

To turn the area light OFF, press and hold the power button for 3 seconds again.

CHARGING INSTRUCTIONS

THE LI-ION MINI JUMP STARTER MUST BE FULLY CHARGED BEFORE BEING USED FOR THE FIRST TIME. IT IS RECOMMENDED THAT THE BATTERY BE RE-CHARGED EVERY 3 MONTHS TO ENSURE MAXIMUM PERFORMANCE IN AN EMERGENCY.

This will ensure that the battery gives its best performance now and on future re-charging cycles. The charging adapters are for re-charging the battery only. Always ensure that the area light switch is in the OFF position while charging.

Using The DC Charging Adapter

1. Insert the 12 Volt DC Charger round Plug into the Li-ion Mini Jumper Charging Port.
2. Connect the 12 Volt DC Charger Plug into the vehicle cigarette lighter or 12 Volt accessory port.
3. Fully charge the Li-ion Jumper internal battery for 3 hours while the vehicle engine is running.
4. Unplug the DC charger from the vehicle cigarette lighter or 12 Volt accessory port first and then remove the round plug from the Li-ion Mini Jumper Charging Port.

TO PREVENT OVERHEATING DO NOT CHARGE FOR MORE THAN 6 HOURS.

Using The USB Charging Cable

1. Plug the micro USB charging jack cable into the micro USB charging port on the front of the unit
2. Plug the other end of USB cable into a USB charging port
3. The LED battery status indicator lights will come on while charging is in progress.
4. The battery will be fully charged after approximately 3-4 hours and the LED charging indicator light will turn OFF when the unit is fully charged.
5. Disconnect the charging cable from the unit first and then the other end from the USB power outlet.

TO PREVENT OVERCHARGING DO NOT CHARGE FOR MORE THAN 8 HOURS.

CARE AND MAINTENANCE

STORAGE

Store the Li-ion Mini Jumper and charging adapters in a clean and dry area. Be sure to keep the charging adapters supplied with this product stored separately from similar items as only charging adapters included with this unit are compatible. Using a non-compatible charger could cause damage to the unit or personal injury.

The Li-ion Mini Jumper may also be stored in a vehicle for use in roadside emergencies. To prevent the unit and any of the accessories from being damaged, please ensure that it is properly secure and in a safe place inside the vehicle.

CLEANING

All exterior surfaces of the Li-ion Mini Jumper can be wiped clean with a soft cloth dampened with a mild soap and water solution. Do not immerse or submerge any part of Li-ion Mini Jumper in water or any other solvent. Never use solvents or cleaning agents containing petroleum (petrol, kerosene, oil), paint thinner, turpentine, alcohol, or ammonia. Harsh materials like these can damage surfaces.

MAINTENANCE

Only qualified service personnel must perform repairs. Do not open the exterior casing of the Li-ion Mini Jumper as there are no user serviceable parts inside. Opening or visible attempts to open or repair the unit may void any guarantee and / or cause damage to the product or personal injury. LED bulbs will never wear out under normal conditions and do not need to be replaced. Rechargeable battery pack cannot be replaced.



Li-ion

This product contains an internal Lithium-ion battery pack formulated from environmentally sensitive materials. This product must be disposed of properly with due care for the environment. Please return this product to your local dealer or to your local recycling station where batteries will be recycled or disposed of properly.

MobilePower, LLC. Warrants to the original purchaser that this unit shall be free from defects in material and workmanship for a period of one year from the original date of purchase. If the product is determined by MobilePower, LLC to be defective in material and workmanship during the warranty period MobilePower, LLC will repair or replace the defective product or defective accessories/ components with factory original specification product at its option. The original purchaser is authorized to obtain this warranty with the proof of purchase within the warranty period. To obtain shipping instructions related to the warranty services in North America visit us at www.mobilepower-us.com, call 800-708-8550 Customer Support or contact us at customerservice@mobilepower-us.com. You may ship the defective product with freight prepaid to MobilePower, LLC. Your replacement will be shipped back to you at no additional charge.

Great care must be taken when packing the product and all associated accessories into a suitable packing box along with the original dated purchase receipt or invoice. The package must include a letter stating the defect details, contact information including physical address. Any address with a PO Box will not be processed and will be held until further notification from the consumer. Make certain that your package can be tracked when you are shipping the defective product to us. MobilePower, LLC will not be responsible for lost packages sent by consumers. MobilePower, LLC will not be responsible for damage incurred during shipment to our facility. Failure to provide the original purchase receipt or proof of purchase may render this warranty invalid.

THIS WARRANTY SHALL NOT APPLY IF THIS PRODUCT IS: (A) DAMAGED RESULTING FROM ABUSE, MISUSE, NEGLIGENCE, ACCIDENT, LACK OF MAINTENANCE, ABNORMAL WEAR AND TEAR, UNREASONABLE USE OR BY OTHER CAUSES UNRELATED TO DEFECTIVE MATERIAL OR WORKMANSHIP (B) IS USED FOR COMMERCIAL PURPOSES; (C) IF THE PRODUCT HAS BEEN SUBJECTED TO WATER OR FIRE.

This warranty provides you with specific legal rights, and you may also have other rights which vary from state to state.
This warranty is valid only in North America.

MobilePower, LLC. Miami, FL
www.mobilepower-us.com
Customer Support: (800) 708-8550
customerservice@mobilepower-us.com



CAR AND DRIVER

© 2016 Car AND Driver, Inc.

Car and DRIVER is a trademark of Hearst Communications, Inc.

Made in China