



*EMI Solutions  
Page B-8*

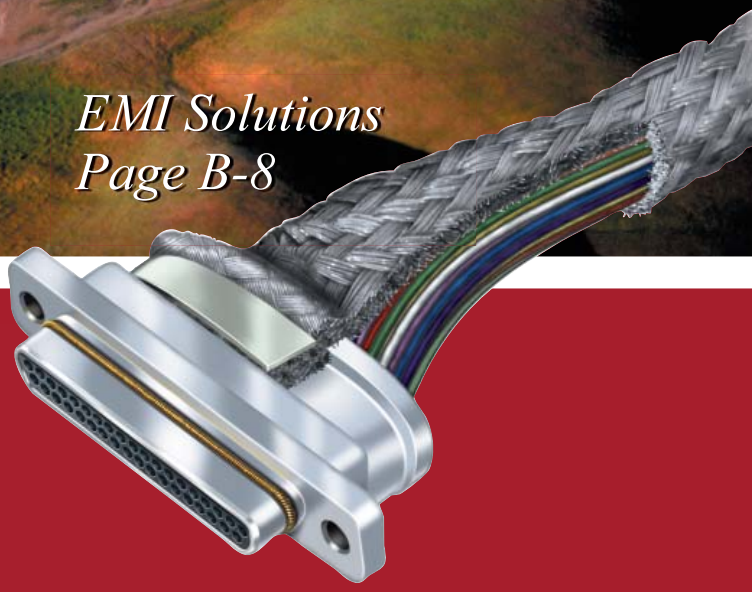

# TwistPin Connectors and Accessories Micro-D • Nanominiature

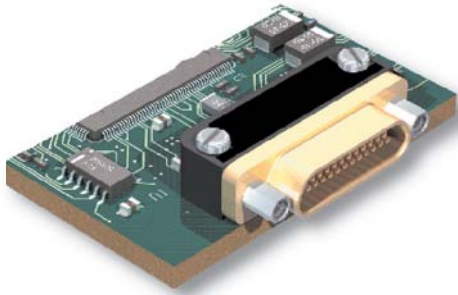

# Six Reasons to Select a High Reliability Glenair Micro-D Connector

## 1 Recognized performance standards.

Every element of the MIL-DTL-83513 Micro-D is exactly controlled—from terminal spacing to approved wire termination methods. The military standard defines contact resistance, dielectric withstanding voltage, corrosion resistance, shock and vibration tolerances and a wide range of other electrical, mechanical and environmental performance standards. Standardized measurement and test methodologies ensure consistent, predictable performance throughout this broad family of ruggedized, miniature connectors.

## 2 Proven reliability under tough operating conditions.

For applications where interconnect failure is simply not an option, the Glenair high-reliability Micro-D offers a wealth of performance benefits which far outweigh any potential cost savings realized by specifying a lesser caliber connector. If downtime is a critical concern, other connectors cannot match the long-term durability and performance advantages of the MIL-DTL-83513 Micro-D, which include:

- Higher current ratings
- Lower circuit resistance
- Superior vibration and shock
- Optimized EMI/RFI shielding
- Broader operating temperature
- Better damage resistance
- Enhanced corrosion resistance
- Better contact retention
- Better environmental sealing

## 3 The flexibility of easy customization.

Manufacturers of satellite communications systems, geophysical exploration devices, medical diagnostics and industrial equipment face many of the same packaging requirements for reduced size, weight and shape as do their military counterparts. And the ability to design-in a wide range of custom modifications which fit the unique packaging requirements of these specialized applications is a distinct advantage of the Glenair Micro-D—making it the connector of choice for many unique or small quantity applications.

## 4 Advanced, high temperature tolerance.


Heat from electrical or environmental sources can soften mated contacts over time and reduce contact retention force. Under extreme conditions of shock and vibration this loss of normal retention can result in unstable resistance across the interconnect. This is the case for all types of contacts—machined, drawn, stamped and twisted. But materials selection, fabrication and heat treating techniques enable Glenair's TwistPin contact to resist high temperature stress relaxation for up to 1000 hours at 125° C and thus perform at levels unmatched by other contact designs.

## 5 Trouble-free mating and unmating.

Glenair has perfected a nickel underplating combined with a proprietary duplex gold overplating which provides optimal contact lubricity (anti-galling) and effectively eliminates the oxidation common to copper flash underplating. Glenair's advanced plating process contributes to the overall durability of the connector by reducing contact engaging and separating forces. Glenair 100 contact Micro-D connectors have been successfully tested to 25,550 mating cycles (test report ER1010) proving the durability of the Glenair plating process.

## 6 Fast Turnaround and Same-Day Availability.

Are the Micro-D connectors and accessories you need either in stock or able to be manufactured in a short period of time? Glenair has built its reputation on fast turnaround and can deliver TwistPin products—from discrete connectors to complete assemblies—faster than anyone else in our business. We maintain the world's largest inventory of Micro-D connectors and accessories, all available for immediate shipment with no quantity or price minimums.

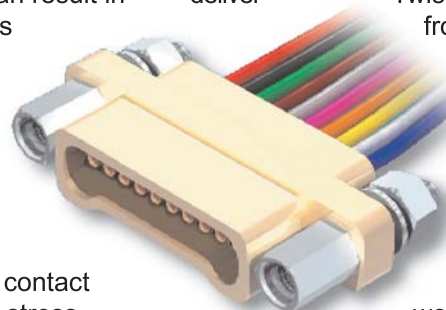


# Micro-D TwistPin Connectors and Accessories Table of Contents



|          |   |   |  |          |
|----------|---|---|--|----------|
| <b>A</b> | <b>General Information and Reference</b>                | Materials and finishes ..... A-1<br>Micro-D specifications ..... A-2<br>Micro-D weights ..... A-6<br>Contact arrangements ..... A-7 | Panel cutouts ..... A-8<br>Color code chart ..... A-9<br>RoHS information ..... A-10                                     | <b>A</b> |
| <b>B</b> | <b>Metal Shell Micro-D for Harnessing Applications</b>  | Selection guide ..... B-1<br>Solder cup ..... B-2<br>Insulated wire ..... B-4<br>Back-to-back cables ..... B-6                      | Shielded cables ..... B-8<br>Uninsulated wire ..... B-12<br>Environmental GMDE ..... B-14                                | <b>B</b> |
| <b>C</b> | <b>Metal Shell Micro-D for Printed Circuit Boards</b>   | Selection guide ..... C-1<br>MWDM CBR ..... C-2<br>MWDM BR ..... C-6<br>MWDM BS ..... C-10  | MWDM CBS ..... C-14<br>GMR7580 ..... C-20<br>GMR7590 ..... C-28<br>Surface Mount ..... C-36                              | <b>C</b> |
| <b>D</b> | <b>Single Row Low Profile Metal Shell Micro-D</b>       | Selection guide ..... D-1<br>GMSM Solder cup ..... D-2<br>GMSM Pigtails ..... D-3<br>GMSM board mount ..... D-5                     |  | <b>D</b> |
| <b>E</b> | <b>Combo Micro-D for High Power</b>                     | Selection guide ..... E-1<br>Insert Arrangements ..... E-2<br>Solder cup ..... E-3<br>Pigtails ..... E-6                            |  | <b>E</b> |
| <b>F</b> | <b>Micro-D Filter Connectors</b>                        | Selection guide ..... F-1<br>Solder cup ..... F-5<br>Pigtails ..... F-7<br>Vertical mount PCB ..... F-11                            | Right angle PCB ..... F-15<br>In-line filter adapter ..... F-9   | <b>F</b> |
| <b>G</b> | <b>Micro-D Hermetic Connectors</b>                      | Selection Guide ..... G-1<br>Soldermount ..... G-5<br>O-ring seal ..... G-7   |  | <b>G</b> |
| <b>H</b> | <b>Micro-D Special Applications and Modifications</b>   | Mod 474 keying ..... H-2<br>Mod 497 ground spring ..... H-4<br>Mod 428 high temperature ..... H-5<br>Mod 429 space grade ..... H-6  |  | <b>H</b> |
| <b>J</b> | <b>MIL-DTL-83513 Connectors and Hardware</b>            | Selection guide ..... J-1<br>M83513/01,02 ..... J-4<br>M83513/03,04 ..... J-5<br>M83513/05 ..... J-7                                | M83513/06, 07 ..... J-8<br>M83513/08,09 ..... J-9<br>M83513/10 thru 27 ..... J-11<br>M83513/28 thru 33 ..... J-23        | <b>J</b> |
| <b>K</b> | <b>Micro-D Plastic Connectors</b>                       | Selection guide ..... K-1<br>MWD solder cup ..... K-2<br>MWD insulated wire ..... K-4<br>MWD uninsulated wire ..... K-6             |  | <b>K</b> |
| <b>L</b> | <b>Micro-D Backshells</b>                               | Selection guide ..... L-1<br>BAND-IT® Tools ..... L-4<br>500-010 ..... L-6  |  | <b>L</b> |
| <b>M</b> | <b>Micro-D Connector Savers and Accessories</b>         | Selection guide ..... M-1<br>Uni-Savers ..... M-2<br>Plastic dust caps ..... M-4<br>Metal covers ..... M-5                          | Bean rubber covers ..... M-7<br>Shorting adapters ..... M-3<br>Jacking hardware ..... M-8<br>Interfacial seals ..... M-4 | <b>M</b> |
| <b>N</b> | <b>Micro EdgeBoard, Micro Strips and Micro Circular</b> | Selection guide ..... N-1<br>MWEB edgeboard ..... N-2<br>MWS strips ..... N-11<br>MWWKQ circular ..... N-13                         |  | <b>N</b> |
| <b>P</b> | <b>Nanominiature Connectors</b>                         | Selection guide ..... P-1<br>Performance spec ..... P-3<br>Materials, finishes ..... P-3<br>Contact arrangements ..... P-4,5        | 890-001 thru -013 ..... P-6<br>891-001 thru -015 ..... P-29  | <b>P</b> |

# Not All Micro-D Connectors Are Created Equally

The MIL-DTL-83513 and MIL-DTL-32139 specifications define the minimum acceptable performance levels for Micro-D and Nanominiature connectors. While the specs are rigid in their performance benchmarks, manufacturers are given considerable leeway when it comes to contact design, crimp fabrication, contact finish and material selection. Stamped and formed contacts, for example, are widely used in Micro-d connectors due to their low-cost and ease of manufacture. But independent testing clearly shows that TwistPin style contacts provide superior performance in such areas as high temperature tolerance, contact retention and crimp strength. If you have already made the decision to use either a Micro-D or Nano sized connector because its ruggedized performance outweighs the potential cost-savings realized in a lesser-caliber connector, then you owe it to yourself to understand the very real differences between stamped pins and the Glenair TwistPin Contact System.

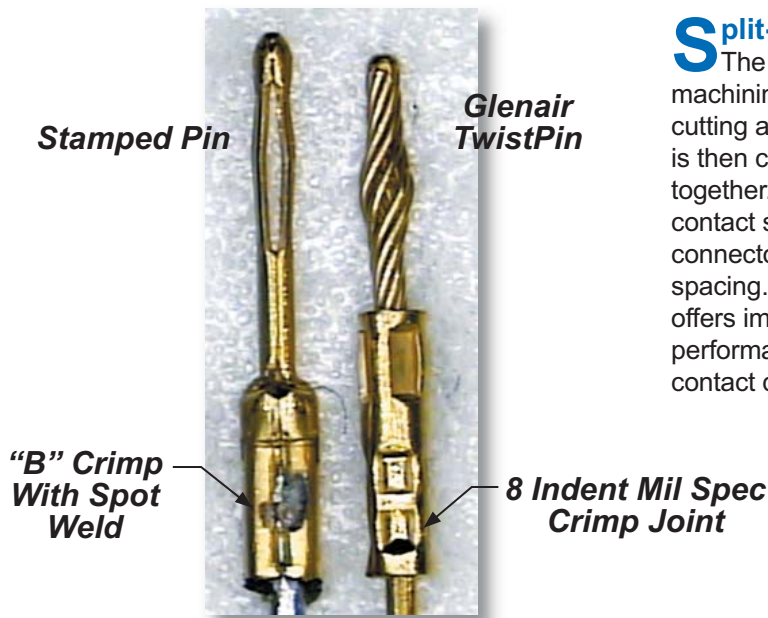

## Split-Tine Contact Systems

The socket contact is made by machining a copper alloy tube, then cutting a longitudinal slot. The contact is then crimped to bend the tines together. The smallest split tine contact systems are used in connectors with .075 inch spacing. The TwistPin offers improved vibration performance and higher contact density.



M39029 Split Tine Contact System

## Two Reasons to Choose TwistPins


This unretouched photograph shows important differences between the TwistPin and stamped pins.

### 1 A Better Crimp Joint

Micro-D connectors are factory-terminated to wire. Board mount and insulated wire pigtailed have crimp joints where the wire attaches to the contact. Micro-D crimp joints are concealed with epoxy potting. The Micro-D is unique among high reliability mil spec connectors because the mil spec allows stamped crimp barrels and does not specify that the crimping process must use mil spec crimp tools. The thin sheet metal in the stamped pin cannot produce a satisfactory gas-tight crimp joint, so spot welding is required to reduce the chance of failure.

### 2 A Stronger Front End

Both types of contacts meet the requirements of MIL-DTL-83513. But only the TwistPin offers a stronger front-end with its seven points of contact, high normal force and better resistance to vibration.

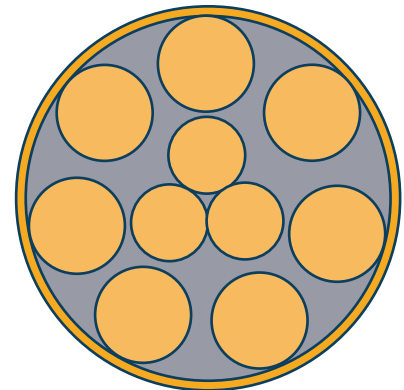

## Seven Points of Electrical Contact

The TwistPin size #24 contact has seven strands of BeCu wire surrounding three filler strands. Each strand makes contact with the socket, assuring low resistance, plenty of contact wipe, and excellent shock and vibration performance.

# The Glenair TwistPin

MicroPin



NanoPin





## Question:

Why choose a TwistPin connector?

## Answer: Design Flexibility and Reliable Performance

If reliability and performance were the only considerations in the design of a micro contact system, everyone would opt for a TwistPin contact and a machined socket and crimp sleeve. But cost and ease of manufacture are significant issues as well, which is why stamped and formed contacts, as well as split-tine M39029 contacts, are still widely used. The Glenair TwistPin Contact System provides a superior wire attachment which translates to lower contact resistance—and it does so under extreme conditions of vibration, shock and high heat. An additional key benefit of the TwistPin contact is the ease of designing a custom package to fit your exact needs. The precision machined components can be readily integrated into a wide range of connector package envelopes.

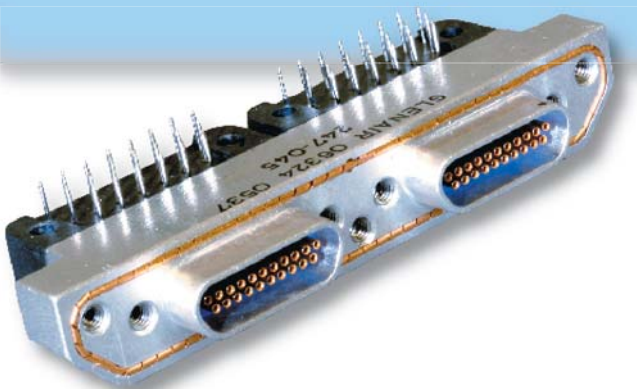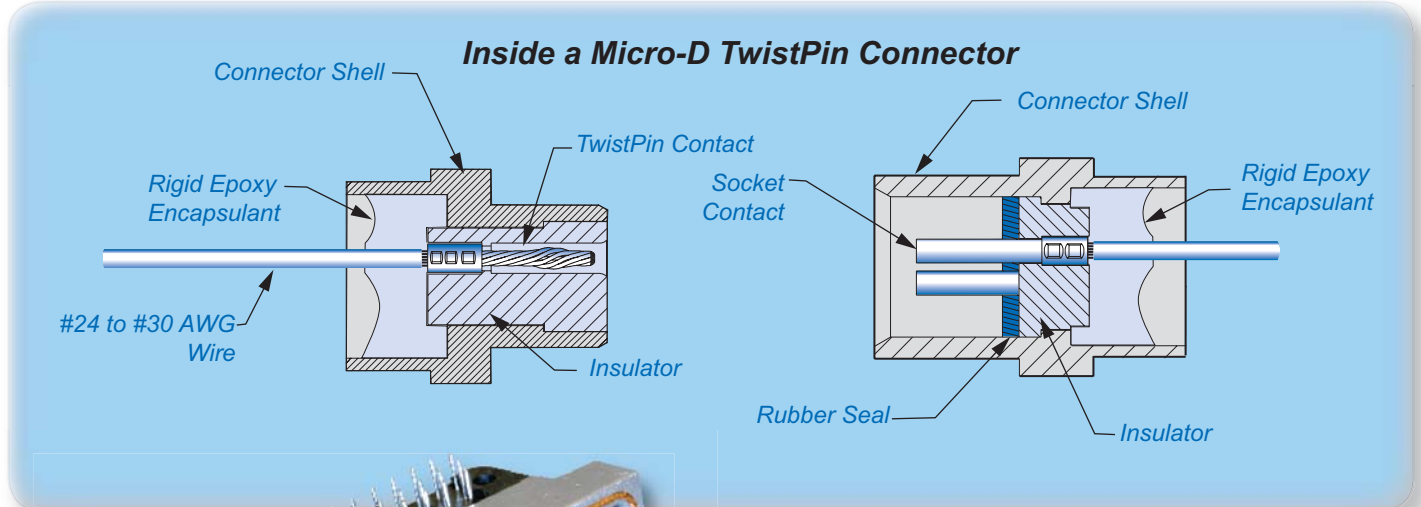

## TwistPin Contacts

The TwistPin contact is made with a bundle of beryllium copper wires welded at the tip to form a semispherical radius and "bulged" to create a spring.

## SECTION B: MICRO-D METAL SHELL FOR HARNESSING



**Solder Cup**  
B-2



**Pigtails**  
B-4



**Back-To-Backs**  
B-6



**Shielded Cords**  
B-8



**Solid Wire**  
B-12



**Environmental**  
B-14


## SECTION C: BOARD MOUNT MICRO-D METAL SHELL



**CBR**  
C-2



**BS**  
C-10




**BR**  
C-6



**CBS**  
C-6



**GMR7590**  
C-28



**GMR7590C**  
C-32



**GMR7580**  
C-20



**GMR7580C**  
C-24



**Surface Mount**  
C-36

## SECTION D: GSM SINGLE ROW MICRO METAL SHELL



**Solder Cup**  
D-2



**Pigtails**  
D-3



**Solid Wire**  
D-3



**Board Mount**  
D-5

## SECTION E: COMBO POWER MICRO-D



**Solder Cup**  
E-3



**Pre-Wired**  
E-6



**Printed Circuit Board**  
E-9

## SECTION F: FILTER MICRO-D



**Solder Cup**  
F-5



**Pre-Wired**  
F-7



**Vertical PCB**  
F-11



**Right Angle PCB**  
F-15



**In-Line Adapter**  
F-9

## SECTION G: HERMETIC MICRO-D



**Weld Mount Solder Cup**  
G-5




**Weld Mount PC Tail**  
G-5



**O-Ring Hermetic**  
G-7

## SECTION J: MIL-DTL-83513 MICRO-D CONNECTORS




**Plastic M83513**  
J-8



**Metal Shell M83513**  
J-4



**Board Mount M83513**  
J-15



**M83513 Hardware**  
J-7

## SECTION K: PLASTIC SHELL MICRO-D



**Plastic Solder Cup**  
K-2



**Plastic Pigtail**  
K-4



**Plastic Pigtail**  
K-4

## SECTION L: MICRO-D BACKSHELLS



See Page L-1 for Comprehensive  
Backshell Selection Guide



## SECTION M: MICRO-D ACCESSORIES



**Uni-Savers**  
M-2



**Hardware**  
M-8



**Switching Shells**  
M-3



**Face Seals**  
M-4

## SECTION N: TWISTPIN CONNECTORS



**MWEB**  
N-2



**MWKQ**  
N-13



**MWS**  
N-11



**Metal Covers**  
M-5




**Rubber Covers**  
M-7




**Plastic Covers**  
M-4


## SECTION P: NANOMINIATURE CONNECTORS




**One Row Pigtail**  
P-6




**One Row Vertical**  
P-12




**One Row 90°**  
P-16



**Two Row Pigtail**  
P-29




**Two Row Vertical**  
P-35




**Two Row 90°**  
P-39

# Four Reasons to Select Glenair for Your Next Micro/Nano Flex Circuit Project

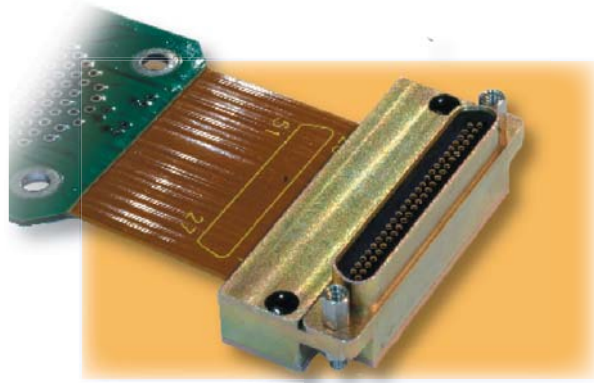


## 1 Unsurpassed Experience in Micro/Nano Flex Circuit Production

Glenair has been integrating Micro-D and Nanominiature connectors into flex circuitry for over 30 years. Our technical capabilities include design and layout of turnkey assemblies as well as the production of custom-configured micro and nano interconnects for maximum size and weight savings.

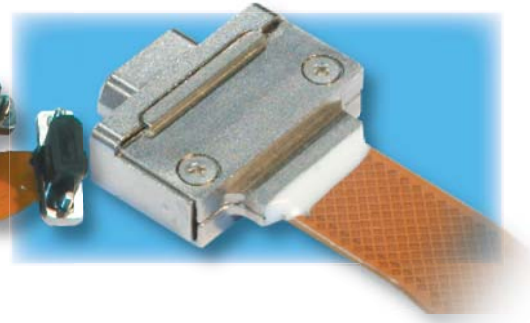


## 2 Full Spectrum Product Offering

Glenair offers a complete range of miniaturized printed circuit board connectors with high-reliability TwistPin contacts. We supply both through-hole and surface mount designs in every angle and mounting style for integration into single-sided, double-sided and multilayered flex circuitry.

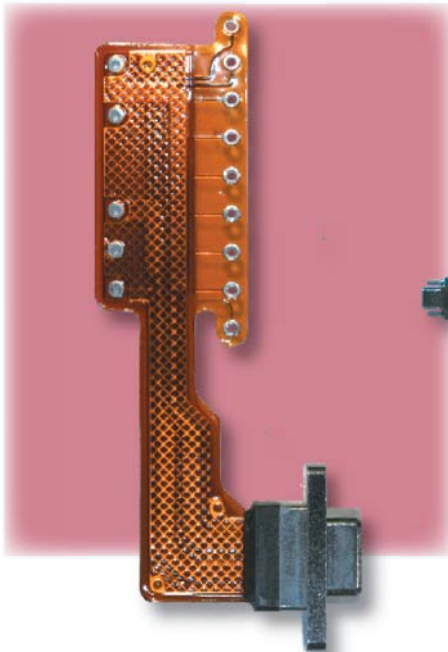

## 3 Application Design

Our turnkey Micro-D and Nanominiature flex circuit assemblies are produced to exacting specifications. Customer-supplied designs are reviewed and revised to insure the most advantageous utilization of EMI shielding, polarization, strain-relief and connector packaging technologies. At Glenair, the final design solution is optimized to meet the exact mechanical and electronic requirements of the application environment.

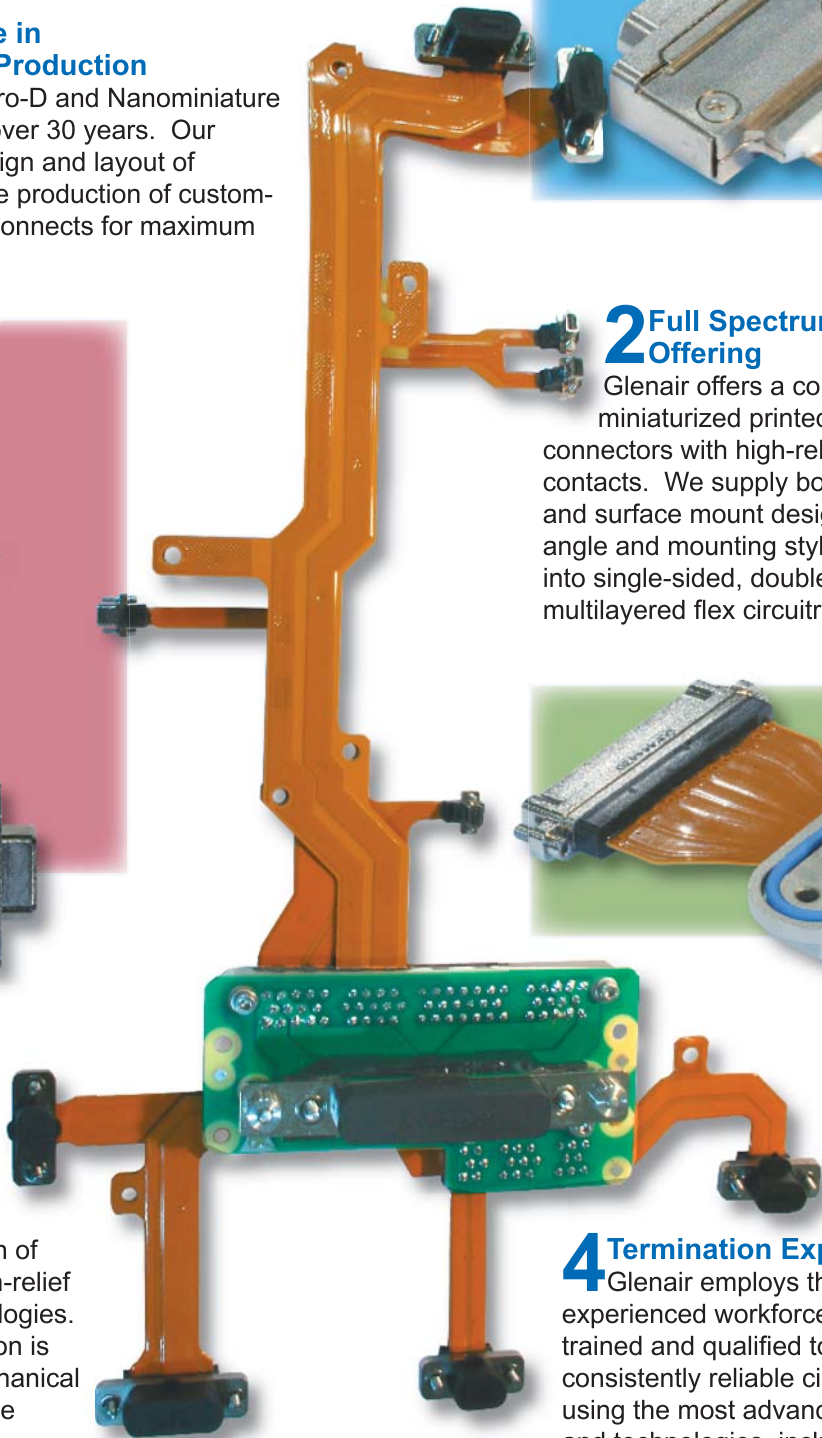


## 4 Termination Expertise

Glenair employs the most experienced workforce in the world—trained and qualified to produce consistently reliable circuit terminations using the most advanced techniques and technologies, including automated solder reflow systems.




# Tired of the "Highway Robbery" of minimum orders?

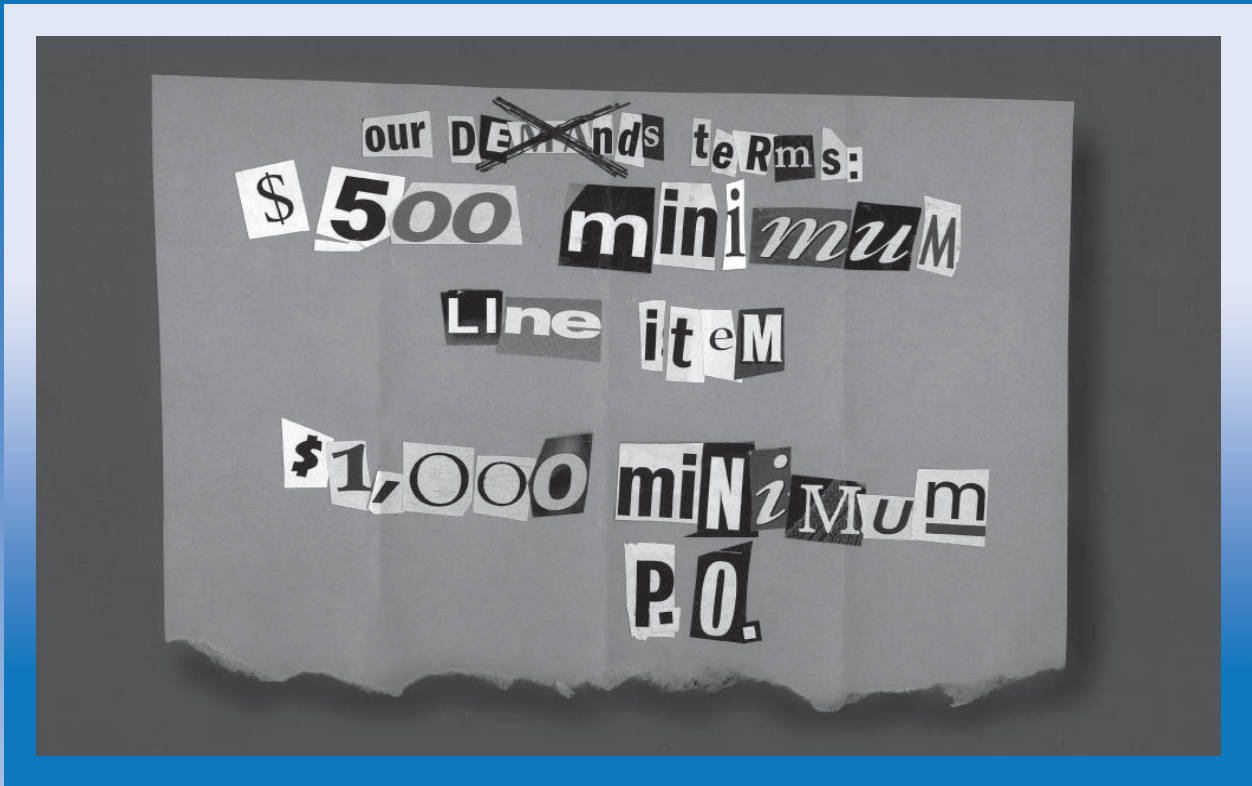

## Then Glenair's "no minimum order" policy is the answer.

Regardless of how few you may need, Glenair is pleased to offer you no restrictions when you purchase any of the hundreds of thousands of electrical interconnect part numbers we produce. That's right: no quantity or dollar minimums.

At Glenair, we've made the economy and convenience of "no minimums", and other customer-friendly policies a regular part of our business—and a big part of our strategy for keeping current with your every need.




Commercial and Mil Spec connector accessories




Convoluted tubing and metal-core conduit



Electrical and fiber optic cable assemblies



Composite thermoplastic components



Microminiature connectors and accessories



Backshell assembly and termination tools



1211 Air Way

Glendale, California 91201-2497

Telephone: 818-247-6000 · Facsimilie: 818-500-9912 · EMail: sales@glenair.com

United States · United Kingdom · Germany · Nordic · France · Italy · Spain

www.glenair.com

## MICRO-D STANDARD MATERIALS AND FINISHES

A

|                                     |   |
|-------------------------------------|---|
| Connector Shell, Metal              | <p>Aluminum Alloy 6061 In Accordance With SAE AMS-QQ-A-250/11<br/>                     Plating Code 1: Cadmium With Yellow Chromate Conversion Coating in Accordance With SAE-AMS-QQ-P-416, Type II, Class 3<br/>                     Plating Code 2: Electroless Nickel In Accordance With ASTM B733<br/>                     Plating Code 4: Black Anodize In Accordance With MIL-A-8625 Type II Class 2<br/>                     Plating Code 5: Gold Plated In Accordance With ASTM B488 Over Electroless Nickel In Accordance With ASTM B733-90.<br/>                     Plating Code 6: Chem Film In Accordance With MIL-C-5541 Class 3</p> <p>Stainless Steel, 300 Series<br/>                     Plating Code 3: Passivated In Accordance With SAE AMS 2700</p> |
| Connector Shell, Plastic            | Liquid Crystal Polymer, 30% Glass-Filled, In Accordance With MIL-M-24519  |
| Insulator                           | Liquid Crystal Polymer, 30% Glass-Filled, In Accordance With MIL-M-24519  |
| Interfacial Seal                    | Flourosilicone Rubber In Accordance With A-A-59588  |
| Terminal Block, PCB                 | Liquid Crystal Polymer, 30% Glass-Filled, In Accordance With MIL-M-24519  |
| Pin Contact (TwistPin)              | Beryllium Copper, Gold Plated In Accordance With ASTM B 488 Type II Class 1.27 (50 Microinches Minimum) Code C, Over Nickel Underplate In Accordance With SAE AMS-QQ-N-290, Class 2, (30-150 Microinches).  |
| Socket Contact                      | Phos Bronze In accordance With ASTM 139 Gold Plated In Accordance With ASTM B 488 Type II Class 1.27 (50 Microinches Minimum) Code C, Over Nickel Underplate In Accordance With SAE-AMS-QQ-N-290, Class 2, (30-150 Microinches).  |
| Encapsulant (Potting)               | Epoxy Resin, Hysol EE4215/HD3561  |
| Jackscrews, Jackposts, Float Mounts | Stainless Steel, 300 Series, Passivated In Accordance With SAE AMS 2700   |
| Pigtail Wire, Insulated Hookup      | <p>Wire Type E: Silver-Coated Copper Wire, Extruded PTFE Insulation, 600 Volts RMS, 200°C., In Accordance with NEMA HP3 (Replaces MIL-W-16878/4)</p> <p>Wire Type K: Silver-Coated Copper Wire, Extruded PTFE Insulation, 600 Volts RMS, 200° C., In Accordance with SAE AS 22759/11</p> <p>Wire Type J: High-Strength Silver-Coated Copper Alloy Wire, Crosslinked Modified ETFE Insulation, 600 Volts RMS, 200° C., In Accordance with SAE AS 22759/33</p>  |
| Pigtail Wire, Uninsulated           | <p>Wire Finish Code 3: Solid Copper Wire In Accordance With A-A-59551, Gold-Plated, Solder Dipped in 63/37 tin-lead</p> <p>Wire Finish Code 4: Solid Copper Wire In Accordance With A-A-59551, Gold-Plated</p>  |



## MICRO-D PERFORMANCE SPECIFICATIONS

### 1 SCOPE

- 1.1 **Scope.** This specification covers performance requirements for Glenair Micro-D connectors manufactured in accordance with MIL-DTL-83513F.
- 1.2 **Description.** MWD plastic and MWDM metal shell Micro-D connectors on .050 inch (1.27 mm) centers, with TwistPin contacts.

### 2 ORDER OF PRECEDENCE

- 2.1 **Order of precedence.** In the event of a conflict between the requirements of this specification and the references cited herein, this document takes precedence. The requirements set forth in customer specifications and Glenair detail drawings shall take precedence over this document.

### 3 REQUIREMENTS

#### 3.1 Electrical performance requirements.

- 3.1.1 **Insulation resistance.** 5,000 megohms minimum between any pair of contacts and any contact and the shell when tested in accordance with EIA-364 Procedure 21, which specifies 500 volts DC.

#### 3.1.2 Dielectric withstanding voltage.

- 3.1.2.1 **Dielectric withstanding voltage (sea level).** 600 volts ac, rms 60 Hz. Connectors shall show no evidence of breakdown or flashover when subjected to the DWV test of EIA-364 Procedure 20.

- 3.1.2.2 **Dielectric withstanding voltage (70,000 feet).** 150 volts ac, rms 60 Hz. Connectors shall show no evidence of breakdown or flashover when subjected to the DWV test of EIA-364 Procedure 20.

#### 3.1.3 Contact resistance

- 3.1.3.1 **Contact resistance (M83513 Group C qualification).** The voltage drop of a mated pair of contacts attached to wires shall not exceed the values shown when tested in accordance with MIL-DTL-83513F Paragraph 4.5.8, using 2.5 amps test current.

| <u>Wire</u>       | <u>Voltage Drop (mV)</u> |
|-------------------|--------------------------|
| M22759/11-26      | 65 Maximum               |
| M22759/33-26      | 75 Maximum               |
| A-A-59551 25 gage | 60 Maximum               |

- 3.1.3.2 **Contact resistance (lot acceptance testing).** The voltage drop across a mated pair of contacts shall not exceed 8 millivolts when tested in accordance with EIA-364-06, using a test current of one ampere  $\pm$  2%. If the connector under test is wired, the calculated resistance across the contacts shall not exceed 8 milliohms when the maximum specified wire resistance per foot is subtracted from the total resistance.

- 3.1.4 **Low signal level contact resistance.** When tested with a micro-ohmmeter using a test current of 100 milliamperes maximum and 20 millivolts open circuit maximum, the resistance of a mated pair of contacts shall be 32 milliohms maximum. Test procedure shall be in accordance with EIA-364-23.

- 3.1.5 **Contact Current Capability.** Contacts shall be capable of carrying 3.0 amperes in continuous duty operation from -55° C. to +150° C. when tested in accordance with EIA-364-70.

## MICRO-D PERFORMANCE SPECIFICATIONS

A

3.1.6 **Shell-To-Shell Conductivity.** A mated pair of nickel-plated metal shell Micro-D connectors fitted with an optional grounding spring on the plug shell mating face, shall not exceed 10 millivolts maximum voltage drop when tested in accordance with EIA-364-83.

3.1.7 **Shielding Effectiveness.** A mated pair of metal shell Micro-D connectors fitted with an optional grounding spring on the plug shell mating face shall meet a requirement of 65 dB minimum attenuation when tested in accordance with EIA-364-66.

3.1.8 **Magnetic Permeability.** Magnetic permeability, when tested in accordance with EIA-364-54, shall not exceed 2 mu.

### 3.2 MECHANICAL REQUIREMENTS

3.2.1 **Contact engaging and separation force.** Maximum engaging force shall be 6.0 ounces when tested in accordance with EIA-364-37, except with a  $.0221 \pm .0001$  diameter sleeve with a 6-10 microfinish. Minimum separation force shall be 0.5 ounces when tested in accordance with EIA-364-37, except with a  $.0230 \pm .0001$  diameter sleeve with a 6-10 microfinish.

3.2.2 **Connector mating and unmating force.** The maximum mating and unmating force shall not exceed a value equal to 10 ounces times the number of contacts, when tested per EIA-364-13. Mate connectors three times before initial measurements are taken.

3.2.3 **Contact Retention.** Contacts, when tested in accordance with EIA-364-29, shall withstand a 5 pound axial load for a minimum of 5 seconds, with a maximum allowable displacement of .005 inch.

3.2.4 **Crimp Tensile Strength.** Wire shall not break or pull out of crimp joints at less than the specified force when tested in accordance with EIA-364-08.

| <u>Wire</u> | <u>Gage</u> | <u>Force in Pounds</u> |
|-------------|-------------|------------------------|
| M22759/11   | 24          | 8                      |
| M22759/11   | 26          | 5                      |
| M22759/11   | 28          | 4                      |
| M22759/33   | 24          | 12                     |
| M22759/33   | 26          | 10                     |
| M22759/33   | 28          | 6                      |

3.2.5 **Insert retention.** Inserts shall not be dislodged or moved from their original position when subjected to an axial load of 50 pounds per square inch when tested in accordance with EIA-364-35.

3.2.6 **Resistance to soldering heat.** Connectors with solder cup contacts shall not be damaged following soldering with a 360° C. solder iron for at least 4 seconds in accordance with EIA-364-56 Procedure 1. Connectors with printed circuit board terminations shall withstand immersion in a solder bath for 9-11 seconds at 260° C. when tested in accordance with EIA-364-56 Procedure 3 Test Condition B. Connectors, after cooling, shall not exhibit damage or warpage when examined at 10X magnification. .

3.2.7 **Solderability.** Solder cup and printed circuit terminals shall meet the solderability requirements of MIL-STD-202 Method 208.

3.2.8 **Durability.** Micro-D connectors shall be capable of 500 cycles of mating with no damage or degradation to electrical performance. Engaging and separation force and mating forces shall not exceed the requirements of 3.2.1 and 3.2.2.



## MICRO-D PERFORMANCE SPECIFICATIONS

### 3.3 ENVIRONMENTAL REQUIREMENTS

3.3.1 **Salt spray (corrosion).** Connectors shall show no exposure of base metal due to corrosion when subjected to the salt spray test of EIA-364-26. In addition, connectors shall meet contact resistance, low circuit level contact resistance and mating force requirements.

| <u>Shell material, finish (code)</u>      | <u>EIA-364-26 test condition</u> | <u>Duration (hours)</u> |
|---|----------------------------------|-------------------------|
| Aluminum, cadmium plating (01)            | A                                | 96                      |
| Aluminum, electroless nickel plating (02) | B                                | 48                      |
| Aluminum, black anodize (04)              | B                                | 48                      |
| Aluminum, chem film (06)                  | B                                | 48                      |
| Aluminum, gold (05)                       | B                                | 48                      |
| Stainless steel, passivated (03)          | D                                | 1000                    |

3.3.2 **Fluid immersion.** Connectors shall meet mating force requirements following 20 hours immersion in synthetic lubricating oil and 1 hour immersion in coolanol 25, when tested in accordance with MIL-DTL-83513F paragraph 4.5.18.

3.3.3 **Thermal vacuum outgassing.** The assembled connector mass excluding metallic parts shall not exceed 1.0% total mass loss (TML) or 0.1% total volatile condensable materials (CVCM) when tested in accordance with ASTM E595. **NOTE: the interfacial seal on metal shell MWDM receptacle connectors slightly exceeds the allowable CVCM unless it is specially processed. This is acceptable per MIL-DTL-83513 but may not be permissible for specific space programs.**

Outgassing properties of Micro-d components

| Component  | Material               | Brand Name    | % Total Mass Loss (TML) | % Collected Volatile Condensable Material (CVCM) | Test Report         |
|--|------------------------|---------------|-------------------------|--|---------------------|
| Thermoplastic Insulators and PCB Trays                       | Liquid Crystal Polymer | Vectra® C-130 | 0.03                    | 0.00   | NASA Test #GSC17478 |
| Potting Compound   | Epoxy                  | Hysol C9-4215 | 0.48                    | 0.01   | Glenair Test        |
| Interfacial Seal "as received"                               | Flourosilicone         | (none)        | 0.99                    | 0.13   | Glenair Test        |
| Interfacial Seal with Oven Bakeout 8 hrs. 400° F.            | Flourosilicone         | (none)        | 0.03                    | 0.01   | Glenair Test        |
| Interfacial Seal with Thermal Vacuum Bakeout 24 hrs. 125° C. | Flourosilicone         | (none)        | 0.08                    | 0.02   | Glenair Test        |
| Wire   | Tefzel®                | Tefzel®       | 0.22                    | 0.01   | NASA Test #GSC19998 |

3.3.4 **Thermal shock.** Unmated connectors shall withstand 5 cycles of thermal shock with a minimum temperature of -65° C. and a maximum temperature of 150° C. when tested in accordance with EIA-364-32, Condition IV. Connectors shall not exhibit any detrimental damage or degradation of electrical performance.

## MICRO-D PERFORMANCE SPECIFICATIONS

**A**

### 3.3.5 Humidity

- 3.3.5.1 **Humidity, MWDM connectors with interfacial seals.** Wired, mated connectors shall be subjected to humidity conditioning in accordance with EIA-364-31, Test Condition IV. After a minimum of 3 hours of step 7a of the final cycle, and while the connectors are still subjected to high humidity, the insulation resistance shall be measured when the chamber temperature reaches  $20^{\circ} \pm 5^{\circ}$  C. Insulation resistance shall not be less than 100 megohms, and connectors shall pass a DWV test of 360 volts (rms 60 hertz ac).
- 3.3.5.2 **Humidity, MWD plastic connectors without interfacial seals.** Wired, mated connectors shall be subjected to humidity conditioning in accordance with EIA-364-31, Test Condition IV. On completion of step 6 of the final cycle, connectors shall be removed from the chamber, unmated and surface moisture removed. Connectors shall meet 1 megohm minimum and shall pass a DWV test of 100 volts (rms 60 hertz ac).
- 3.3.6 **Vibration (sine).** Connectors, when mated, wired in series and fixtured in accordance with MIL-DTL-83513F, shall not exhibit any discontinuity longer than 1 microsecond when tested in accordance with EIA-364-28 Test Condition IV, which specifies 12 hour duration, 10 Hz to 2000 Hz, and amplitude of 20  $g_n$  peak. Connectors shall not be damaged and no loosening of parts shall occur.
- 3.3.7 **Shock.** Connectors, when mated, wired in series and fixtured in accordance with MIL-DTL-83513F, shall not exhibit any discontinuity longer than 1 microsecond when tested in accordance with EIA-364-27, Test Condition E, which specifies an amplitude of 50 g peak. Connectors shall not be damaged and no loosening of parts shall occur.
- 3.3.8 **Marking Permanency.** Connector marking shall meet the requirements of MIL-STD-202 Method 215.
- 3.3.9 **Fungus resistance.** Connector materials shall meet the requirements of MIL-STD-810 Method 508.5.



# Micro-D Weights

## MICRO-D METAL SHELL WEIGHTS IN GRAMS<sup>1</sup>

| Layout | Solder Cup | Pigtail <sup>2</sup> | PCB<br>"CBR" | PCB<br>"BR" | PCB<br>"BS" | PCB<br>"CBS" |
|--------|------------|----------------------|--------------|-------------|-------------|--------------|
| 9P     | 1.7        | 1.6                  | 3.9          | 5.9         | 4.1         | 3.1          |
| 9S     | 1.7        | 1.6                  | 3.9          | 5.9         | 4.1         | 3.1          |
| 15P    | 2.3        | 2.2                  | 4.8          | 6.8         | 4.7         | 3.3          |
| 15S    | 2.2        | 2.1                  | 4.7          | 6.7         | 4.7         | 3.4          |
| 21P    | 3.0        | 2.9                  | 5.6          | 7.7         | 5.7         | 4.1          |
| 21S    | 2.6        | 2.5                  | 5.4          | 7.6         | 5.6         | 4.8          |
| 25P    | 3.3        | 3.2                  | 6.1          | 8.3         | 5.9         | 5.3          |
| 25S    | 3.0        | 2.9                  | 6.0          | 8.2         | 6.1         | 5.5          |
| 31P    | 3.9        | 3.8                  | 7.6          | 9.5         | 7.2         | 6.5          |
| 31S    | 3.6        | 3.5                  | 7.5          | 9.4         | 7.3         | 6.6          |
| 37P    | 4.4        | 4.2                  | 8.4          | 11.1        | 8.5         | 7.7          |
| 37S    | 4.1        | 3.9                  | 8.4          | 11.0        | 8.3         | 7.5          |
| 51P    | 5.1        | 4.9                  | 11.0         | 12.7        | 9.6         | 8.6          |
| 51S    | 4.8        | 4.7                  | 10.9         | 12.8        | 9.5         | 8.6          |
| 100P   | 9.1        | 8.6                  | 26.6         | 27.5        | 25.4        | 22.9         |
| 100S   | 8.2        | 7.9                  | 26.4         | 27.1        | 24.8        | 22.3         |

1. Nominal weight shown. Add 10% for maximum weight.
2. Weight is connector only. See table below for wire weight calculation.

## STAINLESS STEEL MICRO-D WEIGHT ADDERS

| Layout | Stainless Steel Adder in Grams |
|--------|--------------------------------|
| 9P     | 1.9                            |
| 9S     | 2.0                            |
| 15P    | 2.4                            |
| 15S    | 2.4                            |
| 21P    | 2.9                            |
| 21S    | 2.8                            |
| 25P    | 3.2                            |
| 25S    | 2.9                            |
| 31P    | 3.4                            |
| 31S    | 3.2                            |
| 37P    | 3.6                            |
| 37S    | 4.1                            |
| 51P    | 4.0                            |
| 51S    | 3.8                            |
| 100P   | 6.3                            |
| 100S   | 5.6                            |

1. Nominal weight shown. Add 10% for maximum weight.
2. Weight includes 18 inches of M22759/11-26 insulated #26 AWG copper wire.

## HOW TO CALCULATE WEIGHTS FOR DIFFERENT WIRE TYPES AND LENGTHS

| Wire Type | Wire Gage (AWG) | Maximum Wire Weight Per Inch in Grams |
|-----------|-----------------|---------------------------------------|
| M22759/11 | 24              | .098                                  |
| M22759/11 | 26              | .072                                  |
| M22759/11 | 28              | .052                                  |
| M22759/33 | 24              | .076                                  |
| M22759/33 | 26              | .053                                  |
| M22759/33 | 28              | .034                                  |
| M22759/33 | 30              | .025                                  |


### EXAMPLE CALCULATION:

**MWDM2L-37P-6K7-54B** (54 inches of M22759/11 #26 gage wire)


1. Find the connector weight in the "Pigtail" column above .... 4.2 g.
2. Find the wire weight in grams per inch.....0.072 g./in.
3. Multiply the # of conductors times length and weight  
37 wires x 54 inches x .072 g./in. = ..... 144 g.
4. Add the connector weight to the wire weight ..... 148.2 g.

## MICRO-D CONTACT ARRANGEMENTS (FACE VIEW PIN CONNECTOR)


A




9 Pin




15 Pin




21 Pin




25 Pin




31 Pin




37 Pin




51 Pin (Special 2 Row)

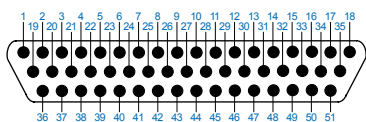


51 Pin



67 Pin

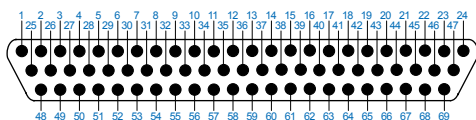


69 Pin

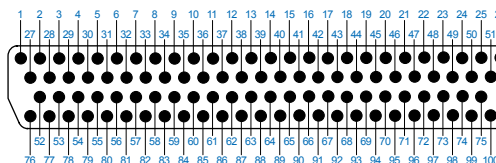


100 Pin


## MICRO-D CONTACT ARRANGEMENTS (FACE VIEW SOCKET CONNECTOR)




9 Socket




15 Socket




21 Socket




25 Socket




31 Socket




37 Socket




51 Socket (Special 2 Row)

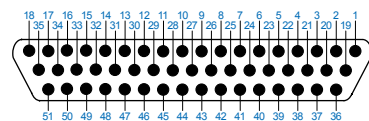


51 Socket



67 Socket

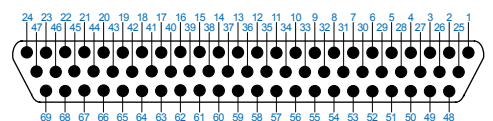

69 Socket

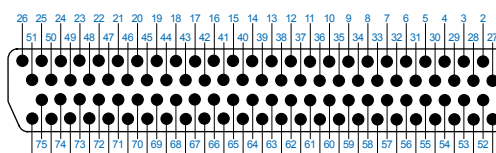


100 Socket




## RECOMMENDED MICRO-D PANEL CUTOUTS

A

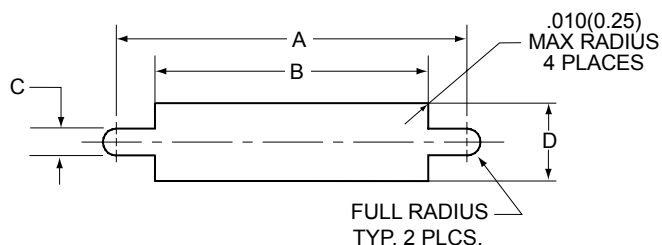

Front Panel Mounting

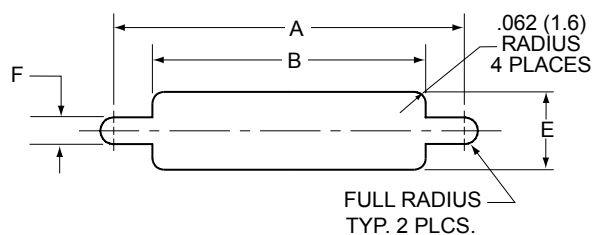

Rear Panel Mounting

## PLASTIC SHELL MWD CONNECTORS (M83513/06 THRU /09)

| Layout    | A      |        | B      |        | C      |        | D      |        | E                |                  | F      |        |
|-----------|--------|--------|--------|--------|--------|--------|--------|--------|------------------|------------------|--------|--------|
|           | In .   | mm.    | In .   | mm.    | In .   | mm.    | In .   | mm.    | In .             | mm.              | In .   | mm.    |
| <b>9</b>  | ± .003 | ± 0.08 | ± .002 | ± 0.05 | ± .002 | ± 0.05 | ± .002 | ± 0.05 | + .005<br>- .000 | + 0.13<br>- 0.00 | ± .002 | ± 0.05 |
| <b>15</b> | .565   | 14.35  | .410   | 10.41  | .091   | 2.31   | .174   | 4.42   | .219             | 5.56             | .126   | 3.20   |
| <b>21</b> | .715   | 18.16  | .560   | 14.22  | .091   | 2.31   | .174   | 4.42   | .219             | 5.56             | .126   | 3.20   |
| <b>25</b> | .865   | 21.97  | .710   | 18.03  | .091   | 2.31   | .174   | 4.42   | .219             | 5.56             | .126   | 3.20   |
| <b>31</b> | .965   | 24.51  | .810   | 20.57  | .091   | 2.31   | .174   | 4.42   | .219             | 5.56             | .126   | 3.20   |
| <b>37</b> | 1.115  | 28.32  | .960   | 24.38  | .091   | 2.31   | .174   | 4.42   | .219             | 5.56             | .126   | 3.20   |
| <b>51</b> | 1.265  | 32.13  | 1.110  | 28.19  | .091   | 2.31   | .174   | 4.42   | .219             | 5.56             | .126   | 3.20   |
| <b>51</b> | 1.215  | 30.86  | 1.060  | 26.92  | .091   | 2.31   | .217   | 5.51   | .261             | 5.56             | .126   | 3.20   |

## METAL SHELL MWD CONNECTORS

| Layout      | A      |        | B      |        | C      |        | D      |        | E      |        | F      |        |
|-------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|             | In .   | mm.    | In .   | mm.    | In .   | mm.    | In .   | mm.    | In .   | mm.    | In .   | mm.    |
| <b>9</b>    | ± .003 | ± 0.08 | ± .002 | ± 0.05 | ± .002 | ± 0.05 | ± .002 | ± 0.05 | ± .005 | ± 0.13 | ± .002 | ± 0.05 |
| <b>15</b>   | .565   | 14.35  | .410   | 10.41  | .091   | 2.31   | .277   | 7.04   | .256   | 6.50   | .125   | 3.18   |
| <b>21</b>   | .715   | 18.16  | .560   | 14.22  | .091   | 2.31   | .277   | 7.04   | .256   | 6.50   | .125   | 3.18   |
| <b>25</b>   | .865   | 21.97  | .710   | 18.03  | .091   | 2.31   | .277   | 7.04   | .256   | 6.50   | .125   | 3.18   |
| <b>31</b>   | .965   | 24.51  | .810   | 20.57  | .091   | 2.31   | .277   | 7.04   | .256   | 6.50   | .125   | 3.18   |
| <b>37</b>   | 1.115  | 28.32  | .960   | 24.38  | .091   | 2.31   | .277   | 7.04   | .256   | 6.50   | .125   | 3.18   |
| <b>51</b>   | 1.265  | 32.13  | 1.110  | 28.19  | .091   | 2.31   | .277   | 7.04   | .256   | 6.50   | .125   | 3.18   |
| <b>51</b>   | 1.215  | 30.86  | 1.060  | 26.92  | .091   | 2.31   | .317   | 8.05   | .300   | 7.62   | .125   | 3.18   |
| <b>51-2</b> | 1.615  | 41.02  | 1.460  | 37.08  | .091   | 2.31   | .277   | 7.04   | .256   | 6.50   | .125   | 3.18   |
| <b>67</b>   | 2.015  | 51.18  | 1.858  | 47.19  | .091   | 2.31   | .317   | 8.05   | .256   | 6.50   | .125   | 3.18   |
| <b>69</b>   | 1.520  | 38.61  | 1.360  | 34.54  | .091   | 2.31   | .317   | 8.05   | .300   | 7.62   | .125   | 3.18   |
| <b>100</b>  | 1.800  | 45.72  | 1.455  | 36.96  | .120   | 3.05   | .363   | 9.22   | .406   | 10.31  | .147   | 3.73   |

# MIL-STD-681 Color Code Chart



## MIL-STD-681 COLOR CODE CHART FOR MICRO-D CONNECTORS

| PIN NO. | MIL-STD-681 NUMBER | Base Color | First Stripe | Second Stripe | PIN NO. | MIL-STD-681 NO. | Base Color | First Stripe | Second Stripe | Third Stripe |
|---------|--------------------|------------|--------------|---------------|---------|-----------------|------------|--------------|---------------|--------------|
| 1       | 0                  | BLK        |              |               | 51      | 957             | WHT        | GRN          | VIO           |              |
| 2       | 1                  | BRN        |              |               | 52      | 958             | WHT        | GRN          | GRY           |              |
| 3       | 2                  | RED        |              |               | 53      | 967             | WHT        | BLU          | VIO           |              |
| 4       | 3                  | ORN        |              |               | 54      | 968             | WHT        | BLU          | GRY           |              |
| 5       | 4                  | YEL        |              |               | 55      | 978             | WHT        | VIO          | GRY           |              |
| 6       | 5                  | GRN        |              |               | 56      | 9012            | WHT        | BLK          | BRN           | RED          |
| 7       | 6                  | BLU        |              |               | 57      | 9013            | WHT        | BLK          | BRN           | ORN          |
| 8       | 7                  | VIO        |              |               | 58      | 9014            | WHT        | BLK          | BRN           | YEL          |
| 9       | 8                  | GRY        |              |               | 59      | 9015            | WHT        | BLK          | BRN           | GRN          |
| 10      | 9                  | WHT        |              |               | 60      | 9016            | WHT        | BLK          | BRN           | BLU          |
| 11      | 90                 | WHT        | BLK          |               | 61      | 9017            | WHT        | BLK          | BRN           | VIO          |
| 12      | 91                 | WHT        | BRN          |               | 62      | 9018            | WHT        | BLK          | BRN           | GRY          |
| 13      | 92                 | WHT        | RED          |               | 63      | 9023            | WHT        | BLK          | RED           | ORN          |
| 14      | 93                 | WHT        | ORN          |               | 64      | 9024            | WHT        | BLK          | RED           | YEL          |
| 15      | 94                 | WHT        | YEL          |               | 65      | 9025            | WHT        | BLK          | RED           | GRN          |
| 16      | 95                 | WHT        | GRN          |               | 66      | 9026            | WHT        | BLK          | RED           | BLU          |
| 17      | 96                 | WHT        | BLU          |               | 67      | 9027            | WHT        | BLK          | RED           | VIO          |
| 18      | 97                 | WHT        | VIO          |               | 68      | 9028            | WHT        | BLK          | RED           | GRY          |
| 19      | 98                 | WHT        | GRY          |               | 69      | 9034            | WHT        | BLK          | ORN           | YEL          |
| 20      | 901                | WHT        | BLK          | BRN           | 70      | 9035            | WHT        | BLK          | ORN           | GRN          |
| 21      | 902                | WHT        | BLK          | RED           | 71      | 9036            | WHT        | BLK          | ORN           | BLU          |
| 22      | 903                | WHT        | BLK          | ORN           | 72      | 9037            | WHT        | BLK          | ORN           | VIO          |
| 23      | 904                | WHT        | BLK          | YEL           | 73      | 9038            | WHT        | BLK          | ORN           | GRY          |
| 24      | 905                | WHT        | BLK          | GRN           | 74      | 9045            | WHT        | BLK          | YEL           | GRN          |
| 25      | 906                | WHT        | BLK          | BLU           | 75      | 9046            | WHT        | BLK          | YEL           | BLU          |
| 26      | 907                | WHT        | BLK          | VIO           | 76      | 9047            | WHT        | BLK          | YEL           | VIO          |
| 27      | 908                | WHT        | BLK          | GRY           | 77      | 9048            | WHT        | BLK          | YEL           | GRY          |
| 28      | 912                | WHT        | BRN          | RED           | 78      | 9056            | WHT        | BLK          | GRN           | BLU          |
| 29      | 913                | WHT        | BRN          | ORN           | 79      | 9057            | WHT        | BLK          | GRN           | VIO          |
| 30      | 914                | WHT        | BRN          | YEL           | 80      | 9058            | WHT        | BLK          | GRN           | GRY          |
| 31      | 915                | WHT        | BRN          | GRN           | 81      | 9067            | WHT        | BLK          | BLU           | VIO          |
| 32      | 916                | WHT        | BRN          | BLU           | 82      | 9068            | WHT        | BLK          | BLU           | GRY          |
| 33      | 917                | WHT        | BRN          | VIO           | 83      | 9078            | WHT        | BLK          | VIO           | GRY          |
| 34      | 918                | WHT        | BRN          | GRY           | 84      | 9123            | WHT        | BRN          | RED           | ORN          |
| 35      | 923                | WHT        | RED          | ORN           | 85      | 9124            | WHT        | BRN          | RED           | YEL          |
| 36      | 924                | WHT        | RED          | YEL           | 86      | 9125            | WHT        | BRN          | RED           | GRN          |
| 37      | 925                | WHT        | RED          | GRN           | 87      | 9126            | WHT        | BRN          | RED           | BLU          |
| 38      | 926                | WHT        | RED          | BLU           | 88      | 9127            | WHT        | BRN          | RED           | VIO          |
| 39      | 927                | WHT        | RED          | VIO           | 89      | 9128            | WHT        | BRN          | RED           | GRY          |
| 40      | 928                | WHT        | RED          | GRY           | 90      | 9134            | WHT        | BRN          | ORN           | YEL          |
| 41      | 934                | WHT        | ORN          | YEL           | 91      | 9135            | WHT        | BRN          | ORN           | GRN          |
| 42      | 935                | WHT        | ORN          | GRN           | 92      | 9136            | WHT        | BRN          | ORN           | BLU          |
| 43      | 936                | WHT        | ORN          | BLU           | 93      | 9137            | WHT        | BRN          | ORN           | VIO          |
| 44      | 937                | WHT        | ORN          | VIO           | 94      | 9138            | WHT        | BRN          | ORN           | GRY          |
| 45      | 938                | WHT        | ORN          | GRY           | 95      | 9145            | WHT        | BRN          | YEL           | GRN          |
| 46      | 945                | WHT        | YEL          | GRN           | 96      | 9146            | WHT        | BRN          | YEL           | BLU          |
| 47      | 946                | WHT        | YEL          | BLU           | 97      | 9147            | WHT        | BRN          | YEL           | VIO          |
| 48      | 947                | WHT        | YEL          | VIO           | 98      | 9148            | WHT        | BRN          | YEL           | GRY          |
| 49      | 948                | WHT        | YEL          | GRY           | 99      | 9156            | WHT        | BRN          | GRN           | BLU          |
| 50      | 956                | WHT        | GRN          | BLU           | 100     | 9157            | WHT        | BRN          | GRN           | VIO          |

A

## TwistPin Connectors and RoHS Compliance



European Union Directive 2002/95/EC on Restriction of the use of certain Hazardous Substances ("RoHS") states that certain types of equipment (primarily consumer electronic products such as personal computers) shall not contain lead, mercury, cadmium, hexavalent chromium, PBB's or PBDE's. For the record, Glenair does not produce any OEM products of this type. Furthermore, our interconnect components are either free of the substances RoHS controls, or specifically intended for use in military-aerospace applications that are exempt. Makers of consumer products should refer to the following guidelines to insure Glenair interconnect components are correctly specified when used in in RoHS regulated electronic equipment.

### Are Micro-D connectors RoHS compliant?

The products in this catalog can be ordered with various plating finishes. Some of these finishes such as cadmium and chem film, along with solder-dipping, do not comply with the RoHS directive.

### Why doesn't Glenair eliminate non-RoHS products?

Glenair products are typically used in defense and aerospace equipment exempt from RoHS requirements. Glenair will continue to offer cadmium and chromate finishes in accordance with DoD and aerospace specifications. Our part numbers contain a broad range of plating finish ordering codes. Customers can easily specify RoHS compliant finishes if desired.

### Products that do not comply with RoHS regulations:

**1 Cadmium plating** is available on metal shell connectors in this catalog. Note that cadmium plating does not currently comply with RoHS rules.

**2 Chem film** is available on metal shell connectors. This coating contains hexavalent chromium which does not currently comply with RoHS rules.

**3 Tin-lead solder dipped printed circuit board tails.** Board mount M83513 Micro-D's and other products are normally solder dipped in 63% tin 37% lead molton solder. RoHS compliance for consumer products requires elimination of solder coatings containing lead.

### RoHS compliance made easy





**1 Specify electroless nickel plating on the connector shell.** Or, choose stainless steel shells for maximum corrosion protection and RoHS compliance.

**2 Use Mod Code 513 on Micro-D board mount connectors.** Board mount Micro-D's and other products are normally solder dipped in 63% tin 37% lead molton solder. Any solder-dipped part can be supplied with RoHS compliant gold-plating instead simply by adding Mod Code 513 as a suffix to the standard part number.

### MICRO-D RoHS COMPLIANCE EXAMPLES




| Part Number         | Problem   | Solution   | RoHS Compliant Part Number |
|---------------------|---|--|----------------------------|
| MWDM1L-37PSB        | Plating code 1 specifies cadmium plating.               | Change to electroless nickel plating (code 2).                 | MWDM2L-37PSB               |
| MWDM2L-25SCBRP-.110 | CBR style PCB connectors are solder-dipped in tin-lead. | Add Mod Code 513 to change the PC tail finish to gold plating. | MWDM2L-25SCBRP-.110-513    |
| MWDM6L-9S-6K7-18L   | Plating code 6 specifies chem film.                     | Change to electroless nickel plating (code 2).                 | MWDM2L-9S-6K7-18L          |
| M83513/03-E07C      | Cadmium plated shell and solder-dipped contacts.        | Change to nickel plating and gold contacts                     | M83513/03-E05N             |

## MICRO-D CONNECTOR PLATING CODES: RoHS COMPLIANCE

| Micro-D Plating Code | Plating Type  | RoHS Compliance   | Notes  |
|----------------------|---|---|--|
| 1                    | Cadmium with yellow chromate conversion coating over electroless nickel | No  | Electroless nickel is the preferred alternate.   |
| 2                    | Electroless nickel  |  | First choice for RoHS compliance. Good corrosion resistance, excellent conductivity, M83513 approved, always in stock. |
| 3                    | Stainless steel shell, passivated                                       |  | Higher cost but unsurpassed corrosion resistance, not conductive enough for typical EMI needs. Build-to-order.         |
| 4                    | Black anodize over aluminum   |  | Economical, non-reflective, non-conductive. Build-to-order.  |
| 5                    | Gold over aluminum  |  | Low volume, higher cost, excellent conductivity. Build-to-order.   |
| 6                    | Chem film   | No  | Electroless nickel is the preferred alternate.   |

A

## MICRO-D BACKSHELL PLATING CODES: RoHS COMPLIANCE

| Plating Code | Plating Type  | RoHS Compliance   | Notes  |
|--------------|---|---|--|
| C            | Black anodize   |  | Inexpensive, non-reflective, not suitable for EMI (poor conductivity), build-to-order.                                 |
| E            | Chem film   | No  | Electroless nickel is the preferred alternate.   |
| J            | Cadmium with yellow chromate conversion coating over electroless nickel     | No  | Electroless nickel is the preferred alternate.   |
| M            | Electroless nickel  |  | First choice for RoHS compliance. Good corrosion resistance, excellent conductivity, M83513 approved, always in stock. |
| NF           | Cadmium with olive drab chromate conversion coating over electroless nickel | No  | Electroless nickel is the preferred alternate.   |
| Z2           | Gold  |  | Low volume, higher cost, excellent conductivity, build-to-order.   |

# Need something unusual in a multi-contact connector?




## Then consider Glenair's expertise in high reliability connector design and development.

Glenair's line of innovative, specialty connectors has grown, year after year, to become one of the most diverse in the industry. Our application engineers have worked directly with commercial, industrial and military customers worldwide to design and build such products as quick disconnects for missile launchers, high tempera-

ture connectors for jet engines, shorting plugs to prevent accidental weapon firing, explosion-proof bulkhead feed-throughs for marine and off-shore platform use, and hermetically-sealed MIL-DTL-38999 connectors for military applications. So, for extraordinary applications, consider an extraordinary partner: Glenair.



Commercial and Mil Spec connector accessories



Convolved tubing and metal-core conduit



Electrical and fiber optic cable assemblies



Composite thermoplastic components



Microminiature connectors and accessories



Backshell assembly and termination tools



1211 Air Way

Glendale, California 91201-2497

Telephone: 818-247-6000 · Facsimilie: 818-500-9912 · EMail: sales@glenair.com


United States • United Kingdom • Germany • Nordic • France • Italy • Spain

www.glenair.com

PRODUCT SELECTION GUIDE

**MWDM Solder Cup Connectors**

Always in stock, these connectors feature gold-plated solder cup contacts for termination to #24 through #30 AWG wire.

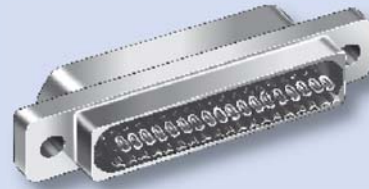

*Solder Cup Page  
B-2*

**MWDM Pre-Wired Connectors**

These connectors avoid the expense and workmanship issues with soldering wires. Crimp terminations assure consistent circuit resistance. Stocked in #26 AWG, available in #24 gage to #30 gage wire.



*Pre-Wired  
Page B-4*

**MWDM Back-To-Back Unshielded Cables**

If a simple jumper cable is required, these cable assemblies simplify ordering. No special part numbers are necessary. Available in all sizes. Wiring is #1 to #1, etc. Back-to-backs are built to order in any length.



*Back-To-Back  
Page B-6*

**MWDM Shielded Cable Assemblies**

Featuring special Micro-D connectors with integral shield attachment platforms and ground springs, these shielded cable assemblies are terminated, tested and ready for immediate use.



*Shielded Cables  
Page B-8*

**MWDM Uninsulated Wire Pigtails**

Gold plated or solder dipped single strand uninsulated wire can be used for a variety of termination techniques, including wire bonding, flexible circuits and rigid boards.



*Uninsulated Wire  
Page B-12*

**GMDE Environmentally Sealed Panel Mount**

GMDE connectors are special Micro-D connectors with O-rings for sealing to panels or bulkheads.



*Environmental  
Page B-14*

B



# Micro-D Metal Shell MWDM Solder Cup Connectors



**Micro-D Solder Cup Termination**—These connectors feature gold-plated TwistPin contacts for best performance. Use with #26 or smaller stranded or solid wire. Specify nickel-plated shells or cadmium plated shells for best availability.

**Now Available With #24 Gage Contacts**—AWG 24 wire offers increased mechanical strength and lower voltage drop. Glenair Micro-D solder cup connectors are now compatible with 24 gage stranded or solid wire. Specify “N” for 24 gage pin contacts, or “T” for 24 gage socket contacts.

## HOW TO ORDER METAL SHELL SOLDER CUP MICRO-D CONNECTORS

| Series | Shell Material and Finish  | Insulator Material                                     | Contact Layout            | Contact Type  | Termination Type | Hardware   |   |     |    |   |   |   |
|--------|--|--|---------------------------|---|------------------|--|---|-----|----|---|---|---|
| MWDM   | <b>Aluminum Shell</b><br>1 – Cadmium<br>2 – Nickel<br>4 – Black Anodize<br>5 – Gold<br>6 – Chem Film | L – LCP<br><br>30% Glass-Filled Liquid Crystal Polymer | 9                         | <b>Size #26 Solder Cup Contacts (Standard)</b><br><br>P – Pin<br>S – Socket | S – Solder Cup   | B<br>P<br>M<br>M1<br>S<br>S1<br>L<br>K<br>F<br>R |   |     |    |   |   |   |
|        |  |  | 15                        |   |                  |  |   |     |    |   |   |   |
|        |  |  | 21                        |   |                  |  |   |     |    |   |   |   |
|        |  |  | 25                        |   |                  |  |   |     |    |   |   |   |
|        |  |  | 31                        |   |                  |  |   |     |    |   |   |   |
|        |  |  | 37                        |   |                  |  |   |     |    |   |   |   |
|        | <b>Stainless Steel Shell</b><br>3 – Passivated   |  | 51                        | <b>Size #24 Solder Cup Contacts</b><br><br>N – Pin<br>T – Socket            |                  |  |   |     |    |   |   |   |
|        |  |  | 51-2                      |   |                  |  |   |     |    |   |   |   |
|        |  |  | 67                        |   |                  |  |   |     |    |   |   |   |
|        |  |  | 69                        |   |                  |  |   |     |    |   |   |   |
|        |  |  | 100                       |   |                  |  |   |     |    |   |   |   |
|        |  |  | <b>Sample Part Number</b> |   |                  |  |   |     |    |   |   |   |
|        |  |  | MWDM                      |   |                  |  | 2 | L – | 37 | S | S | B |

See Micro-D Mounting Hardware Options Below

## MICRO-D MOUNTING HARDWARE

| B   | P  | M   | M1   | S  | S1  | L  | K  | F  | R   |
|---|--|---|--|--|---|--|--|--|---|
|   |  |   |  |  |   |  |  |  |   |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head Removable E-ring | <b>Jackscrew</b><br>Hex Head Removable E-ring Extended | <b>Jackscrew</b><br>Slot Head Removable E-ring | <b>Jackscrew</b><br>Slot Head Removable E-ring Extended | <b>Jackscrew</b><br>Hex Head Non-Removable | <b>Jackscrew</b><br>Slot Head Non-Removable Extended | <b>Float Mount</b><br>For Front Panel Mounting | <b>Float Mount</b><br>For Rear Panel Mounting |

# Micro-D Metal Shell MWDM Solder Cup Connectors






## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator        | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

B

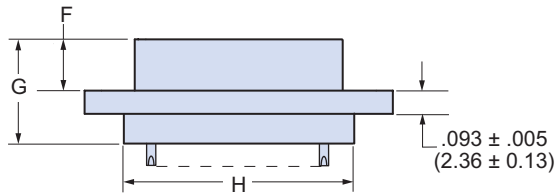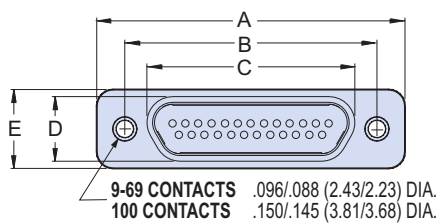

## DIMENSIONS

| Layout | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |       | F          |            | G Max. |       | H Max. |       | J Max. |      |
|--------|--------|-------|------------|------------|--------|-------|--------|------|--------|-------|------------|------------|--------|-------|--------|-------|--------|------|
|        | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.   | In.    | mm.  |
| 9P     | .785   | 19.94 | .565       | 14.35      | .333   | 8.46  | .184   | 4.67 | .308   | 7.82  | .183       | 4.65       | .416   | 10.57 | .400   | 10.16 | .270   | 6.86 |
| 9S     | .785   | 19.94 | .565       | 14.35      | .400   | 10.16 | .250   | 6.35 | .308   | 7.82  | .195       | 4.95       | .429   | 10.90 | .400   | 10.16 | .270   | 6.86 |
| 15P    | .935   | 23.75 | .715       | 18.16      | .483   | 12.27 | .184   | 4.67 | .308   | 7.82  | .183       | 4.65       | .416   | 10.57 | .550   | 13.97 | .270   | 6.86 |
| 15S    | .935   | 23.75 | .715       | 18.16      | .551   | 14.00 | .250   | 6.35 | .308   | 7.82  | .195       | 4.95       | .429   | 10.90 | .550   | 13.97 | .270   | 6.86 |
| 21P    | 1.085  | 27.56 | .865       | 21.97      | .633   | 16.08 | .184   | 4.67 | .308   | 7.82  | .183       | 4.65       | .416   | 10.57 | .700   | 17.78 | .270   | 6.86 |
| 21S    | 1.085  | 27.56 | .865       | 21.97      | .701   | 17.81 | .250   | 6.35 | .308   | 7.82  | .195       | 4.95       | .429   | 10.90 | .700   | 17.78 | .270   | 6.86 |
| 25P    | 1.185  | 30.01 | .965       | 24.51      | .733   | 18.62 | .184   | 4.67 | .308   | 7.82  | .183       | 4.65       | .416   | 10.57 | .800   | 20.32 | .270   | 6.86 |
| 25S    | 1.185  | 30.01 | .965       | 24.51      | .801   | 20.35 | .250   | 6.35 | .308   | 7.82  | .195       | 4.95       | .429   | 10.90 | .800   | 20.32 | .270   | 6.86 |
| 31P    | 1.335  | 33.91 | 1.115      | 28.32      | .883   | 22.43 | .184   | 4.67 | .308   | 7.82  | .183       | 4.65       | .416   | 10.57 | .950   | 24.13 | .270   | 6.86 |
| 31S    | 1.335  | 33.91 | 1.115      | 28.32      | .951   | 24.16 | .250   | 6.35 | .308   | 7.82  | .195       | 4.95       | .429   | 10.90 | .950   | 24.13 | .270   | 6.86 |
| 37P    | 1.485  | 37.72 | 1.265      | 32.13      | 1.033  | 26.24 | .184   | 4.67 | .308   | 7.82  | .183       | 4.65       | .416   | 10.57 | 1.100  | 27.94 | .270   | 6.86 |
| 37S    | 1.485  | 37.72 | 1.265      | 32.13      | 1.101  | 27.96 | .250   | 6.35 | .308   | 7.82  | .195       | 4.95       | .429   | 10.90 | 1.100  | 27.94 | .270   | 6.86 |
| 51P    | 1.435  | 36.45 | 1.215      | 30.86      | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .183       | 4.65       | .416   | 10.57 | 1.050  | 26.67 | .310   | 7.87 |
| 51S    | 1.435  | 36.45 | 1.215      | 30.86      | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195       | 4.95       | .429   | 10.90 | 1.050  | 26.67 | .310   | 7.87 |
| 51-2P  | 1.835  | 46.61 | 1.615      | 41.02      | 1.384  | 35.15 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | 1.450  | 36.83 | .270   | 6.86 |
| 51-2S  | 1.835  | 46.61 | 1.615      | 41.02      | 1.450  | 36.83 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | 1.450  | 36.83 | .270   | 6.86 |
| 67P    | 2.235  | 56.77 | 2.015      | 51.18      | 1.784  | 45.31 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | 1.850  | 36.83 | .270   | 6.86 |
| 67S    | 2.235  | 56.77 | 2.015      | 51.18      | 1.850  | 46.99 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | 1.850  | 36.83 | .270   | 6.86 |
| 69P    | 1.735  | 44.07 | 1.515      | 38.48      | 1.284  | 32.61 | .224   | 5.69 | .351   | 8.92  | .183       | 4.65       | .416   | 10.57 | 1.350  | 34.29 | .310   | 7.87 |
| 69S    | 1.735  | 44.07 | 1.515      | 38.48      | 1.350  | 34.29 | .293   | 7.44 | .351   | 8.92  | .195       | 4.95       | .429   | 10.90 | 1.350  | 34.29 | .310   | 7.87 |
| 100P   | 2.170  | 55.12 | 1.800      | 45.72      | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | .183       | 4.65       | .416   | 10.57 | 1.442  | 36.63 | .360   | 9.14 |
| 100S   | 2.170  | 55.12 | 1.800      | 45.72      | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195       | 4.95       | .429   | 10.90 | 1.442  | 36.63 | .360   | 9.14 |





## Micro-D Metal Shell MWDM Pre-Wired with Insulated Wire



**Micro-D Pre-Wired Pigtails**—These connectors feature gold-plated TwistPin contacts and mil spec crimp termination. Specify nickel-plated shells or cadmium plated shells for best availability. 100% tested and backpotted, ready for use.

**Choose the Wire Type and Size To Fit Your Application**—If on-hand availability is most important, choose #26 AWG Type K mil spec Teflon® wire. Select M22759/33 Type J for space applications.

### HOW TO ORDER METAL SHELL PRE-WIRED MICRO-D CONNECTORS

| Series                    | Shell Material and Finish    | Insulator Material                                     | Contact Layout | Contact Type | Wire Gage (AWG) | Wire Type  | Wire Color   | Wire Length Inches   | Hardware   |
|---------------------------|------------------------------|--|----------------|--------------|-----------------|--|--|--|--|
| MWDM                      | <b>Aluminum Shell</b>        | L – LCP<br><br>30% Glass-Filled Liquid Crystal Polymer | 9              | P – Pin      | 4 – #24         | K – M22759/11<br>600 Vrms Teflon® (TFE)<br><br>J – M22759/33<br>600 Vrms Modified Cross-Linked Tefzel® (ETFE)<br><br>E – NEMA HP3-EB<br>600 Vrms Type E M16878/4 (TFE) (replaced by M22759/11 for mil spec applications) | 1 – White  | 18<br><br>Wire Length In Inches. "18" Specifies 18 Inches. | B<br>P<br>M<br>M1<br>S<br>S1<br>L<br>K<br>F<br>R |
|                           |                              |  | 15             | S – Socket   | 6 – #26         |  | 2 – Yellow   |  |  |
|                           |                              |  | 21             |              | 8 – #28         |  | 5 – Color-Coded Stripes Per MIL-STD-681  |  |  |
|                           |                              |  | 25             |              | 0 – #30         |  | (Striped wire not available on 67, 69 or 100 pin connectors or for #28, #30 AWG) |  |  |
|                           |                              |  | 31             |              |                 |  | 7 – Ten Color Repeating  |  |  |
|                           |                              |  | 37             |              |                 |  |  |  |  |
|                           | <b>Stainless Steel Shell</b> | 3 – Passivated   |                | 51-2         |                 |  |  |  |  |
|                           |                              |  |                | 67           |                 |  |  |  |  |
|                           |                              |  |                | 69           |                 |  |  |  |  |
|                           |                              |  |                | 100          |                 |  |  |  |  |
|                           |                              |  |                |              |                 |  |  |  |  |
|                           |                              |  |                |              |                 |  |  |  |  |
| <b>Sample Part Number</b> |                              |  |                |              |                 |  |  |  |  |
| MWDM                      | 2                            | L –  | 25             | S –          | 4               | K  | 7 –  | 18   | B  |

### MICRO-D MOUNTING HARDWARE

| B   | P  | M   | M1   | S  | S1  | L  | K  | F  | R   |
|---|--|---|--|--|---|--|--|--|---|
|   |  |   |  |  |   |  |  |  |   |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head Removable E-ring | <b>Jackscrew</b><br>Hex Head Removable E-ring Extended | <b>Jackscrew</b><br>Slot Head Removable E-ring | <b>Jackscrew</b><br>Slot Head Removable E-ring Extended | <b>Jackscrew</b><br>Hex Head Non-Removable | <b>Jackscrew</b><br>Slot Head Non-Removable Extended | <b>Float Mount</b><br>For Front Panel Mounting | <b>Float Mount</b><br>For Rear Panel Mounting |

# Micro-D Metal Shell MWDM Pre-Wired with Insulated Wire



## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES


|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator        | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |



## DIMENSIONS

| Layout | A Max. |       | B              |                | C Max. |       | D Max. |      | E Max. |       | F              |                | G Max. |       | H Max. |       | J Max. |      |
|--------|--------|-------|----------------|----------------|--------|-------|--------|------|--------|-------|----------------|----------------|--------|-------|--------|-------|--------|------|
|        | In.    | mm.   | In. $\pm$ .003 | mm. $\pm$ 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. $\pm$ .003 | mm. $\pm$ 0.08 | In.    | mm.   | In.    | mm.   | In.    | mm.  |
| 9P     | .785   | 19.94 | .565           | 14.35          | .333   | 8.46  | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .400   | 10.16 | .270   | 6.86 |
| 9S     | .785   | 19.94 | .565           | 14.35          | .400   | 10.16 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .400   | 10.16 | .270   | 6.86 |
| 15P    | .935   | 23.75 | .715           | 18.16          | .483   | 12.27 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .550   | 13.97 | .270   | 6.86 |
| 15S    | .935   | 23.75 | .715           | 18.16          | .551   | 14.00 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .550   | 13.97 | .270   | 6.86 |
| 21P    | 1.085  | 27.56 | .865           | 21.97          | .633   | 16.08 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .700   | 17.78 | .270   | 6.86 |
| 21S    | 1.085  | 27.56 | .865           | 21.97          | .701   | 17.81 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .700   | 17.78 | .270   | 6.86 |
| 25P    | 1.185  | 30.01 | .965           | 24.51          | .733   | 18.62 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .800   | 20.32 | .270   | 6.86 |
| 25S    | 1.185  | 30.01 | .965           | 24.51          | .801   | 20.35 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .800   | 20.32 | .270   | 6.86 |
| 31P    | 1.335  | 33.91 | 1.115          | 28.32          | .883   | 22.43 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .950   | 24.13 | .270   | 6.86 |
| 31S    | 1.335  | 33.91 | 1.115          | 28.32          | .951   | 24.16 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .950   | 24.13 | .270   | 6.86 |
| 37P    | 1.485  | 37.72 | 1.265          | 32.13          | 1.033  | 26.24 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | 1.100  | 27.94 | .270   | 6.86 |
| 37S    | 1.485  | 37.72 | 1.265          | 32.13          | 1.101  | 27.96 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | 1.100  | 27.94 | .270   | 6.86 |
| 51P    | 1.435  | 36.45 | 1.215          | 30.86          | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .183           | 4.65           | .416   | 10.57 | 1.050  | 26.67 | .310   | 7.87 |
| 51S    | 1.435  | 36.45 | 1.215          | 30.86          | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195           | 4.95           | .429   | 10.90 | 1.050  | 26.67 | .310   | 7.87 |
| 51-2P  | 1.835  | 46.61 | 1.615          | 41.02          | 1.384  | 35.15 | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .416   | 10.57 | 1.450  | 36.83 | .270   | 6.86 |
| 51-2S  | 1.835  | 46.61 | 1.615          | 41.02          | 1.450  | 36.83 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .429   | 10.90 | 1.450  | 36.83 | .270   | 6.86 |
| 67P    | 2.235  | 56.77 | 2.015          | 51.18          | 1.784  | 45.31 | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .416   | 10.57 | 1.850  | 36.83 | .270   | 6.86 |
| 67S    | 2.235  | 56.77 | 2.015          | 51.18          | 1.850  | 46.99 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .429   | 10.90 | 1.850  | 36.83 | .270   | 6.86 |
| 69P    | 1.735  | 44.07 | 1.515          | 38.48          | 1.284  | 32.61 | .224   | 5.69 | .351   | 8.92  | .183           | 4.65           | .416   | 10.57 | 1.350  | 34.29 | .310   | 7.87 |
| 69S    | 1.735  | 44.07 | 1.515          | 38.48          | 1.350  | 34.29 | .293   | 7.44 | .351   | 8.92  | .195           | 4.95           | .429   | 10.90 | 1.350  | 34.29 | .310   | 7.87 |
| 100P   | 2.170  | 55.12 | 1.800          | 45.72          | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | .183           | 4.65           | .416   | 10.57 | 1.442  | 36.63 | .360   | 9.14 |
| 100S   | 2.170  | 55.12 | 1.800          | 45.72          | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195           | 4.95           | .429   | 10.90 | 1.442  | 36.63 | .360   | 9.14 |

# Micro-D Metal Shell MWDM Back-To-Back Unshielded Cable Assemblies

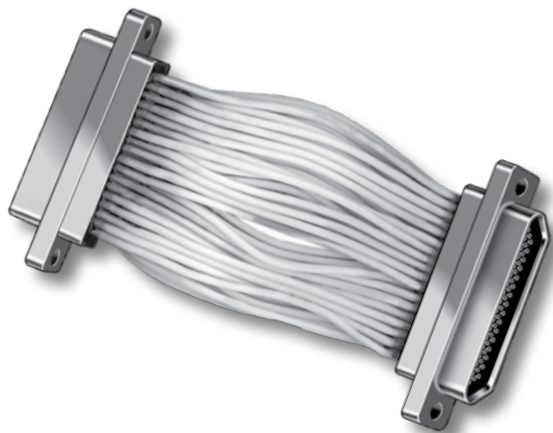

B

### Save Time and Money With Back-To-Back Cables—

These Micro-D connectors feature crimp wire terminations and epoxy encapsulation. The installed cost is lower than terminating solder cup connectors.

### 100% Certified—

all back-to-back assemblies are 100% checked for continuity, resistance, voltage and insulation resistance.

### Hardware Note—

if jackposts are required on one end and jackscrews on the other, use hardware designator “B” (no hardware installed), and order hardware kits separately.

## HOW TO ORDER BACK-TO-BACK UNSHIELDED CABLES

| Series                    | Shell Material and Finish  | Insulator Material                                 | Contact Layout | Connect or Type  | Wire Gage (AWG) | Wire Type  | Wire Color   | Total Length Inches   | Hardware   |
|---------------------------|--|--|----------------|--|-----------------|--|--|---|--|
| MWDM                      | <b>Aluminum Shell</b><br>1 – Cadmium<br>2 – Nickel<br>4 – Black Anodize<br>5 – Gold<br>6 – Chem Film | L – LCP<br>30% Glass-Filled Liquid Crystal Polymer | 9              | <b>GP</b> – Pin (Plug) Connector Both Ends<br><br><b>GS</b> – Socket (Receptacle) Connector Both Ends<br><br><b>CS</b> – Pin Connector to Socket Connector | 4 – #24         | <b>K</b> – M22759/11<br>600 Vrms Teflon (TFE)<br><br><b>J</b> – M22759/33<br>600 Vrms Modified Cross-Linked Tefzel® (ETFE)<br><br><b>E</b> – NEMA HP3-EB<br>600 Vrms Type E M16878/4 (TFE) (replaced by M22759/11 for mil spec applications) | 1 – White  | 18<br>Total Length In Inches. “18”<br>Specifies 18 Inches (2” Min.) | <b>B</b><br><b>P</b><br><b>M</b><br><b>M1</b><br><b>S</b><br><b>S1</b><br><b>L</b><br><b>K</b> |
|                           |  |  | 15             |  | 6 – #26         |  | 2 – Yellow   |   |  |
|                           |  |  | 21             |  | 8 – #28         |  | 7 – Ten Color Repeating  |   |  |
|                           |  |  | 25             |  | 0 – #30         |  | 5 – Color-Coded Stripes Per MIL-STD-681  |   |  |
|                           |  |  | 31             |  |                 |  | (Striped wire not available on 67, 69 or 100 pin connectors or for #28, #30 AWG) |   |  |
|                           | <b>Stainless Steel Shell</b><br>3 – Passivated   |  |                | 37   |                 |  |  |   |  |
|                           |  |  |                | 51   |                 |  |  |   |  |
|                           |  |  |                | 51-2   |                 |  |  |   |  |
|                           |  |  |                | 67   |                 |  |  |   |  |
|                           |  |  |                | 69   |                 |  |  |   |  |
| 100                       |  |  |                |  |                 |  |  |   |  |
| <b>Sample Part Number</b> |  |  |                |  |                 |  |  |   |  |
| MWDM                      | 1  | L –  | 25             | GP –   | 6               | K  | 7 –  | 18  | B  |

## MICRO-D MOUNTING HARDWARE

| B   | P   | M   | M1  | S  | S1   | L   | K  |
|---|---|---|---|--|--|---|--|
|   |   |   |   |  |  |   |  |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable<br>Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head<br>Removable<br>E-ring | <b>Jackscrew</b><br>Hex Head<br>Removable<br>E-ring<br>Extended | <b>Jackscrew</b><br>Slot Head<br>Removable<br>E-ring | <b>Jackscrew</b><br>Slot Head<br>Removable<br>E-ring<br>Extended | <b>Jackscrew</b><br>Hex Head<br>Non-Removable | <b>Jackscrew</b><br>Slot Head<br>Non-Removable<br>Extended |

# Micro-D Metal Shell MWDM Back-To-Back Unshielded Cable Assemblies




## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator        | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

B

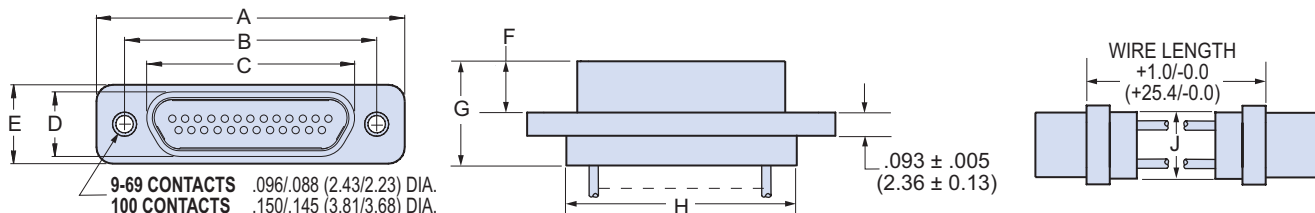

## DIMENSIONS

| Layout | A Max. |       | B              |                | C Max. |       | D Max. |      | E Max. |       | F              |                | G Max. |       | H Max. |       | J Max. |      |
|--------|--------|-------|----------------|----------------|--------|-------|--------|------|--------|-------|----------------|----------------|--------|-------|--------|-------|--------|------|
|        | In.    | mm.   | In. $\pm .003$ | mm. $\pm 0.08$ | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. $\pm .003$ | mm. $\pm 0.08$ | In.    | mm.   | In.    | mm.   | In.    | mm.  |
| 9P     | .785   | 19.94 | .565           | 14.35          | .333   | 8.46  | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .400   | 10.16 | .270   | 6.86 |
| 9S     | .785   | 19.94 | .565           | 14.35          | .400   | 10.16 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .400   | 10.16 | .270   | 6.86 |
| 15P    | .935   | 23.75 | .715           | 18.16          | .483   | 12.27 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .550   | 13.97 | .270   | 6.86 |
| 15S    | .935   | 23.75 | .715           | 18.16          | .551   | 14.00 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .550   | 13.97 | .270   | 6.86 |
| 21P    | 1.085  | 27.56 | .865           | 21.97          | .633   | 16.08 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .700   | 17.78 | .270   | 6.86 |
| 21S    | 1.085  | 27.56 | .865           | 21.97          | .701   | 17.81 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .700   | 17.78 | .270   | 6.86 |
| 25P    | 1.185  | 30.01 | .965           | 24.51          | .733   | 18.62 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .800   | 20.32 | .270   | 6.86 |
| 25S    | 1.185  | 30.01 | .965           | 24.51          | .801   | 20.35 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .800   | 20.32 | .270   | 6.86 |
| 31P    | 1.335  | 33.91 | 1.115          | 28.32          | .883   | 22.43 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .950   | 24.13 | .270   | 6.86 |
| 31S    | 1.335  | 33.91 | 1.115          | 28.32          | .951   | 24.16 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .950   | 24.13 | .270   | 6.86 |
| 37P    | 1.485  | 37.72 | 1.265          | 32.13          | 1.033  | 26.24 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | 1.100  | 27.94 | .270   | 6.86 |
| 37S    | 1.485  | 37.72 | 1.265          | 32.13          | 1.101  | 27.96 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | 1.100  | 27.94 | .270   | 6.86 |
| 51P    | 1.435  | 36.45 | 1.215          | 30.86          | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .183           | 4.65           | .416   | 10.57 | 1.050  | 26.67 | .310   | 7.87 |
| 51S    | 1.435  | 36.45 | 1.215          | 30.86          | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195           | 4.95           | .429   | 10.90 | 1.050  | 26.67 | .310   | 7.87 |
| 51-2P  | 1.835  | 46.61 | 1.615          | 41.02          | 1.384  | 35.15 | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .416   | 10.57 | 1.450  | 36.83 | .270   | 6.86 |
| 51-2S  | 1.835  | 46.61 | 1.615          | 41.02          | 1.450  | 36.83 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .429   | 10.90 | 1.450  | 36.83 | .270   | 6.86 |
| 67P    | 2.235  | 56.77 | 2.015          | 51.18          | 1.784  | 45.31 | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .416   | 10.57 | 1.850  | 36.83 | .270   | 6.86 |
| 67S    | 2.235  | 56.77 | 2.015          | 51.18          | 1.850  | 46.99 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .429   | 10.90 | 1.850  | 36.83 | .270   | 6.86 |
| 69P    | 1.735  | 44.07 | 1.515          | 38.48          | 1.284  | 32.61 | .224   | 5.69 | .351   | 8.92  | .183           | 4.65           | .416   | 10.57 | 1.350  | 34.29 | .310   | 7.87 |
| 69S    | 1.735  | 44.07 | 1.515          | 38.48          | 1.350  | 34.29 | .293   | 7.44 | .351   | 8.92  | .195           | 4.95           | .429   | 10.90 | 1.350  | 34.29 | .310   | 7.87 |
| 100P   | 2.170  | 55.12 | 1.800          | 45.72          | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | .183           | 4.65           | .416   | 10.57 | 1.442  | 36.63 | .360   | 9.14 |
| 100S   | 2.170  | 55.12 | 1.800          | 45.72          | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195           | 4.95           | .429   | 10.90 | 1.442  | 36.63 | .360   | 9.14 |



**Single-Ended or Double-Ended**—These easy-to-order cable assemblies eliminate the need for expensive assembly labor. 100% tested and ready for use.


**Now With Twisted Pairs**—No need to create a procurement specification for Micro-D cables with twisted pairs. Glenair 177-740 cables are furnished with a full complement of white/blue twisted pair wires.

**Integral Shield Termination**—The connector shell has a platform to accept Band-It shield termination bands. The cable shield braid is attached directly to the connector.


## Save Labor, Reduce Weight and Improve EMI Shielding with Glenair’s Micro-D Shielded Cable Assemblies

Aerospace electronics systems require higher and higher levels of protection from radiated emissions. Glenair’s fully shielded Micro-D cable assemblies meet this need. The cable shield is attached directly onto the one-piece connector shell and secured with a stainless steel **BAND-IT**® clamp. These pre-wired, 100% tested assemblies meet the requirements of MIL-DTL-83513. An optional ground spring on the pin connector assures low shell-to-shell resistance. Available with a variety of wire types and shields, Micro-D shielded assemblies can be ordered in any length, either single-ended or “back-to-back”.


**Ground Spring and EMI Shielding Effectiveness** – A gold-plated stainless steel ground spring on the pin connector mating face offers substantial improvement in EMI protection. The graphs compare identical connectors tested with and without ground springs.



EMI Performance with Ground Spring

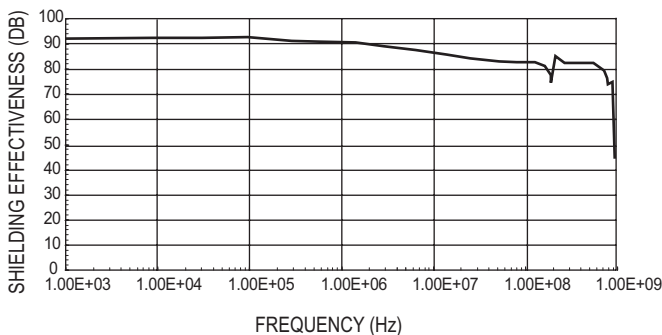

EMI Performance without Ground Spring

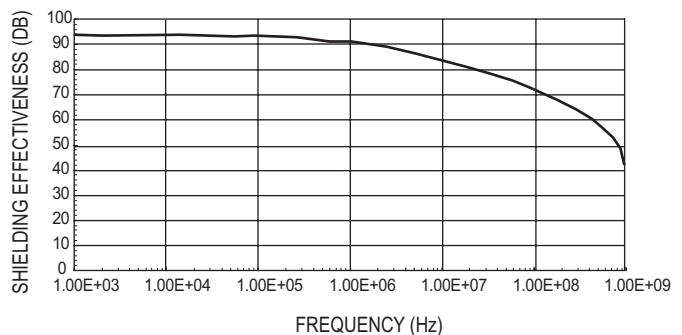

# MWDM Micro-D Shielded Cable Assemblies 177-710 (Untwisted) and 177-740 (Twisted Pairs)



## HOW TO ORDER SHIELDED MICRO-D CABLE ASSEMBLIES

**177-710 - 2 - 25 P 4 K 1 - 24 M A G**

**Basic Number**

- 177-710 – Untwisted Wire
- 177-740 – Twisted Pair Wire

**Shell Plating**

- 1 – Cadmium w/Yellow Chromate\*
- 2 – Electroless Nickel
- 5 – Gold

**Number of Contacts**

- 9, 15, 21, 25, 31, 37, 51, 100

**Contact Type**

- P – Pin (Single End Plug)
- S – Socket (Single End Receptacle)
- GP – Double End Cable, Pin Connectors Both Ends
- GS – Double End Cable, Socket connectors Both Ends
- CS – Double End Cable, Pin and Socket

**Wire Gage (AWG)**

- 4 – #24 Gage
- 6 – #26 Gage
- 8 – #28 Gage
- 0 – #30 Gage

**Wire Type**

- K – Teflon® Wire Per MIL-W-22759/11 (Not available in #30 gage)
- J – Cross-Linked Tefzel® Wire Per MIL-W-22759/33

**Wire Color**

- 1 – White (177-710 only) Or White/Blue Pairs (177-740 Only)
- 5 – Color-Coded Per MIL-STD-681 (177-710 only)(#24 and #26 gage only)  
White/Blue Twisted Pairs With Numbered Wire Markers (177-740 only)
- 7 – Ten Color Repeating (177-710 only)

**Overall Length in Inches**

- 6 Inch (152 mm.) Minimum

**Mounting Hardware**

- |   |   |
|---|---|
| B – No Mounting Hardware Installed          | L – Male Jackscrew, Allen Head, Non-Removable |
| M – Male Jackscrew, Allen Head, Low Profile | F – Float Mount, for Front Panel Mounting     |
| S – Male Jackscrew, Slot Head, Low Profile  | R – Float Mount, for Rear Panel Mounting      |
| P – Female Jackpost                         |   |

**Shield and Jacket Option**

- N – No Shield, No Jacket
- A – Braided Shield Installed
- C – Braided Shield Installed, With E-CTFE Halar “Expando” Jacket (+150° C.)
- D – No Shield, With E-CTFE Halar “Expando” Jacket (+150° C.)

**Ground Spring Option\***

- N – No Ground Spring
- G – Ground Spring Installed (Pin Connectors Only)

**\*Ground Spring cannot be used with Cadmium Plating**



# MWDM Micro-D Shielded Cable Assemblies 177-710 (Untwisted) and 177-740 (Twisted Pairs)


## PERFORMANCE SPECIFICATIONS

|                                 |  |
|---------------------------------|--|
| Current Rating                  | 3 AMP                                    |
| Dielectric Withstanding Voltage | 600 VAC Sea Level<br>150 VAC 70,000 Feet |
| Insulation Resistance           | 5000 Megohms Minimum                     |
| Contact Resistance              | 8 Milliohms Maximum                      |
| Low Level Contact Resistance    | 32 Milliohms Maximum                     |
| Magnetic Permeability           | 2 $\mu$ Maximum                          |
| Operating Temperature           | -55° C. to +150° C.                      |
| Shock                           | 50 g.                                    |
| Vibration                       | 20 g.                                    |
| Outgassing                      | Meets NASA Outgassing Requirements       |
| Mating Force                    | (10 Ounces) X (# of Contacts)            |
| EMI Shielding Effectiveness     | 50 dB Attenuation, 100 MHz to 1000 MHz   |

For additional performance requirements, please refer to MIL-DTL-83513

## MATERIALS AND FINISHES

|                  |  |
|------------------|--|
| Connector Shell  | Plating Code 1: Cadmium With Yellow Chromate<br>Plating Code 2: Electroless Nickel<br>Plating Code 5: Gold   |
| Insulator        | Liquid Crystal Polymer (LCP)   |
| Interfacial Seal | Flourosilicone Rubber, Blue  |
| Pin Contact      | Beryllium Copper With 50 Microinches Gold over Nickel Plating  |
| Socket Contact   | Copper Alloy With 50 Microinches Gold Over Nickel Plating  |
| Hardware         | 300 Series Stainless Steel   |
| Wire             | Type K: per MIL-W-22759/11. Silver-Plated Copper Conductor, Extruded TFE Teflon® Insulation<br>Type J: per MIL-W-22759/33. Silver-Plated Copper Conductor, Extruded Crosslinked Tefzel® Insulation |
| Shield Braid     | #36 AWG Nickel-Coated Copper per ASTM B355 Class 4 OFHC  |
| Jacket           | Type B: PET Expando Braided Jacket, +125° C.<br>Type C: E-CTFE (Ethylene-Chlorotriflourethylene) Halar Expando Braided Jacket, +150° C.  |
| Encapsulant      | Epoxy Resin Hysol EE4215   |

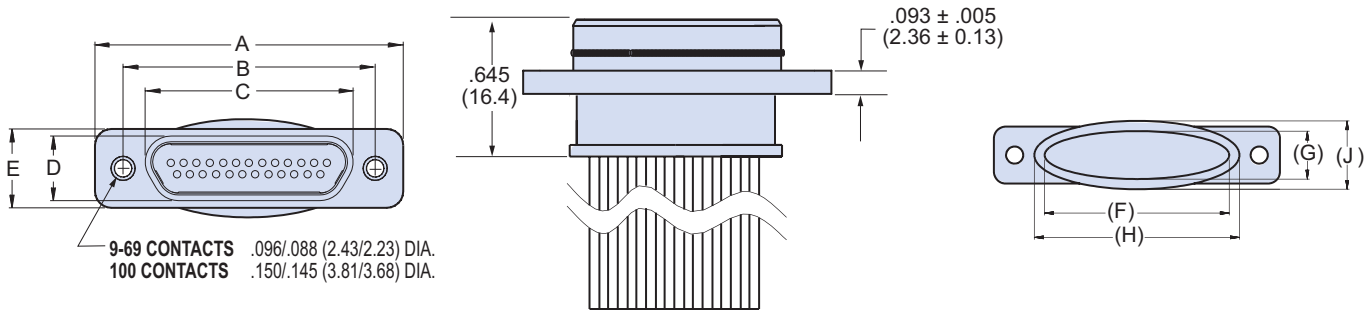


## DIMENSIONS

| Layout | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |       | F     |       | G    |      | H     |       | J    |       |
|--------|--------|-------|------------|------------|--------|-------|--------|------|--------|-------|-------|-------|------|------|-------|-------|------|-------|
|        | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In.   | mm.   | In.  | mm.  | In.   | mm.   | In.  | mm.   |
| 9      | .785   | 19.94 | .565       | 14.35      | .333   | 8.46  | .184   | 4.67 | .308   | 7.82  | .340  | 8.64  | .214 | 5.44 | .450  | 11.43 | .324 | 8.23  |
| 15     | .935   | 23.75 | .715       | 18.16      | .483   | 12.27 | .184   | 4.67 | .308   | 7.82  | .490  | 12.45 | .214 | 5.44 | .600  | 15.24 | .324 | 8.23  |
| 21     | 1.085  | 27.56 | .865       | 21.97      | .633   | 16.08 | .184   | 4.67 | .308   | 7.82  | .640  | 16.26 | .214 | 5.44 | .750  | 19.05 | .324 | 8.23  |
| 25     | 1.185  | 30.01 | .965       | 24.51      | .733   | 18.62 | .184   | 4.67 | .308   | 7.82  | .740  | 18.80 | .214 | 5.44 | .850  | 21.59 | .324 | 8.23  |
| 31     | 1.335  | 33.91 | 1.115      | 28.32      | .883   | 22.43 | .184   | 4.67 | .308   | 7.82  | .890  | 22.61 | .214 | 5.44 | 1.000 | 25.40 | .324 | 8.23  |
| 37     | 1.485  | 37.72 | 1.265      | 32.13      | 1.033  | 26.24 | .184   | 4.67 | .308   | 7.82  | 1.040 | 26.42 | .214 | 5.44 | 1.150 | 29.21 | .324 | 8.23  |
| 51     | 1.435  | 36.45 | 1.215      | 30.86      | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .990  | 24.15 | .257 | 6.53 | 1.100 | 27.94 | .367 | 9.32  |
| 100    | 2.170  | 55.12 | 1.800      | 45.72      | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | 1.385 | 35.18 | .307 | 7.80 | 1.495 | 37.97 | .417 | 10.59 |


# MWDM Micro-D Shielded Cable Assemblies 177-710 (Untwisted) and 177-740 (Twisted Pairs)




## 177-740 TWISTED PAIR WIRING DIAGRAM




**9 Contacts**




**15 Contacts**

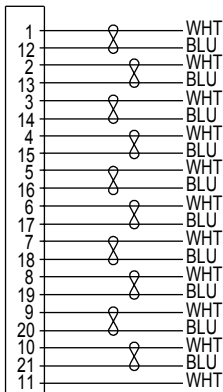


**21 Contacts**

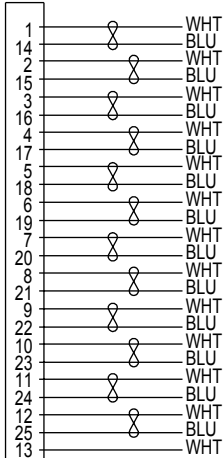


**25 Contacts**

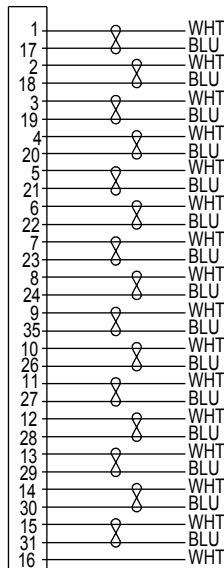


**31 Contacts**

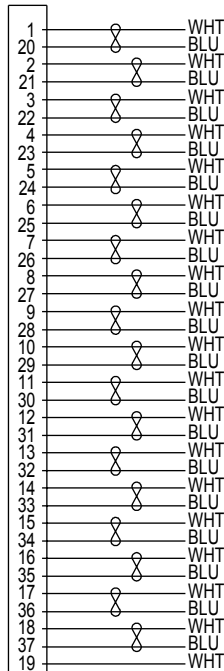


**37 Contacts**

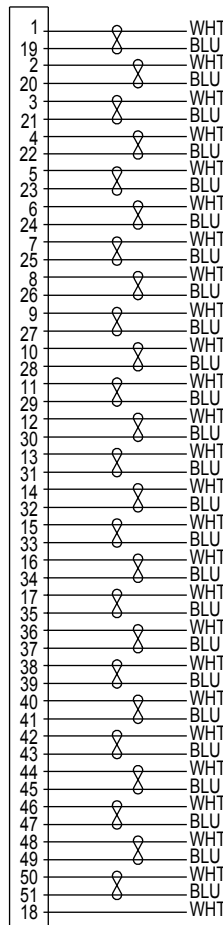

**51 Contacts**

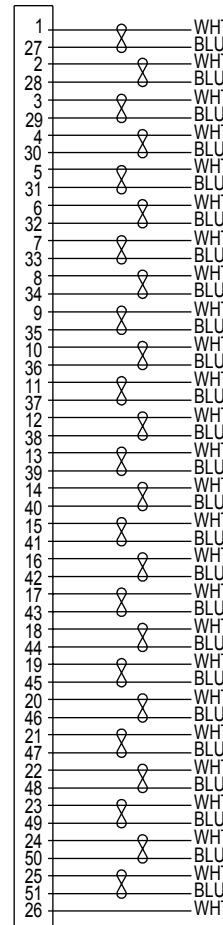

**51-2 Contacts  
(Special 2-Row)**

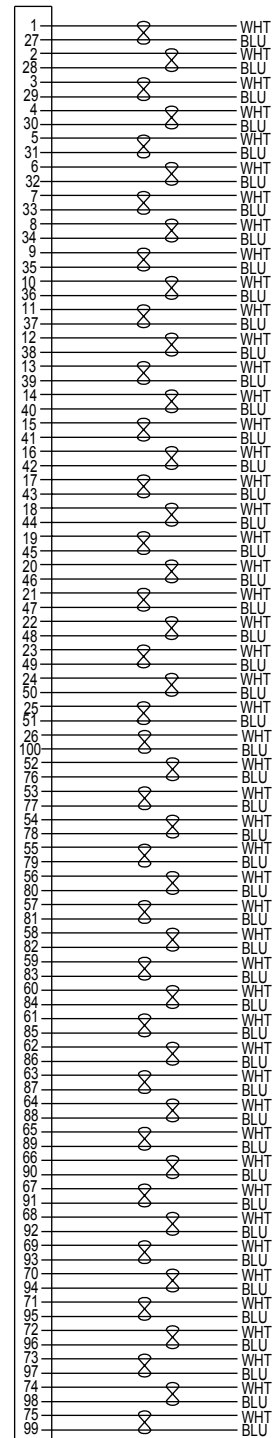

**100 Contacts**







## Micro-D Metal Shell MWDM Uninsulated Wire Pigtails



**Micro-D Uninsulated Pigtails**—These connectors feature gold-plated TwistPin contacts and mil spec crimp termination to gold-plated single strand copper wire. Suitable for soldering or splicing applications, the wire leads can be ordered either gold-plated or solder-dipped.

**New One-Piece Socket Contact**—An “integral tail” socket contact is now standard on all socket connectors ordered with up to one inch of wire. This phos bronze contact eliminates the crimp joint and offers greater rigidity.

### HOW TO ORDER METAL SHELL PIGTAILS, UNINSULATED WIRE MICRO-D CONNECTORS

| Series | Shell Material and Finish    | Insulator Material                                     | Contact Layout | Contact Type          | Wire Gage (AWG)                                       | Wire Type                | Wire Finish                   | Wire Length Inches  | Hardware   |     |    |     |   |   |     |      |   |
|--------|------------------------------|--|----------------|-----------------------|---|--------------------------|-------------------------------|---|--|-----|----|-----|---|---|-----|------|---|
| MWDM   | <b>Aluminum Shell</b>        | L – LCP<br><br>30% Glass-Filled Liquid Crystal Polymer | <b>9</b>       | P – Pin<br>S – Socket | 4 – #24 (.020")<br>5 – #25 (.018")<br>6 – #26 (.016") | C – Single Strand Copper | 3 – Solder-Dipped<br>4 – Gold | .125<br>.250<br>.375<br>.500<br>.750<br>1.000<br>2.000<br><br>Wire Length In Inches. "500" Specifies Half Inch. | B<br>P<br>M<br>M1<br>S<br>S1<br>L<br>K<br>F<br>R |     |    |     |   |   |     |      |   |
|        | 1 – Cadmium                  |  | 15             |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        | 2 – Nickel                   |  | 21             |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        | 4 – Black Anodize            |  | 25             |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        | 5 – Gold                     |  | 31             |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        | 6 – Chem Film                |  | 37             |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        |                              |  | 51             |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        |                              |  | 51-2           |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        | <b>Stainless Steel Shell</b> |  | 67             |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        |                              |  | 69             |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        | 3 – Passivated               |  | 100            |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        | <b>Sample Part Number</b>    |  |                |                       |   |                          |                               |   |  |     |    |     |   |   |     |      |   |
|        | MWDM                         |  | 2              |                       |   |                          |                               |   |  | L – | 37 | P – | 5 | C | 4 – | .250 | M |

### MICRO-D MOUNTING HARDWARE

| B   | P  | M   | M1   | S  | S1  | L  | K  | F  | R   |
|---|--|---|--|--|---|--|--|--|---|
|   |  |   |  |  |   |  |  |  |   |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head Removable E-ring | <b>Jackscrew</b><br>Hex Head Removable E-ring Extended | <b>Jackscrew</b><br>Slot Head Removable E-ring | <b>Jackscrew</b><br>Slot Head Removable E-ring Extended | <b>Jackscrew</b><br>Hex Head Non-Removable | <b>Jackscrew</b><br>Slot Head Non-Removable Extended | <b>Float Mount</b><br>For Front Panel Mounting | <b>Float Mount</b><br>For Rear Panel Mounting |

# Micro-D Metal Shell MWDM Uninsulated Wire Pigtails




## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator        | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

B

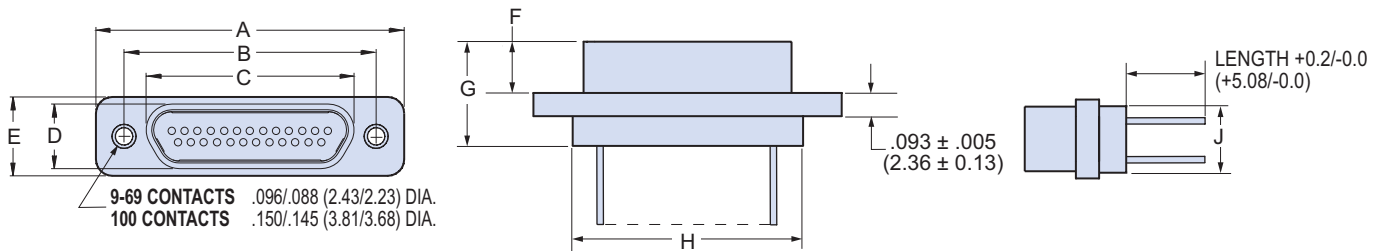

## DIMENSIONS

| Layout | A Max. |       | B              |                | C Max. |       | D Max. |      | E Max. |       | F              |                | G Max. |       | H Max. |       | J Max. |      |
|--------|--------|-------|----------------|----------------|--------|-------|--------|------|--------|-------|----------------|----------------|--------|-------|--------|-------|--------|------|
|        | In.    | mm.   | In. $\pm .003$ | mm. $\pm 0.08$ | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. $\pm .003$ | mm. $\pm 0.08$ | In.    | mm.   | In.    | mm.   | In.    | mm.  |
| 9P     | .785   | 19.94 | .565           | 14.35          | .333   | 8.46  | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .400   | 10.16 | .270   | 6.86 |
| 9S     | .785   | 19.94 | .565           | 14.35          | .400   | 10.16 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .400   | 10.16 | .270   | 6.86 |
| 15P    | .935   | 23.75 | .715           | 18.16          | .483   | 12.27 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .550   | 13.97 | .270   | 6.86 |
| 15S    | .935   | 23.75 | .715           | 18.16          | .551   | 14.00 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .550   | 13.97 | .270   | 6.86 |
| 21P    | 1.085  | 27.56 | .865           | 21.97          | .633   | 16.08 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .700   | 17.78 | .270   | 6.86 |
| 21S    | 1.085  | 27.56 | .865           | 21.97          | .701   | 17.81 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .700   | 17.78 | .270   | 6.86 |
| 25P    | 1.185  | 30.01 | .965           | 24.51          | .733   | 18.62 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .800   | 20.32 | .270   | 6.86 |
| 25S    | 1.185  | 30.01 | .965           | 24.51          | .801   | 20.35 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .800   | 20.32 | .270   | 6.86 |
| 31P    | 1.335  | 33.91 | 1.115          | 28.32          | .883   | 22.43 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | .950   | 24.13 | .270   | 6.86 |
| 31S    | 1.335  | 33.91 | 1.115          | 28.32          | .951   | 24.16 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | .950   | 24.13 | .270   | 6.86 |
| 37P    | 1.485  | 37.72 | 1.265          | 32.13          | 1.033  | 26.24 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | 1.100  | 27.94 | .270   | 6.86 |
| 37S    | 1.485  | 37.72 | 1.265          | 32.13          | 1.101  | 27.96 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | 1.100  | 27.94 | .270   | 6.86 |
| 51P    | 1.435  | 36.45 | 1.215          | 30.86          | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .183           | 4.65           | .416   | 10.57 | 1.050  | 26.67 | .310   | 7.87 |
| 51S    | 1.435  | 36.45 | 1.215          | 30.86          | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195           | 4.95           | .429   | 10.90 | 1.050  | 26.67 | .310   | 7.87 |
| 51-2P  | 1.835  | 46.61 | 1.615          | 41.02          | 1.384  | 35.15 | .184   | 4.67 | .308   | 7.82  | .183           | 4.65           | .416   | 10.57 | 1.450  | 36.83 | .270   | 6.86 |
| 51-2S  | 1.835  | 46.61 | 1.615          | 41.02          | 1.450  | 36.83 | .250   | 6.35 | .308   | 7.82  | .195           | 4.95           | .429   | 10.90 | 1.450  | 36.83 | .270   | 6.86 |
| 67P    | 2.235  | 56.77 | 2.015          | 51.18          | 1.784  | 45.31 | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .416   | 10.57 | 1.850  | 36.83 | .270   | 6.86 |
| 67S    | 2.235  | 56.77 | 2.015          | 51.18          | 1.850  | 46.99 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .429   | 10.90 | 1.850  | 36.83 | .270   | 6.86 |
| 69P    | 1.735  | 44.07 | 1.515          | 38.48          | 1.284  | 32.61 | .224   | 5.69 | .351   | 8.92  | .183           | 4.65           | .416   | 10.57 | 1.350  | 34.29 | .310   | 7.87 |
| 69S    | 1.735  | 44.07 | 1.515          | 38.48          | 1.350  | 34.29 | .293   | 7.44 | .351   | 8.92  | .195           | 4.95           | .429   | 10.90 | 1.350  | 34.29 | .310   | 7.87 |
| 100P   | 2.170  | 55.12 | 1.800          | 45.72          | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | .183           | 4.65           | .416   | 10.57 | 1.442  | 36.63 | .360   | 9.14 |
| 100S   | 2.170  | 55.12 | 1.800          | 45.72          | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195           | 4.95           | .429   | 10.90 | 1.442  | 36.63 | .360   | 9.14 |



## Micro-D Metal Shell GMDE Environmentally Sealed Panel Mount With O-Ring



**RMI**

### RMI Style

Blind tapped mounting holes with stainless steel inserts accommodate either #4-40 or M3 mounting screws. Connectors are supplied with jackposts installed. Socket connectors feature integral jackposts.



**CMI**

### CMI Style

Space-saving design uses rear panel mount jackposts to attach connectors to the panel.

**Choose the Style That Meets Your Needs**— **RMI** version features blind tapped mounting holes, allowing secure installation on panels. **CMI** version saves space by using rear panel jackposts to attach the connector.

**Mates to Standard M83513 Connectors**— GMDE connectors meet the requirements of MIL-DTL-83513 and feature TwistPin contacts for best performance.

**Meets MIL-STD-810 Immersion**— The nitrile O-ring and a special epoxy wire sealing process allow GMDE connectors to meet immersion requirements.

## Protect Your Equipment with Ruggedized Micro-D Connectors

Tactical communications boxes must be sealed to prevent water ingress. Standard M83513 type Micro connectors can be difficult to seal to a bulkhead. The flange is too narrow for a gasket, and sealing with RTV can be time-consuming and messy. The Glenair GMDE connector with O-rings provide a better way to seal the connector.


### HOW TO ORDER GMDE CONNECTORS

| Series                    | Shell Material and Finish | Layout | Contact Type | Flange Style | Wire Gauge (AWG) | Wire Type   | Wire Color   | Wire Length Inches  | Hardware  |
|---------------------------|---------------------------|--------|--------------|--------------|------------------|---|--|---|---|
| GMDE                      | 1 – Cadmium               | 9      | P – Pin      | RMI          | 4 – #24          | <b>K</b> – M22759/11<br>600 Vrms Teflon® (TFE)<br><br><b>J</b> – M22759/33<br>600 Vrms Modified Cross-Linked Tefzel® (ETFE)<br><br><b>E</b> – NEMA HP3-EB<br>600 Vrms Type E M16878/4 (TFE) | 1 – White  | <b>18</b><br><br>Wire Length In Inches. "18" Specifies 18 Inches. | <b>RMI Style Only</b><br><br><b>SM</b><br><br>Furnished with Jackposts and M3 Mounting Holes<br><br><b>SU</b><br><br>Furnished with Jackposts and #4-40 Mounting Holes<br><br><b>CMI Style Only</b><br><br>Jackposts for Rear Panel Mount<br><br><b>T</b> – .094 (2.4)<br><b>V</b> – .062 (1.6)<br><br><b>W</b> – .047 (1.2)<br><b>X</b> – .031 (0.8)<br><b>Y</b> – .023 (0.65) |
|                           | 2 – Electroless Nickel    | 15     | S – Socket   | CMI          | 6 – #26          |   | 2 – Yellow   |   |   |
|                           | 4 – Black Anodize         | 21     |              |              | 8 – #28          |   | 5 – Color-Coded Stripes Per MIL-STD-681                                      |   |   |
|                           | 5 – Gold                  | 25     |              |              | 0 – #30          |   | (Striped wire not available on 67 or 100 pin connectors or for #28, #30 AWG) |   |   |
|                           | 6 – Chem Film             | 31     |              |              |                  |   | 7 – Ten Color Repeating  |   |   |
|                           |                           | 37     |              |              |                  |   |  |   |   |
|                           |                           | 51     |              |              |                  |   |  |   |   |
|                           |                           | 51-2   |              |              |                  |   |  |   |   |
|                           |                           | 67     |              |              |                  |   |  |   |   |
|                           |                           | 100    |              |              |                  |   |  |   |   |
| <b>Sample Part Number</b> |                           |        |              |              |                  |   |  |   |   |
| GMDE                      | 2                         | 25     | S –          | RMI          | 4                | K   | 7 –  | 18  | SM  |

# Micro-D Metal Shell GMDE Environmentally Sealed Panel Mount With O-Ring



Micro-D  
Harness

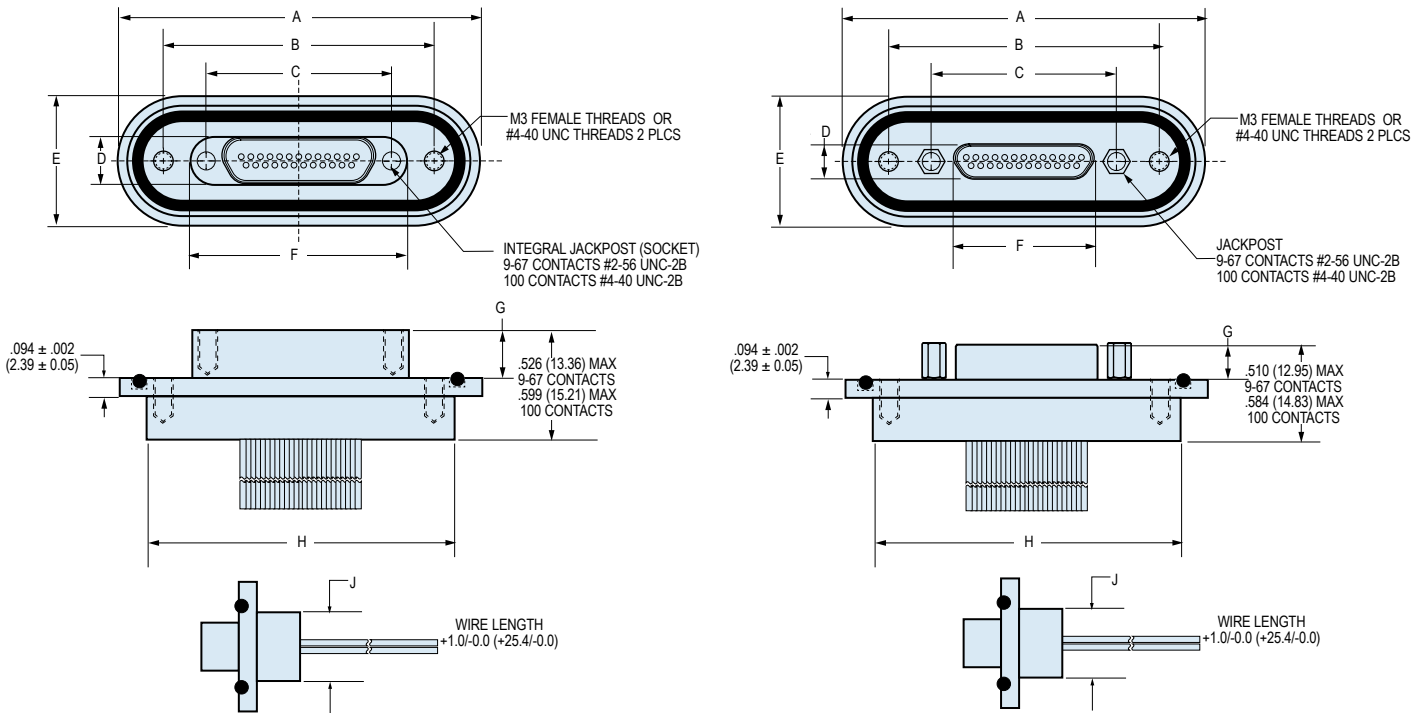


## GMDE RMI DIMENSIONS



| Layout | A Max. |       | B         |           | C         |           | D Max. |      | E Max. |       | F Max. |       | G         |           | H Max. |       | J Max. |       |
|--------|--------|-------|-----------|-----------|-----------|-----------|--------|------|--------|-------|--------|-------|-----------|-----------|--------|-------|--------|-------|
|        | In.    | mm.   | In. ±.003 | mm. ±.008 | In. ±.003 | mm. ±.008 | In.    | mm.  | In.    | mm.   | In.    | mm.   | In. ±.003 | mm. ±.008 | In.    | mm.   | In.    | mm.   |
| 9P     | 1.488  | 37.79 | 1.011     | 25.69     | .565      | 14.35     | .184   | 4.67 | .675   | 17.13 | .333   | 8.46  | .183      | 4.65      | 1.193  | 30.29 | .358   | 9.10  |
| 9S     | 1.488  | 37.79 | 1.011     | 25.69     | .565      | 14.35     | .250   | 6.35 | .675   | 17.13 | .728   | 18.48 | .195      | 4.95      | 1.193  | 30.29 | .358   | 9.10  |
| 15P    | 1.638  | 41.60 | 1.161     | 29.50     | .715      | 18.16     | .184   | 4.67 | .675   | 17.13 | .483   | 12.27 | .183      | 4.65      | 1.343  | 34.10 | .358   | 9.10  |
| 15S    | 1.638  | 41.60 | 1.161     | 29.50     | .715      | 18.16     | .250   | 6.35 | .675   | 17.13 | .878   | 22.29 | .195      | 4.95      | 1.343  | 34.10 | .358   | 9.10  |
| 21P    | 1.788  | 45.41 | 1.311     | 33.31     | .865      | 21.97     | .184   | 4.67 | .675   | 17.13 | .633   | 16.08 | .183      | 4.65      | 1.532  | 38.91 | .358   | 9.10  |
| 21S    | 1.788  | 45.41 | 1.311     | 33.31     | .865      | 21.97     | .250   | 6.35 | .675   | 17.13 | 1.028  | 26.10 | .195      | 4.95      | 1.532  | 38.91 | .358   | 9.10  |
| 25P    | 1.888  | 47.95 | 1.411     | 35.85     | .965      | 24.51     | .184   | 4.67 | .675   | 17.13 | .733   | 18.62 | .183      | 4.65      | 1.593  | 40.45 | .358   | 9.10  |
| 25S    | 1.888  | 47.95 | 1.411     | 35.85     | .965      | 24.51     | .250   | 6.35 | .675   | 17.13 | 1.128  | 28.64 | .195      | 4.95      | 1.593  | 40.45 | .358   | 9.10  |
| 31P    | 2.038  | 51.76 | 1.561     | 39.66     | 1.115     | 28.32     | .184   | 4.67 | .675   | 17.13 | .883   | 22.43 | .183      | 4.65      | 1.743  | 44.26 | .358   | 9.10  |
| 31S    | 2.038  | 51.76 | 1.561     | 39.66     | 1.115     | 28.32     | .250   | 6.35 | .675   | 17.13 | 1.278  | 32.45 | .195      | 4.95      | 1.743  | 44.26 | .358   | 9.10  |
| 37P    | 2.188  | 55.57 | 1.711     | 43.47     | 1.265     | 32.13     | .184   | 4.67 | .675   | 17.13 | 1.033  | 26.24 | .183      | 4.65      | 1.893  | 48.07 | .358   | 9.10  |
| 37S    | 2.188  | 55.57 | 1.711     | 43.47     | 1.265     | 32.13     | .250   | 6.35 | .675   | 17.13 | 1.428  | 36.26 | .195      | 4.95      | 1.893  | 48.07 | .358   | 9.10  |
| 51P    | 2.138  | 54.30 | 1.661     | 42.40     | 1.215     | 30.86     | .224   | 5.69 | .714   | 18.13 | .983   | 24.97 | .183      | 4.65      | 1.843  | 46.80 | .358   | 9.10  |
| 51S    | 2.138  | 54.30 | 1.661     | 42.40     | 1.215     | 30.86     | .293   | 7.44 | .714   | 18.13 | 1.378  | 34.99 | .195      | 4.95      | 1.843  | 46.80 | .358   | 9.10  |
| 51-2P  | 2.538  | 64.46 | 2.061     | 52.36     | 1.615     | 41.02     | .184   | 4.67 | .675   | 17.13 | 1.384  | 35.15 | .183      | 4.65      | 2.243  | 56.96 | .358   | 9.10  |
| 51-2S  | 2.538  | 64.46 | 2.061     | 52.36     | 1.615     | 41.02     | .250   | 6.35 | .675   | 17.13 | 1.778  | 45.15 | .195      | 4.95      | 2.243  | 56.96 | .358   | 9.10  |
| 67P    | 2.938  | 74.62 | 2.461     | 62.52     | 1.515     | 38.48     | .184   | 5.69 | .675   | 17.13 | 1.284  | 32.61 | .183      | 4.65      | 2.643  | 67.12 | .358   | 9.10  |
| 67S    | 2.938  | 74.62 | 2.461     | 62.52     | 1.515     | 38.48     | .250   | 7.44 | .675   | 17.13 | 2.178  | 55.31 | .195      | 4.95      | 2.643  | 67.12 | .358   | 9.10  |
| 100P   | 2.820  | 71.62 | 2.312     | 58.72     | 1.800     | 45.72     | .270   | 6.86 | .875   | 22.13 | 1.383  | 35.13 | .183      | 4.65      | 2.493  | 63.32 | .555   | 14.10 |
| 100S   | 2.820  | 71.62 | 2.312     | 58.72     | 1.800     | 45.72     | .333   | 8.46 | .875   | 22.13 | 2.002  | 50.85 | .195      | 4.95      | 2.493  | 63.32 | .555   | 14.10 |

# Micro-D Metal Shell GMDE Environmentally Sealed Panel Mount With O-Ring

B

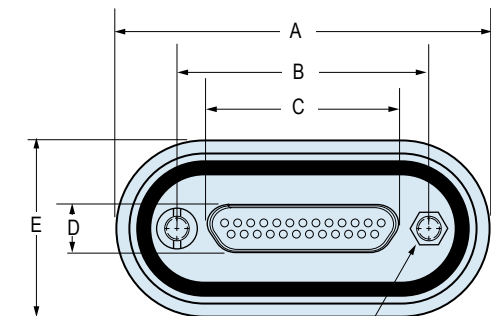

REAR PANEL JACKPOST  
9-67 CONTACTS #2-56 UNC-2B  
100 CONTACTS #4-40 UNC-2B

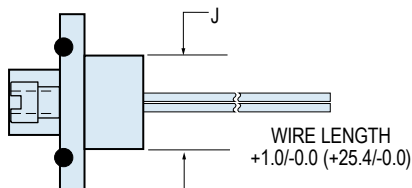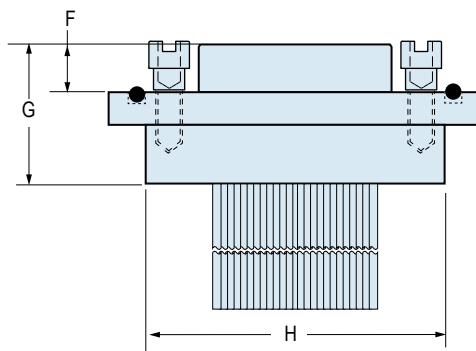



## GMDE CMI DIMENSIONS

| Layout | A Max. |       | B         |           | C Max. |       | D Max. |      | E Max. |       | F Max.    |           | G Max. |       | H Max. |       | J Max. |       |
|--------|--------|-------|-----------|-----------|--------|-------|--------|------|--------|-------|-----------|-----------|--------|-------|--------|-------|--------|-------|
|        | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| 9P     | 1.025  | 26.03 | .565      | 14.35     | .333   | 8.46  | .184   | 4.67 | .675   | 17.13 | .183      | 4.65      | .510   | 12.95 | .795   | 20.13 | .358   | 9.10  |
| 9S     | 1.025  | 26.03 | .565      | 14.35     | .400   | 10.16 | .250   | 6.35 | .675   | 17.13 | .195      | 4.95      | .526   | 13.36 | .795   | 20.13 | .358   | 9.10  |
| 15P    | 1.135  | 28.83 | .715      | 18.16     | .483   | 12.27 | .184   | 4.67 | .675   | 17.13 | .183      | 4.65      | .510   | 12.95 | .950   | 24.13 | .358   | 9.10  |
| 15S    | 1.135  | 28.83 | .715      | 18.16     | .551   | 14.00 | .250   | 6.35 | .675   | 17.13 | .195      | 4.95      | .526   | 13.36 | .950   | 24.13 | .358   | 9.10  |
| 21P    | 1.325  | 33.63 | .865      | 21.97     | .633   | 16.08 | .184   | 4.67 | .675   | 17.13 | .183      | 4.65      | .510   | 12.95 | 1.090  | 27.63 | .358   | 9.10  |
| 21S    | 1.325  | 33.63 | .865      | 21.97     | .701   | 17.81 | .250   | 6.35 | .675   | 17.13 | .195      | 4.95      | .526   | 13.36 | 1.090  | 27.63 | .358   | 9.10  |
| 25P    | 1.430  | 36.33 | .965      | 24.51     | .733   | 18.62 | .184   | 4.67 | .675   | 17.13 | .183      | 4.65      | .510   | 12.95 | 1.190  | 30.13 | .358   | 9.10  |
| 25S    | 1.430  | 36.33 | .965      | 24.51     | .801   | 20.35 | .250   | 6.35 | .675   | 17.13 | .195      | 4.95      | .526   | 13.36 | 1.190  | 30.13 | .358   | 9.10  |
| 31P    | 1.580  | 40.09 | 1.115     | 28.32     | .883   | 22.43 | .184   | 4.67 | .675   | 17.13 | .183      | 4.65      | .510   | 12.95 | 1.345  | 34.13 | .358   | 9.10  |
| 31S    | 1.580  | 40.09 | 1.115     | 28.32     | .951   | 24.16 | .250   | 6.35 | .675   | 17.13 | .195      | 4.95      | .526   | 13.36 | 1.345  | 34.13 | .358   | 9.10  |
| 37P    | 1.725  | 43.83 | 1.265     | 32.13     | 1.033  | 26.24 | .184   | 4.67 | .675   | 17.13 | .183      | 4.65      | .510   | 12.95 | 1.505  | 38.13 | .358   | 9.10  |
| 37S    | 1.725  | 43.83 | 1.265     | 32.13     | 1.101  | 27.96 | .250   | 6.35 | .675   | 17.13 | .195      | 4.95      | .526   | 13.36 | 1.505  | 38.13 | .358   | 9.10  |
| 51P    | 1.675  | 42.53 | 1.215     | 30.86     | .983   | 24.97 | .224   | 5.69 | .714   | 18.14 | .183      | 4.65      | .510   | 12.95 | 1.445  | 36.63 | .358   | 9.10  |
| 51S    | 1.675  | 42.53 | 1.215     | 30.86     | 1.051  | 26.70 | .293   | 7.44 | .714   | 18.14 | .195      | 4.95      | .526   | 13.36 | 1.445  | 36.63 | .358   | 9.10  |
| 51-2P  | 2.075  | 52.63 | 1.615     | 41.02     | 1.384  | 35.15 | .184   | 4.67 | .675   | 17.13 | .183      | 4.65      | .510   | 12.95 | 1.835  | 46.63 | .358   | 9.10  |
| 51-2S  | 2.075  | 52.63 | 1.615     | 41.02     | 1.450  | 36.83 | .250   | 6.35 | .675   | 17.13 | .195      | 4.95      | .526   | 13.36 | 1.835  | 46.63 | .358   | 9.10  |
| 67P    | 2.465  | 62.63 | 1.515     | 38.48     | 1.284  | 32.61 | .184   | 5.69 | .675   | 17.13 | .183      | 4.65      | .510   | 12.95 | 2.250  | 57.13 | .358   | 9.10  |
| 67S    | 2.465  | 62.63 | 1.515     | 38.48     | 1.350  | 34.29 | .250   | 7.44 | .675   | 17.13 | .195      | 4.95      | .526   | 13.36 | 2.250  | 57.13 | .358   | 9.10  |
| 100P   | 2.600  | 63.50 | 1.800     | 45.72     | 1.383  | 35.13 | .270   | 6.86 | .875   | 22.13 | .183      | 4.65      | .585   | 14.83 | 2.135  | 54.13 | .555   | 14.10 |
| 100S   | 2.600  | 63.50 | 1.800     | 45.72     | 1.451  | 36.86 | .333   | 8.46 | .875   | 22.13 | .195      | 4.95      | .600   | 15.24 | 2.135  | 54.13 | .555   | 14.10 |



# Micro-D Metal Shell GMDE Environmentally Sealed Panel Mount With O-Ring



**RMI Version**

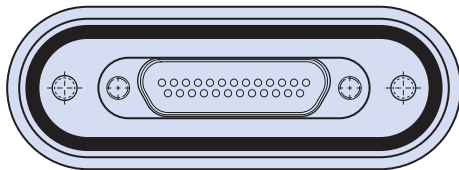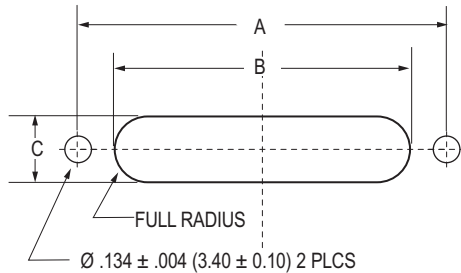

**CMI Version**

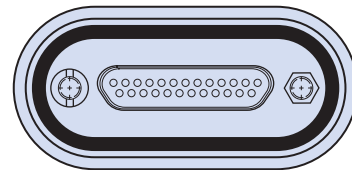


**B**

## GMDE PANEL CUTOUT DIMENSIONS

| Layout      | A             |              | B             |              | C                |                 | D             |              | E             |              | F             |              | G             |              |
|-------------|---------------|--------------|---------------|--------------|------------------|-----------------|---------------|--------------|---------------|--------------|---------------|--------------|---------------|--------------|
|             | In .<br>±.003 | mm.<br>±0.08 | In .<br>±.005 | mm.<br>±0.13 | In .<br>+.005/-0 | mm.<br>+0.13/-0 | In .<br>±.005 | mm.<br>±0.13 | In .<br>±.005 | mm.<br>±0.13 | In .<br>±.002 | mm.<br>±0.05 | In .<br>±.005 | mm.<br>±0.13 |
| <b>9</b>    | 1.011         | 25.69        | .731          | 18.56        | .252             | 6.40            | .565          | 14.35        | .406          | 10.31        | .126          | 3.20         | .256          | 6.50         |
| <b>15</b>   | 1.161         | 29.50        | .881          | 22.37        | .252             | 6.40            | .715          | 18.16        | .556          | 14.12        | .126          | 3.20         | .256          | 6.50         |
| <b>21</b>   | 1.311         | 33.31        | 1.031         | 26.18        | .252             | 6.40            | .865          | 21.97        | .706          | 17.93        | .126          | 3.20         | .256          | 6.50         |
| <b>25</b>   | 1.411         | 35.85        | 1.131         | 28.72        | .252             | 6.40            | .965          | 24.51        | .806          | 20.47        | .126          | 3.20         | .256          | 6.50         |
| <b>31</b>   | 1.561         | 39.66        | 1.281         | 32.53        | .252             | 6.40            | 1.115         | 28.32        | .956          | 24.28        | .126          | 3.20         | .256          | 6.50         |
| <b>37</b>   | 1.711         | 43.47        | 1.431         | 36.34        | .252             | 6.40            | 1.265         | 32.13        | 1.106         | 28.09        | .126          | 3.20         | .256          | 6.50         |
| <b>51</b>   | 1.661         | 42.20        | 1.381         | 35.07        | .295             | 7.50            | 1.215         | 30.86        | 1.056         | 26.82        | .126          | 3.20         | .300          | 7.62         |
| <b>51-2</b> | 2.061         | 52.36        | 1.781         | 45.23        | .252             | 6.40            | 1.615         | 41.02        | 1.456         | 36.98        | .126          | 3.20         | .256          | 6.50         |
| <b>67</b>   | 2.461         | 62.52        | 2.181         | 55.39        | .252             | 6.40            | 1.515         | 38.48        | 2.606         | 66.19        | .126          | 3.20         | .256          | 6.50         |
| <b>100</b>  | 2.312         | 58.72        | 2.005         | 50.93        | .333             | 8.47            | 1.800         | 45.72        | 1.520         | 38.61        | .148          | 3.76         | .406          | 10.31        |

# What's Less than Half the Size and Weight of a D38999 Connector?

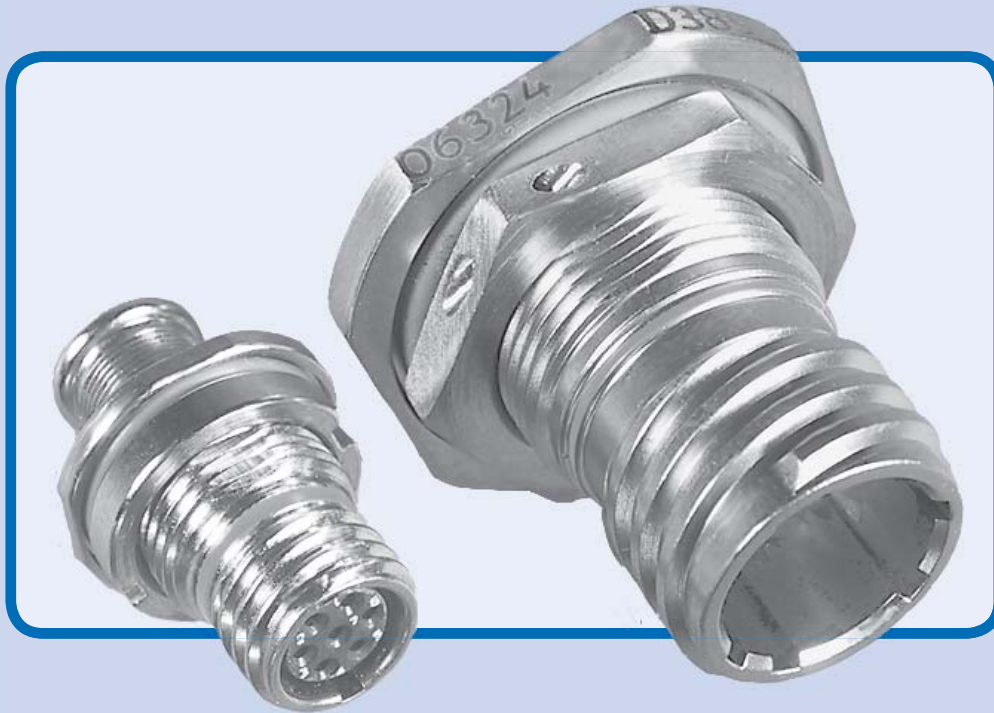

## The Glenair Series 80 "Mighty Mouse"

Nothing tells the "Mighty Mouse" story better than the above picture. If your goal is to maintain the performance standards of the D38999 but to reduce the size and weight of the overall interconnect system, than the Series 80 "Mighty Mouse" is the answer. The "Mighty Mouse" offers up to 71% weight savings when compared to aluminum versions of

the D38999 Series III. Compared to composite D38999's the savings top out at 64%. Size reduction is equally dramatic. And the Series 80 "Mighty Mouse" accommodates the same range of wire sizes as the D38999 and matches the product on critical performance requirements such as vibration and shock. Not bad for a COTS connector. Not bad for a mouse



1211 Air Way

Glendale, California 91201-2497

Telephone: 818-247-6000 · Facsimilie: 818-500-9912 · EMail: sales@glenair.com


United States · United Kingdom · Germany · Nordic · France · Italy · Spain

www.glenair.com


PRODUCT SELECTION GUIDE

**MWDM .100" Pitch  
Thru-Hole Printed  
Circuit Board**


Always in stock, these industry-standard PCB connectors feature 63/37 SnPb solder-dipped .020" diameter tails in eight lengths.



**"BS" Vertical**  
Page C-10




**"BR" 90°**  
Page C-6

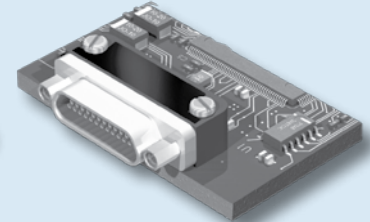

**"CBR" Compact 90°**  
Page C-2

**MWDM .100" X .075" Compact  
Vertical Mount**

A recent addition to the M83513 spec, these connectors save real estate on the circuit board and are also intended for use on flexible circuits.




**"CBS" Vertical Mount**  
Page C-14

**GMR75 .075" X .075" Pitch  
Thru-Hole PCB**

These connectors save size and weight compared to .100" pitch connectors. Available with two standard tail lengths plus a staggered tail version, these connectors also have a full range of mounting hardware options and shell plating options.




**MR7590**  
Page C-28




**MR7580**  
Page C-20

**GMR75C .075" X .075" Pitch  
Compact**

Designed for flexible circuits, these connectors are modified versions of the GMR75 series. The flange thickness is .100" maximum, allowing installation of standard jackscrews.




**MR7580C**  
Page C-24



**MR7590C**  
Page C-32

**MWDM Surface Mount Right Angle**

These connectors feature .025 inch (0.64 mm.) terminal spacing. The integral metal mounting legs provide a ground path. A molded alignment strip ensures accurate terminal registration.




**Surface Mount**  
Page C-36





# Micro-D Metal Shell Printed Circuit Board Connectors CBR Style Right Angle Thru-Hole

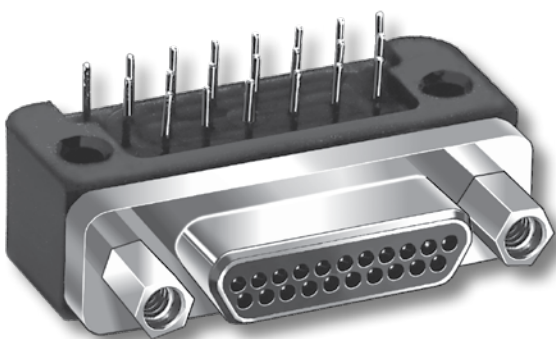

**High Performance** – These connectors feature gold-plated TwistPin contacts for best performance. PC tails are .020 inch diameter. Specify nickel-plated shells or cadmium plated shells for best availability.

**Solder-Dipped** – Terminals are coated with SN63/Pb37 tin-lead solder for best solderability. Optional gold-plated terminals are available for RoHS compliance.

**Front Panel or Rear Mountable** – Can be installed through panels up to .125 inch thick. Specify rear panel mount jackposts.

## HOW TO ORDER CBR STYLE PCB MICRO-D CONNECTORS

| Series | Shell Material and Finish | Insulator Material                                 | Contact Layout | Contact Type   | Termination Type                   | Jackpost Option                 | Threaded Insert Option | Terminal Length In Inches            | Gold-Plated Terminal Mod Code  |                                   |                                     |                      |
|--------|---------------------------|--|----------------|--|------------------------------------|---------------------------------|------------------------|--------------------------------------|--|-----------------------------------|-------------------------------------|----------------------|
| MWDM   | Aluminum Shell            | L – LCP<br>30% Glass-Filled Liquid Crystal Polymer | 9              | P<br>Pin   | CBR<br>Condensed Board Right Angle | (Omit for None)<br>P – Jackpost | T                      | .080                                 | These connectors are solder-dipped in 63/37 tin-lead solder.<br><br>To delete the solder dip and change to gold-plated terminals, add code 513 |                                   |                                     |                      |
|        | 1 – Cadmium               |  | 15             |  |                                    |                                 |                        | S<br>Socket                          |  | Jackposts for Rear Panel Mounting | Threaded Insert In Board Mount Hole | .110                 |
|        | 2 – Nickel                |  | 21             |  |                                    |                                 |                        |                                      |  |                                   |                                     | (Omit for Thru-Hole) |
|        | 4 – Black Anodize         |  | 25             | R1 – .032" Panel<br>R2 – .047" Panel<br>R3 – .062" Panel<br>R4 – .093" Panel<br>R5 – .125" Panel |                                    | .140                            |                        |                                      |  |                                   |                                     |                      |
|        | 5 – Gold                  |  | 31             |  |                                    | .150                            |                        |                                      |  |                                   |                                     |                      |
|        | 6 – Chem Film             |  | 37             |  |                                    | .172                            |                        |                                      |  |                                   |                                     |                      |
|        | Stainless Steel Shell     | 3 – Passivated                                     | 51             |  |                                    |                                 | .190                   | Length in Inches<br>± .015<br>(0.38) |  |                                   |                                     |                      |
|        | 3 – Passivated            |  | 100            |  |                                    |                                 | .250                   |                                      |  |                                   |                                     |                      |

### Sample Part Number

|      |   |   |      |   |     |    |        |
|------|---|---|------|---|-----|----|--------|
| MWDM | 1 | L | - 15 | P | CBR | R3 | - .110 |
|------|---|---|------|---|-----|----|--------|

## MICRO-D JACKPOST OPTIONS

|   |   |   |
|---|---|---|
| <p><b>No Designator</b></p> <p>HEX NUT<br/>EPOXY FILL</p>   | <p><b>P</b></p>   | <p><b>R1 Thru R5</b></p> <p>Panel</p>   |
| <p><b>Thru-Hole</b></p> <p>For use with Glenair jackposts only. Order hardware separately. Install with threadlocking compound.</p> | <p><b>Standard Jackpost</b></p> <p>Factory installed, not intended for removal.</p> | <p><b>Jackpost for Rear Panel Mounting</b></p> <p>Shipped loosely installed. Install with permanent threadlocking compound.</p> |

# Micro-D Metal Shell Printed Circuit Board Connectors CBR Style Right Angle Thru-Hole




Micro-D  
PCB

## PERFORMANCE SPECIFICATIONS


|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES


|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator, Tray  | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| PCB Terminals    | Gold Plated Copper Alloy, Solder Dipped   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

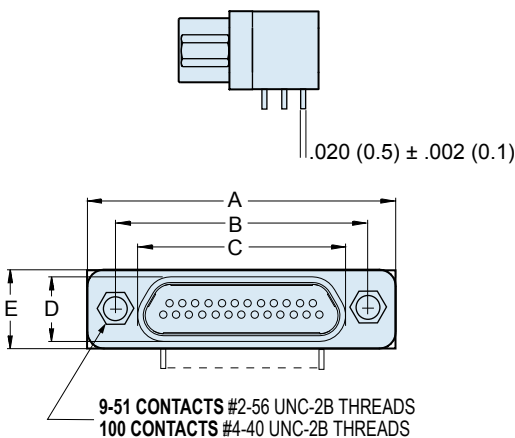

CONFIGURATION FOR 9-25 CONTACTS

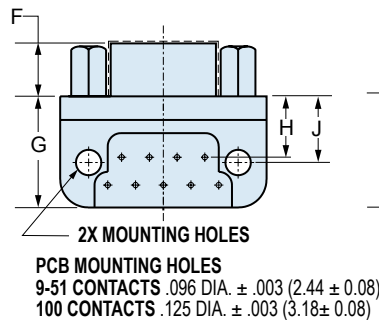

CONFIGURATION FOR 31-100 CONTACTS

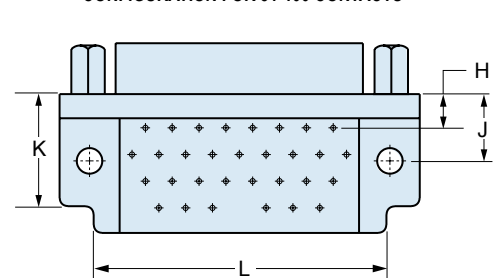


## DIMENSIONS


| Layout | A Max. |       | B         |           | C Max. |       | D Max. |      | E Max. |       | F         |           | G Max. |       | H         |           | J         |           | K Max. |       | L Max. |       |  |
|--------|--------|-------|-----------|-----------|--------|-------|--------|------|--------|-------|-----------|-----------|--------|-------|-----------|-----------|-----------|-----------|--------|-------|--------|-------|--|
|        | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In. ±.010 | mm. ±0.25 | In. ±.010 | mm. ±0.25 | In.    | mm.   | In.    | mm.   |  |
| 9P     | .787   | 19.94 | .565      | 14.35     | .333   | 8.46  | .184   | 4.67 | .310   | 7.87  | .183      | 4.65      | .425   | 10.80 | .230      | 5.84      | .250      | 6.35      |        |       |        |       |  |
| 9S     | .787   | 19.94 | .565      | 14.35     | .400   | 10.16 | .250   | 6.35 | .310   | 7.87  | .195      | 4.95      | .425   | 10.80 | .230      | 5.84      | .250      | 6.35      |        |       |        |       |  |
| 15P    | .937   | 23.75 | .715      | 18.16     | .483   | 12.27 | .184   | 4.67 | .310   | 7.87  | .183      | 4.65      | .425   | 10.80 | .130      | 3.30      | .250      | 6.35      |        |       |        |       |  |
| 15S    | .937   | 23.75 | .715      | 18.16     | .551   | 14.00 | .250   | 6.35 | .310   | 7.87  | .195      | 4.95      | .425   | 10.80 | .130      | 3.30      | .250      | 6.35      |        |       |        |       |  |
| 21P    | 1.087  | 27.56 | .865      | 21.97     | .633   | 16.08 | .184   | 4.67 | .310   | 7.87  | .183      | 4.65      | .425   | 10.80 | .130      | 3.30      | .250      | 6.35      |        |       |        |       |  |
| 21S    | 1.087  | 27.56 | .865      | 21.97     | .701   | 17.81 | .250   | 6.35 | .310   | 7.87  | .195      | 4.95      | .425   | 10.80 | .130      | 3.30      | .250      | 6.35      |        |       |        |       |  |
| 25P    | 1.187  | 30.01 | .965      | 24.51     | .733   | 18.62 | .184   | 4.67 | .310   | 7.87  | .183      | 4.65      | .425   | 10.80 | .130      | 3.30      | .250      | 6.35      |        |       |        |       |  |
| 25S    | 1.187  | 30.01 | .965      | 24.51     | .801   | 20.35 | .250   | 6.35 | .310   | 7.87  | .195      | 4.95      | .425   | 10.80 | .130      | 3.30      | .250      | 6.35      |        |       |        |       |  |
| 31P    | 1.337  | 33.91 | 1.115     | 28.32     | .883   | 22.43 | .184   | 4.67 | .310   | 7.87  | .183      | 4.65      | .525   | 13.34 | .130      | 3.30      | .250      | 6.35      | .450   | 11.43 | 1.085  | 27.56 |  |
| 31S    | 1.337  | 33.91 | 1.115     | 28.32     | .951   | 24.16 | .250   | 6.35 | .310   | 7.87  | .195      | 4.95      | .525   | 13.34 | .130      | 3.30      | .250      | 6.35      | .450   | 11.43 | 1.085  | 27.56 |  |
| 37P    | 1.487  | 37.72 | 1.265     | 32.13     | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87  | .183      | 4.65      | .525   | 13.34 | .130      | 3.30      | .250      | 6.35      | .450   | 11.43 | 1.185  | 30.10 |  |
| 37S    | 1.487  | 37.72 | 1.265     | 32.13     | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87  | .195      | 4.95      | .525   | 13.34 | .130      | 3.30      | .250      | 6.35      | .450   | 11.43 | 1.185  | 30.10 |  |
| 51P    | 1.435  | 36.45 | 1.215     | 30.86     | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .183      | 4.65      | .660   | 16.76 | .150      | 3.81      | .300      | 7.62      | .450   | 11.43 | 1.225  | 31.12 |  |
| 51S    | 1.435  | 36.45 | 1.215     | 30.86     | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195      | 4.95      | .660   | 16.76 | .150      | 3.81      | .300      | 7.62      | .450   | 11.43 | 1.225  | 31.12 |  |
| 100P   | 2.175  | 55.12 | 1.800     | 45.72     | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | .183      | 4.65      | 1.010  | 25.65 | .200      | 5.08      | .400      | 10.16     | .590   | 14.99 | 1.820  | 46.23 |  |
| 100S   | 2.175  | 55.12 | 1.800     | 45.72     | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195      | 4.95      | 1.010  | 25.65 | .200      | 5.08      | .400      | 10.16     | .590   | 14.99 | 1.820  | 46.23 |  |

## MICRO-D CBR BOARD MOUNT CONNECTOR PCB LAYOUTS – PIN CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

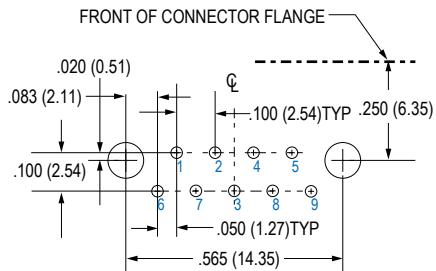


**9 PIN MWDM-9PCBR**

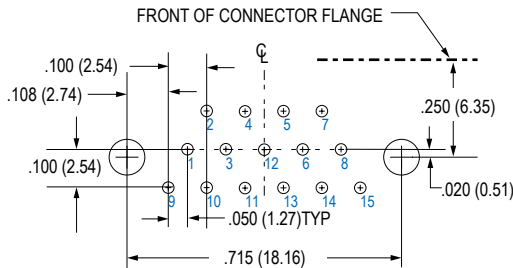


**15 PIN MWDM-15PCBR**

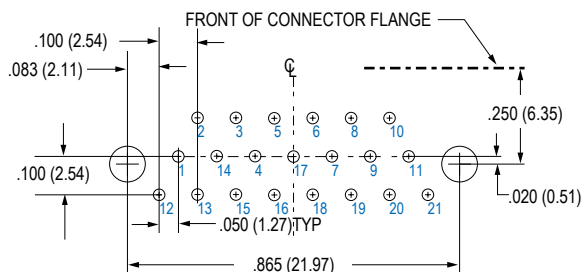


**21 PIN MWDM-21PCBR**

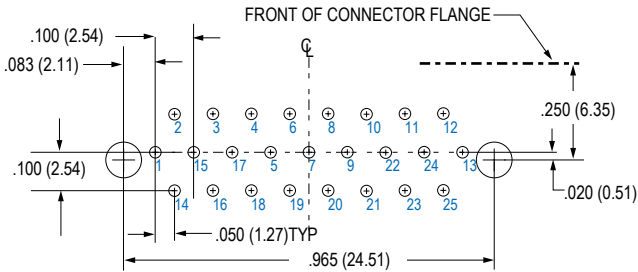


**25 PIN MWDM-25PCBR**

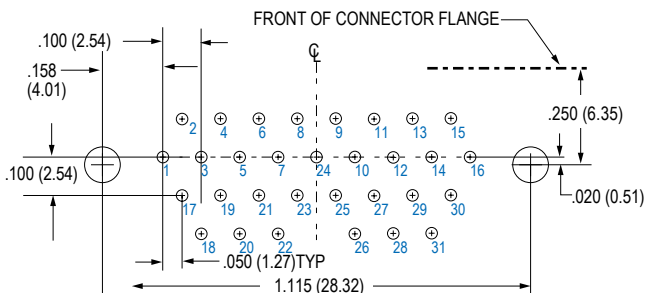


**31 PIN MWDM-31PCBR**

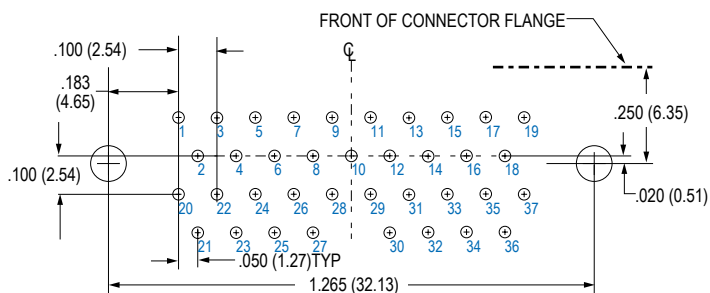

**37 PIN MWDM-37PCBR**

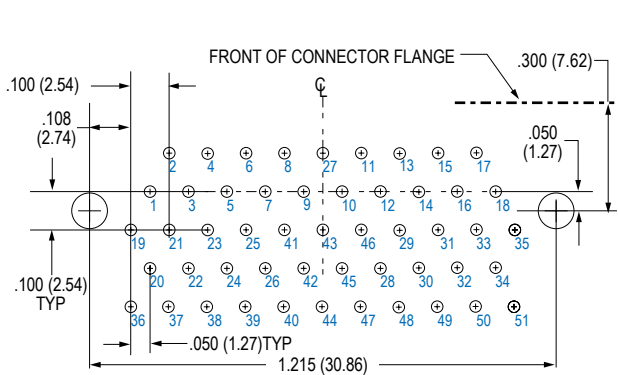

**51 PIN MWDM-51PCBR**

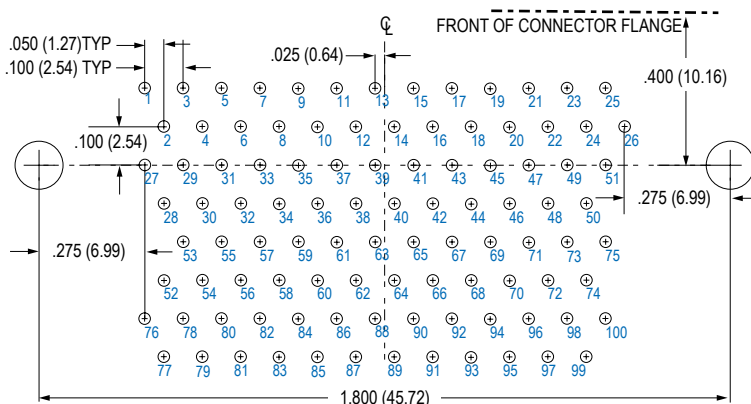


**100 PIN MWDM-100PCBR**

# Micro-D Metal Shell Printed Circuit Board Connectors CBR Style Right Angle Thru-Hole




## MICRO-D CBR BOARD MOUNT CONNECTOR PCB LAYOUTS – SOCKET CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

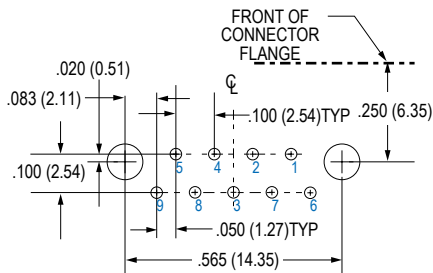


**9 SOCKET MWDM-9SCBR**

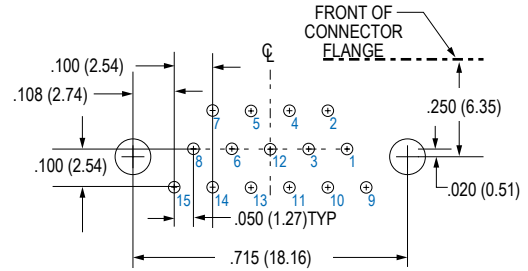


**15 SOCKET MWDM-15SCBR**

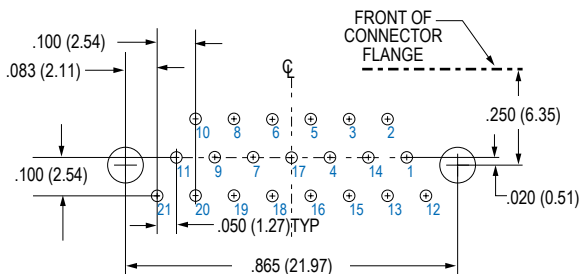


**21 SOCKET MWDM-21SCBR**

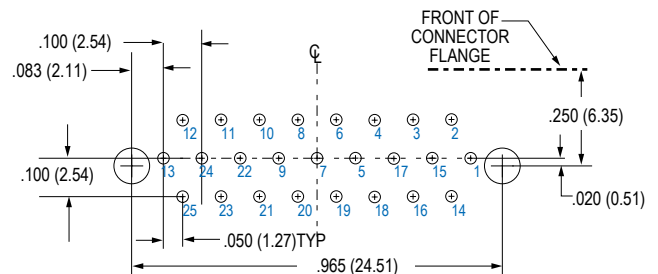


**25 SOCKET MWDM-25SCBR**

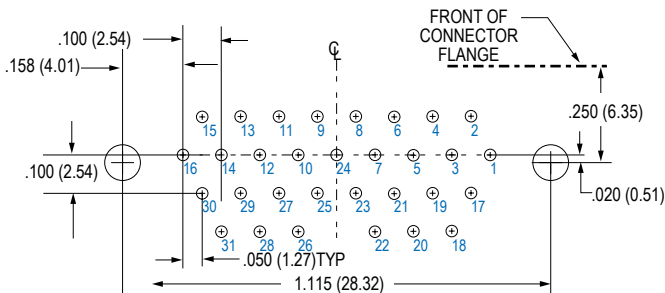


**31 SOCKET MWDM-31SCBR**

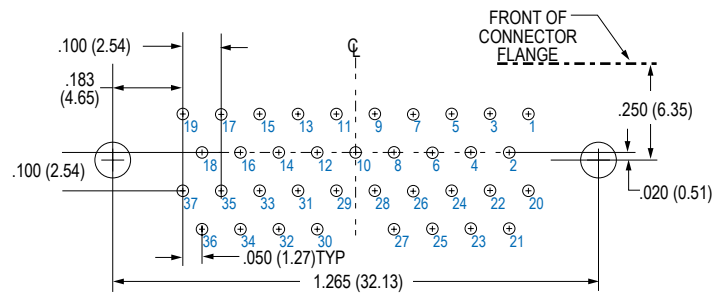

**37 SOCKET MWDM-37SCBR**

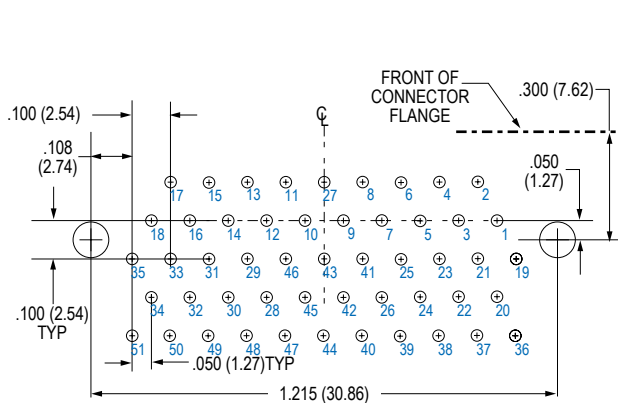


**51 SOCKET MWDM-51SCBR**

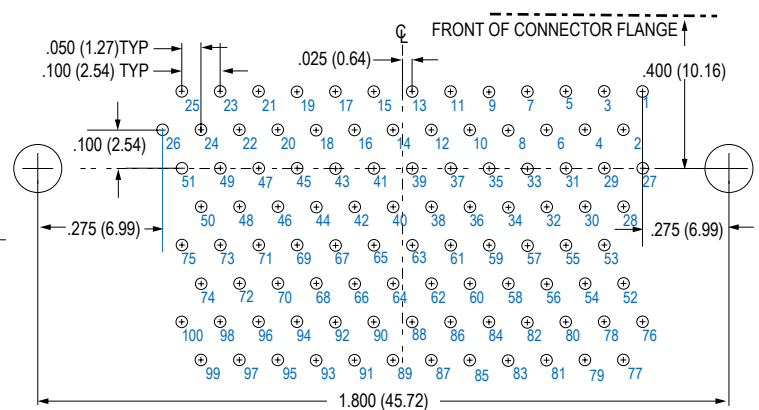

**100 SOCKET MWDM-100SCBR**



# Micro-D Metal Shell Printed Circuit Board Connectors BR Style Right Angle Thru-Hole

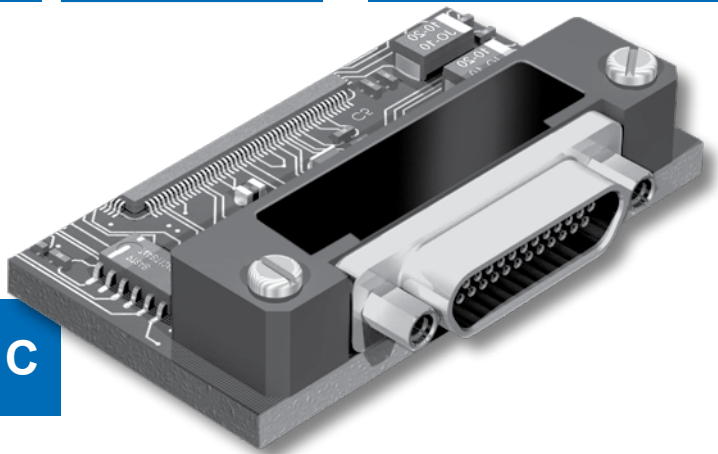

**High Performance**—These connectors feature gold-plated TwistPin contacts for best performance. PC tails are .020 inch diameter. Specify nickel-plated shells or cadmium plated shells for best availability.

**Solder-Dipped**—Terminals are coated with SN63/Pb37 tin-lead solder for best solderability. Optional gold-plated terminals are available for RoHS compliance.

**Front Panel or Rear Mountable**—Can be installed through panels up to .125 inch thick. Specify rear panel mount jackposts.

## HOW TO ORDER BR STYLE PCB MICRO-D CONNECTORS

| Series | Shell Material and Finish | Insulator Material                                 | Contact Layout   | Contact Type     | Termination Type        | Jackpost Option                 | Threaded Insert Option | Terminal Length In Inches            | Gold-Plated Terminal Mod Code  |                                   |
|--------|---------------------------|--|------------------|------------------|-------------------------|---------------------------------|------------------------|--------------------------------------|--|-----------------------------------|
| MWDM   | Aluminum Shell            | L – LCP<br>30% Glass-Filled Liquid Crystal Polymer | 9                | P<br>Pin         | BR<br>Board Right Angle | (Omit for None)<br>P – Jackpost | T                      | .080                                 | These connectors are solder-dipped in 63/37 tin-lead solder.<br><br>To delete the solder dip and change to gold-plated terminals, add code 513 |                                   |
|        | 1 – Cadmium               |  | 15               |                  |                         |                                 |                        | S<br>Socket                          |  | Jackposts for Rear Panel Mounting |
|        | 2 – Nickel                |  | 21               | R1 – .032" Panel |                         | .125                            |                        |                                      |  |                                   |
|        | 4 – Black Anodize         |  | 25               |                  |                         |                                 | R2 – .047" Panel       |                                      |  |                                   |
|        | 5 – Gold                  |  | 31               | R3 – .062" Panel |                         | .150                            |                        |                                      |  |                                   |
|        | 6 – Chem Film             |  | 37               |                  |                         |                                 | R4 – .093" Panel       | .172                                 |  |                                   |
|        | Stainless Steel Shell     | 51   | R5 – .125" Panel | .190             |                         |                                 |                        |                                      |  |                                   |
|        | 3 – Passivated            | 100  |                  | .250             |                         |                                 |                        |                                      |  |                                   |
|        |                           |  |                  |                  |                         |                                 |                        | Length in Inches<br>± .015<br>(0.38) |  |                                   |
|        | <b>Sample Part Number</b> |  |                  |                  |                         |                                 |                        |                                      |  |                                   |
| MWDM   | 1                         | L  | - 15             | P                | BR                      | R3                              |                        | - .110                               |  |                                   |

## MICRO-D JACKPOST OPTIONS

| No Designator  | P  | R1 Thru R5   |
|--|--|--|
| <p>HEX NUT<br/>EPOXY FILL</p>  |  | <p>Panel</p>   |
| <p><b>Thru-Hole</b><br/>For use with Glenair jackposts only. Order hardware separately. Install with threadlocking compound.</p> | <p><b>Standard Jackpost</b><br/>Factory installed, not intended for removal.</p> | <p><b>Jackpost for Rear Panel Mounting</b><br/>Shipped loosely installed. Install with permanent threadlocking compound.</p> |

# Micro-D Metal Shell Printed Circuit Board Connectors BR Style Right Angle Thru-Hole



Micro-D  
PCB


## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator, Tray  | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| PCB Terminals    | Gold Plated Copper Alloy, Solder Dipped   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

C

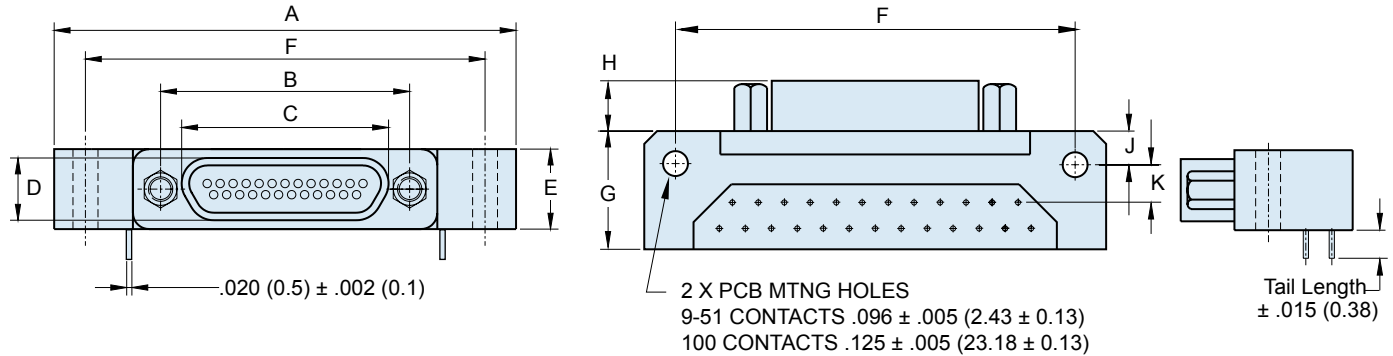


## BR STYLE MICRO-D PCB CONNECTORS

| Layout | A Max. |       | B              |                | C Max. |       | D Max. |      | E Max. |       | F              |                | G Max. |       | H              |                | J              |                | K              |                |
|--------|--------|-------|----------------|----------------|--------|-------|--------|------|--------|-------|----------------|----------------|--------|-------|----------------|----------------|----------------|----------------|----------------|----------------|
|        | In.    | mm.   | In. $\pm .003$ | mm. $\pm 0.08$ | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. $\pm .007$ | mm. $\pm 0.18$ | In.    | mm.   | In. $\pm .003$ | mm. $\pm 0.08$ | In. $\pm .015$ | mm. $\pm 0.38$ | In. $\pm .010$ | mm. $\pm 0.25$ |
| 9P     | 1.390  | 35.31 | .565           | 14.35          | .333   | 8.46  | .184   | 4.67 | .310   | 7.87  | 1.150          | 29.21          | .465   | 11.81 | .183           | 4.65           | .125           | 3.18           | .150           | 3.81           |
| 9S     | 1.390  | 35.31 | .565           | 14.35          | .400   | 10.16 | .250   | 6.35 | .310   | 7.87  | 1.150          | 29.21          | .465   | 11.81 | .195           | 4.95           | .125           | 3.18           | .150           | 3.81           |
| 15P    | 1.540  | 39.12 | .715           | 18.16          | .483   | 12.27 | .184   | 4.67 | .310   | 7.87  | 1.300          | 33.02          | .465   | 11.81 | .183           | 4.65           | .125           | 3.18           | .150           | 3.81           |
| 15S    | 1.540  | 39.12 | .715           | 18.16          | .551   | 14.00 | .250   | 6.35 | .310   | 7.87  | 1.300          | 33.02          | .465   | 11.81 | .195           | 4.95           | .125           | 3.18           | .150           | 3.81           |
| 21P    | 1.690  | 42.93 | .865           | 21.97          | .633   | 16.08 | .184   | 4.67 | .310   | 7.87  | 1.450          | 36.83          | .465   | 11.81 | .183           | 4.65           | .125           | 3.18           | .150           | 3.81           |
| 21S    | 1.690  | 42.93 | .865           | 21.97          | .701   | 17.81 | .250   | 6.35 | .310   | 7.87  | 1.450          | 36.83          | .465   | 11.81 | .195           | 4.95           | .125           | 3.18           | .150           | 3.81           |
| 25P    | 1.790  | 45.47 | .965           | 24.51          | .733   | 18.62 | .184   | 4.67 | .310   | 7.87  | 1.550          | 39.37          | .465   | 11.81 | .183           | 4.65           | .125           | 3.18           | .150           | 3.81           |
| 25S    | 1.790  | 45.47 | .965           | 24.51          | .801   | 20.35 | .250   | 6.35 | .310   | 7.87  | 1.550          | 39.37          | .465   | 11.81 | .195           | 4.95           | .125           | 3.18           | .150           | 3.81           |
| 31P    | 2.040  | 51.82 | 1.115          | 28.32          | .883   | 22.43 | .184   | 4.67 | .310   | 7.87  | 1.800          | 45.72          | .465   | 11.81 | .183           | 4.65           | .125           | 3.18           | .150           | 3.81           |
| 31S    | 2.040  | 51.82 | 1.115          | 28.32          | .951   | 24.16 | .250   | 6.35 | .310   | 7.87  | 1.800          | 45.72          | .465   | 11.81 | .195           | 4.95           | .125           | 3.18           | .150           | 3.81           |
| 37P    | 2.340  | 59.44 | 1.265          | 32.13          | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87  | 2.100          | 53.34          | .465   | 11.81 | .183           | 4.65           | .125           | 3.18           | .150           | 3.81           |
| 37S    | 2.340  | 59.44 | 1.265          | 32.13          | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87  | 2.100          | 53.34          | .465   | 11.81 | .195           | 4.95           | .125           | 3.18           | .150           | 3.81           |
| 51P    | 1.875  | 47.63 | 1.215          | 30.86          | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | 1.600          | 40.64          | .565   | 14.35 | .183           | 4.65           | .125           | 3.18           | .150           | 3.81           |
| 51S    | 1.875  | 47.63 | 1.215          | 30.86          | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | 1.600          | 40.64          | .565   | 14.35 | .195           | 4.95           | .125           | 3.18           | .150           | 3.81           |
| 100P   | 2.780  | 70.60 | 1.800          | 45.72          | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | 2.500          | 63.50          | .765   | 19.43 | .183           | 4.65           | .225           | 5.72           | .150           | 3.81           |
| 100S   | 2.780  | 70.60 | 1.800          | 45.72          | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | 2.500          | 63.50          | .765   | 19.43 | .195           | 4.95           | .225           | 5.72           | .150           | 3.81           |


## MICRO-D BR BOARD MOUNT CONNECTOR PCB LAYOUTS – PIN CONNECTORS

Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter


C

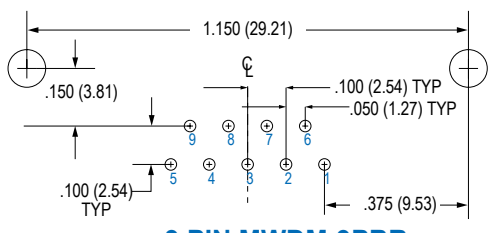


9 PIN MWDM-9PBR

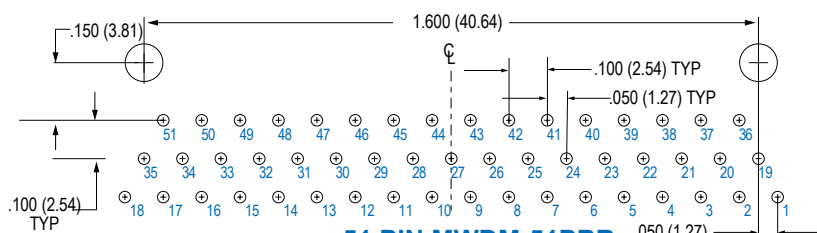


51 PIN MWDM-51PBR

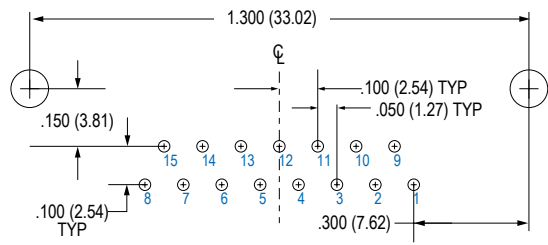


15 PIN MWDM-15PBR

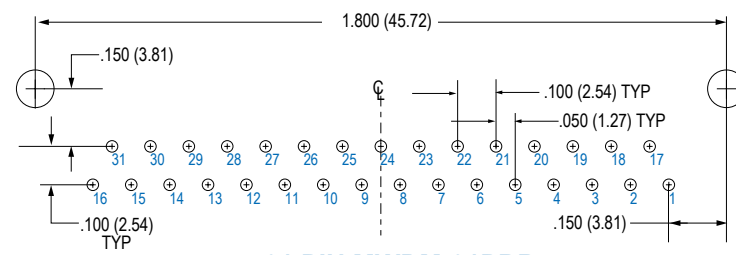


31 PIN MWDM-31PBR

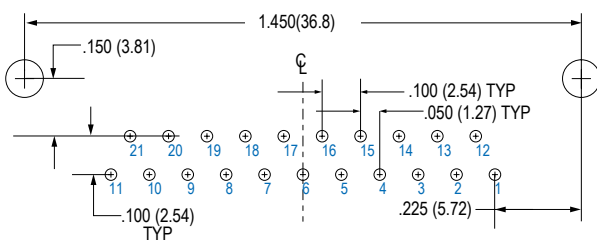


21 PIN MWDM-21PBR

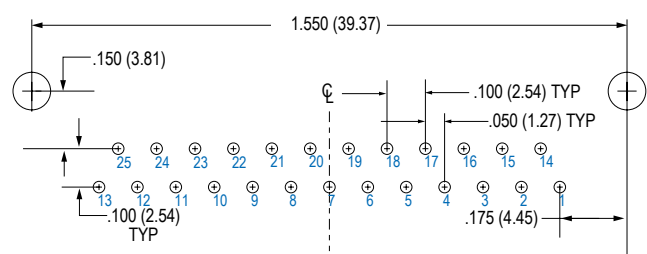

25 PIN MWDM-25PBR

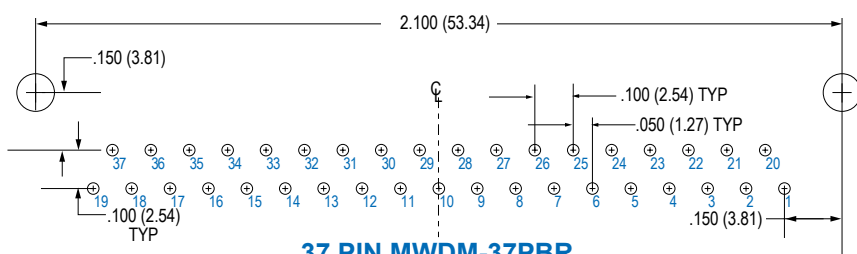


37 PIN MWDM-37PBR

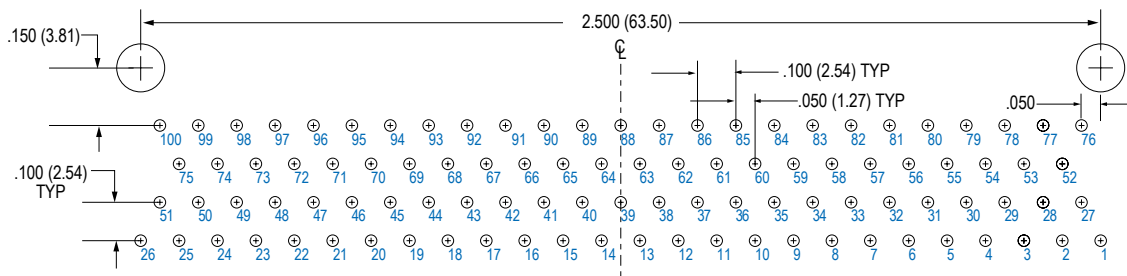


100 PIN MWDM-100PBR

## MICRO-D BR BOARD MOUNT CONNECTOR PCB LAYOUTS – SOCKET CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

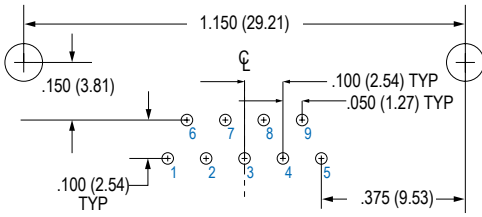


**9 SOCKET MWDM-9SBR**

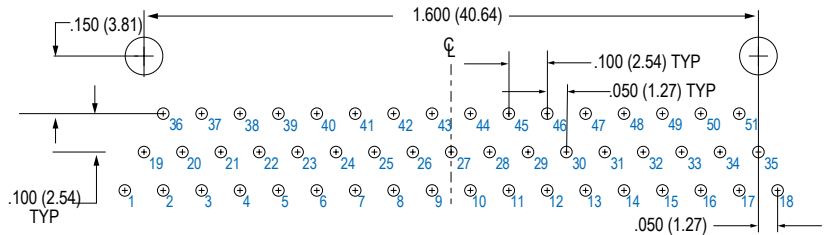


**51 SOCKET MWDM-51SBR**

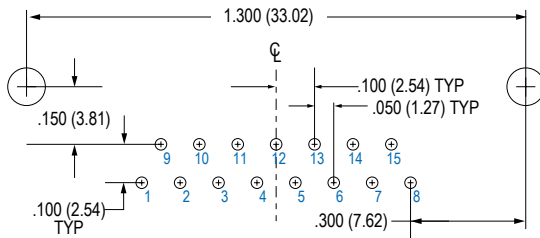


**15 SOCKET MWDM-15SBR**

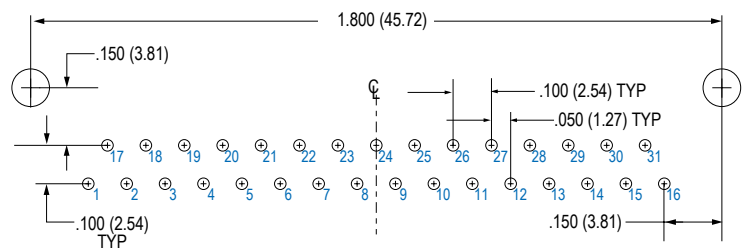


**31 SOCKET MWDM-31SBR**

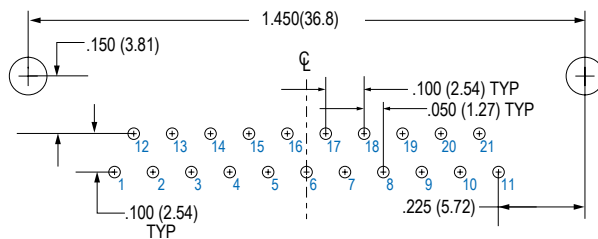


**21 SOCKET MWDM-21SBR**

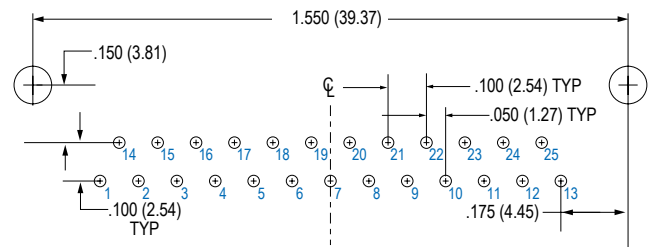

**25 SOCKET MWDM-25SBR**

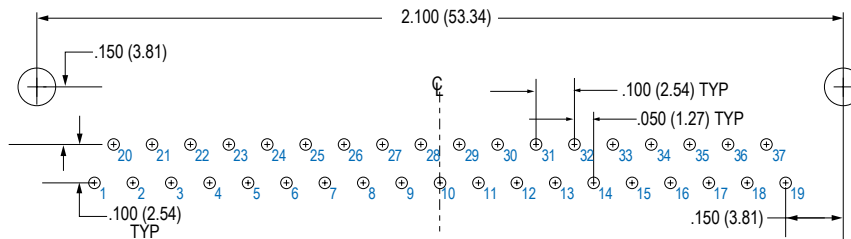


**37 SOCKET MWDM-37SBR**

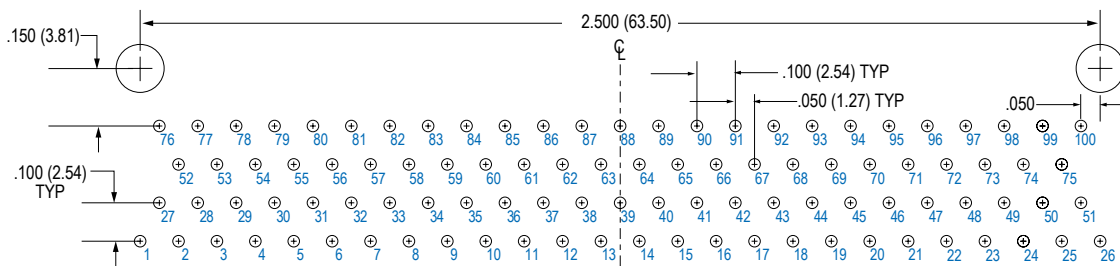

**100 SOCKET MWDM-100SBR**



# Micro-D Metal Shell Printed Circuit Board Connectors BS Style Vertical Mount Thru-Hole

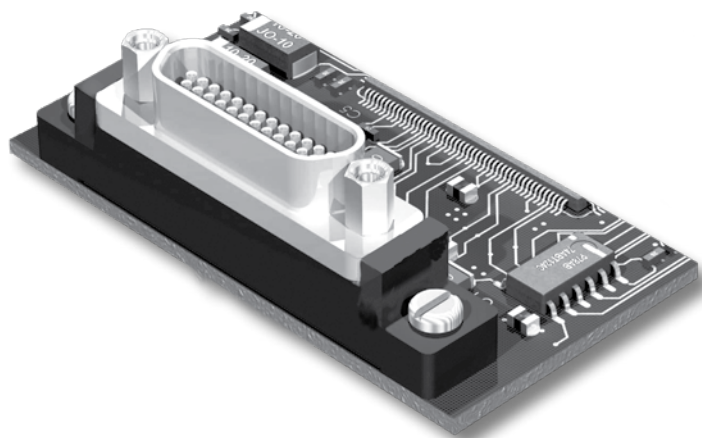

**High Performance**—These connectors feature gold-plated TwistPin contacts for best performance. PC tails are .020 inch diameter. Specify nickel-plated shells or cadmium plated shells for best availability.

**Solder-Dipped**—Terminals are coated with SN63/Pb37 tin-lead solder for best solderability. Optional gold-plated terminals are available for RoHS compliance.

**Front Panel or Rear Mountable**—Can be installed through panels up to .125 inch thick. Specify rear panel mount jackposts.

## HOW TO ORDER BS STYLE PCB MICRO-D CONNECTORS

| Series | Shell Material and Finish | Insulator Material                                 | Contact Layout       | Contact Type                        | Termination Type           | Jackpost Option                 | Threaded Insert Option | Terminal Length In Inches            | Gold-Plated Terminal Mod Code  |  |
|--------|---------------------------|--|----------------------|-------------------------------------|----------------------------|---------------------------------|------------------------|--------------------------------------|--|--|
| MWDM   | Aluminum Shell            | L – LCP<br>30% Glass-Filled Liquid Crystal Polymer | 9                    | P<br>Pin                            | BS<br>Vertical Board Mount | (Omit for None)<br>P – Jackpost | T                      | .080                                 | These connectors are solder-dipped in 63/37 tin-lead solder.<br><br>To delete the solder dip and change to gold-plated terminals, add code 513 |  |
|        | 1 – Cadmium               |  | 15                   |                                     |                            |                                 |                        | .110                                 |  |  |
|        | 2 – Nickel                |  | 21                   | Threaded Insert In Board Mount Hole |                            | .125                            |                        |                                      |  |  |
|        | 4 – Black Anodize         |  | 25                   |                                     |                            | .140                            |                        |                                      |  |  |
|        | 5 – Gold                  |  | 31                   | Jackposts for Rear Panel Mounting   |                            | .150                            |                        |                                      |  |  |
|        | 6 – Chem Film             |  | 37                   |                                     |                            | .172                            |                        |                                      |  |  |
|        | Stainless Steel Shell     | 51   | (Omit for Thru-Hole) | .190                                |                            |                                 |                        |                                      |  |  |
|        | 3 – Passivated            | 100  |                      | .250                                |                            |                                 |                        |                                      |  |  |
|        |                           |  |                      |                                     |                            |                                 |                        | Length in Inches<br>± .015<br>(0.38) |  |  |
|        | <b>Sample Part Number</b> |  |                      |                                     |                            |                                 |                        |                                      |  |  |
| MWDM   | 1                         | L  | - 15                 | P                                   | BS                         | R3                              |                        | - .110                               |  |  |

## MICRO-D JACKPOST OPTIONS

| No Designator  | P  | R1 Thru R5   |
|--|--|--|
| <p>HEX NUT<br/>EPOXY FILL</p>  |  | <p>Panel</p>   |
| <p><b>Thru-Hole</b><br/>For use with Glenair jackposts only. Order hardware separately. Install with threadlocking compound.</p> | <p><b>Standard Jackpost</b><br/>Factory installed, not intended for removal.</p> | <p><b>Jackpost for Rear Panel Mounting</b><br/>Shipped loosely installed. Install with permanent threadlocking compound.</p> |

# Micro-D Metal Shell Printed Circuit Board Connectors BS Style Vertical Mount Thru-Hole





## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator, Tray  | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| PCB Terminals    | Gold Plated Copper Alloy, Solder Dipped   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

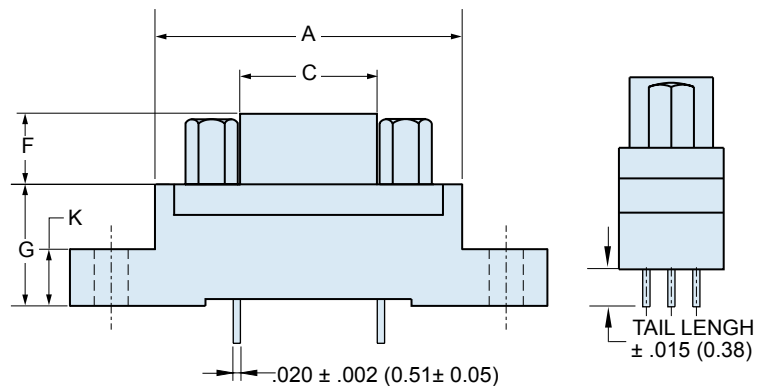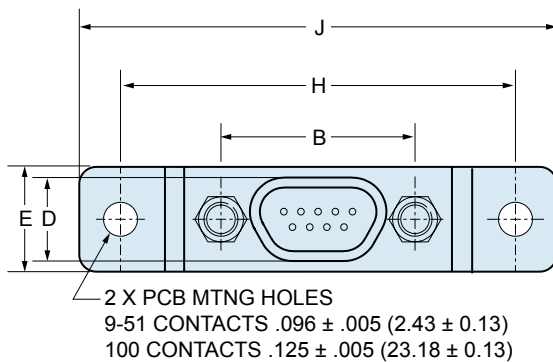


## DIMENSIONS


| Layout | A Max. |       | B              |                | C Max. |       | D Max. |      | E Max. |       | F              |                | G              |                | H              |                | J Max. |       | K              |                |
|--------|--------|-------|----------------|----------------|--------|-------|--------|------|--------|-------|----------------|----------------|----------------|----------------|----------------|----------------|--------|-------|----------------|----------------|
|        | In.    | mm.   | In. $\pm$ .003 | mm. $\pm$ 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. $\pm$ .004 | mm. $\pm$ 0.10 | In. $\pm$ .010 | mm. $\pm$ 0.25 | In. $\pm$ .007 | mm. $\pm$ 0.18 | In.    | mm.   | In. $\pm$ .010 | mm. $\pm$ 0.25 |
| 9P     | .790   | 20.07 | .565           | 14.35          | .333   | 8.46  | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .333           | 8.46           | 1.150          | 29.21          | 1.390  | 35.31 | .155           | 3.94           |
| 9S     | .790   | 20.07 | .565           | 14.35          | .400   | 10.16 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .333           | 8.46           | 1.150          | 29.21          | 1.390  | 35.31 | .155           | 3.94           |
| 15P    | .940   | 23.88 | .715           | 18.16          | .483   | 12.27 | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .333           | 8.46           | 1.150          | 29.21          | 1.390  | 35.31 | .155           | 3.94           |
| 15S    | .940   | 23.88 | .715           | 18.16          | .551   | 14.00 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .333           | 8.46           | 1.150          | 29.21          | 1.390  | 35.31 | .155           | 3.94           |
| 21P    | 1.180  | 29.97 | .865           | 21.97          | .633   | 16.08 | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .333           | 8.46           | 1.450          | 36.83          | 1.690  | 42.93 | .155           | 3.94           |
| 21S    | 1.180  | 29.97 | .865           | 21.97          | .701   | 17.81 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .333           | 8.46           | 1.450          | 36.83          | 1.690  | 42.93 | .155           | 3.94           |
| 25P    | 1.275  | 32.39 | .965           | 24.51          | .733   | 18.62 | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .333           | 8.46           | 1.500          | 38.10          | 1.740  | 44.20 | .155           | 3.94           |
| 25S    | 1.275  | 32.39 | .965           | 24.51          | .801   | 20.35 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .333           | 8.46           | 1.500          | 38.10          | 1.740  | 44.20 | .155           | 3.94           |
| 31P    | 1.575  | 40.01 | 1.115          | 28.32          | .883   | 22.43 | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .333           | 8.46           | 1.800          | 45.72          | 2.040  | 51.82 | .155           | 3.94           |
| 31S    | 1.575  | 40.01 | 1.115          | 28.32          | .951   | 24.16 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .333           | 8.46           | 1.800          | 45.72          | 2.040  | 51.82 | .155           | 3.94           |
| 37P    | 1.875  | 47.63 | 1.265          | 32.13          | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87  | .183           | 4.65           | .333           | 8.46           | 2.100          | 53.34          | 2.340  | 59.44 | .155           | 3.94           |
| 37S    | 1.875  | 47.63 | 1.265          | 32.13          | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87  | .195           | 4.95           | .333           | 8.46           | 2.100          | 53.34          | 2.340  | 59.44 | .155           | 3.94           |
| 51P    | 1.775  | 45.09 | 1.215          | 30.86          | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .183           | 4.65           | .333           | 8.46           | 2.000          | 50.80          | 2.270  | 57.64 | .155           | 3.94           |
| 51S    | 1.775  | 45.09 | 1.215          | 30.86          | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195           | 4.95           | .333           | 8.46           | 2.000          | 50.80          | 2.270  | 57.64 | .155           | 3.94           |
| 100P   | 2.585  | 65.66 | 1.800          | 45.72          | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | .183           | 4.65           | .525           | 13.34          | 2.800          | 71.12          | 3.250  | 82.55 | .293           | 7.44           |
| 100S   | 2.585  | 65.66 | 1.800          | 45.72          | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195           | 4.95           | .525           | 13.34          | 2.800          | 71.12          | 3.250  | 82.55 | .293           | 7.44           |

## MICRO-D BS BOARD MOUNT CONNECTOR PCB LAYOUTS – PIN CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

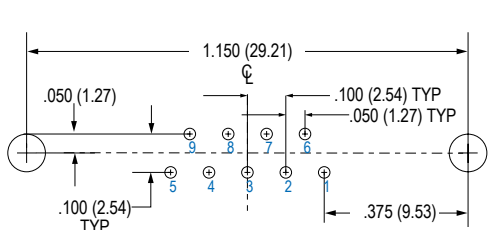


**9 PIN MWDM-9PBS**

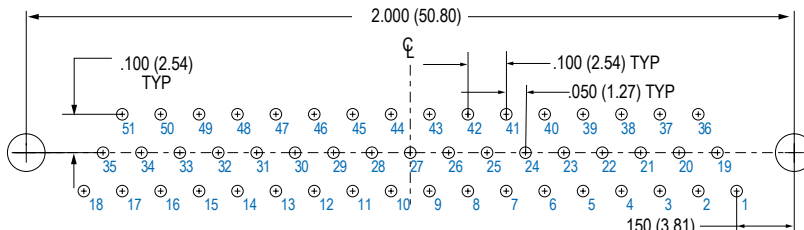


**51 PIN MWDM-51PBS**

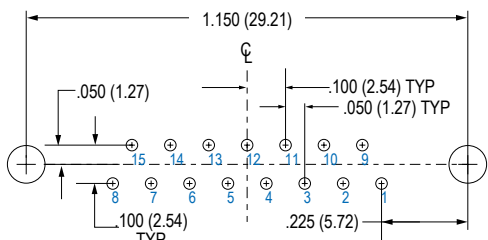


**15 PIN MWDM-15PBS**

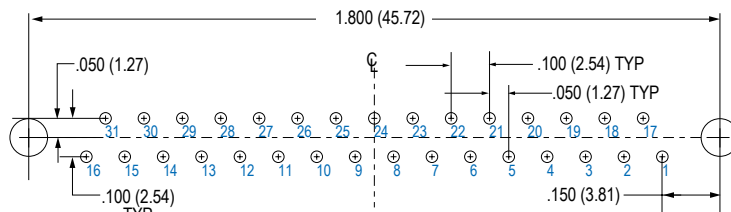

**31 PIN MWDM-31PBS**


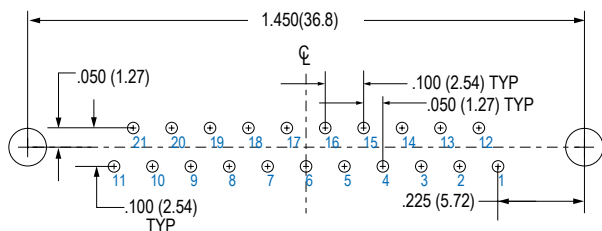


**21 PIN MWDM-21PBS**

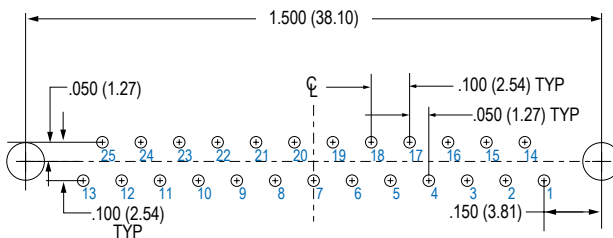


**25 PIN MWDM-25PBS**

**Connector Orientation**

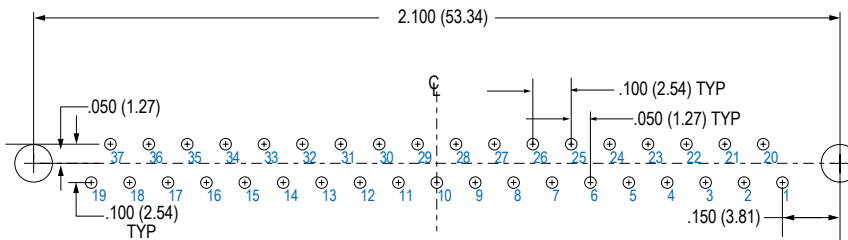


**37 PIN MWDM-37PBS**

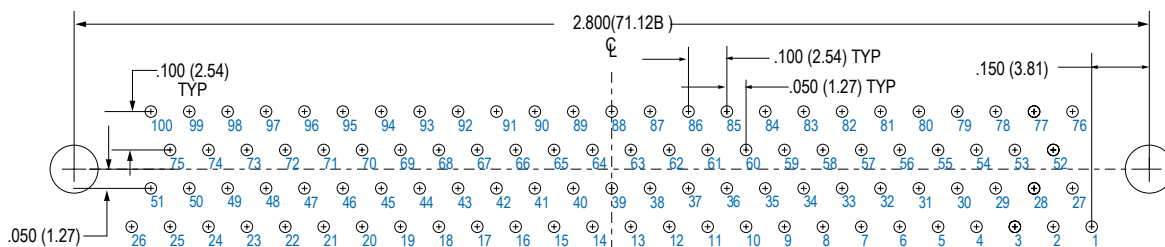


**100 PIN MWDM-100PBS**

## MICRO-D BS BOARD MOUNT CONNECTOR PCB LAYOUTS – SOCKET CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

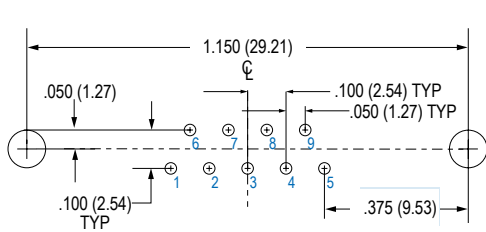


**9 SOCKET MWDM-9SBS**

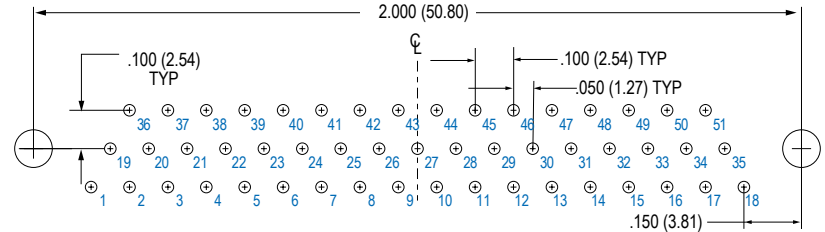


**51 SOCKET MWDM-51SBS**

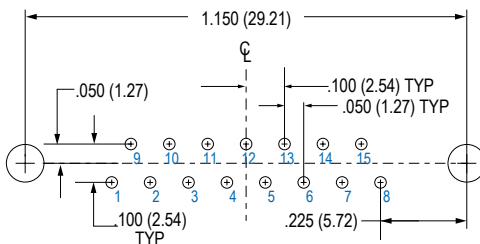


**15 SOCKET MWDM-15SBS**

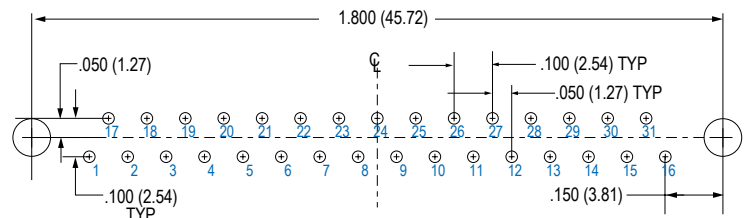



**31 SOCKET MWDM-31SBS**

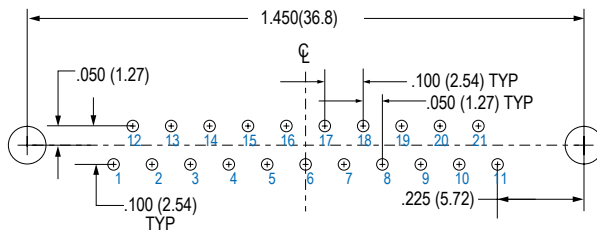


**21 SOCKET MWDM-21SBS**

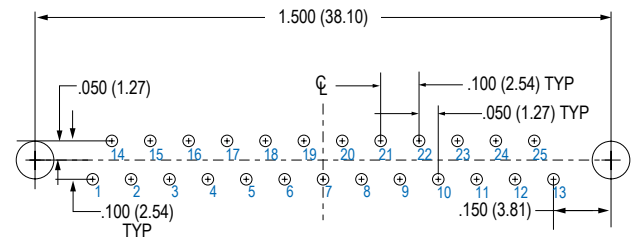

**25 SOCKET MWDM-25SBS**

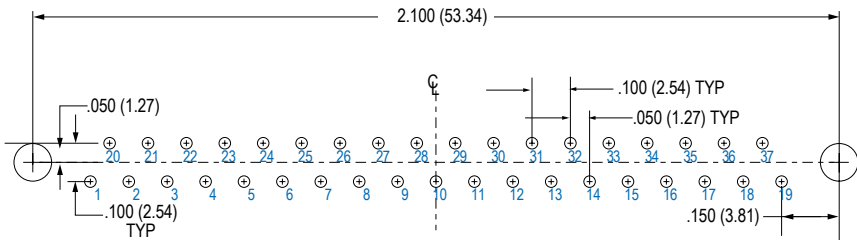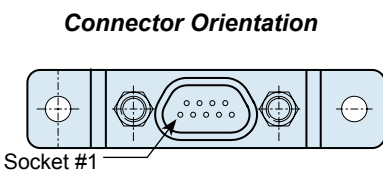


**37 SOCKET MWDM-37SBS**

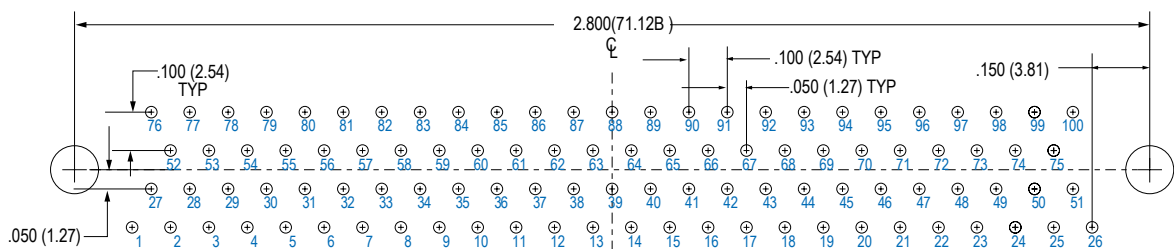

**100 SOCKET MWDM-100SBS**



# Micro-D Printed Circuit Board Connectors Condensed Board Straight CBS .075 Inch Spacing

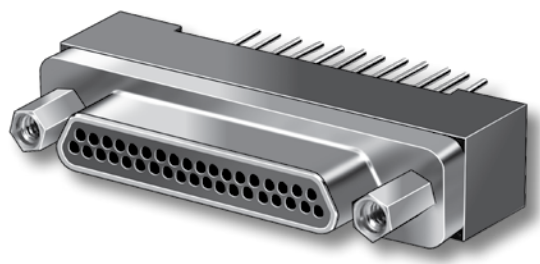

**Save Space On Your Circuit Board**—These Micro-D connectors feature .075 inch row spacing. The board footprint is reduced to match the size of the connector body.

**Designed for Flex Circuits**—CBS COTS connectors are available with jackscrews for flex circuit compatibility.

**Solder-Dipped**—Terminals are coated with SN63/Pb37 tin-lead solder for best solderability. Optional gold-plated terminals are available for RoHS compliance.

**High Performance**—These connectors meet the demanding requirements of MIL-DTL-83513. Suitable for Level 1 NASA reliability.

## HOW TO ORDER CBS CONDENSED BOARD STRAIGHT CONNECTORS

| Series                         | Shell Material and Plating Finish | Insulator Material                         | Number of Contacts     | Contact Type  | Termination Style                         | Hardware Option                        | PC Tail Length | Gold-Plated Terminal Mod Code  |
|--------------------------------|-----------------------------------|--|------------------------|---|---|--|----------------|--|
| MWDM<br>Micro-D<br>Metal Shell | Aluminum Shell                    | L<br>LCP<br>(Liquid<br>Crystal<br>Polymer) | 9                      | P<br>Pin  | CBS                                       | NN –No Jackpost, No<br>Threaded Insert | .080           | These<br>connectors are<br>solder-dipped<br>in 63/37 tin-<br>lead solder.<br><br><b>To delete the<br/>solder dip<br/>and change<br/>to gold-plated<br/>terminals,<br/>add code 513</b> |
|                                | 1 – Cadmium                       |  | 15                     |   |   |  | S<br>Socket    |  |
|                                | 2 – Nickel                        |  | 21                     | .140  |   |  |                |  |
|                                | 4 – Black Anodize                 |  | 25                     | .172  |   |  |                |  |
|                                | 5 – Gold                          |  | 31                     | .190  |   |  |                |  |
|                                | 6 – Chem Film                     |  | 37                     | RN –Extended Jackpost for<br>.196" (5.0) PCB, No<br>Threaded Insert | .250                                      |  |                |  |
|                                | 51                                | NU –Threaded Insert Only,<br>No Jackposts  | Length<br>in<br>Inches |   |   |  |                |  |
|                                | Stainless Steel Shell             |  |                        | 100   | PU –Short Jackpost and<br>Threaded Insert | ± .015<br>(0.38)                       |                |  |
|                                | 3 – Passivated                    |  |                        |   |   |  |                |  |
|                                |                                   |  |                        |   |   |  |                |  |
|                                |                                   |  |                        |   |   |  |                |  |
|                                |                                   |  |                        |   |   |  |                |  |
|                                |                                   |  |                        |   |   |  |                |  |
|                                |                                   |  |                        |   |   |  |                |  |

### Sample Part Number

|      |   |     |    |   |     |    |        |  |
|------|---|-----|----|---|-----|----|--------|--|
| MWDM | 1 | L – | 31 | P | CBS | NN | – .110 |  |
|------|---|-----|----|---|-----|----|--------|--|

# Micro-D Printed Circuit Board Connectors Condensed Board Straight CBS .075 Inch Spacing






## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator, Tray  | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| PCB Terminals    | Gold Plated Copper Alloy, Solder Dipped   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

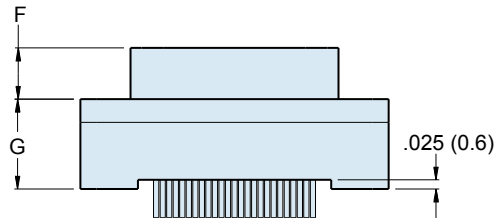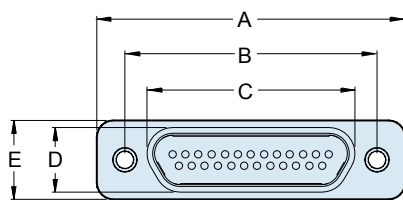


## MICRO-D CBS BOARD MOUNT CONNECTOR DIMENSIONS

| Layout | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |       | F          |            | G Max. |       |
|--------|--------|-------|------------|------------|--------|-------|--------|------|--------|-------|------------|------------|--------|-------|
|        | In.    | mm.   | In. ± .005 | mm. ± 0.13 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   |
| 9P     | .785   | 19.94 | .565       | 14.35      | .333   | 8.46  | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .355   | 9.02  |
| 9S     | .785   | 19.94 | .565       | 14.35      | .400   | 10.16 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .355   | 9.02  |
| 15P    | .935   | 23.75 | .715       | 18.16      | .483   | 12.27 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .355   | 9.02  |
| 15S    | .935   | 23.75 | .715       | 18.16      | .551   | 14.00 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .355   | 9.02  |
| 21P    | 1.085  | 27.56 | .865       | 21.97      | .633   | 16.08 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .355   | 9.02  |
| 21S    | 1.085  | 27.56 | .865       | 21.97      | .701   | 17.81 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .355   | 9.02  |
| 25P    | 1.185  | 30.01 | .965       | 24.51      | .733   | 18.62 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .355   | 9.02  |
| 25S    | 1.185  | 30.01 | .965       | 24.51      | .801   | 20.35 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .355   | 9.02  |
| 31P    | 1.335  | 33.91 | 1.115      | 28.32      | .883   | 22.43 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .355   | 9.02  |
| 31S    | 1.335  | 33.91 | 1.115      | 28.32      | .951   | 24.16 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .355   | 9.02  |
| 37P    | 1.485  | 37.72 | 1.265      | 32.13      | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .355   | 9.02  |
| 37S    | 1.485  | 37.72 | 1.265      | 32.13      | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .355   | 9.02  |
| 51P    | 1.435  | 36.45 | 1.215      | 30.86      | .983   | 24.97 | .224   | 5.69 | .400   | 10.16 | .183       | 4.65       | .355   | 9.02  |
| 51S    | 1.435  | 36.45 | 1.215      | 30.86      | 1.051  | 26.70 | .293   | 7.44 | .400   | 10.16 | .195       | 4.95       | .355   | 9.02  |
| 100P   | 2.170  | 55.12 | 1.800      | 45.72      | 1.383  | 35.13 | .270   | 6.86 | .510   | 12.95 | .183       | 4.65       | .430   | 10.92 |
| 100S   | 2.170  | 55.12 | 1.800      | 45.72      | 1.451  | 36.86 | .333   | 8.46 | .510   | 12.95 | .195       | 4.95       | .430   | 10.92 |


## MICRO-D CBS BOARD MOUNT CONNECTOR HARDWARE OPTIONS

C

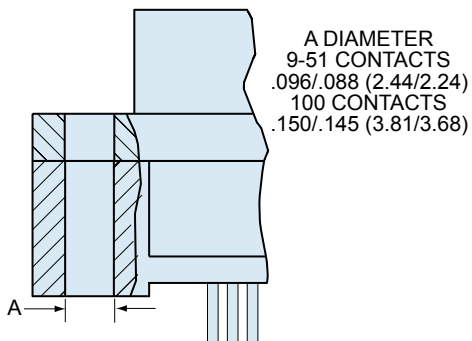


**NN Style**  
Thru-Hole, No Hardware

A DIAMETER  
9-51 CONTACTS  
.096/.088 (2.44/2.24)  
100 CONTACTS  
.150/.145 (3.81/3.68)




**NU Style**  
Threaded Insert

9-51 CONTACTS  
NO. 2-56 UNC-2B  
100 CONTACTS  
NO. 4-40 UNC-2B

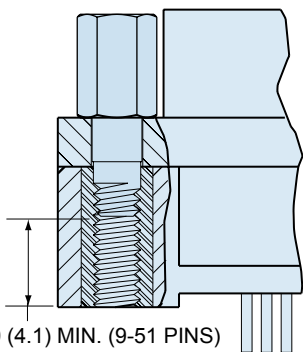


.160 (4.1) MIN. (9-51 PINS)  
.225 (5.7) MIN. (100 PIN)


**PU Style**  
Jackpost with Threaded Insert

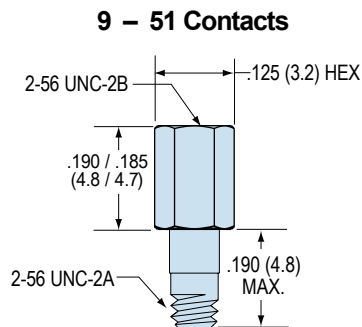

Kit Part Number **500-063-1**  
Kit Consists of Two Jackposts


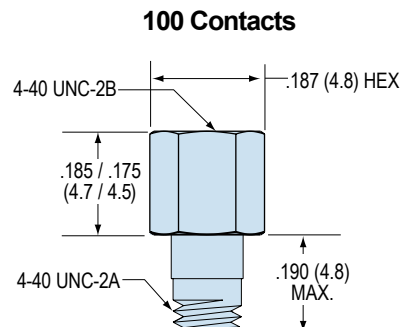


Kit Part Number **500-063-2**  
Kit Consists of Two Jackposts

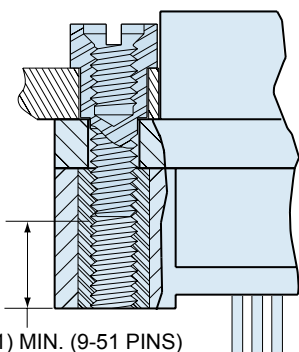


.160 (4.1) MIN. (9-51 PINS)  
.225 (5.7) MIN. (100 PIN)

**RU Style**  
Jackpost For Rear Panel  
Mounting, with Threaded Insert

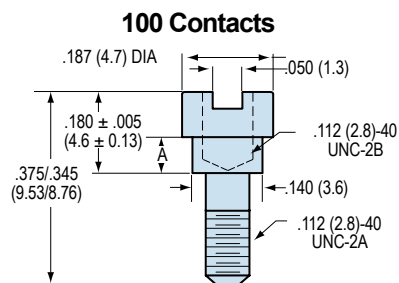


| Hardware Option | Panel Thickness | Part Number   | A<br>± .003 (0.08) | Hardware Option | Panel Thickness | Part Number   | A<br>± .003 (0.08) |
|-----------------|-----------------|---------------|--------------------|-----------------|-----------------|---------------|--------------------|
| R2U             | 1/32 (0.8)      | 177-505-A-2-2 | .024 (0.6)         | R2U             | 1/32 (0.8)      | 177-505-D-4-2 | .024 (0.6)         |
| R3U             | 3/64 (1.2)      | 177-505-A-2-3 | .041 (1.0)         | R3U             | 3/64 (1.2)      | 177-505-D-4-3 | .041 (1.0)         |
| R4U             | 1/16 (1.6)      | 177-505-A-2-4 | .055 (1.4)         | R4U             | 1/16 (1.6)      | 177-505-D-4-4 | .055 (1.4)         |
| R5U             | 3/32 (2.4)      | 177-505-A-2-5 | .086 (2.2)         | R5U             | 3/32 (2.4)      | 177-505-D-4-5 | .086 (2.2)         |
| R6U             | 1/8 (3.2)       | 177-505-A-2-6 | .118 (3.0)         | R6U             | 1/8 (3.2)       | 177-505-D-4-6 | .118 (3.0)         |


## MICRO-D CBS BOARD MOUNT CONNECTOR HARDWARE OPTIONS




**PN Style** for .062" PCB  
**RN Style** for .196" PCB  
Jackpost Kit




PN Kit Part Number **500-069-2-6**  
RN Kit Part Number **500-069-2-7**  
Kit Consists of 2 Jackposts, 2 Nuts, 2 Washers




PN Kit Part Number **500-069-4-7**  
RN Kit Part Number **500-069-4-8**  
Kit Consists of 2 Jackposts, 2 Nuts, 2 Washers




**M Style**  
Hex Head Jackscrew with  
E-Ring

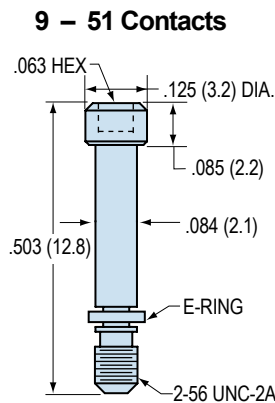


Kit Part Number **500-080-2**  
Kit Consists of 2 Jackscrews and 2 E-Rings

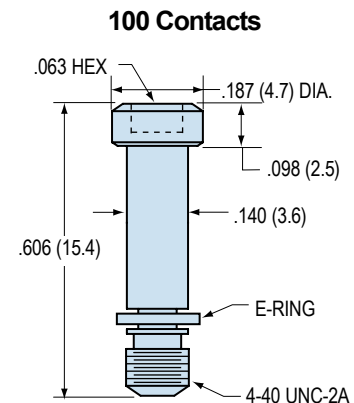


Kit Part Number **500-080-4**  
Kit Consists of 2 Jackscrews and 2 E-Rings



**S Style**  
Slot Head Jackscrew with  
E-Ring

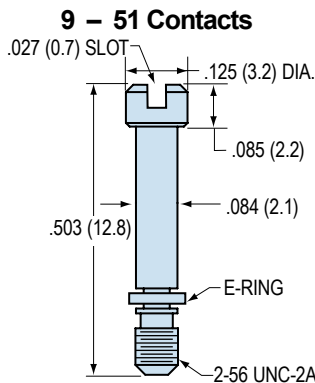

Kit Part Number **500-081-2**  
Kit Consists of 2 Jackscrews and 2 E-Rings

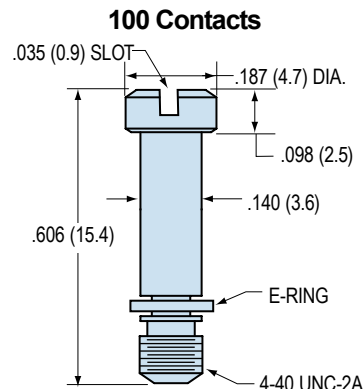


Kit Part Number **500-081-4**  
Kit Consists of 2 Jackscrews and 2 E-Rings




Patterns shown are for connector mounting side of PC board.

## MICRO-D CBS BOARD MOUNT CONNECTOR PCB LAYOUTS – PIN CONNECTORS


C

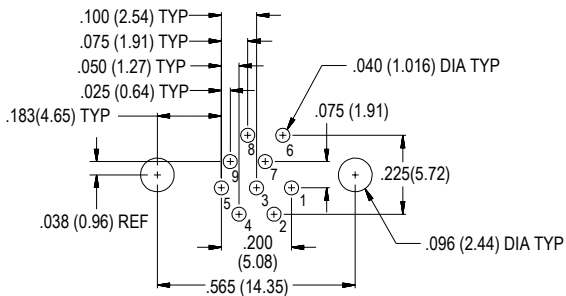


9 PIN MWDM-9PCBS

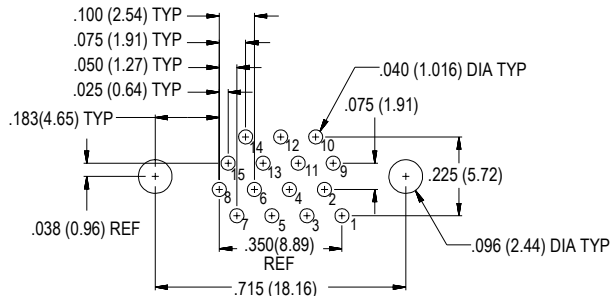


15 PIN MWDM-15PCBS

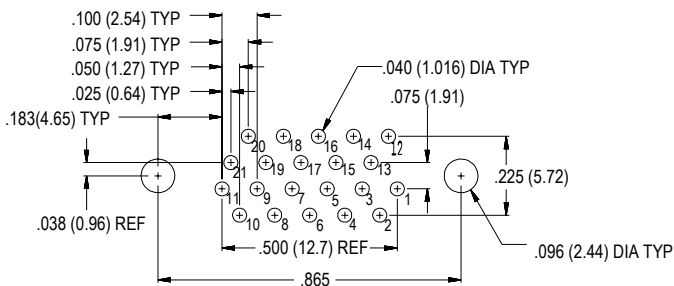


21 PIN MWDM-21PCBS

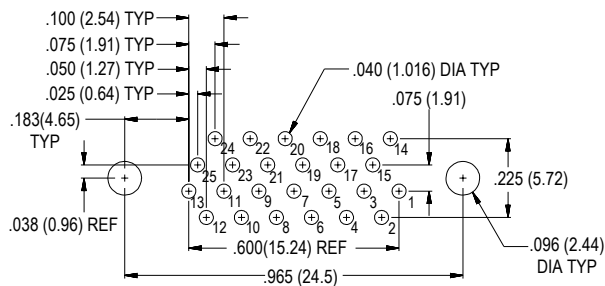


25 PIN MWDM-25PCBS

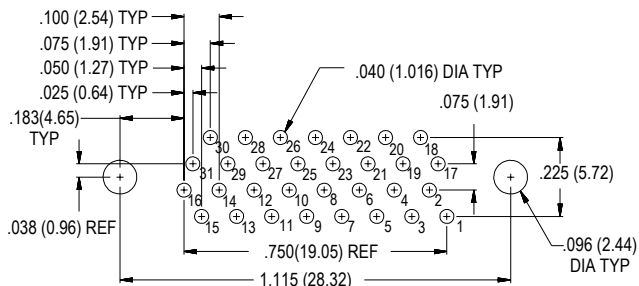


31 PIN MWDM-31PCBS

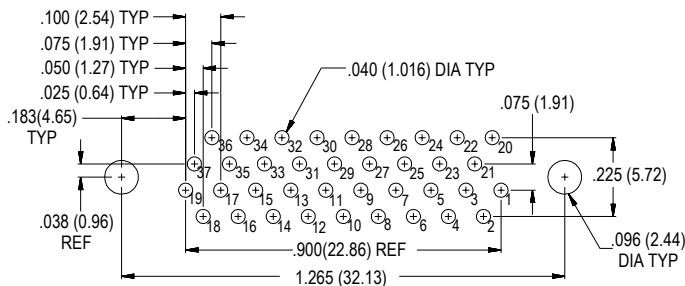

37 PIN MWDM-37PCBS

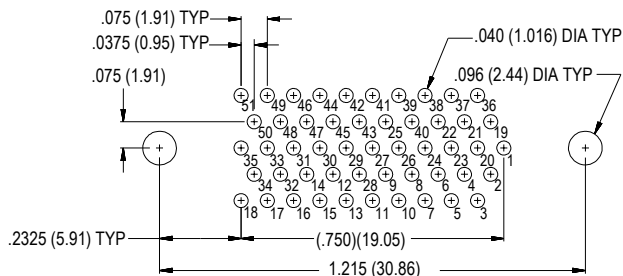

51 PIN MWDM-51PCBS

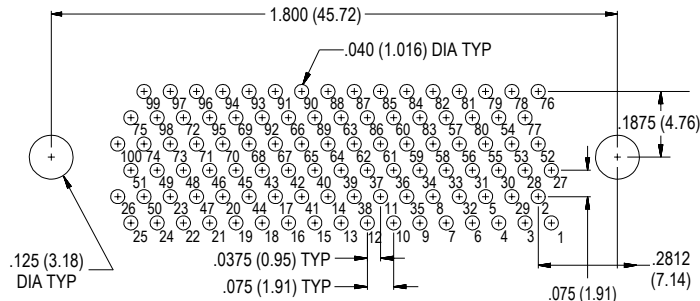

100 PIN MWDM-100PCBS


# Micro-D Printed Circuit Board Connectors Condensed Board Straight CBS .075 Inch Spacing




Micro-D  
PCB

Patterns shown are for connector mounting side of PC board.


## MICRO-D CBS BOARD MOUNT CONNECTOR PCB LAYOUTS – SOCKET CONNECTORS

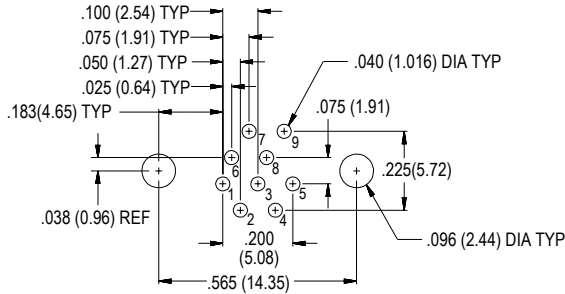


9 Socket MWDM-9SCBS

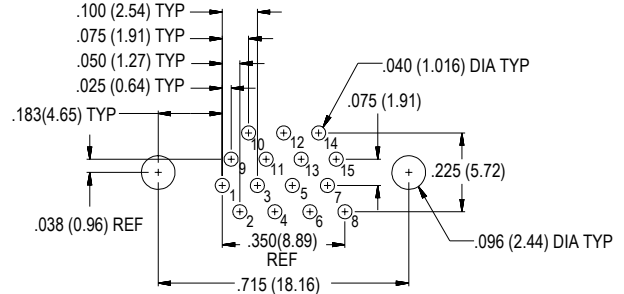


15 Socket MWDM-15SCBS

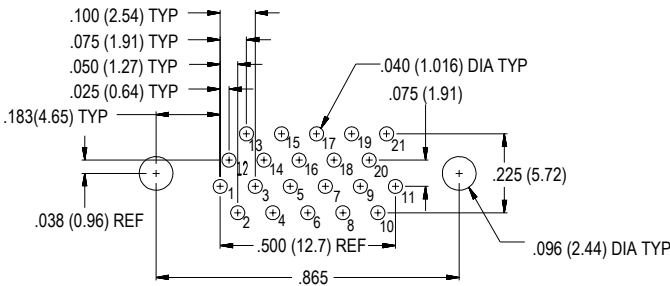


21 Socket MWDM-21SCBS

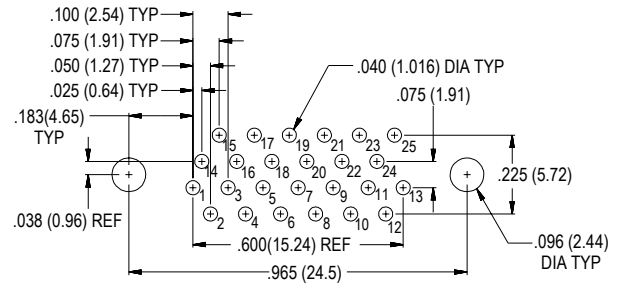


25 Socket MWDM-25SCBS

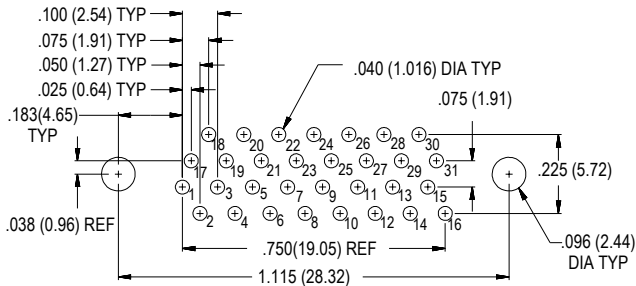


31 Socket MWDM-31SCBS

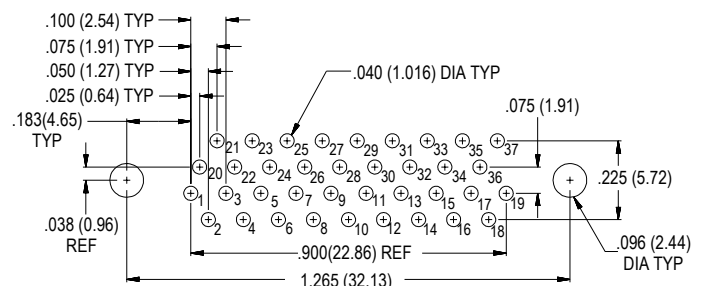

37 Socket MWDM-37SCBS

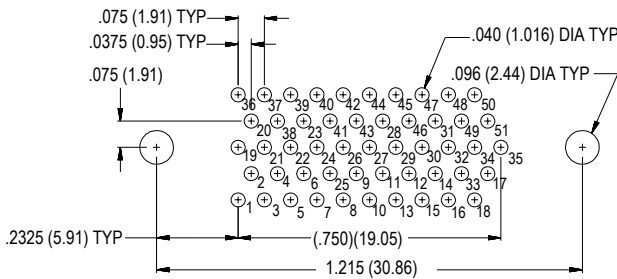


51 Socket MWDM-51SCBS

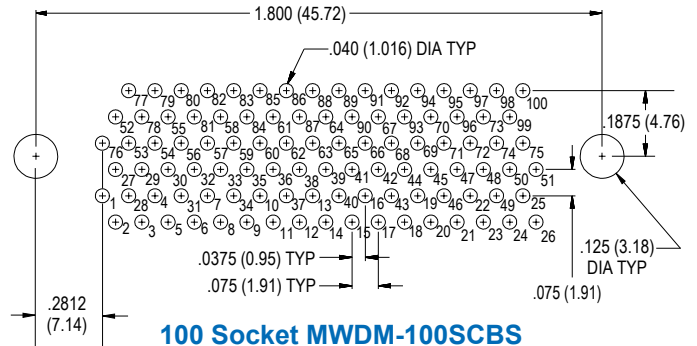

100 Socket MWDM-100SCBS



# GMR7580 Vertical Mount Micro-D Connectors

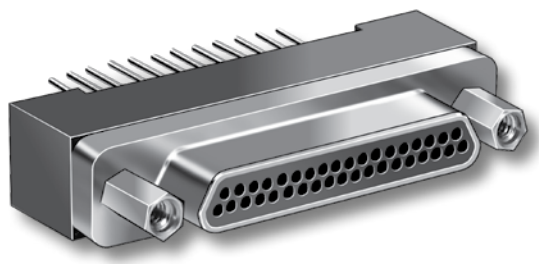

**Save Space On Your Circuit Board** – These Micro-D connectors feature .075 X .075 inch terminal spacing. Glenair's GMR7580 offers significant size and weight savings compared to traditional .100" pitch connectors.

**High Performance** – Approved for British Standard BS9000, GMR7580 connectors meet the performance requirements of MIL-DTL-83513. Gold-plated TwistPin contacts assure best performance.

C

## HOW TO ORDER GMR7580 VERTICAL .075" PITCH CONNECTORS

| Series  | Number of Contacts | Contact Type                   | Tail Length In. (mm.) | Shell Plating Finish | Hardware Option  | Gold-Plated Terminal Mod Code |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
|---|--------------------|--------------------------------|-----------------------|----------------------|--|-------------------------------|----------------|-----------------|-----------|-----------|-------------|-----------|-----------|-------------|-----------|-----------|-------------|-----------|-----------|-------------|-----------|-----------|-------------|---|
| GMR7580<br>Micro-D<br>Metal Shell,<br>Vertical<br>Mount PCB | 9                  | P<br>Pin                       | 1 – .109" (2.76)      | A – Cadmium          | <b>NN</b> – No Jackpost, No Threaded Insert<br><b>PN</b> – Extended Jackpost for .062" (1.6) PCB, No Threaded Insert<br><b>RN</b> – Extended Jackpost for .196" (5.0) PCB, No Threaded Insert<br><b>NU</b> – UN Threaded Insert Only, No Jackposts<br><b>NM</b> – Metric Threaded Insert Only, No Jackposts<br><b>SU</b> – Short Jackpost and UN Threaded Insert<br><b>SM</b> – Short Jackpost and Metric Threaded Insert<br><br><b>Rear Panel Mount Jackposts and Threaded Inserts</b><br><table border="1"> <thead> <tr> <th>UN Threads</th> <th>Metric Threads</th> <th>Panel Thickness</th> </tr> </thead> <tbody> <tr> <td><b>TU</b></td> <td><b>TM</b></td> <td>.094" (2.4)</td> </tr> <tr> <td><b>VU</b></td> <td><b>VM</b></td> <td>.062" (1.6)</td> </tr> <tr> <td><b>WU</b></td> <td><b>WM</b></td> <td>.047" (1.2)</td> </tr> <tr> <td><b>XU</b></td> <td><b>XM</b></td> <td>.031" (0.8)</td> </tr> <tr> <td><b>YU</b></td> <td><b>YM</b></td> <td>.023" (0.6)</td> </tr> </tbody> </table> | UN Threads                    | Metric Threads | Panel Thickness | <b>TU</b> | <b>TM</b> | .094" (2.4) | <b>VU</b> | <b>VM</b> | .062" (1.6) | <b>WU</b> | <b>WM</b> | .047" (1.2) | <b>XU</b> | <b>XM</b> | .031" (0.8) | <b>YU</b> | <b>YM</b> | .023" (0.6) | These connectors are solder-dipped in 63/37 tin-lead solder.<br><br><b>To delete the solder dip and change to gold-plated terminals, add code 513</b> |
|   | UN Threads         |                                | Metric Threads        | Panel Thickness      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
|   | <b>TU</b>          |                                | <b>TM</b>             | .094" (2.4)          |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
|   | <b>VU</b>          | <b>VM</b>                      | .062" (1.6)           |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
|   | <b>WU</b>          | <b>WM</b>                      | .047" (1.2)           |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
|   | <b>XU</b>          | <b>XM</b>                      | .031" (0.8)           |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
| <b>YU</b>   | <b>YM</b>          | .023" (0.6)                    |                       |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
| 15  | S<br>Socket        | 2 – .150" (3.81)               | B – Nickel            |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
| 21  |                    | 3 – .190" (4.83)               | C – Alchrome          |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
| 25  |                    | 4 – .250" (6.35)               | D – Black Anodize     |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
| 31  |                    | 5 – Staggered Tail Length      | E – Gold              |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
| 37  |                    | Length in Inches ± .015 (0.38) |                       |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
| 51  |                    |                                |                       |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
| 100   |                    |                                |                       |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
| <b>Sample Part Number</b>                                   |                    |                                |                       |                      |  |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |
| GMR7580   | - 31               | S                              | 2                     | B                    | NN   |                               |                |                 |           |           |             |           |           |             |           |           |             |           |           |             |           |           |             |   |

## GMR7580 JACKPOST OPTIONS

| Option                                 | Diagram | Description  |
|--|---------|--|
| NN                                     |         | Thru-Hole  |
| PN and RN                              |         | Jackpost Kit<br>PN – .062 (1.6) PCB<br>RN – .196 (5.0) PCB |
| NU, NM                                 |         | Threaded Inserts   |
| SU, SM                                 |         | Jackpost With Threaded Insert                              |
| TU, VU, WU, XU, YU, TM, VM, WM, XM, YM |         | Jackpost for Rear Panel Mounting                           |

# GMR7580 Vertical Mount Micro-D Connectors




Micro-D  
PCB

## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator, Tray  | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| PCB Terminals    | Gold Plated Copper Alloy, Solder Dipped   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

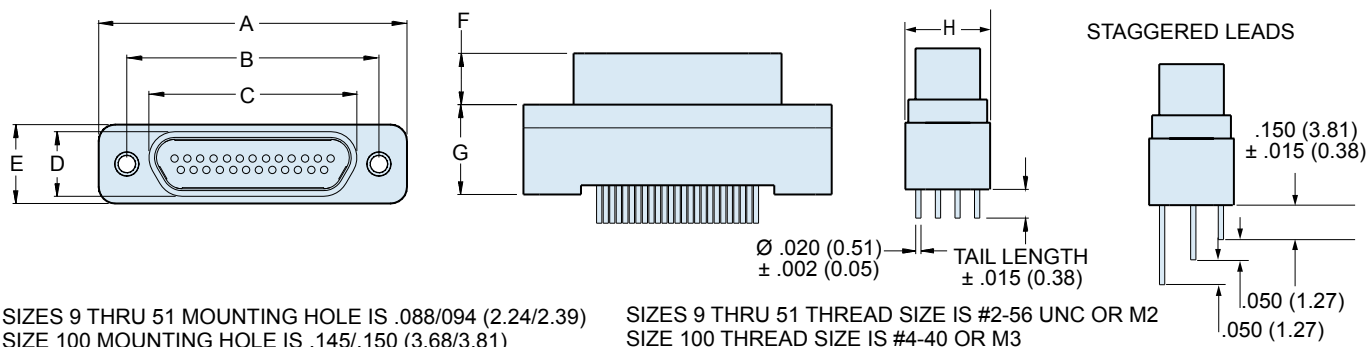


## GMR7580 CONNECTOR DIMENSIONS


| Layout | A Max. |       | B              |                | C Max. |       | D Max. |       | E Max. |       | F              |                | G Max. |       | H Max. |       |
|--------|--------|-------|----------------|----------------|--------|-------|--------|-------|--------|-------|----------------|----------------|--------|-------|--------|-------|
|        | In.    | mm.   | In. $\pm .005$ | mm. $\pm 0.13$ | In.    | mm.   | In.    | mm.   | In.    | mm.   | In. $\pm .003$ | mm. $\pm 0.08$ | In.    | mm.   | In.    | mm.   |
| 9P     | .785   | 19.94 | .565           | 14.35          | .335   | 8.51  | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .355   | 9.02  | .310   | 7.87  |
| 9S     | .785   | 19.94 | .565           | 14.35          | .400   | 10.16 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .355   | 9.02  | .310   | 7.87  |
| 15P    | .935   | 23.75 | .715           | 18.16          | .485   | 12.32 | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .355   | 9.02  | .310   | 7.87  |
| 15S    | .935   | 23.75 | .715           | 18.16          | .550   | 13.97 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .355   | 9.02  | .310   | 7.87  |
| 21P    | 1.085  | 27.56 | .865           | 21.97          | .635   | 16.13 | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .355   | 9.02  | .310   | 7.87  |
| 21S    | 1.085  | 27.56 | .865           | 21.97          | .700   | 17.78 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .355   | 9.02  | .310   | 7.87  |
| 25P    | 1.185  | 30.01 | .965           | 24.51          | .735   | 18.67 | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .355   | 9.02  | .310   | 7.87  |
| 25S    | 1.185  | 30.01 | .965           | 24.51          | .800   | 20.32 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .355   | 9.02  | .310   | 7.87  |
| 31P    | 1.335  | 33.91 | 1.115          | 28.32          | .885   | 22.48 | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .355   | 9.02  | .310   | 7.87  |
| 31S    | 1.335  | 33.91 | 1.115          | 28.32          | .950   | 24.13 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .355   | 9.02  | .310   | 7.87  |
| 37P    | 1.485  | 37.72 | 1.265          | 32.13          | 1.035  | 26.29 | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .355   | 9.02  | .310   | 7.87  |
| 37S    | 1.485  | 37.72 | 1.265          | 32.13          | 1.100  | 27.94 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .355   | 9.02  | .310   | 7.87  |
| 51P    | 1.435  | 36.45 | 1.215          | 30.86          | .985   | 25.02 | .228   | 5.79  | .351   | 8.92  | .183           | 4.65           | .355   | 9.02  | .351   | 8.92  |
| 51S    | 1.435  | 36.45 | 1.215          | 30.86          | 1.050  | 26.67 | .294   | 7.47  | .351   | 8.92  | .195           | 4.95           | .355   | 9.02  | .351   | 8.92  |
| 100P   | 2.170  | 55.12 | 1.800          | 45.72          | 1.384  | 35.15 | .271   | 6.88  | .394   | 10.00 | .183           | 4.65           | .430   | 10.92 | .470   | 11.94 |
| 100S   | 2.170  | 55.12 | 1.800          | 45.72          | 1.508  | 38.30 | .394   | 10.00 | .394   | 10.00 | .195           | 4.95           | .430   | 10.92 | .470   | 11.94 |

## GMR7580 CONNECTOR PCB LAYOUTS – PIN CONNECTORS


Patterns shown are for connector mounting side of PC board.

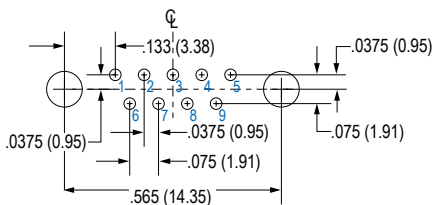


9 PIN




15 PIN

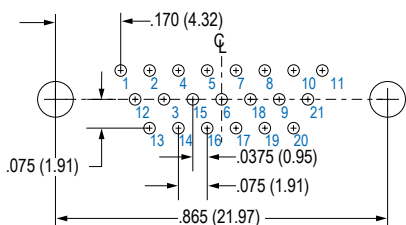


21 PIN

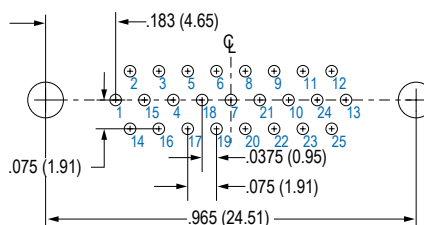


25 PIN

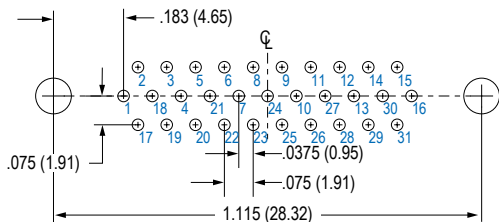


31 PIN

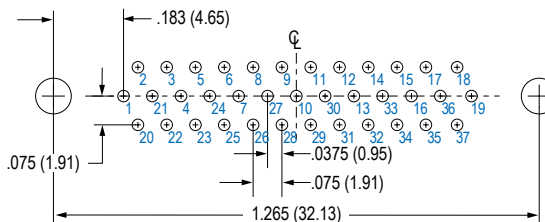

37 PIN

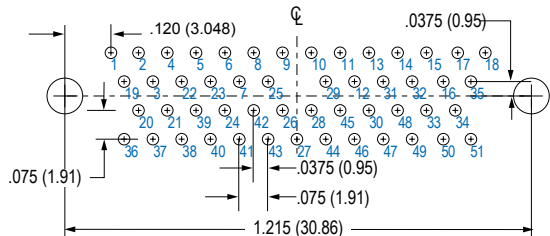


51 PIN

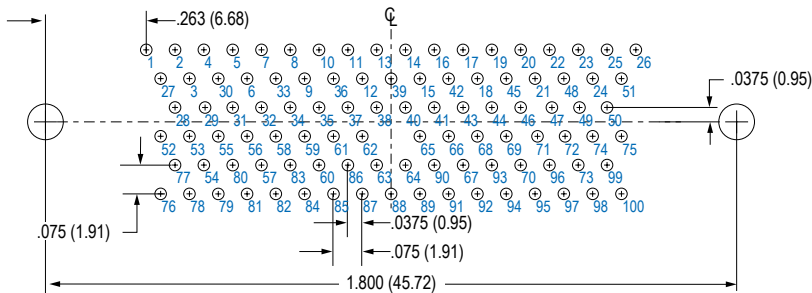


100 PIN

## GMR7580 CONNECTOR PCB LAYOUTS – SOCKET CONNECTORS


Patterns shown are for connector mounting side of PC board.

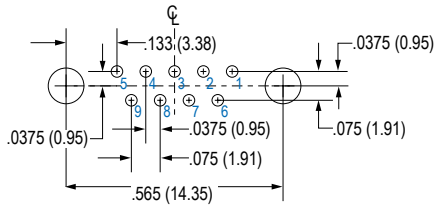


**9 SOCKET**




**15 SOCKET**

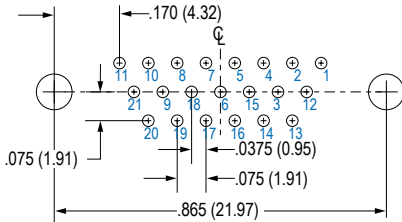


**21 SOCKET**

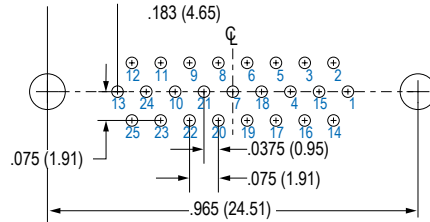


**25 SOCKET**

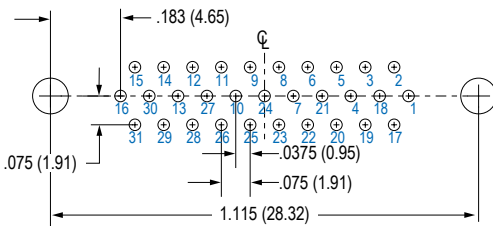


**31 SOCKET**

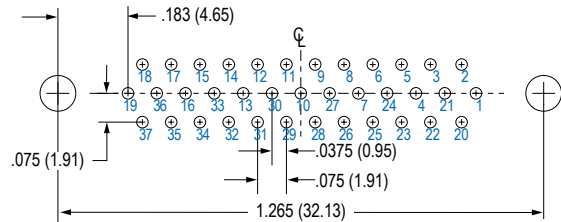

**37 SOCKET**

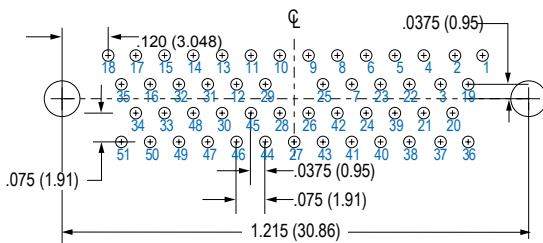


**51 SOCKET**

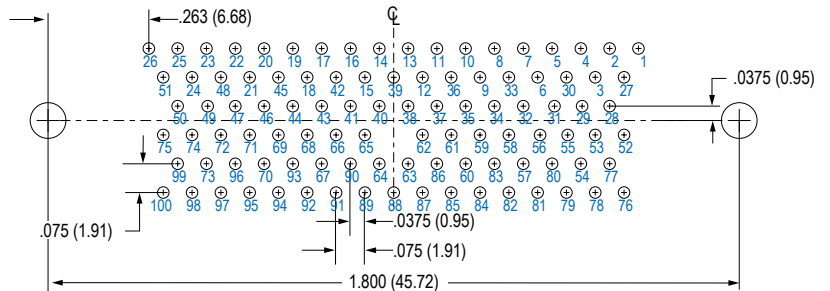

**100 SOCKET**



# GMR7580C Vertical Mount Micro-D Connectors Compact Flange

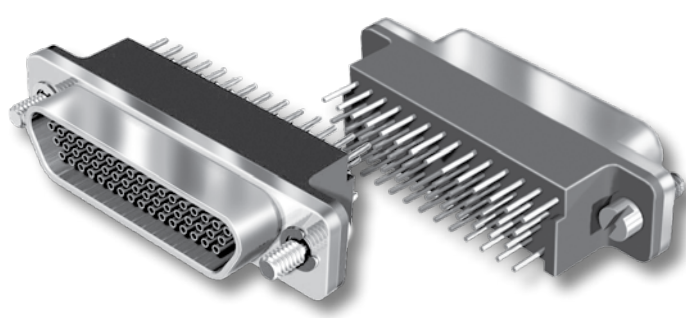

**Innovative Design for Flex Circuits** – These Micro-D connectors answer the need for a compact flex circuit connector. Featuring .075 X .075 inch row spacing. Glenair's GMR7580C accepts standard jackscrews and jackposts, making it ideal for flex-to-board applications.

**High Performance** – Approved for British Standard BS9000, GMR7580C connectors meet the performance requirements of MIL-DTL-83513. Gold-plated TwistPin contacts assure best electrical and mechanical performance.

## HOW TO ORDER GMR7580 VERTICAL .075" PITCH CONNECTORS

| Series  | Number of Contacts | Contact Type       | Tail Length In. (mm.)          | Shell Plating Finish  | Hardware   | Gold-Plated Terminal Mod Code   |
|---|--------------------|--------------------|--------------------------------|---|--|---|
| <b>GMR7580C</b><br>Micro-D Metal Shell,<br>Vertical Mount PCB,<br>Compact | 9                  | <b>P</b><br>Pin    | 1 – .109" (2.76)               | <b>A</b> – Cadmium<br><b>B</b> – Nickel<br><b>C</b> – Allochrome<br><b>D</b> – Black Anodize<br><b>E</b> – Gold | <b>B</b><br><b>P</b><br><b>M</b><br><b>M1</b><br><b>S</b><br><b>S1</b><br><b>L</b><br><b>K</b><br><b>F</b><br><b>R</b> | These connectors are solder-dipped in 63/37 tin-lead solder.<br><br><b>To delete the solder dip and change to gold-plated terminals, add code 513</b> |
|   | 15                 |                    | 2 – .150" (3.81)               |   |  |   |
|   | 21                 |                    | 3 – .190" (4.83)               |   |  |   |
|   | 25                 | <b>S</b><br>Socket | 4 – .250" (6.35)               |   |  |   |
|   | 31                 |                    | 5 – Staggered Tail Length      |   |  |   |
|   | 37                 |                    | Length in Inches ± .015 (0.38) |   |  |   |
|   | 51                 |                    | 100                            |   |  |   |
| <b>Sample Part Number</b>   |                    |                    |                                |   |  |   |
| <b>GMR7580C</b>   | <b>- 31</b>        | <b>S</b>           | <b>2</b>                       | <b>B</b>  | <b>S1</b>  |   |

## MICRO-D MOUNTING HARDWARE

| B   | P  | M   | M1   | S  | S1  | L  | K  | F  | R   |
|---|--|---|--|--|---|--|--|--|---|
|   |  |   |  |  |   |  |  |  |   |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head Removable E-ring | <b>Jackscrew</b><br>Hex Head Removable E-ring Extended | <b>Jackscrew</b><br>Slot Head Removable E-ring | <b>Jackscrew</b><br>Slot Head Removable E-ring Extended | <b>Jackscrew</b><br>Hex Head Non-Removable | <b>Jackscrew</b><br>Slot Head Non-Removable Extended | <b>Float Mount</b><br>For Front Panel Mounting | <b>Float Mount</b><br>For Rear Panel Mounting |

# GMR7580C Vertical Mount Micro-D Connectors Compact Flange



Micro-D  
PCB




## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |


## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator, Tray  | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| PCB Terminals    | Gold Plated Copper Alloy, Solder Dipped   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

C

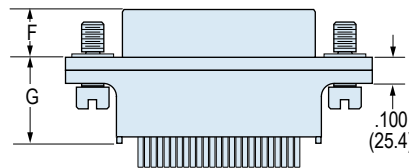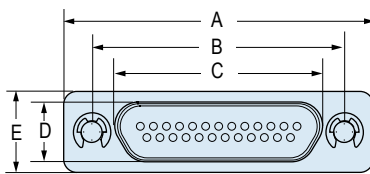

### STAGGERED LEADS



SIZES 9 THRU 51 MOUNTING HOLE IS .088/.094 (2.24/2.39)  
SIZE 100 MOUNTING HOLE IS .145/.150 (3.68/3.81)

SIZES 9 THRU 51 THREAD SIZE IS #2-56 UNC  
SIZE 100 THREAD SIZE IS #4-40


## GMR7580C CONNECTOR DIMENSIONS

| Layout | A Max. |       | B         |           | C Max. |       | D Max. |       | E Max. |       | F         |           | G Max. |       | H Max. |       |
|--------|--------|-------|-----------|-----------|--------|-------|--------|-------|--------|-------|-----------|-----------|--------|-------|--------|-------|
|        | In.    | mm.   | In. ±.005 | mm. ±0.13 | In.    | mm.   | In.    | mm.   | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In.    | mm.   |
| 9P     | .785   | 19.94 | .565      | 14.35     | .335   | 8.51  | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .355   | 9.02  | .310   | 7.87  |
| 9S     | .785   | 19.94 | .565      | 14.35     | .400   | 10.16 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .355   | 9.02  | .310   | 7.87  |
| 15P    | .935   | 23.75 | .715      | 18.16     | .485   | 12.32 | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .355   | 9.02  | .310   | 7.87  |
| 15S    | .935   | 23.75 | .715      | 18.16     | .550   | 13.97 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .355   | 9.02  | .310   | 7.87  |
| 21P    | 1.085  | 27.56 | .865      | 21.97     | .635   | 16.13 | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .355   | 9.02  | .310   | 7.87  |
| 21S    | 1.085  | 27.56 | .865      | 21.97     | .700   | 17.78 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .355   | 9.02  | .310   | 7.87  |
| 25P    | 1.185  | 30.01 | .965      | 24.51     | .735   | 18.67 | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .355   | 9.02  | .310   | 7.87  |
| 25S    | 1.185  | 30.01 | .965      | 24.51     | .800   | 20.32 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .355   | 9.02  | .310   | 7.87  |
| 31P    | 1.335  | 33.91 | 1.115     | 28.32     | .885   | 22.48 | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .355   | 9.02  | .310   | 7.87  |
| 31S    | 1.335  | 33.91 | 1.115     | 28.32     | .950   | 24.13 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .355   | 9.02  | .310   | 7.87  |
| 37P    | 1.485  | 37.72 | 1.265     | 32.13     | 1.035  | 26.29 | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .355   | 9.02  | .310   | 7.87  |
| 37S    | 1.485  | 37.72 | 1.265     | 32.13     | 1.100  | 27.94 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .355   | 9.02  | .310   | 7.87  |
| 51P    | 1.435  | 36.45 | 1.215     | 30.86     | .985   | 25.02 | .228   | 5.79  | .351   | 8.92  | .183      | 4.65      | .355   | 9.02  | .351   | 8.92  |
| 51S    | 1.435  | 36.45 | 1.215     | 30.86     | 1.050  | 26.67 | .294   | 7.47  | .351   | 8.92  | .195      | 4.95      | .355   | 9.02  | .351   | 8.92  |
| 100P   | 2.170  | 55.12 | 1.800     | 45.72     | 1.384  | 35.15 | .271   | 6.88  | .394   | 10.00 | .183      | 4.65      | .430   | 10.92 | .470   | 11.94 |
| 100S   | 2.170  | 55.12 | 1.800     | 45.72     | 1.508  | 38.30 | .394   | 10.00 | .394   | 10.00 | .195      | 4.95      | .430   | 10.92 | .470   | 11.94 |




## GMR7580C CONNECTOR PCB LAYOUTS – PIN CONNECTORS


Patterns shown are for connector mounting side of PC board.




9 PIN




15 PIN

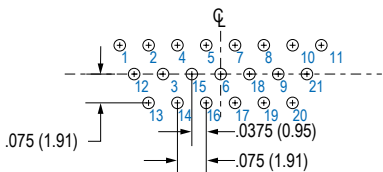


21 PIN

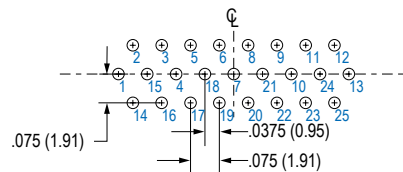


25 PIN

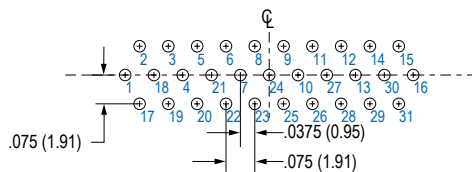


31 PIN

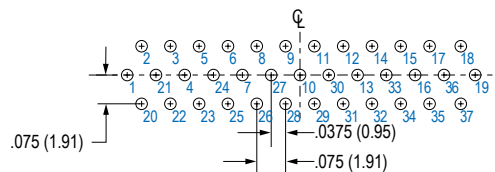

37 PIN

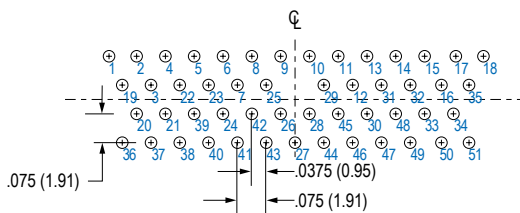

51 PIN

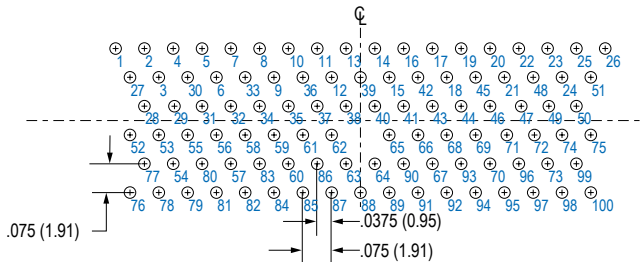









100 PIN


# GMR7580C Vertical Mount Micro-D Connectors Compact Flange



Micro-D  
PCB

Patterns shown are for connector mounting side of PC board.

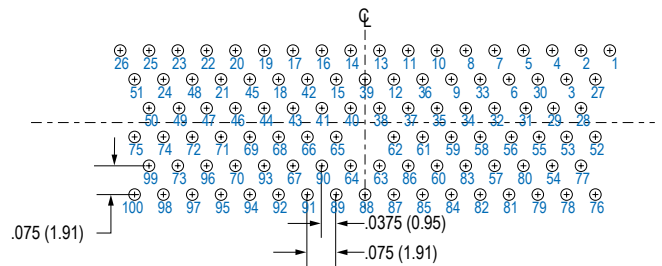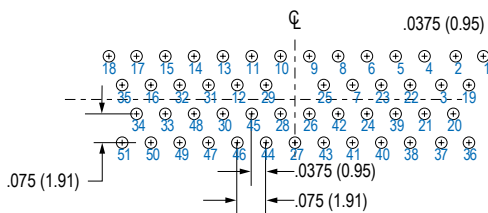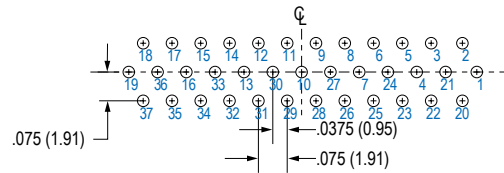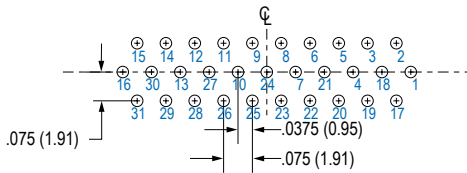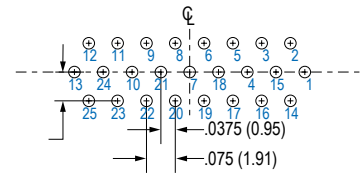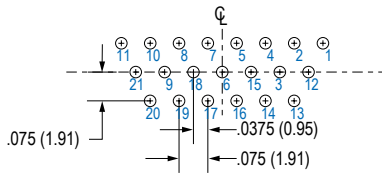

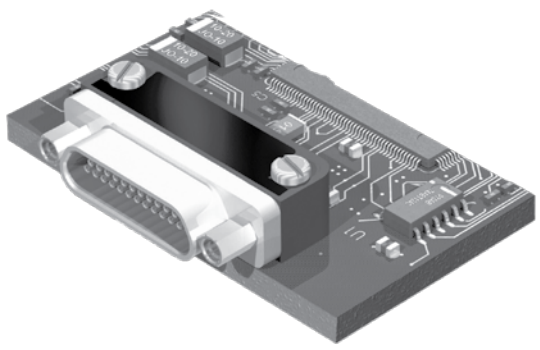

**Save Space On Your Circuit Board** – These Micro-D connectors feature .075 X .075 inch terminal spacing. Glenair's GMR7590 offers size and weight savings compared to traditional .100" pitch connectors.

**High Performance** – Approved for British Standard BS9000, GMR7590 connectors meet the performance requirements of MIL-DTL-83513. Gold plated TwistPin contacts assure best electrical and mechanical performance.

## HOW TO ORDER GMR7590 RIGHT ANGLE .075" PITCH CONNECTORS

| Series   | Number of Contacts | Contact Type | Tail Length In. (mm.)          | Shell Plating Finish | Hardware Option  | Gold-Plated Terminal Mod Code   |
|--|--------------------|--------------|--------------------------------|----------------------|--|---|
| GMR7590<br>Micro-D Metal Shell,<br>Right Angle Mount PCB | 9                  | P<br>Pin     | 1 – .109" (2.76)               | A – Cadmium          | <b>Hardware Option</b><br><br>NN – No Jackpost, No Threaded Insert<br>NU – UN Threaded Insert Only, No Jackposts<br>NM – Metric Threaded Insert Only, No Jackposts<br>SU – Short Jackpost and UN Threaded Insert<br>SM – Short Jackpost and Metric Threaded Insert<br><br><b>Rear Panel Mount Jackposts and Threaded Inserts</b><br>UN Threads    Metric Threads    Panel Thickness<br>TU              TM                    .094" (2.4)<br>VU              VM                    .062" (1.6)<br>WU              WM                    .047" (1.2)<br>XU              XM                    .031" (0.8)<br>YU              YM                    .023" (0.6) | These connectors are solder-dipped in 63/37 tin-lead solder.<br><br><b>To delete the solder dip and change to gold-plated terminals, add code 513</b> |
|  | 15                 |              | 2 – .150" (3.81)               | B – Nickel           |  |   |
|  | 21                 |              | 3 – .190" (4.83)               | C – Allochrome       |  |   |
|  | 25                 | S<br>Socket  | 4 – .250" (6.35)               | D – Black Anodize    |  |   |
|  | 31                 |              | 5 – Staggered Tail Length      | E – Gold             |  |   |
|  | 37                 |              | Length in Inches ± .015 (0.38) |                      |  |   |
| 51   |                    |              |                                |                      |  |   |
| 100  |                    |              |                                |                      |  |   |

### SAMPLE PART NUMBER

|         |      |   |   |   |    |  |
|---------|------|---|---|---|----|--|
| GMR7590 | – 31 | S | 2 | B | SU |  |
|---------|------|---|---|---|----|--|

## GMR7590 JACKPOST OPTIONS



| NN   | NU, NM  | SN  | SU, SM                        | TU, VU, WU, XU, YU<br>TM, VM, WM, XM, YM |
|--|---|---|-------------------------------|--|
|  |   |   |                               |  |
| No Jackpost, No Threaded Insert In PCB Mtng Hole | No Jackpost, Threaded Insert In PCB Mounting Hole | Jackpost Installed, No Threaded Insert in PCB Mounting Hole | Jackpost With Threaded Insert | Jackpost for Rear Panel Mounting         |

## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator, Tray  | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| PCB Terminals    | Gold Plated Copper Alloy, Solder Dipped   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

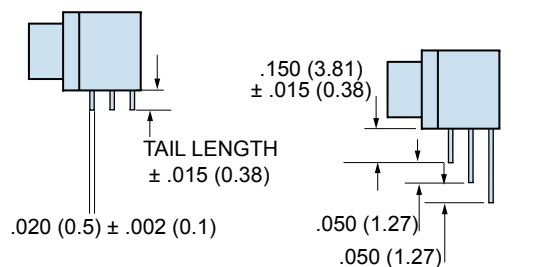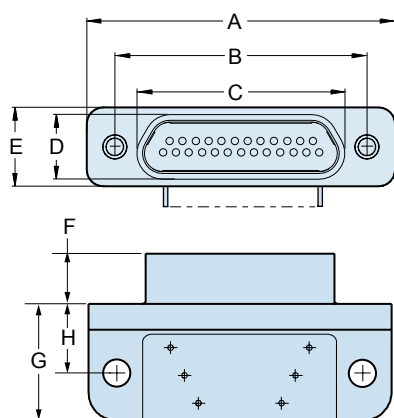

STAGGERED LEADS

SIZES 9 THRU 51 MOUNTING HOLE IS .088/094 (2.24/2.39)  
 SIZE 100 MOUNTING HOLE IS .145/.150 (3.68/3.81)


SIZES 9 THRU 51 THREAD SIZE IS #2-56 UNC OR M2.  
 SIZE 100 THREAD SIZE IS #4-40 OR M3.

## GMR7590 CONNECTOR DIMENSIONS


| Layout | A Max. |       | B              |                | C Max. |       | D Max. |       | E Max. |       | F              |                | G Max. |       | H              |                |
|--------|--------|-------|----------------|----------------|--------|-------|--------|-------|--------|-------|----------------|----------------|--------|-------|----------------|----------------|
|        | In.    | mm.   | In. $\pm .005$ | mm. $\pm 0.13$ | In.    | mm.   | In.    | mm.   | In.    | mm.   | In. $\pm .003$ | mm. $\pm 0.08$ | In.    | mm.   | In. $\pm .010$ | mm. $\pm 0.25$ |
| 9P     | .785   | 19.94 | .565           | 14.35          | .335   | 8.51  | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .400   | 10.16 | .250           | 6.35           |
| 9S     | .785   | 19.94 | .565           | 14.35          | .400   | 10.16 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .400   | 10.16 | .250           | 6.35           |
| 15P    | .935   | 23.75 | .715           | 18.16          | .485   | 12.32 | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .400   | 10.16 | .250           | 6.35           |
| 15S    | .935   | 23.75 | .715           | 18.16          | .550   | 13.97 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .400   | 10.16 | .250           | 6.35           |
| 21P    | 1.085  | 27.56 | .865           | 21.97          | .635   | 16.13 | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .400   | 10.16 | .250           | 6.35           |
| 21S    | 1.085  | 27.56 | .865           | 21.97          | .700   | 17.78 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .400   | 10.16 | .250           | 6.35           |
| 25P    | 1.185  | 30.01 | .965           | 24.51          | .735   | 18.67 | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .400   | 10.16 | .250           | 6.35           |
| 25S    | 1.185  | 30.01 | .965           | 24.51          | .800   | 20.32 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .400   | 10.16 | .250           | 6.35           |
| 31P    | 1.335  | 33.91 | 1.115          | 28.32          | .885   | 22.48 | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .400   | 10.16 | .250           | 6.35           |
| 31S    | 1.335  | 33.91 | 1.115          | 28.32          | .950   | 24.13 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .400   | 10.16 | .250           | 6.35           |
| 37P    | 1.485  | 37.72 | 1.265          | 32.13          | 1.035  | 26.29 | .185   | 4.70  | .310   | 7.87  | .183           | 4.65           | .400   | 10.16 | .250           | 6.35           |
| 37S    | 1.485  | 37.72 | 1.265          | 32.13          | 1.100  | 27.94 | .251   | 6.38  | .310   | 7.87  | .195           | 4.95           | .400   | 10.16 | .250           | 6.35           |
| 51P    | 1.435  | 36.45 | 1.215          | 30.86          | .985   | 25.02 | .228   | 5.79  | .351   | 8.92  | .183           | 4.65           | .490   | 12.45 | .300           | 7.62           |
| 51S    | 1.435  | 36.45 | 1.215          | 30.86          | 1.050  | 26.67 | .294   | 7.47  | .351   | 8.92  | .195           | 4.95           | .490   | 12.45 | .300           | 7.62           |
| 100P   | 2.170  | 55.12 | 1.800          | 45.72          | 1.384  | 35.15 | .271   | 6.88  | .394   | 10.00 | .183           | 4.65           | .660   | 16.76 | .400           | 10.16          |
| 100S   | 2.170  | 55.12 | 1.800          | 45.72          | 1.508  | 38.30 | .394   | 10.00 | .394   | 10.00 | .195           | 4.95           | .660   | 16.76 | .400           | 10.16          |

## GMR7590 CONNECTOR PCB LAYOUTS – PIN CONNECTORS


Patterns shown are for connector mounting side of PC board.

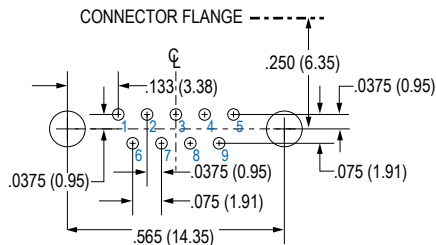


9 PIN

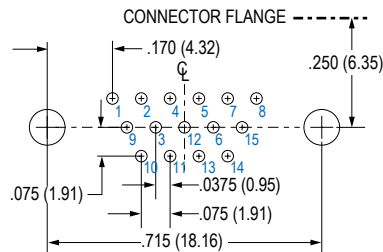


15 PIN

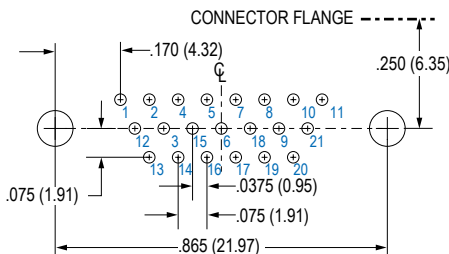


21 PIN

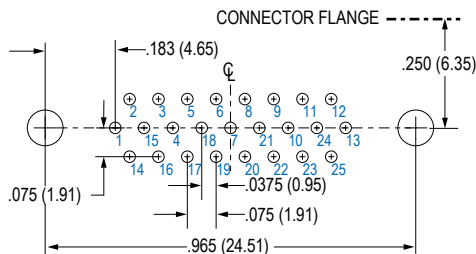


25 PIN

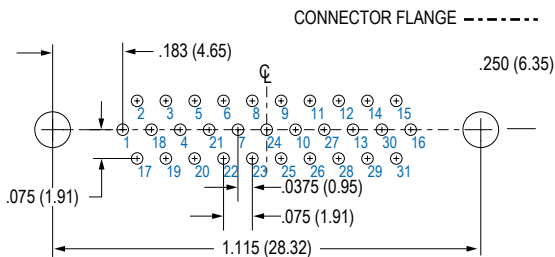


31 PIN

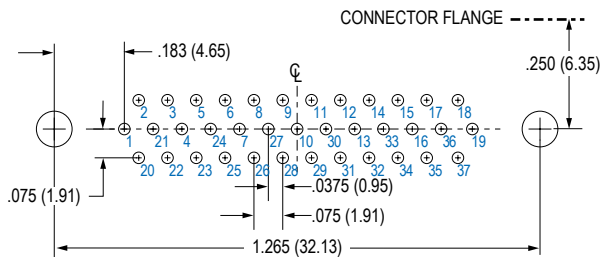

37 PIN

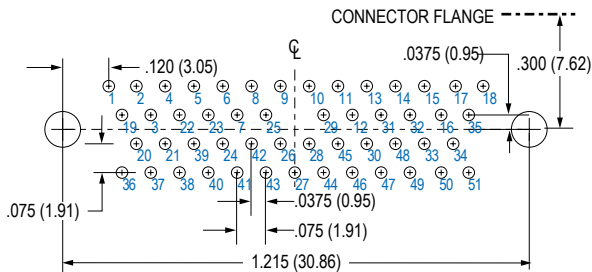


51 PIN

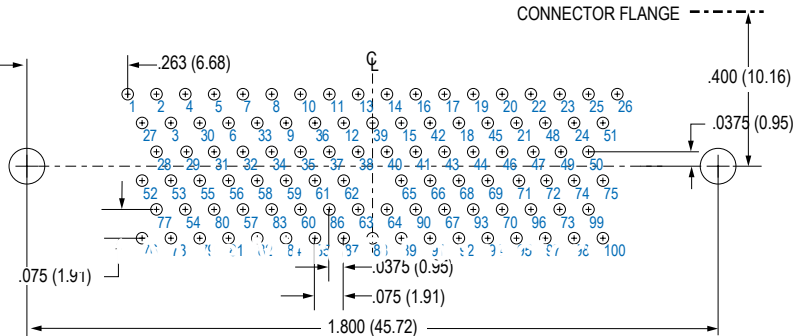


100 PIN

## GMR7590 CONNECTOR PCB LAYOUTS – SOCKET CONNECTORS


Patterns shown are for connector mounting side of PC board.

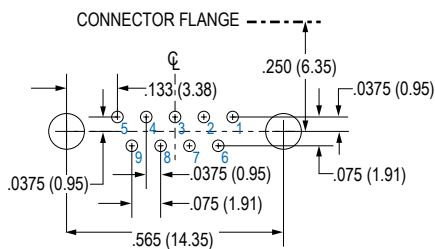


9 SOCKET

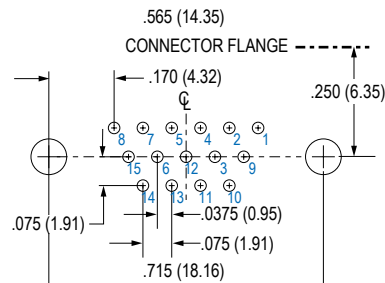


15 SOCKET

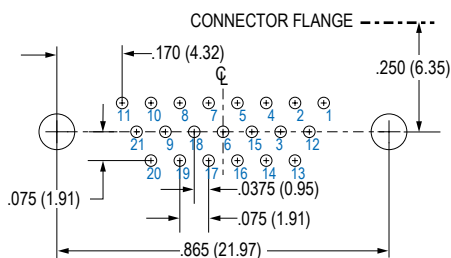


21 SOCKET

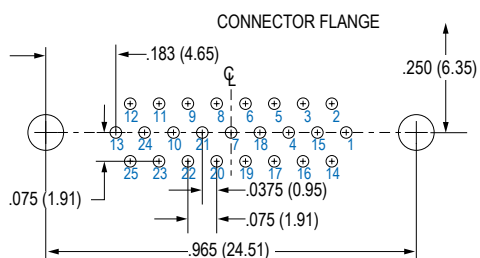


25 SOCKET

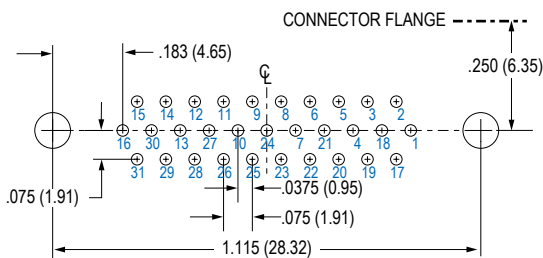


31 SOCKET

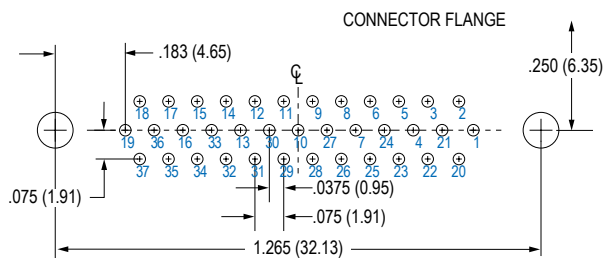

37 SOCKET

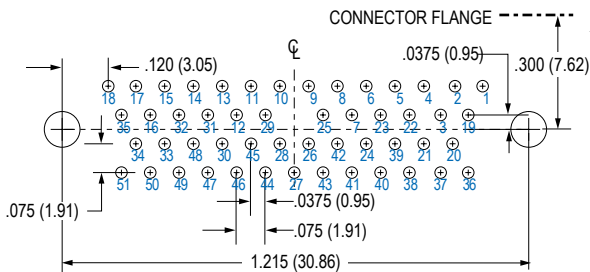


51 SOCKET

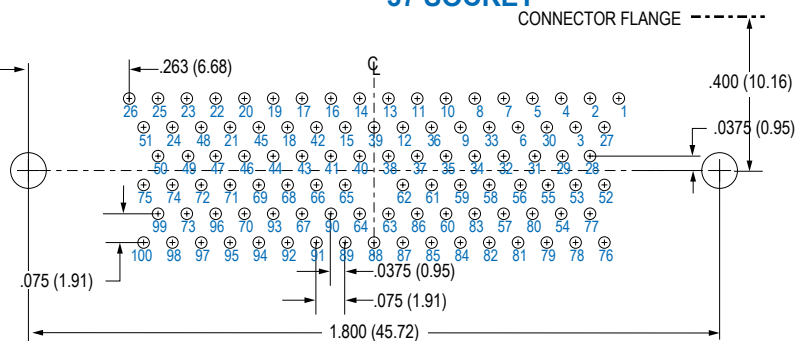

100 SOCKET



# GMR7590C Right Angle Mount Micro-D Connectors Compact Flange

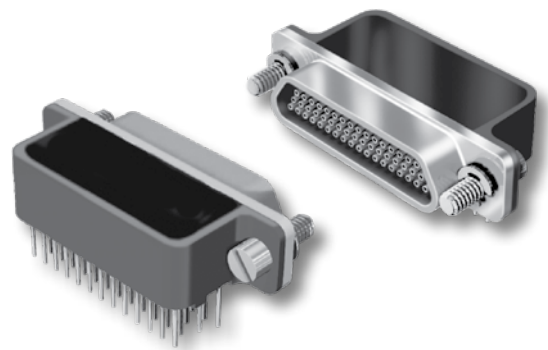

**Innovative Design for Flex Circuits** – These Micro-D connectors answer the need for a compact flex circuit connector. Featuring .075 X .075 inch row spacing. Glenair's GMR7590C accepts standard jackscrews and jackposts, making it ideal for flex-to-board applications.

**High Performance** – Approved for British Standard BS9000, GMR7590C connectors meet the performance requirements of MIL-DTL-83513. Gold plated TwistPin contacts assure best electrical and mechanical performance.

## HOW TO ORDER GMR7590 RIGHT ANGLE .075" PITCH PCB CONNECTORS

| Series   | Number of Contacts | Contact Type       | Tail Length In. (mm.)     | Shell Plating Finish  | Hardware   | Gold-Plated Terminal Mod Code   |
|--|--------------------|--------------------|---------------------------|---|--|---|
| <b>GMR7590C</b><br>Micro-D Metal Shell,<br>Right Angle Mount<br>PCB, Compact | 9                  | <b>P</b><br>Pin    | 1 – .109" (2.76)          | <b>A</b> – Cadmium<br><b>B</b> – Nickel<br><b>C</b> – Alchrome<br><b>D</b> – Black Anodize<br><b>E</b> – Gold | <b>B</b><br><b>P</b><br><b>M</b><br><b>M1</b><br><b>S</b><br><b>S1</b><br><b>L</b><br><b>K</b><br><b>F</b><br><b>R</b> | These connectors are solder-dipped in 63/37 tin-lead solder.<br><br><b>To delete the solder dip and change to gold-plated terminals, add code 513</b> |
|  | 15                 |                    | 2 – .150" (3.81)          |   |  |   |
|  | 21                 |                    | 3 – .190" (4.83)          |   |  |   |
|  | 25                 | <b>S</b><br>Socket | 4 – .250" (6.35)          |   |  |   |
|  | 31                 |                    | 5 – Staggered Tail Length |   |  |   |
|  | 37                 |                    |                           |   |  |   |
|  | 51                 |                    |                           |   |  |   |
| 100  |                    |                    |                           |   |  |   |
| <b>Sample Part Number</b>  |                    |                    |                           |   |  |   |
| <b>GMR7590C</b>  | <b>- 31</b>        | <b>S</b>           | <b>2</b>                  | <b>B</b>  | <b>S1</b>  |   |

## MICRO-D MOUNTING HARDWARE

| B   | P  | M   | M1   | S  | S1  | L  | K  | F  | R   |
|---|--|---|--|--|---|--|--|--|---|
|   |  |   |  |  |   |  |  |  |   |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head Removable E-ring | <b>Jackscrew</b><br>Hex Head Removable E-ring Extended | <b>Jackscrew</b><br>Slot Head Removable E-ring | <b>Jackscrew</b><br>Slot Head Removable E-ring Extended | <b>Jackscrew</b><br>Hex Head Non-Removable | <b>Jackscrew</b><br>Slot Head Non-Removable Extended | <b>Float Mount</b><br>For Front Panel Mounting | <b>Float Mount</b><br>For Rear Panel Mounting |

# GMR7590C Right Angle Mount Micro-D Connectors Compact Flange





Micro-D  
PCB

## PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 3 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options |
| Insulator, Tray  | Liquid Crystal Polymer (LCP)  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating   |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating   |
| PCB Terminals    | Gold Plated Copper Alloy, Solder Dipped   |
| Hardware         | 300 Series Stainless Steel  |
| Encapsulant      | Epoxy Resin Hysol EE4215  |

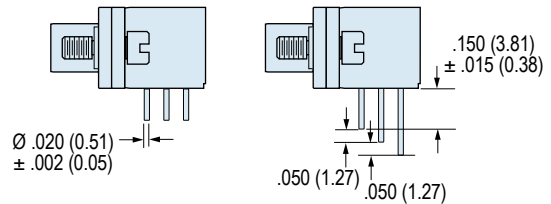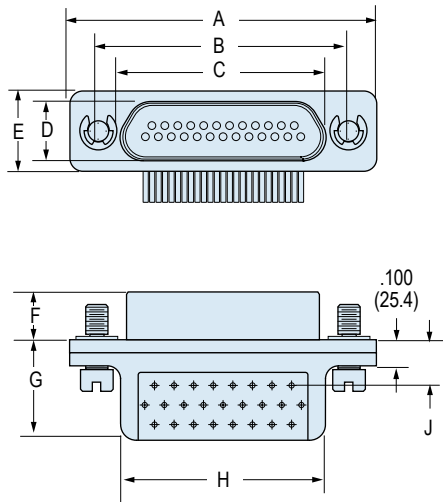

STAGGERED LEADS

SIZES 9 THRU 51 MOUNTING HOLE IS .088/.094 (2.24/2.39)  
SIZE 100 MOUNTING HOLE IS .145/.150 (3.68/3.81)

SIZES 9 THRU 51 THREAD SIZE IS #2-56 UNC  
SIZE 100 THREAD SIZE IS #4-40


## GMR7590C CONNECTOR DIMENSIONS

| Layout | A Max. |       | B         |           | C Max. |       | D Max. |       | E Max. |       | F         |           | G Max. |       | H         |           |
|--------|--------|-------|-----------|-----------|--------|-------|--------|-------|--------|-------|-----------|-----------|--------|-------|-----------|-----------|
|        | In.    | mm.   | In. ±.005 | mm. ±0.13 | In.    | mm.   | In.    | mm.   | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In. ±.010 | mm. ±0.25 |
| 9P     | .785   | 19.94 | .565      | 14.35     | .335   | 8.51  | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .400   | 10.16 | .400      | 10.16     |
| 9S     | .785   | 19.94 | .565      | 14.35     | .400   | 10.16 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .400   | 10.16 | .400      | 10.16     |
| 15P    | .935   | 23.75 | .715      | 18.16     | .485   | 12.32 | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .400   | 10.16 | .550      | 13.97     |
| 15S    | .935   | 23.75 | .715      | 18.16     | .550   | 13.97 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .400   | 10.16 | .550      | 13.97     |
| 21P    | 1.085  | 27.56 | .865      | 21.97     | .635   | 16.13 | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .400   | 10.16 | .700      | 17.78     |
| 21S    | 1.085  | 27.56 | .865      | 21.97     | .700   | 17.78 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .400   | 10.16 | .700      | 17.78     |
| 25P    | 1.185  | 30.01 | .965      | 24.51     | .735   | 18.67 | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .400   | 10.16 | .800      | 20.32     |
| 25S    | 1.185  | 30.01 | .965      | 24.51     | .800   | 20.32 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .400   | 10.16 | .800      | 20.32     |
| 31P    | 1.335  | 33.91 | 1.115     | 28.32     | .885   | 22.48 | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .400   | 10.16 | .950      | 24.13     |
| 31S    | 1.335  | 33.91 | 1.115     | 28.32     | .950   | 24.13 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .400   | 10.16 | .950      | 24.13     |
| 37P    | 1.485  | 37.72 | 1.265     | 32.13     | 1.035  | 26.29 | .185   | 4.70  | .310   | 7.87  | .183      | 4.65      | .400   | 10.16 | 1.100     | 27.94     |
| 37S    | 1.485  | 37.72 | 1.265     | 32.13     | 1.100  | 27.94 | .251   | 6.38  | .310   | 7.87  | .195      | 4.95      | .400   | 10.16 | 1.100     | 27.94     |
| 51P    | 1.435  | 36.45 | 1.215     | 30.86     | .985   | 25.02 | .228   | 5.79  | .351   | 8.92  | .183      | 4.65      | .490   | 12.45 | 1.050     | 26.67     |
| 51S    | 1.435  | 36.45 | 1.215     | 30.86     | 1.050  | 26.67 | .294   | 7.47  | .351   | 8.92  | .195      | 4.95      | .490   | 12.45 | 1.050     | 26.67     |
| 100P   | 2.170  | 55.12 | 1.800     | 45.72     | 1.384  | 35.15 | .271   | 6.88  | .394   | 10.00 | .183      | 4.65      | .660   | 16.76 | 1.500     | 38.13     |
| 100S   | 2.170  | 55.12 | 1.800     | 45.72     | 1.508  | 38.30 | .394   | 10.00 | .394   | 10.00 | .195      | 4.95      | .660   | 16.76 | 1.500     | 38.13     |




## GMR7590C CONNECTOR PCB LAYOUTS – PIN CONNECTORS


Patterns shown are for connector mounting side of PC board.




**9 PIN**

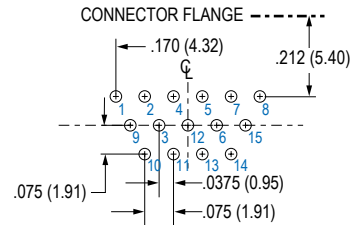


**15 PIN**

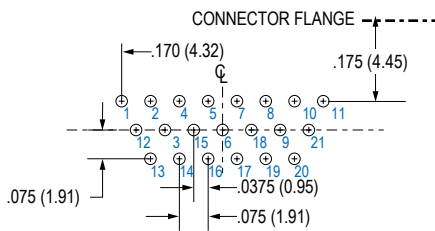


**21 PIN**

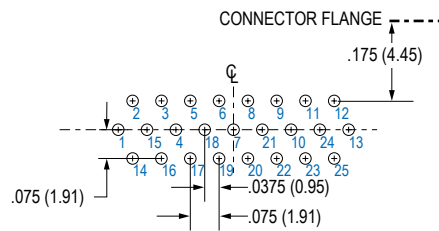


**25 PIN**

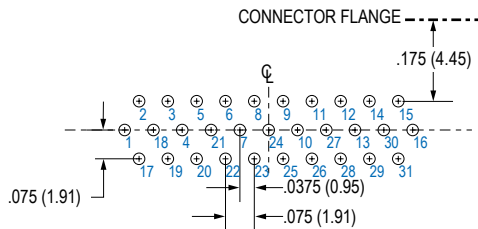


**31 PIN**

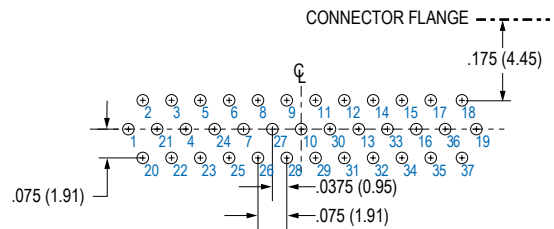

**37 PIN**

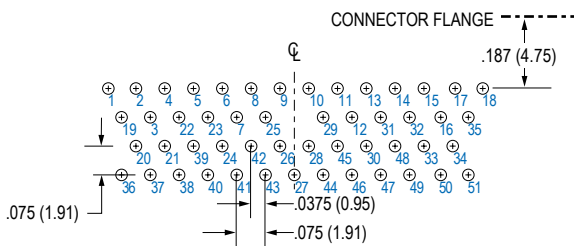


**51 PIN**

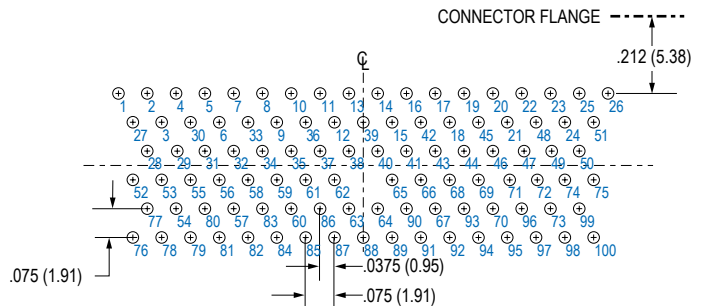


**100 PIN**

## GMR7590C CONNECTOR PCB LAYOUTS – SOCKET CONNECTORS


Patterns shown are for connector mounting side of PC board.




**9 SOCKET**




**15 SOCKET**

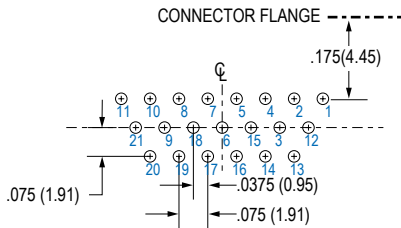


**21 SOCKET**

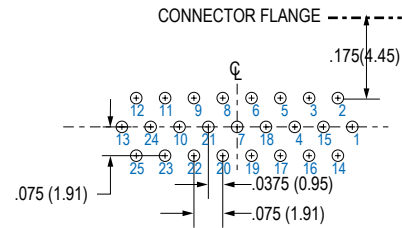


**25 SOCKET**

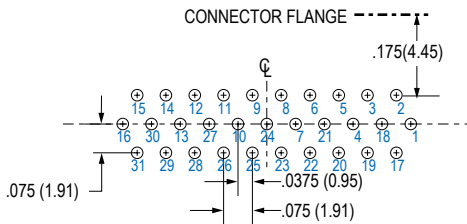


**31 SOCKET**

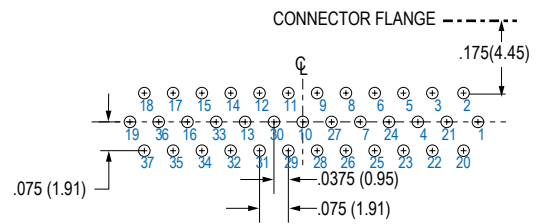


**37 SOCKET**

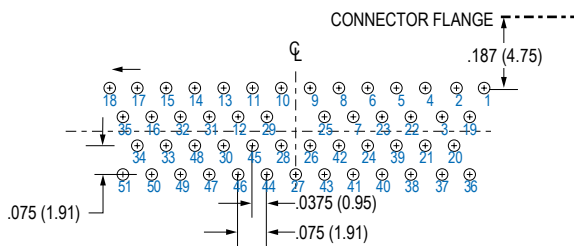

**51 SOCKET**

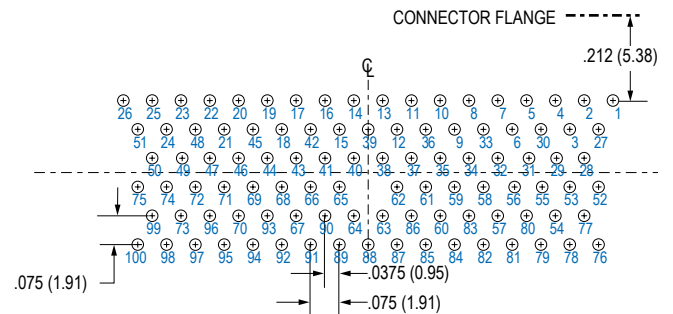


**100 SOCKET**

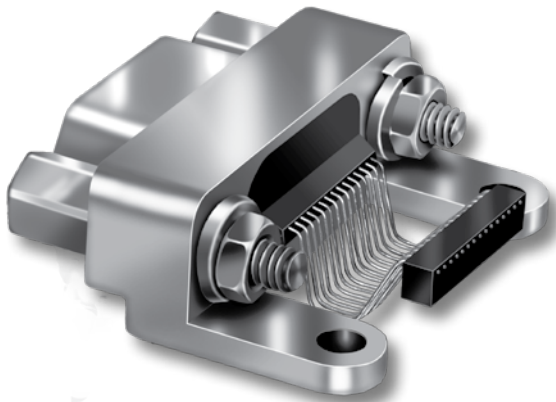


**Surface Mount Micro-D** – These connectors feature .025 inch terminal spacing and an alignment strip for accurate registration. The integral mounting legs provide a ground path.

**9 To 51 Contacts** – These compact connectors are lighter and smaller than comparable thru-hole versions.

**Mil Spec Reliability** – Suitable for mission-critical requirements, These high performance connectors meet the requirements of MIL-DTL-83513.

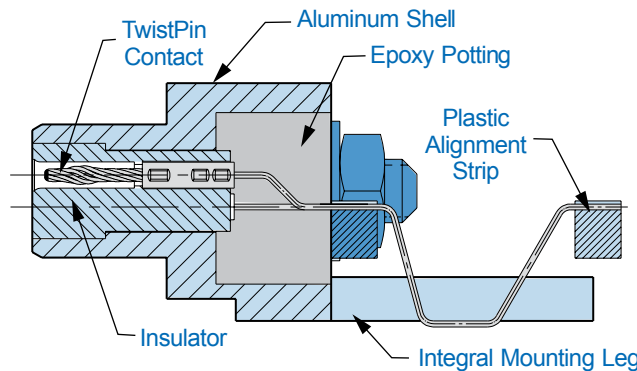


Pin Connector

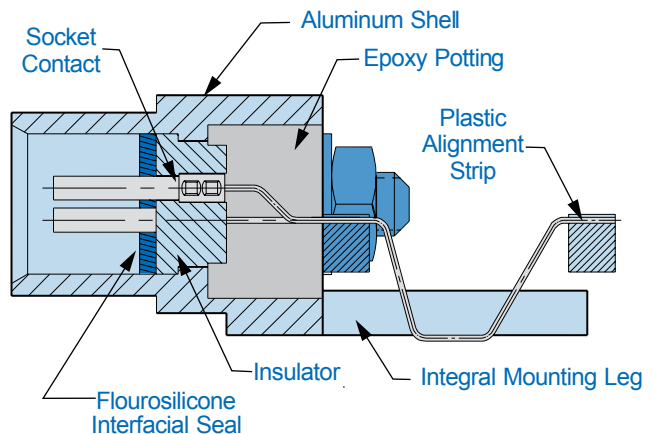

Socket Connector


## HOW TO ORDER SURFACE MOUNT PCB MICRO-D CONNECTORS

| Series | Shell Material and Finish | Insulator Material                                 | Contact Layout | Contact Type | Termination Type                 | Jackpost or Jackscrew Option      | Board Mounting Threaded Insert Option            |
|--------|---------------------------|--|----------------|--------------|----------------------------------|-----------------------------------|--|
| MWDM   | 1 – Cadmium               | L – LCP<br>30% Glass-Filled Liquid Crystal Polymer | 9              | P – Pin      | SMR<br>Surface Mount Right Angle | N – Thru-Hole                     | N – Thru-Hole, No Insert<br>T – Threaded Inserts |
|        | 2 – Nickel                |  | 15             | S – Socket   |                                  | P – Jackpost                      |  |
|        | 4 – Black Anodize         |  | 21             |              |                                  | M – Jackscrew, Hex Head           |  |
|        | 5 – Gold                  |  | 25             |              |                                  | T – Threaded Insert               |  |
|        | 6 – Chem Film             |  | 31             |              |                                  | Jackposts for Rear Panel Mounting |  |
|        |                           |  | 37             |              |                                  | R1 – .032" Panel                  |  |
|        |                           |  | 51-2           |              |                                  | R2 – .047" Panel                  |  |
|        |                           |  |                |              |                                  | R3 – .062" Panel                  |  |
|        |                           |  |                |              |                                  | R4 – .093" Panel                  |  |
|        |                           |  |                |              |                                  | R5 – .125" Panel                  |  |




| Sample Part Number |   |   |        |   |     |   |   |
|--------------------|---|---|--------|---|-----|---|---|
| MWDM               | 2 | L | - 51-2 | P | SMR | P | N |


## SURFACE MOUNT MICRO-D HARDWARE OPTIONS

**N**

**Thru-Hole**


No jackpost supplied

**P**

**Standard Jackpost**


Factory installed with nut and lockwasher

**R1 Thru R5**

**Jackpost for Rear Panel Mounting**


Shipped loosely installed. Install with permanent threadlocking compound.

**M**

**Jackscrew, Hex Drive**

Attached with e-ring

**T**

**Threaded Insert**

#2-56 Thread


**T**

**Board Mount Threaded Insert**

### PERFORMANCE SPECIFICATIONS

|                           |                               |
|---------------------------|-------------------------------|
| Current Rating            | 1 AMP                         |
| DWV                       | 600 VAC Sea level             |
| Insulation Resistance     | 5000 Megohms Minimum          |
| Contact Resistance        | 8 Milliohms Maximum           |
| Low Level Contact Resist. | 32 Milliohms Maximum          |
| Magnetic Permeability     | 2 $\mu$ Maximum               |
| Operating Temperature     | -55° C. to +150° C.           |
| Shock, Vibration          | 50 g., 20g.                   |
| Mating Force              | (10 Ounces) X (# of Contacts) |

### MATERIALS AND FINISHES
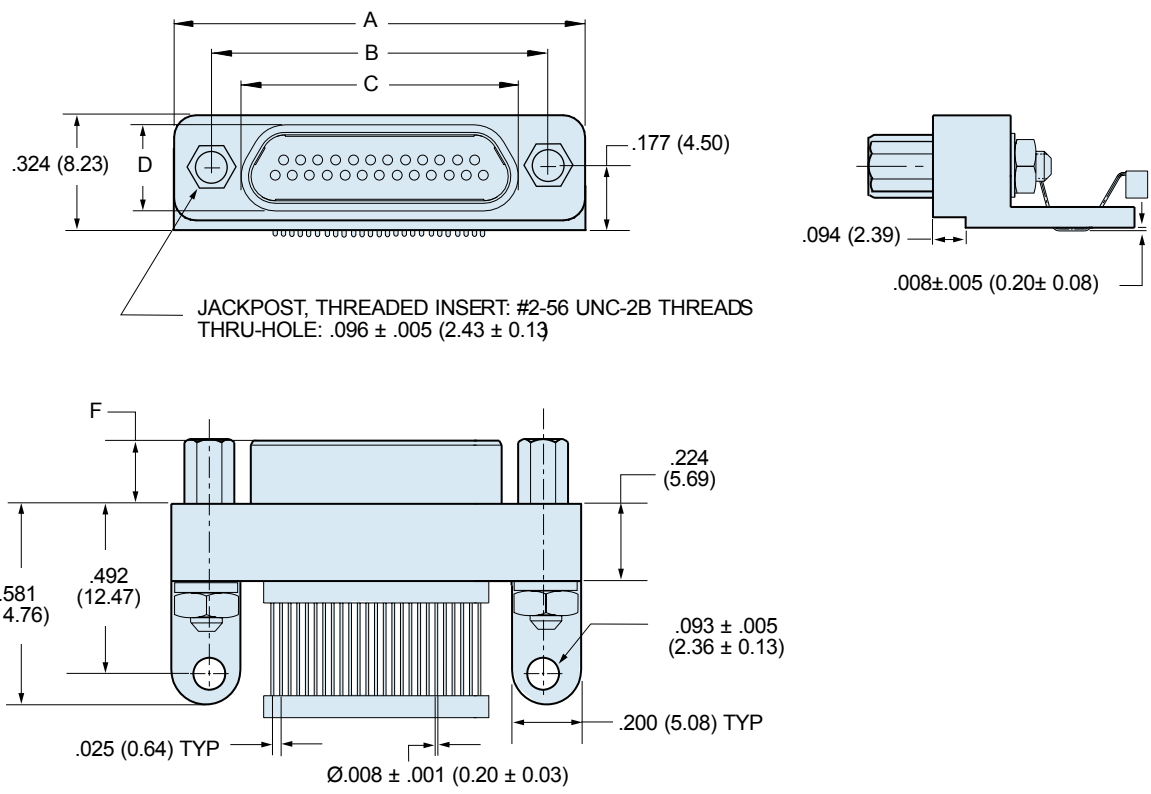
|                  |  |
|------------------|--|
| Connector Shell  | Aluminum Alloy 6061. See Ordering Info for Plating Options |
| Insulators       | Liquid Crystal Polymer (LCP)                               |
| Interfacial Seal | Flourosilicone Rubber, Blue                                |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating                  |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating                      |
| PCB Terminals    | Gold Plated Copper Alloy, Solder Dipped                    |
| Hardware         | 300 Series Stainless Steel                                 |
| Encapsulant      | Epoxy Resin Hysol EE4215                                   |





## DIMENSIONS

| Layout | A Max. |       | B            |               | C Max. |       | D Max. |      | F            |               |
|--------|--------|-------|--------------|---------------|--------|-------|--------|------|--------------|---------------|
|        | In.    | mm.   | In.<br>±.005 | mm.<br>± 0.13 | In.    | mm.   | In.    | mm.  | In.<br>±.003 | mm.<br>± 0.08 |
| 9P     | .785   | 19.94 | .565         | 14.35         | .333   | 8.46  | .184   | 4.67 | .183         | 4.65          |
| 9S     | .785   | 19.94 | .565         | 14.35         | .400   | 10.16 | .250   | 6.35 | .195         | 4.95          |
| 15P    | .935   | 23.75 | .715         | 18.16         | .483   | 12.27 | .184   | 4.67 | .183         | 4.65          |
| 15S    | .935   | 23.75 | .715         | 18.16         | .551   | 14.00 | .250   | 6.35 | .195         | 4.95          |
| 21P    | 1.085  | 27.56 | .865         | 21.97         | .633   | 16.08 | .184   | 4.67 | .183         | 4.65          |
| 21S    | 1.085  | 27.56 | .865         | 21.97         | .701   | 17.81 | .250   | 6.35 | .195         | 4.95          |
| 25P    | 1.185  | 30.01 | .965         | 24.51         | .733   | 18.62 | .184   | 4.67 | .183         | 4.65          |
| 25S    | 1.185  | 30.01 | .965         | 24.51         | .801   | 20.35 | .250   | 6.35 | .195         | 4.95          |
| 31P    | 1.335  | 33.91 | 1.115        | 28.32         | .883   | 22.43 | .184   | 4.67 | .183         | 4.65          |
| 31S    | 1.335  | 33.91 | 1.115        | 28.32         | .951   | 24.16 | .250   | 6.35 | .195         | 4.95          |
| 37P    | 1.485  | 37.72 | 1.265        | 32.13         | 1.033  | 26.24 | .184   | 4.67 | .183         | 4.65          |
| 37S    | 1.485  | 37.72 | 1.265        | 32.13         | 1.101  | 27.96 | .250   | 6.35 | .195         | 4.95          |
| 51-2P  | 1.840  | 46.74 | 1.615        | 41.02         | 1.375  | 34.93 | .184   | 4.67 | .183         | 4.65          |
| 51-2S  | 1.840  | 46.74 | 1.615        | 41.02         | 1.444  | 36.68 | .250   | 6.35 | .195         | 4.95          |

## SMR SURFACE MOUNT CONNECTOR PCB LAYOUTS

### Suggested Printed Circuit Board Layout

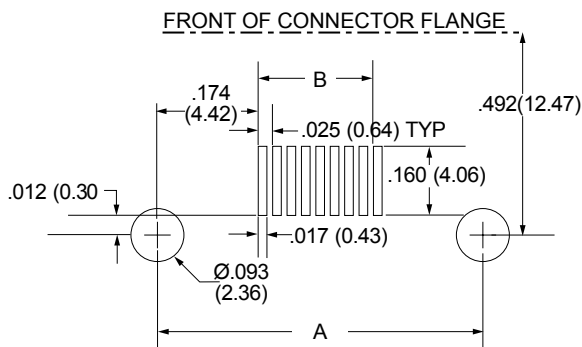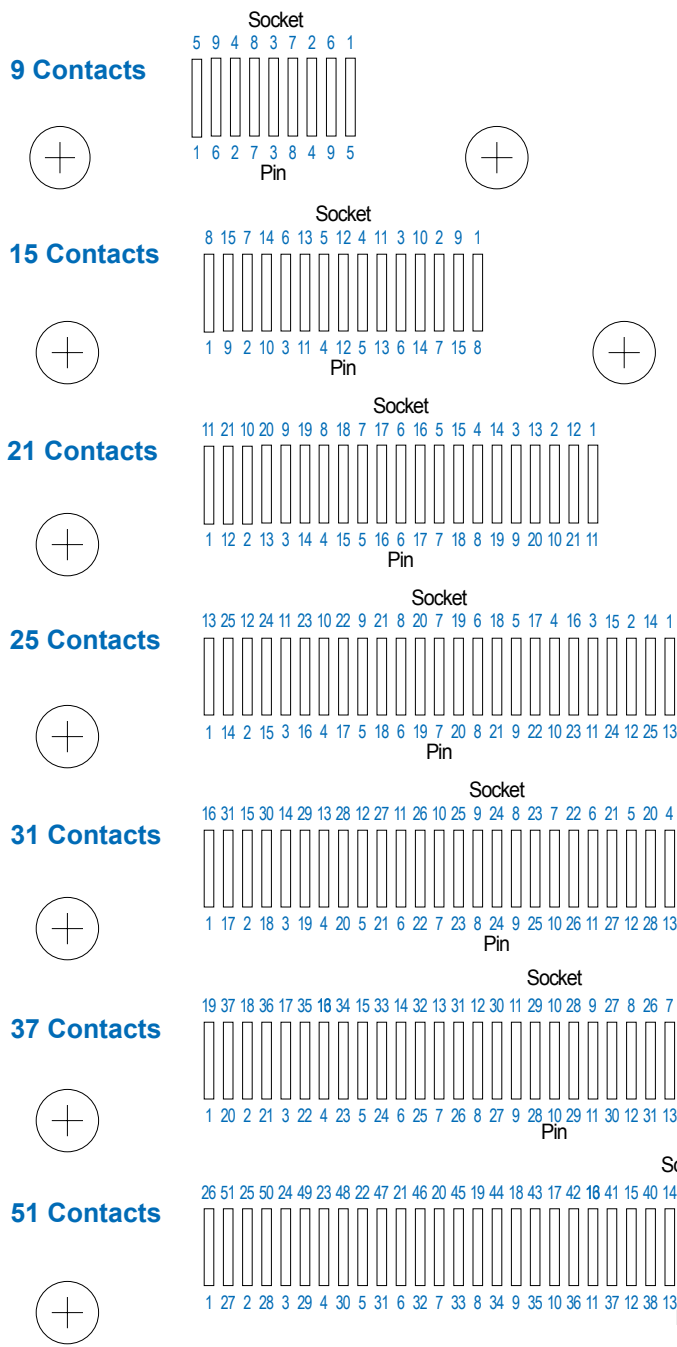

| Layout      | A     |       | B     |       |
|-------------|-------|-------|-------|-------|
|             | In.   | mm.   | In.   | mm.   |
| <b>9</b>    | .565  | 14.35 | .200  | 5.08  |
| <b>15</b>   | .715  | 18.16 | .350  | 8.89  |
| <b>21</b>   | .865  | 21.97 | .500  | 12.70 |
| <b>25</b>   | .965  | 24.51 | .600  | 15.24 |
| <b>31</b>   | 1.115 | 28.32 | .750  | 19.05 |
| <b>37</b>   | 1.265 | 32.13 | .900  | 22.86 |
| <b>51-2</b> | 1.615 | 41.02 | 1.250 | 31.75 |



# Too Fat to Fly?



*"Phenomenal  
Performance;  
Itty-Bitty Package"*

## Maybe. But Not Too Big To Be Saved by a Mouse.

One of the biggest challenges facing designers of armored vehicles and other rapid deployment combat platforms is the requirement to build systems which are transportable by air. In critical weight-reduction applications such as these, literally every ounce counts. That's why Glenair invented the Series 80 "Mighty Mouse;" an ultraminiature connector with

all the performance characteristics of standard Mil-Spec products. The "Mighty Mouse" is being used in ground, air and sea applications where extreme levels of weight reduction are not just an option but a necessity. So, if your system is too fat to fly, consider a switch to the mouse. The Glenair "Mighty Mouse": Phenomenal Performance, Itty-Bitty Package.



1211 Air Way

Glendale, California 91201-2497

Telephone: 818-247-6000 · Facsimilie: 818-500-9912 · EMail: [sales@glenair.com](mailto:sales@glenair.com)

United States · United Kingdom · Germany · Nordic · France · Italy · Spain

[www.glenair.com](http://www.glenair.com)

PRODUCT SELECTION GUIDE



Connector height is a priority for miniaturized electronics modules. These GSM connectors are shorter and occupy less board real estate than comparable two row Micro-D connectors.

**Solder Cup, Pre-wired and PCB Versions** feature gold-plated TwistPin contacts, machined aluminum shells, and are fully potted with epoxy. The glass-filled thermoplastic LCP trays will withstand soldering heat without damage.

**Eight Contact Arrangements** – Choose from four to 35 contacts. Available in a variety of finishes, the socket connectors are fitted with fluoro-silicone interfacial seals.

**GMSM Solder Cup Connectors**

Nonremovable solder cup contacts for termination to #26 AWG or smaller wire, .050" contact spacing, eight layouts from 4 to 35 contacts.



*Solder Cup Connectors  
Page D-2*

**GMSM Pre-Wired Pigtails**

Crimp contacts are terminated to insulated Teflon® wire. Connectors are backpotted with epoxy, providing strain relief and environmental protection.



*Insulated Wire Pigtails  
Page D-3*

**GMSM with Solid Uninsulated Wire**

Gold-plated or solder-dipped solid copper wire, crimp termination, backpotted with epoxy. Can be terminated to flexible circuits.



*Solid Wire Pigtails  
Page D-3*

**GMSM Right Angle Printed Circuit Board**

.075 inch by .100 inch terminal spacing, for thru-hole rigid or flexible circuits. One piece threaded inserts provide a ground path from the jackpost to the board.




*Right Angle PCB  
Page D-5*

D



# GMSM Low Profile Single Row Metal Shell Microminiature Solder Cup and Pre-Wired Connectors

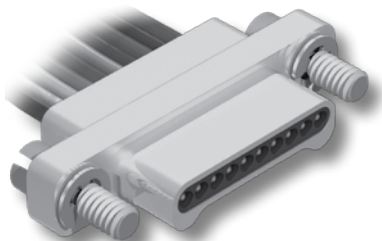


**GMSM Connectors** offer mil spec design and performance in a smaller form factor. These GMSM single row connectors are reduced in height compared to two-row Micro-D connectors.

**GMSM Connectors** feature gold plated TwistPin contacts, machined aluminum shells, and are fully potted with epoxy. Choose from 4 to 35 contacts. Available in a variety of finishes, socket connectors are fitted with flourosilicone interfacial seals.

## HOW TO ORDER GMSM SOLDER CUP CONNECTORS

D

| Series      | Shell Finish                 | Number of Contacts | Contact Type          | Termination Type | Hardware   |
|-------------|------------------------------|--------------------|-----------------------|------------------|--|
| <b>GMSM</b> | 1 – Cadmium                  | 4                  | P – Pin<br>S – Socket | S<br>Solder Cup  | B<br>P<br>M<br>M1<br>S<br>S1<br>L<br>K<br>F<br>R |
|             | 2 – Nickel                   | 6                  |                       |                  |  |
|             | 4 – Black Anodize            | 10                 |                       |                  |  |
|             | 5 – Gold                     | 15                 |                       |                  |  |
|             | 6 – Chem Film                | 20                 |                       |                  |  |
|             |                              | 25                 |                       |                  |  |
|             | <b>Stainless Steel Shell</b> | 30                 |                       |                  |  |
|             |                              | 35                 |                       |                  |  |
|             |                              | 3 – Passivated     |                       |                  |  |
|             | <b>Sample Part Number</b>    |                    |                       |                  |  |
| <b>GMSM</b> | <b>1 –</b>                   | <b>15</b>          | <b>P</b>              | <b>S</b>         | <b>B</b>   |



Solder Cup

## MICRO-D MOUNTING HARDWARE


| B   | P  | M   | M1   | S  | S1  | L  | K  | F  | R   |
|---|--|---|--|--|---|--|--|--|---|
|   |  |   |  |  |   |  |  |  |   |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head Removable E-ring | <b>Jackscrew</b><br>Hex Head Removable E-ring Extended | <b>Jackscrew</b><br>Slot Head Removable E-ring | <b>Jackscrew</b><br>Slot Head Removable E-ring Extended | <b>Jackscrew</b><br>Hex Head Non-Removable | <b>Jackscrew</b><br>Slot Head Non-Removable Extended | <b>Float Mount</b><br>For Front Panel Mounting | <b>Float Mount</b><br>For Rear Panel Mounting |

# GMSM Low Profile Single Row Metal Shell Microminiature Solder Cup and Pre-Wired Connectors



Micro-D  
Single Row


## HOW TO ORDER GMSM CONNECTORS WITH INSULATED WIRE PIGTAILS



Insulated Wire Pigtails


| Series                    | Shell Finish                 | Number of Contacts | Contact Type | Wire Gage (AWG) | Wire Type   | Wire Color   | Wire Length Inches  | Hardware   |                         |
|---------------------------|------------------------------|--------------------|--------------|-----------------|---|--|---|--|-------------------------|
| GMSM                      | 1 – Cadmium                  | 4                  | P – Pin      | 4 – #24         | K – M22759/11<br>600 Vrms Teflon (TFE) <sup>®</sup>   | 1 – White  | 18<br><br>Wire Length In Inches. <sup>18</sup> Specifies 18 Inches. | B<br>P<br>M<br>M1<br>S<br>S1<br>L<br>K<br>F<br>R |                         |
|                           | 2 – Nickel                   | 6                  | S – Socket   | 6 – #26         |   | J – M22759/33<br>600 Vrms Modified Cross-Linked Tefzel (ETFE) <sup>®</sup> |   |  | 2 – Yellow              |
|                           | 4 – Black Anodize            | 10                 |              | 8 – #28         | 5 – Color-Coded Stripes Per MIL-STD-681   |  |   |  |                         |
|                           | 5 – Gold                     | 15                 |              |                 |   |  |   |  | 7 – Ten Color Repeating |
|                           | 6 – Chem Film                | 20                 |              |                 |   |  |   |  |                         |
|                           |                              | 25                 |              |                 |   |  |   |  |                         |
|                           |                              | 30                 |              |                 |   |  |   |  |                         |
|                           |                              | 35                 |              |                 |   |  |   |  |                         |
|                           | <b>Stainless Steel Shell</b> |                    |              |                 |   |  |   |  |                         |
|                           | 3 – Passivated               |                    |              |                 | E – NEMA HP3-EB<br>600 Vrms Type E M16878/4 (TFE) (replaced by M22759/11 for mil spec applications) |  |   |  |                         |
| <b>Sample Part Number</b> |                              |                    |              |                 |   |  |   |  |                         |
| GMSM                      | 2 –                          | 10                 | P –          | 6               | K   | 1 –  | 18  | B  |                         |

## HOW TO ORDER GMSM CONNECTORS WITH UNINSULATED SOLID LEADS




Gold Plated or Solder Dipped Solid Leads

| Series                    | Shell Finish                 | Number of Contacts | Contact Type | Wire Gage (AWG) | Wire Type       | Wire Finish                        | Wire Length Inches  | Hardware   |
|---------------------------|------------------------------|--------------------|--------------|-----------------|-----------------|------------------------------------|---|--|
| GMSM                      | 1 – Cadmium                  | 4                  | P – Pin      | 4 – #24         | C – Copper Wire | 3 – Solder Dipped (63/37 Tin/Lead) | .125  | B<br>P<br>M<br>M1<br>S<br>S1<br>L<br>K<br>F<br>R |
|                           | 2 – Nickel                   | 6                  | S – Socket   | 5 – #25         |                 |                                    | 4 – Gold Plated   |  |
|                           | 4 – Black Anodize            | 10                 |              | 6 – #26         |                 | .375                               |   |  |
|                           | 5 – Gold                     | 15                 |              |                 | .500            |                                    |   |  |
|                           | 6 – Chem Film                | 20                 |              |                 | .750            |                                    |   |  |
|                           |                              | 25                 |              |                 | 1.000           |                                    |   |  |
|                           |                              | 30                 |              |                 | 2.000           |                                    |   |  |
|                           |                              | 35                 |              |                 |                 |                                    |   |  |
|                           | <b>Stainless Steel Shell</b> |                    |              |                 |                 |                                    | Wire Length In Inches. <sup>.500</sup> Specifies Half Inch. |  |
| 3 – Passivated            |                              |                    |              |                 |                 |                                    |   |  |
| <b>Sample Part Number</b> |                              |                    |              |                 |                 |                                    |   |  |
| GMSM                      | 2 –                          | 10                 | P –          | 5               | C               | 4 –                                | .250  | P  |

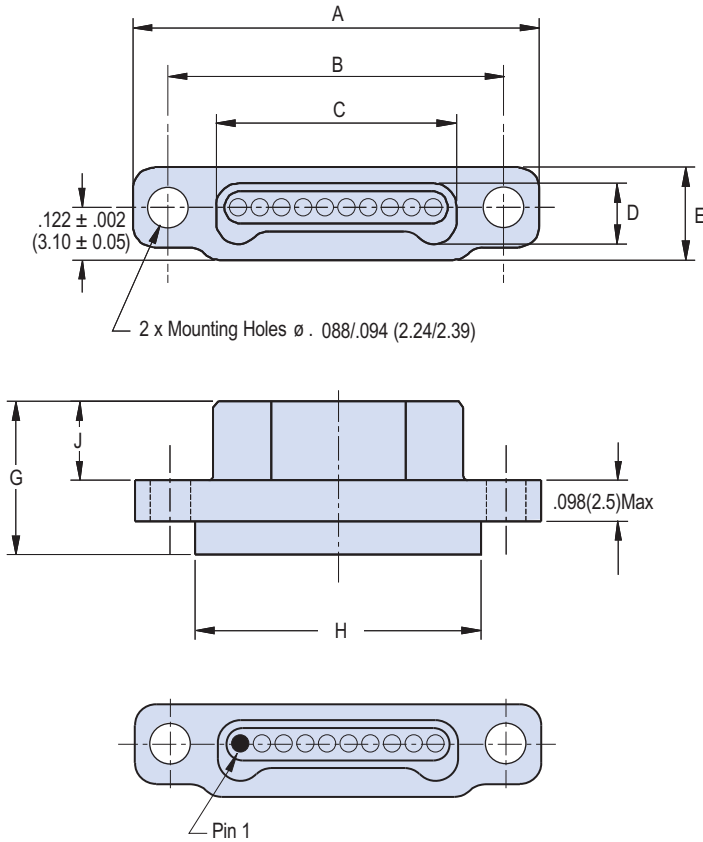

**Face View of Pin (Plug) Connector**

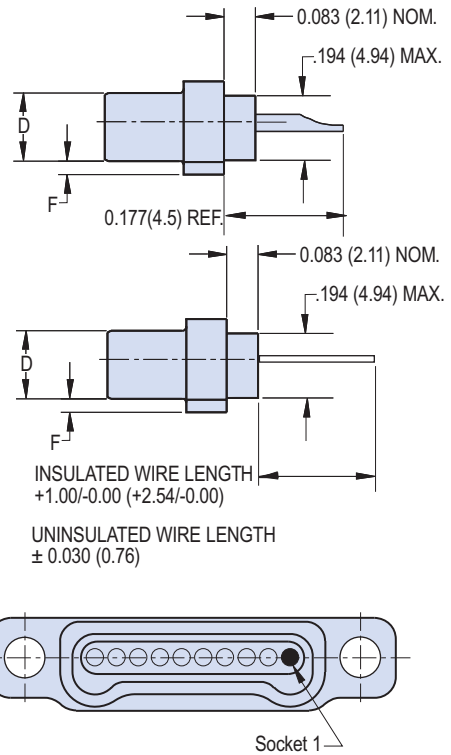


**Face View of Socket (Receptacle) Connector**

## DIMENSIONS

| Layout     | A Max. |       | B            |              | C Max. |       | D Max. |      | E Max. |      | F Max. |      | G Max. |      | H Max. |       | J Max. |      |
|------------|--------|-------|--------------|--------------|--------|-------|--------|------|--------|------|--------|------|--------|------|--------|-------|--------|------|
|            | In.    | mm.   | In.<br>±.003 | mm.<br>±0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.    | mm.  | In.    | mm.  | In.    | mm.   | In.    | mm.  |
| <b>4P</b>  | .648   | 16.45 | .478         | 12.11        | .250   | 6.37  | .135   | 3.42 | .218   | 5.54 | .041   | 1.03 | .358   | 9.10 | .309   | 7.85  | .184   | 4.67 |
| <b>4S</b>  | .648   | 16.45 | .478         | 12.11        | .309   | 7.85  | .194   | 4.94 | .218   | 5.54 | .012   | 0.30 | .370   | 9.40 | .309   | 7.85  | .197   | 5.00 |
| <b>6P</b>  | .748   | 19.00 | .578         | 14.65        | .350   | 8.91  | .135   | 3.42 | .218   | 5.54 | .041   | 1.03 | .358   | 9.10 | .409   | 10.40 | .184   | 4.67 |
| <b>6S</b>  | .748   | 19.00 | .578         | 14.65        | .409   | 10.40 | .194   | 4.94 | .218   | 5.54 | .012   | 0.30 | .370   | 9.40 | .409   | 10.40 | .197   | 5.00 |
| <b>10P</b> | .948   | 24.07 | .777         | 19.73        | .550   | 13.99 | .135   | 3.42 | .218   | 5.54 | .041   | 1.03 | .358   | 9.10 | .609   | 15.47 | .184   | 4.67 |
| <b>10S</b> | .948   | 24.07 | .777         | 19.73        | .609   | 15.47 | .194   | 4.94 | .218   | 5.54 | .012   | 0.30 | .370   | 9.40 | .609   | 15.47 | .197   | 5.00 |
| <b>15P</b> | 1.198  | 30.42 | 1.027        | 26.08        | .800   | 20.34 | .135   | 3.42 | .218   | 5.54 | .041   | 1.03 | .358   | 9.10 | .859   | 21.82 | .184   | 4.67 |
| <b>15S</b> | 1.198  | 30.42 | 1.027        | 26.08        | .859   | 21.82 | .194   | 4.94 | .218   | 5.54 | .012   | 0.30 | .370   | 9.40 | .859   | 21.82 | .197   | 5.00 |
| <b>20P</b> | 1.448  | 36.77 | 1.277        | 32.43        | 1.050  | 26.69 | .135   | 3.42 | .218   | 5.54 | .041   | 1.03 | .358   | 9.10 | 1.109  | 28.17 | .184   | 4.67 |
| <b>20S</b> | 1.448  | 36.77 | 1.277        | 32.43        | 1.109  | 28.17 | .194   | 4.94 | .218   | 5.54 | .012   | 0.30 | .370   | 9.40 | 1.109  | 28.17 | .197   | 5.00 |
| <b>25P</b> | 1.698  | 43.12 | 1.527        | 38.78        | 1.300  | 33.04 | .135   | 3.42 | .218   | 5.54 | .041   | 1.03 | .358   | 9.10 | 1.359  | 34.52 | .184   | 4.67 |
| <b>25S</b> | 1.698  | 43.12 | 1.527        | 38.78        | 1.359  | 34.52 | .194   | 4.94 | .218   | 5.54 | .012   | 0.30 | .370   | 9.40 | 1.359  | 34.52 | .197   | 5.00 |
| <b>30P</b> | 1.948  | 49.47 | 1.777        | 45.13        | 1.550  | 39.39 | .135   | 3.42 | .218   | 5.54 | .041   | 1.03 | .358   | 9.10 | 1.609  | 40.87 | .184   | 4.67 |
| <b>30S</b> | 1.948  | 49.47 | 1.777        | 45.13        | 1.609  | 40.87 | .194   | 4.94 | .218   | 5.54 | .012   | 0.30 | .370   | 9.40 | 1.609  | 40.87 | .197   | 5.00 |
| <b>35P</b> | 2.198  | 55.82 | 2.027        | 51.48        | 1.800  | 45.74 | .135   | 3.42 | .218   | 5.54 | .041   | 1.03 | .358   | 9.10 | 1.859  | 47.22 | .184   | 4.67 |
| <b>35S</b> | 2.198  | 55.82 | 2.027        | 51.48        | 1.859  | 47.22 | .194   | 4.94 | .218   | 5.54 | .012   | 0.30 | .370   | 9.40 | 1.859  | 47.22 | .197   | 5.00 |

# GMSM Low Profile Single Row Metal Shell Microminiature Right Angle Printed Circuit Board Connectors

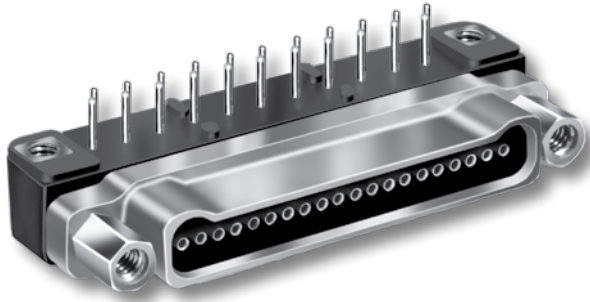

**Low Profile GMSM Single Row Micro Connectors** offer mil spec design and performance in a smaller form factor for space savings. These GMSM connectors are shorter and occupy less board real estate than comparable two row Micro-D connectors.

**GMSM Connectors** feature gold-plated TwistPin contacts, machined aluminum shells, and are fully potted with epoxy. Choose from 4 to 35 contacts. Available in a variety of finishes, socket connectors are fitted with flourosilicone interfacial seals.





## HOW TO ORDER GMSM RIGHT ANGLE PCB CONNECTORS

| Series | Shell Finish                 | Number of Contacts | Contact Type          | Termination Style      | Hardware Option   | Tail Length    |
|--------|------------------------------|--------------------|-----------------------|------------------------|---|----------------|
| GMSM   | 1 – Cadmium                  | 4                  | P – Pin<br>S – Socket | CBR<br>Right Angle PCB | <b>NU</b> – Threaded Insert Only, No Jackposts<br><b>SU</b> – Jackpost and Threaded Insert<br><br><b>Rear Panel Jackposts With Threaded Inserts</b><br><b>TU</b> – 0.094" (2.4) Panel<br><b>VU</b> – 0.062" (1.6) Panel<br><b>WU</b> – 0.047" (1.2) Panel<br><b>XU</b> – 0.031" (0.8) Panel<br><b>YU</b> – 0.023" (0.6) Panel | 1 – .109 (2.8) |
|        | 2 – Nickel                   | 6                  |                       |                        |   | 2 – .150 (3.8) |
|        | 4 – Black Anodize            | 10                 | 3 – .190 (4.8)        |                        |   |                |
|        | 5 – Gold                     | 15                 | 4 – .250 (6.3)        |                        |   |                |
|        | 6 – Chem Film                | 20                 |                       |                        |   |                |
|        |                              | 25                 |                       |                        |   |                |
|        | <b>Stainless Steel Shell</b> | 30                 |                       |                        |   |                |
|        |                              | 35                 |                       |                        |   |                |
|        | 3 – Passivated               |                    |                       |                        |   |                |
|        | <b>Sample Part Number</b>    |                    |                       |                        |   |                |
| GMSM   | 2 –                          | 10                 | P                     | CBR                    | SU  | 1              |


## GMSM PRINTED CIRCUIT BOARD MOUNTING HARDWARE

| NU  | SU                            | TU, VU, WU, XU, YU               |
|---|-------------------------------|----------------------------------|
|   |                               |                                  |
| No Jackpost, Threaded Insert In PCB Mounting Hole | Jackpost With Threaded Insert | Jackpost for Rear Panel Mounting |

# GMSM Low Profile Single Row Metal Shell Microminiature Right Angle Printed Circuit Board Connectors

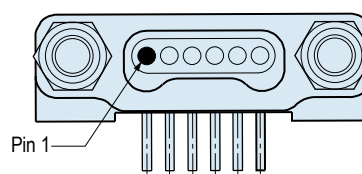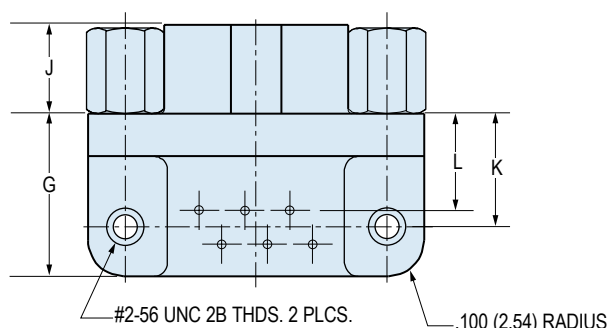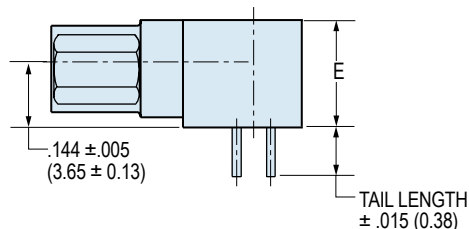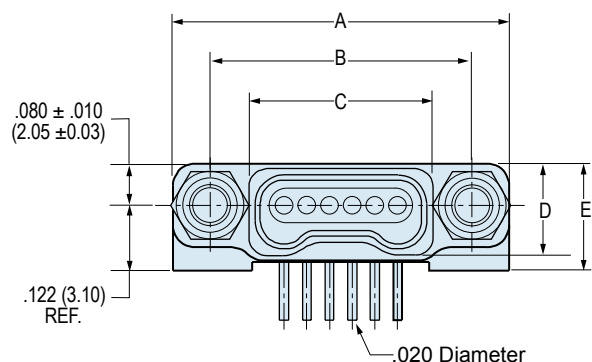

Face View of Pin (Plug) Connector

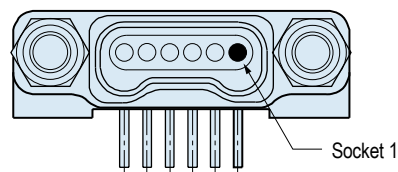

Face View of Socket (Receptacle) Connector

## DIMENSIONS


| Layout | A Max. |       | B            |              | C Max. |       | D Max. |      | E Max. |      | G Max. |      | J Max. |      | K            |              | L            |              |
|--------|--------|-------|--------------|--------------|--------|-------|--------|------|--------|------|--------|------|--------|------|--------------|--------------|--------------|--------------|
|        | In.    | mm.   | In.<br>±.003 | mm.<br>±0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.    | mm.  | In.    | mm.  | In.<br>±.004 | mm.<br>±0.10 | In.<br>±.010 | mm.<br>±0.25 |
| 4P     | .648   | 16.45 | .478         | 12.11        | .250   | 6.37  | .135   | 3.42 | .241   | 6.13 | .364   | 9.25 | .184   | 4.67 | .250         | 6.35         | .213         | 5.41         |
| 4S     | .648   | 16.45 | .478         | 12.11        | .309   | 7.85  | .194   | 4.94 | .241   | 6.13 | .364   | 9.25 | .197   | 5.00 | .250         | 6.35         | .213         | 5.41         |
| 6P     | .748   | 19.00 | .578         | 14.65        | .350   | 8.91  | .135   | 3.42 | .241   | 6.13 | .364   | 9.25 | .184   | 4.67 | .250         | 6.35         | .213         | 5.41         |
| 6S     | .748   | 19.00 | .578         | 14.65        | .409   | 10.40 | .194   | 4.94 | .241   | 6.13 | .364   | 9.25 | .197   | 5.00 | .250         | 6.35         | .213         | 5.41         |
| 10P    | .948   | 24.07 | .777         | 19.73        | .550   | 13.99 | .135   | 3.42 | .241   | 6.13 | .364   | 9.25 | .184   | 4.67 | .250         | 6.35         | .213         | 5.41         |
| 10S    | .948   | 24.07 | .777         | 19.73        | .609   | 15.47 | .194   | 4.94 | .241   | 6.13 | .364   | 9.25 | .197   | 5.00 | .250         | 6.35         | .213         | 5.41         |
| 15P    | 1.198  | 30.42 | 1.027        | 26.08        | .800   | 20.34 | .135   | 3.42 | .241   | 6.13 | .364   | 9.25 | .184   | 4.67 | .250         | 6.35         | .213         | 5.41         |
| 15S    | 1.198  | 30.42 | 1.027        | 26.08        | .859   | 21.82 | .194   | 4.94 | .241   | 6.13 | .364   | 9.25 | .197   | 5.00 | .250         | 6.35         | .213         | 5.41         |
| 20P    | 1.448  | 36.77 | 1.277        | 32.43        | 1.050  | 26.69 | .135   | 3.42 | .241   | 6.13 | .364   | 9.25 | .184   | 4.67 | .250         | 6.35         | .213         | 5.41         |
| 20S    | 1.448  | 36.77 | 1.277        | 32.43        | 1.109  | 28.17 | .194   | 4.94 | .241   | 6.13 | .364   | 9.25 | .197   | 5.00 | .250         | 6.35         | .213         | 5.41         |
| 25P    | 1.698  | 43.12 | 1.527        | 38.78        | 1.300  | 33.04 | .135   | 3.42 | .241   | 6.13 | .364   | 9.25 | .184   | 4.67 | .250         | 6.35         | .213         | 5.41         |
| 25S    | 1.698  | 43.12 | 1.527        | 38.78        | 1.359  | 34.52 | .194   | 4.94 | .241   | 6.13 | .364   | 9.25 | .197   | 5.00 | .250         | 6.35         | .213         | 5.41         |
| 30P    | 1.948  | 49.47 | 1.777        | 45.13        | 1.550  | 39.39 | .135   | 3.42 | .241   | 6.13 | .364   | 9.25 | .184   | 4.67 | .250         | 6.35         | .213         | 5.41         |
| 30S    | 1.948  | 49.47 | 1.777        | 45.13        | 1.609  | 40.87 | .194   | 4.94 | .241   | 6.13 | .364   | 9.25 | .197   | 5.00 | .250         | 6.35         | .213         | 5.41         |
| 35P    | 2.198  | 55.82 | 2.027        | 51.48        | 1.800  | 45.74 | .135   | 3.42 | .241   | 6.13 | .364   | 9.25 | .184   | 4.67 | .250         | 6.35         | .213         | 5.41         |
| 35S    | 2.198  | 55.82 | 2.027        | 51.48        | 1.859  | 47.22 | .194   | 4.94 | .241   | 6.13 | .364   | 9.25 | .197   | 5.00 | .250         | 6.35         | .213         | 5.41         |

# GMSM Low Profile Single Row Metal Shell Microminiature Right Angle Printed Circuit Board Connectors




Micro-D  
Single Row


## GMSM PCB LAYOUTS – PIN CONNECTORS

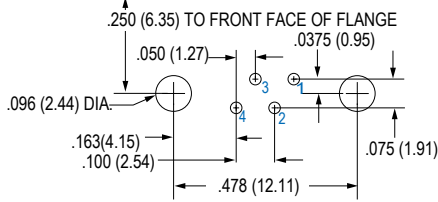


**4 Pin**

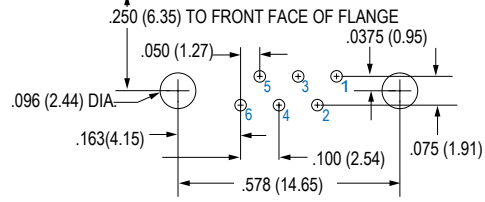


**6 Pin**

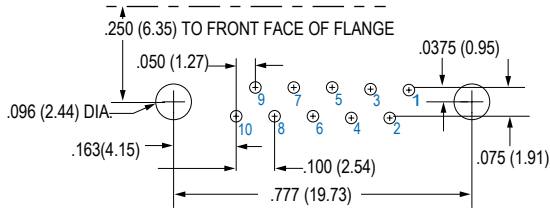



**10 Pin**

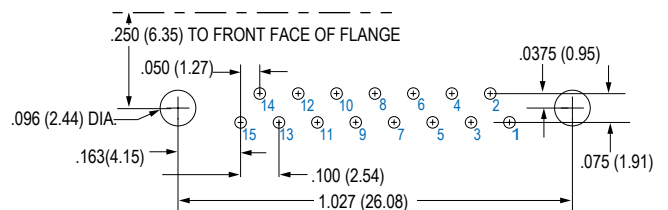


**15 Pin**

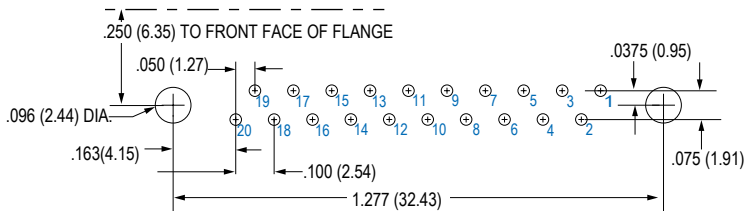


**20 Pin**

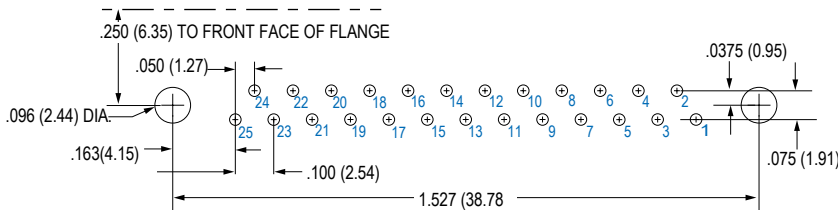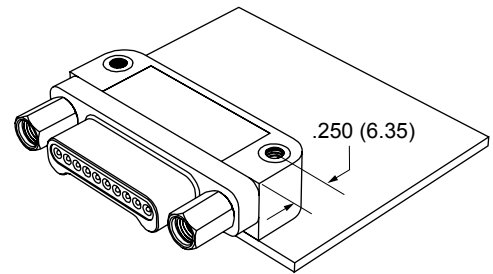

**25 Pin**









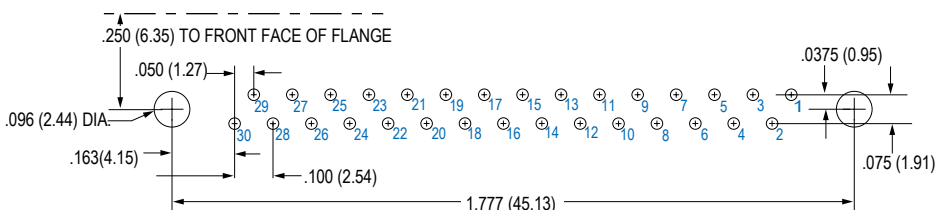


**30 Pin**

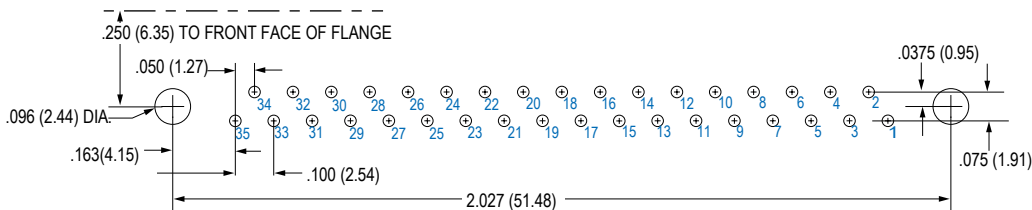


**35 Pin**


## GMSM PCB LAYOUTS – SOCKET CONNECTORS

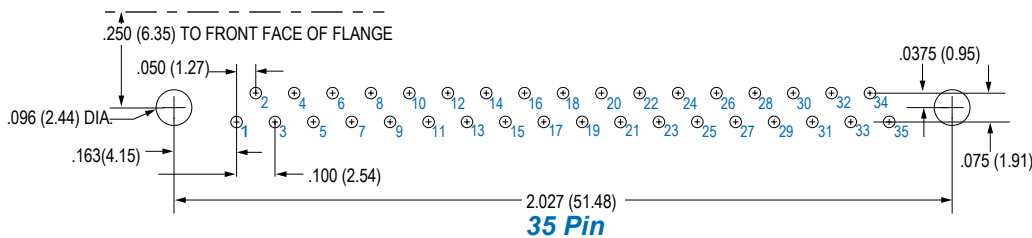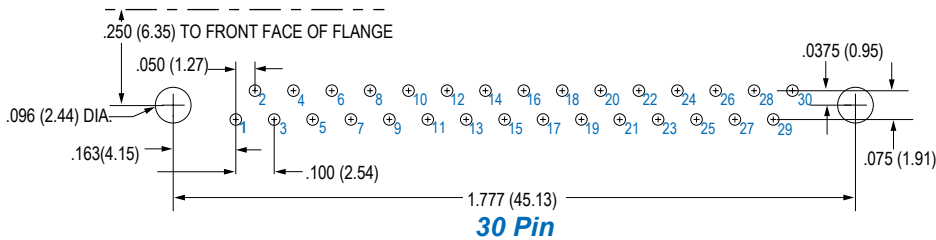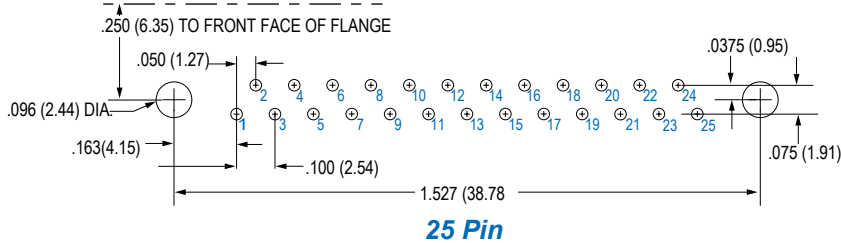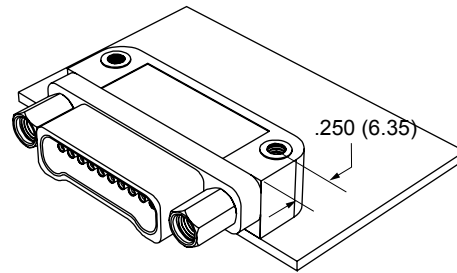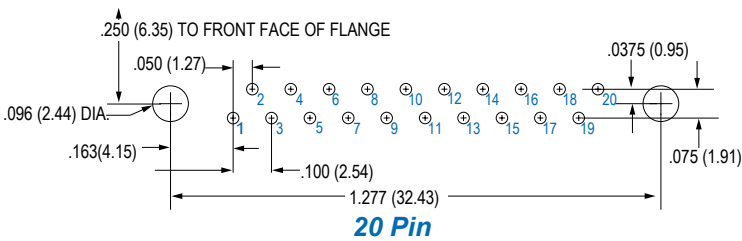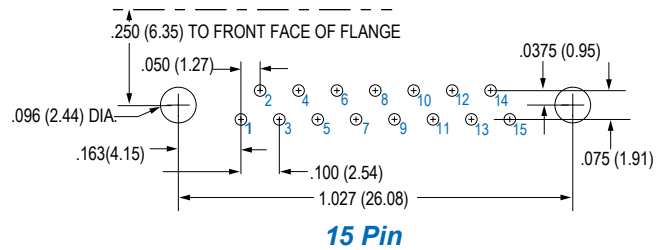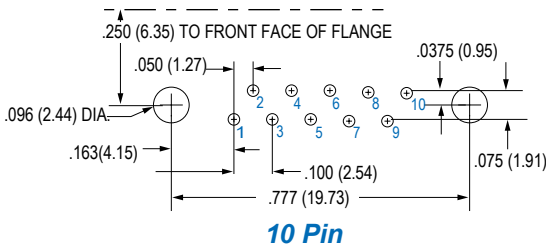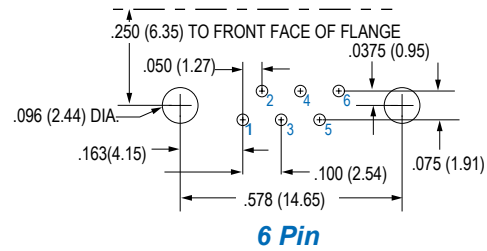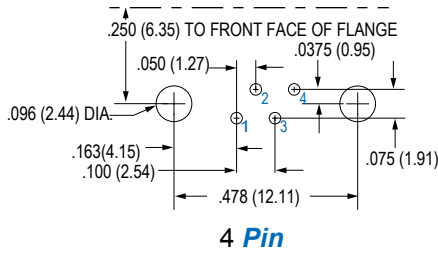

## OVERVIEW AND PRODUCT SELECTION GUIDE

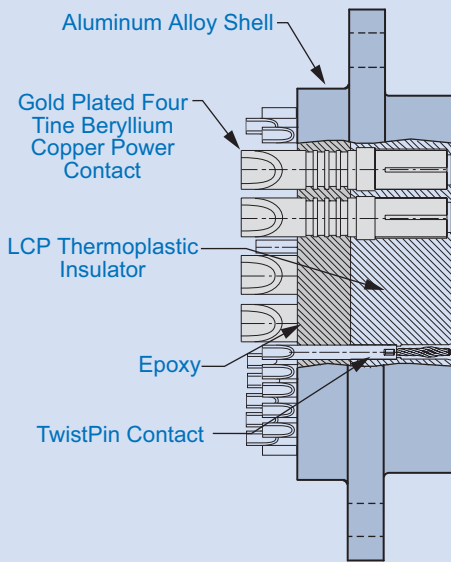

**Plug Connector**

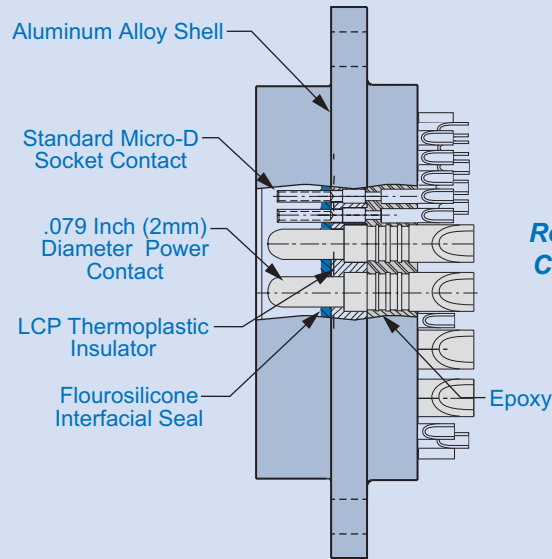

**Receptacle Connector**

**Glenair's Combo Micro-D's** combine the size and weight advantages of a Micro -D connector with the added ability to handle higher power needs. These connectors feature combinations of .079 inch (2mm) power contacts and TwistPin signal contacts.

**13 Amp Current Rating** – Available in three styles: solder cup, pre-wired pigtails or printed circuit board, these Micro-D connectors handle up to #16 AWG wire.

### Combo Micro-D Solder Cup Connectors

Nonremovable solder cup #16 power contacts for termination to #16 AWG or smaller wire. Micro pins accept #26 AWG or smaller wire. Gold plated contacts are backfilled with rigid epoxy.



**Combo Solder Cup**  
Page E-3

### Combo Micro-D Pre-Wired Pigtails

Crimp contacts are terminated to insulated Teflon® wire. Connectors are backpotted with epoxy, providing strain relief and environmental protection.



**Combo Pre-Wired**  
Page E-6

### Combo Micro-D Printed Circuit Board


Ideal for flexible or rigid circuits, these vertical mount connectors feature high temperature materials to withstand soldering heat. A full range of hardware options is available.



**Combo Board Mount**  
Page E-9




## CONTACT ARRANGEMENTS— MATING FACE VIEW




**B112P Plug**  
2 Each .079" (2mm) Socket Contacts




**B112R Receptacle**  
2 Each .079" (2mm) Pin Contacts




**D113P Plug**  
2 Each .079" (2mm) Socket Contacts, 6 Each Micro TwistPins




**D113R Receptacle**  
2 Each .079" (2mm) Pin Contacts, 6 Each Micro Sockets




**D112P Plug**  
2 Each .079" (2mm) Socket Contacts




**D112R Receptacle**  
3 Each .079" (2mm) Pin Contacts




**E113P Plug**  
3 Each .079" (2mm) Socket Contacts, 8 Each Micro TwistPins




**E113R Receptacle**  
3 Each .079" (2mm) Pin Contacts, 8 Each Micro Sockets

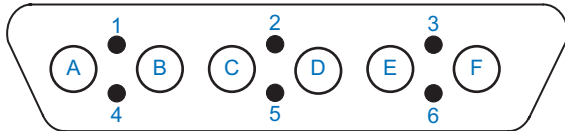


**G103P Plug**  
6 Each .079" (2mm) Socket Contacts, 6 Each Micro TwistPins

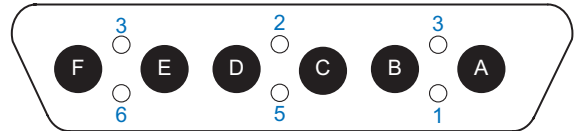


**G103R Receptacle**  
6 Each .079" (2mm) Pin Contacts, 6 Each Micro Sockets

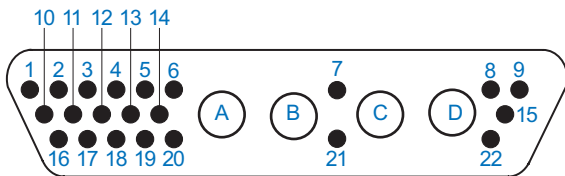


**G101P Plug**  
4 Each .079" (2mm) Socket Contacts, 22 Each Micro TwistPins

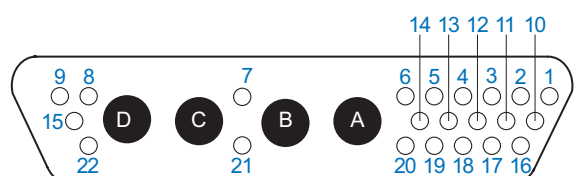

**G101R Receptacle**  
4 Each .079" (2mm) Pin Contacts, 22 Each Micro Sockets

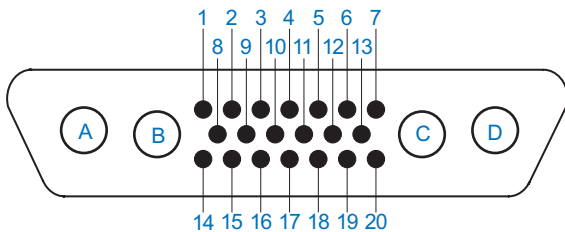

**G111P Plug**  
4 Each .079" (2mm) Socket Contacts, 20 Each Micro TwistPins

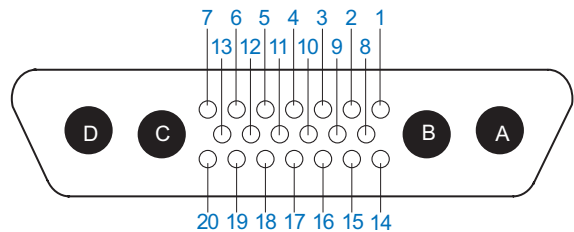

**G111R Receptacle**  
4 Each .079" (2mm) Pin Contacts, 20 Each Micro Sockets



**13 Amp Current Rating** – Combo Micro-D's combine the size and weight advantages of a Micro -D connector with the added ability to handle higher power needs.

**Solder Cup Contacts** – Gold plated beryllium copper power contacts accommodate up to #16 AWG stranded wire. Signal contacts accept up to #26 AWG wire.

**Mil Spec Performance** – Glenair combo Micro-D connectors comply with the requirements of MIL-DTL-83513 and feature excellent resistance to high temperatures, shock and vibration.

## HOW TO ORDER COMBO SOLDER CUP MICRO-D

| Series                    | Shell Finish      | Shell Size and Insert Arrangement | Termination Type | Hardware |
|---------------------------|-------------------|-----------------------------------|------------------|----------|
| GMPM                      | 1 – Cadmium       | B112P                             | S – Solder Cup   | B        |
|                           | 2 – Nickel        | B112R                             |                  | P        |
|                           | 4 – Black Anodize | D112P                             |                  | M        |
|                           | 5 – Gold          | D112R                             |                  | M1       |
|                           | 6 – Chem Film     | D113P                             |                  | S        |
|                           |                   | D113R                             |                  | S1       |
|                           |                   | E113P                             |                  | L        |
|                           |                   | E113R                             |                  | K        |
|                           |                   | G101P                             |                  | F        |
|                           |                   | G101R                             |                  | R        |
|                           |                   | G103P                             |                  |          |
|                           |                   | G103R                             |                  |          |
|                           |                   | G111P                             |                  |          |
| G111R                     |                   |                                   |                  |          |
| <b>Sample Part Number</b> |                   |                                   |                  |          |
| GMPM                      | 2                 | – G111P                           | S                | B        |



G103P

### Plug Connector

with male TwistPin signal contacts and female 2mm power contacts



G103S

### Receptacle Connector

with female TwistPin signal contacts and male 2mm power contacts

## MICRO-D MOUNTING HARDWARE

| B   | P  | M   | M1   | S  | S1  | L  | K  | F  | R   |
|---|--|---|--|--|---|--|--|--|---|
|   |  |   |  |  |   |  |  |  |   |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head Removable E-ring | <b>Jackscrew</b><br>Hex Head Removable E-ring Extended | <b>Jackscrew</b><br>Slot Head Removable E-ring | <b>Jackscrew</b><br>Slot Head Removable E-ring Extended | <b>Jackscrew</b><br>Hex Head Non-Removable | <b>Jackscrew</b><br>Slot Head Non-Removable Extended | <b>Float Mount</b><br>For Front Panel Mounting | <b>Float Mount</b><br>For Rear Panel Mounting |


## PERFORMANCE SPECIFICATIONS

|                                 |  |
|---------------------------------|--|
| Current Rating                  | 3 AMP Signal Contacts<br>13 AMP .079" (2mm) Power Contacts |
| Dielectric Withstanding Voltage | 600 VAC Sea Level<br>150 VAC 70,000 Feet                   |
| Insulation Resistance           | 5000 Megohms Minimum                                       |
| Contact Resistance              | 8 Milliohms Maximum  |
| Low Level Contact Resistance    | 32 Milliohms Max. Signal Contacts                          |
| Magnetic Permeability           | 2 $\mu$ Maximum  |
| Operating Temperature           | -55° C. to +150° C.  |
| Shock                           | 50 g.  |
| Vibration                       | 20 g.  |
| Outgassing                      | Meets NASA Outgassing Requirements                         |
| Mating Force                    | (10 Ounces) X (# of Contacts)                              |


## MATERIALS AND FINISHES

|                          |   |
|--------------------------|---|
| Connector Shell          | Aluminum Alloy 6061. See Ordering Info for Plating Options.   |
| Insulator                | Liquid Crystal Polymer (LCP)                                  |
| Interfacial Seal         | Flourosilicone Rubber, Blue                                   |
| Pin Contact, TwistPin    | Beryllium Copper With 50 Microinches Gold over Nickel Plating |
| Socket Contact, TwistPin | Copper Alloy With 50 Microinches Gold Over Nickel Plating     |
| Pin Contact, 2mm. Power  | Brass With 50 Microinches Gold Over Nickel Plating            |
| Skt. Contact, 2mm. Power | Beryllium Copper With 50 Microinches Gold Over Nickel Plating |
| Hardware                 | 300 Series Stainless Steel                                    |
| PCB Terminals            | Gold-Plated Copper Alloy, Solder Dipped                       |
| Encapsulant              | Epoxy Resin Hysol EE4215                                      |

## DIMENSIONS FOR SHELL SIZE G CONNECTORS

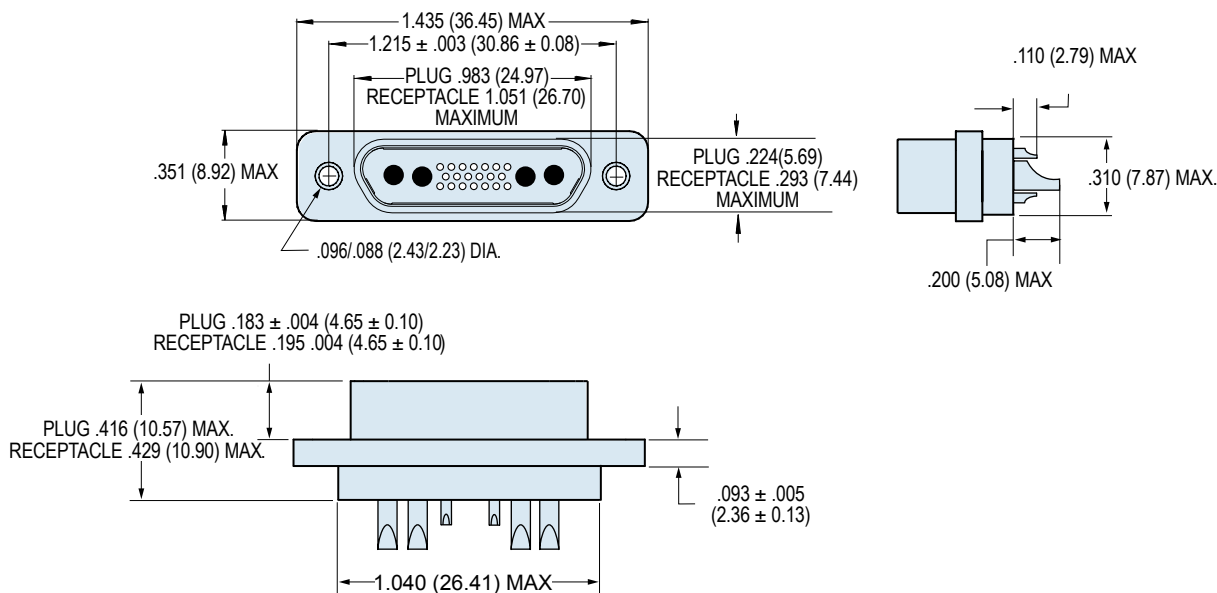

Dimensions for Shell Size G Connectors  
Layouts G101, G103, G111

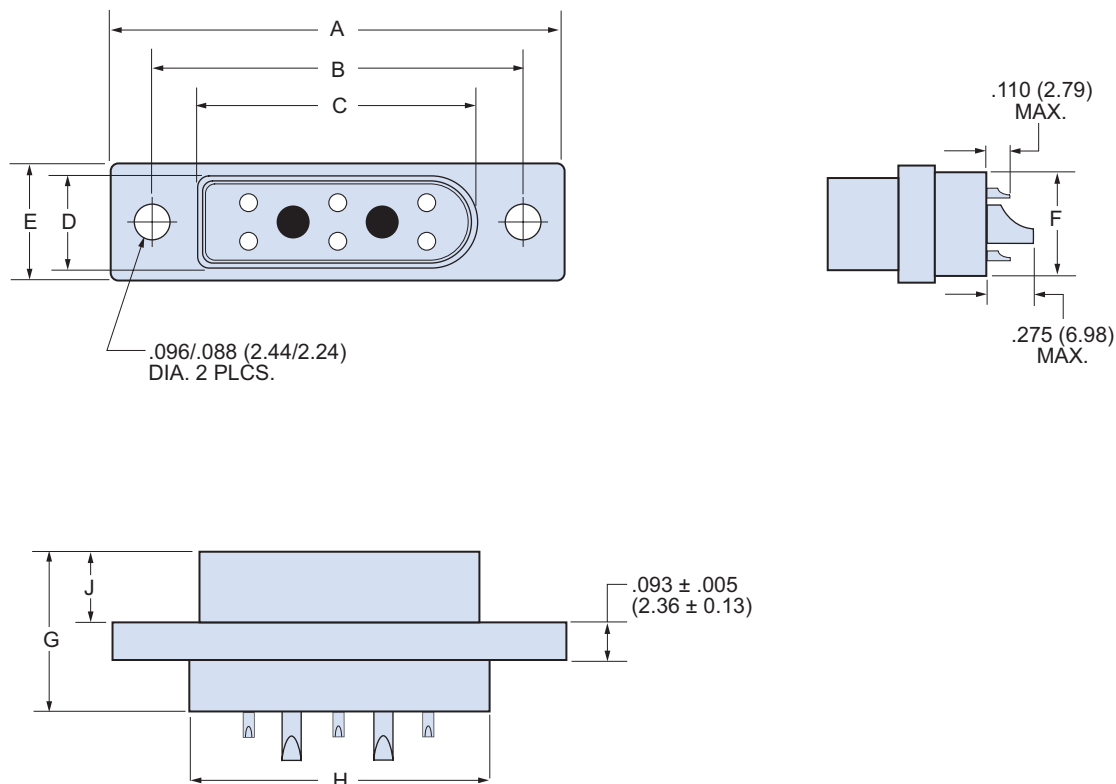

Dimensions for Shell Size B, D, AND E Connectors  
Layouts B112, D112, D113, and E113

## COMBO SOLDER CUP CONNECTOR DIMENSIONS

| Layout       | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |      | F Max. |      | G Max. |       | H Max. |       | J Max. |      |
|--------------|--------|-------|------------|------------|--------|-------|--------|------|--------|------|--------|------|--------|-------|--------|-------|--------|------|
|              | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.    | mm.  | In.    | mm.   | In.    | mm.   | In.    | mm.  |
| <b>B112P</b> | .935   | 23.75 | .715       | 18.16      | .481   | 12.21 | .242   | 6.15 | .315   | 8.00 | .270   | 6.86 | .416   | 10.57 | .550   | 13.97 | .184   | 4.68 |
| <b>B112R</b> | .935   | 23.75 | .715       | 18.16      | .547   | 13.92 | .315   | 8.00 | .315   | 8.00 | .270   | 6.86 | .429   | 10.90 | .550   | 13.97 | .197   | 5.01 |
| <b>D112P</b> | 1.185  | 30.01 | .965       | 24.51      | .731   | 18.56 | .242   | 6.15 | .315   | 8.00 | .270   | 6.86 | .416   | 10.57 | .800   | 20.32 | .184   | 4.68 |
| <b>D112R</b> | 1.185  | 30.01 | .965       | 24.51      | .798   | 20.27 | .315   | 8.00 | .315   | 8.00 | .270   | 6.86 | .429   | 10.90 | .800   | 20.32 | .197   | 5.01 |
| <b>D113P</b> | 1.185  | 30.01 | .965       | 24.51      | .731   | 18.56 | .242   | 6.15 | .315   | 8.00 | .270   | 6.86 | .416   | 10.57 | .800   | 20.32 | .184   | 4.68 |
| <b>D113R</b> | 1.185  | 30.01 | .965       | 24.51      | .798   | 20.27 | .315   | 8.00 | .315   | 8.00 | .270   | 6.86 | .429   | 10.90 | .800   | 20.32 | .197   | 5.01 |
| <b>E113P</b> | 1.335  | 33.91 | 1.115      | 28.32      | .881   | 22.37 | .242   | 6.15 | .315   | 8.00 | .270   | 6.86 | .416   | 10.57 | .950   | 24.13 | .184   | 4.68 |
| <b>E113R</b> | 1.335  | 33.91 | 1.115      | 28.32      | .948   | 24.08 | .315   | 8.00 | .315   | 8.00 | .270   | 6.86 | .429   | 10.90 | .950   | 24.13 | .197   | 5.01 |



**GMPMT-D113P with (6) #24 pins and (3) 2mm. sockets**

**13 Amp Current Rating**—Combo Micro-D's combine the size and weight advantages of a Micro -D connector with the added ability to handle higher power needs.

**Pre-Wired And Potted with Epoxy**—Gold plated power contacts accommodate up to #16 AWG stranded wire. Signal contacts accept up to #24 AWG wire.

**Mil Spec Performance**—Glenair combo Micro-D connectors comply with the requirements of MIL-DTL-83513 and feature excellent resistance to high temperatures, shock and vibration.

## HOW TO ORDER PRE-WIRED MICRO-D POWER CONNECTORS

| Series | Shell Finish      | Shell Size and Insert Layout | Cable Entry Style | Wire Gage for #24 Contacts (AWG)                               | Wire Gage for #16 Contacts (AWG) | Wire Type                                       | Wire Color   | Wire Length mm  | Hardware   |   |   |
|--------|-------------------|------------------------------|-------------------|--|----------------------------------|---|--|---|--|---|---|
| GMPM   | 1 – Cadmium       | B112P                        | T - Top Entry     | 4 – #24  | 16                               | K – M22759/11<br>600 Vrms<br>Teflon® (TFE)      | 1 – White Wire   | 460<br>Wire length in millimeters, rounded up to the nearest 10 mm. | B<br>P<br>M<br>M1<br>S<br>S1<br>L<br>K<br>F<br>R |   |   |
|        | 2 – Nickel        | B112R                        |                   | 6 – #26  | 18                               |   | J – M22759/33<br>600 Vrms<br>Modified Cross-Linked Tefze® (ETFE) |   |  | 2 – Yellow  |   |
|        | 4 – Black Anodize | D112P                        |                   | 8 – #28  | 20                               |   |  |   |  | E – NEMA HP3-EB<br>600 Vrms Type E M16878/4 (TFE) | 5 – Color-Coded Stripes Per MIL-STD-681 |
|        | 5 – Gold          | D112R                        |                   | Omit for D112 and B112 layouts containing power contacts only. |                                  | F – NEMA HP3-ETB<br>Type ET M16878/6<br>250Vrms |  |   |  |   | 7 – Ten Color Repeating                 |
|        | 6 – Chem Film     | D113P                        |                   |  |                                  |   |  |   |  |   |   |
|        |                   | D113R                        |                   |  |                                  |   |  |   |  |   |   |
|        |                   | E113P                        |                   |  |                                  |   |  |   |  |   |   |
|        |                   | E113R                        |                   |  |                                  |   |  |   |  |   |   |
|        |                   | G101P                        |                   |  |                                  |   |  |   |  |   |   |
|        |                   | G101R                        |                   |  |                                  |   |  |   |  |   |   |
|        |                   | G103P                        |                   |  |                                  |   |  |   |  |   |   |
|        |                   | G103R                        |                   |  |                                  |   |  |   |  |   |   |
|        |                   | G111P                        |                   |  |                                  |   |  |   |  |   |   |
|        | G111R             |                              |                   |  |                                  |   |  |   |  |   |   |

### Sample Part Number

|      |     |       |   |   |    |   |     |     |   |
|------|-----|-------|---|---|----|---|-----|-----|---|
| GMPM | 2 – | B112P | T | – | 18 | K | 7 – | 460 | B |
|------|-----|-------|---|---|----|---|-----|-----|---|

## MICRO-D MOUNTING HARDWARE

| B         | P        | M                     | M1                    | S                      | S1                     | L                     | K                      | F                          | R                         |
|-----------|----------|-----------------------|-----------------------|------------------------|------------------------|-----------------------|------------------------|----------------------------|---------------------------|
|           |          |                       |                       |                        |                        |                       |                        |                            |                           |
| Thru-Hole | Jackpost | Jackscrew<br>Hex Head | Jackscrew<br>Hex Head | Jackscrew<br>Slot Head | Jackscrew<br>Slot Head | Jackscrew<br>Hex Head | Jackscrew<br>Slot Head | Float Mount<br>Front Panel | Float Mount<br>Rear Panel |


## PERFORMANCE SPECIFICATIONS

|                                 |  |
|---------------------------------|--|
| Current Rating                  | 3 AMP Signal Contacts<br>13 AMP .079" (2mm) Power Contacts |
| Dielectric Withstanding Voltage | 600 VAC Sea Level<br>150 VAC 70,000 Feet                   |
| Insulation Resistance           | 5000 Megohms Minimum                                       |
| Contact Resistance              | 8 Milliohms Maximum  |
| Low Level Contact Resistance    | 32 Milliohms Max. Signal Contacts                          |
| Magnetic Permeability           | 2 $\mu$ Maximum  |
| Operating Temperature           | -55° C. to +150° C.  |
| Shock                           | 50 g.  |
| Vibration                       | 20 g.  |
| Outgassing                      | Meets NASA Outgassing Requirements                         |
| Mating Force                    | (10 Ounces) X (# of Contacts)                              |


## MATERIALS AND FINISHES

|                          |   |
|--------------------------|---|
| Connector Shell          | Aluminum Alloy 6061. See Ordering Info for Plating Options.   |
| Insulator                | Liquid Crystal Polymer (LCP)                                  |
| Interfacial Seal         | Flourosilicone Rubber, Blue                                   |
| Pin Contact, TwistPin    | Beryllium Copper With 50 Microinches Gold over Nickel Plating |
| Socket Contact, TwistPin | Copper Alloy With 50 Microinches Gold Over Nickel Plating     |
| Pin Contact, 2mm. Power  | Brass With 50 Microinches Gold Over Nickel Plating            |
| Skt. Contact, 2mm. Power | Beryllium Copper With 50 Microinches Gold Over Nickel Plating |
| Hardware                 | 300 Series Stainless Steel                                    |
| PCB Terminals            | Gold-Plated Copper Alloy, Solder Dipped                       |
| Encapsulant              | Epoxy Resin Hysol EE4215                                      |

## DIMENSIONS FOR SHELL SIZE G CONNECTORS

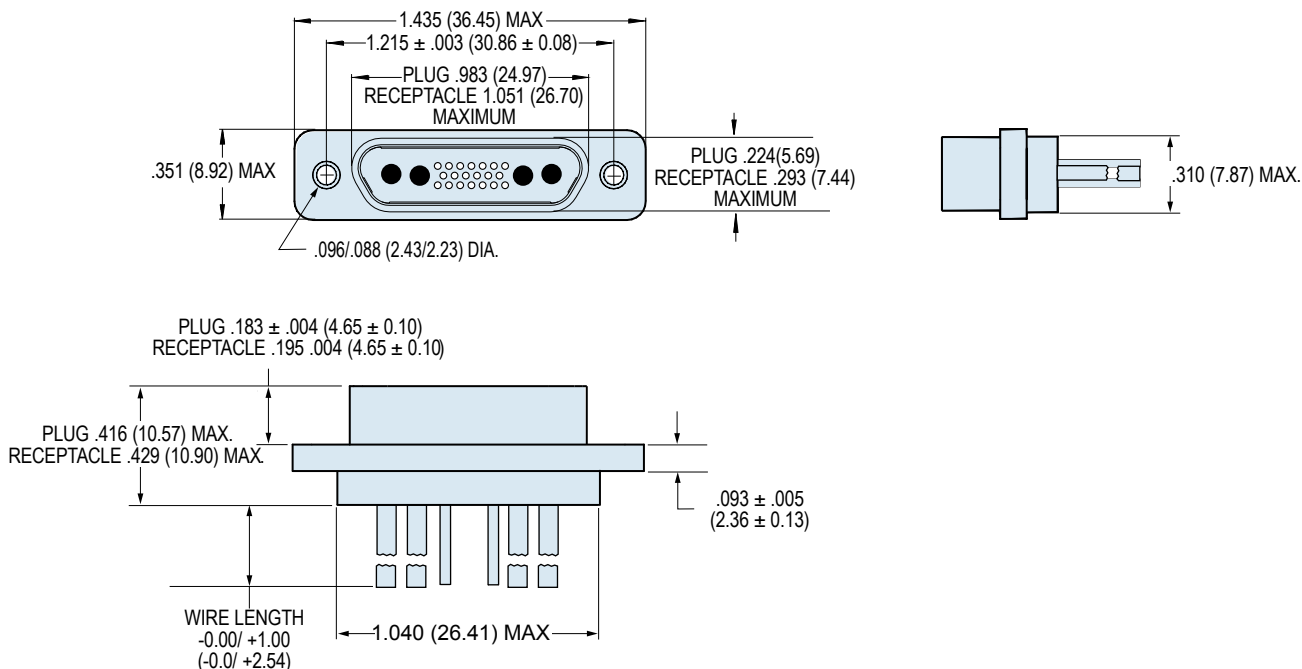

Dimensions for Shell Size G Connectors  
Layouts G101, G103, G111

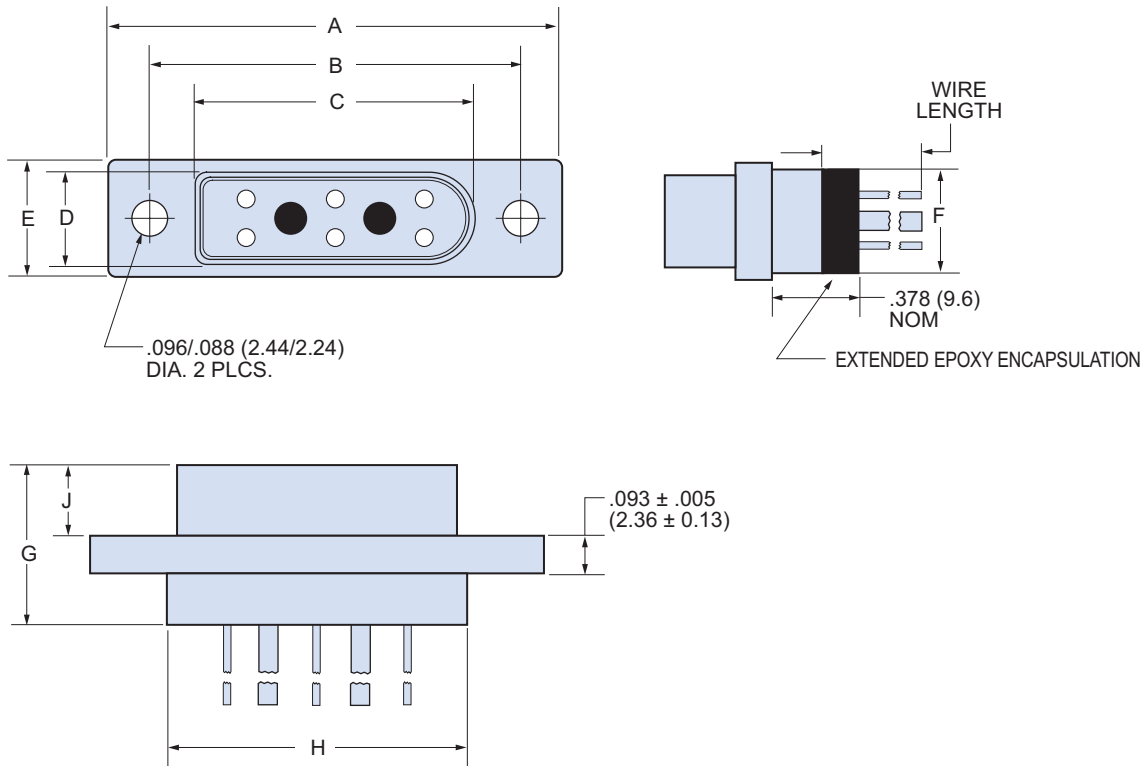

Dimensions for Shell Size B, D, AND E Connectors  
Layouts B112, D112, D113, and E113

## COMBO PRE-WIRED CONNECTOR DIMENSIONS



| Layout | A Max. |       | B         |           | C Max. |       | D Max. |      | E Max. |      | F Max. |      | G Max. |       | H Max. |       | J Max. |      |
|--------|--------|-------|-----------|-----------|--------|-------|--------|------|--------|------|--------|------|--------|-------|--------|-------|--------|------|
|        | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.    | mm.  | In.    | mm.   | In.    | mm.   | In.    | mm.  |
| B112P  | .935   | 23.75 | .715      | 18.16     | .481   | 12.21 | .242   | 6.15 | .315   | 8.00 | .270   | 6.86 | .416   | 10.57 | .550   | 13.97 | .184   | 4.68 |
| B112R  | .935   | 23.75 | .715      | 18.16     | .547   | 13.92 | .315   | 8.00 | .315   | 8.00 | .270   | 6.86 | .429   | 10.90 | .550   | 13.97 | .197   | 5.01 |
| D112P  | 1.185  | 30.01 | .965      | 24.51     | .731   | 18.56 | .242   | 6.15 | .315   | 8.00 | .270   | 6.86 | .416   | 10.57 | .800   | 20.32 | .184   | 4.68 |
| D112R  | 1.185  | 30.01 | .965      | 24.51     | .798   | 20.27 | .315   | 8.00 | .315   | 8.00 | .270   | 6.86 | .429   | 10.90 | .800   | 20.32 | .197   | 5.01 |
| D113P  | 1.185  | 30.01 | .965      | 24.51     | .731   | 18.56 | .242   | 6.15 | .315   | 8.00 | .270   | 6.86 | .416   | 10.57 | .800   | 20.32 | .184   | 4.68 |
| D113R  | 1.185  | 30.01 | .965      | 24.51     | .798   | 20.27 | .315   | 8.00 | .315   | 8.00 | .270   | 6.86 | .429   | 10.90 | .800   | 20.32 | .197   | 5.01 |
| E113P  | 1.335  | 33.91 | 1.115     | 28.32     | .881   | 22.37 | .242   | 6.15 | .315   | 8.00 | .270   | 6.86 | .416   | 10.57 | .950   | 24.13 | .184   | 4.68 |
| E113R  | 1.335  | 33.91 | 1.115     | 28.32     | .948   | 24.08 | .315   | 8.00 | .315   | 8.00 | .270   | 6.86 | .429   | 10.90 | .950   | 24.13 | .197   | 5.01 |








**13 Amp Current Rating**—Combo Micro-D's combine the size and weight advantages of a Micro -D connector with the added ability to handle higher power needs.

**Printed Circuit Board Terminals**—Ideal for flexible circuits or rigid boards, these gold plated PC tail contacts are sealed with epoxy encapsulant and are non-removable.




## HOW TO ORDER VERTICAL MOUNT PCB COMBO MICRO-D CONNECTORS

| Series                    | Shell Finish      | Shell Size and Insert Arrangement | Shell Style  | Termination Style   | Hardware   | PC Tail Length                                      |
|---------------------------|-------------------|-----------------------------------|--|---|--|---|
| GMPM                      | 1 – Cadmium       | B112                              | P – Plug   | CBS<br>Compact<br>Vertical Mount                                  | NN – No Jackpost, No Threaded Insert   | .172<br><br>Length in<br>Inches<br>± .015<br>(0.38) |
|                           | 2 – Nickel        | D112                              | R – Receptacle   |   | PN – Extended Jackpost for .062" (1.6) PCB,<br>No Threaded Insert  |   |
|                           | 4 – Black Anodize | D112                              | <br>Plug<br><br><br>Receptacle | RN – Extended Jackpost for .196" (5.0) PCB,<br>No Threaded Insert | <b>Rear Panel Jackposts</b><br>Supplied either with <b>U</b> style 2-56 UNC or <b>M</b> style<br>M2 Threaded Inserts<br><br><b>TU or TM</b> – 0.094" (2.4) Panel<br><b>VU or VM</b> – 0.062" (1.6) Panel<br><b>WU or WM</b> – 0.047" (1.2) Panel<br><b>XU or XM</b> – 0.031" (0.8) Panel<br><b>XU or XM</b> – 0.023" (0.6) Panel |   |
|                           | 5 – Gold Plated   | D113                              |  | NU – 2-56 UNC Threaded Insert, No Jackposts                       |  |   |
|                           | 6 – Chem Film     | E113                              |  | NM – Metric M2 Threaded Insert, No Jackposts                      |  |   |
|                           |                   |                                   |  | SU – Short Jackpost, 2-56 UNC Threaded Insert                     |  |   |
|                           |                   |                                   |  | SM – Short Jackpost, M2 Metric Threaded Insert                    |  |   |
| <b>Sample Part Number</b> |                   |                                   |  |   |  |   |
| GMPM                      | 2                 | B112                              | R  | CBS   | PU   | – .110  |

## GMR7580 JACKPOST OPTIONS

| NN   | PN and RN   | NU, NM  | SU, SM   | TU, VU, WU, XU, YU<br>TM, VM, WM, XM, YM  |
|--|---|---|--|---|
|  <p>Thru-Hole</p> |  <p>Jackpost Kit<br/>PN – .062 (1.6) PCB<br/>RN – .196 (5.0) PCB</p> |  <p>Threaded Inserts</p> |  <p>Jackpost With Threaded Insert</p> |  <p>Jackpost for Rear Panel Mounting</p> |



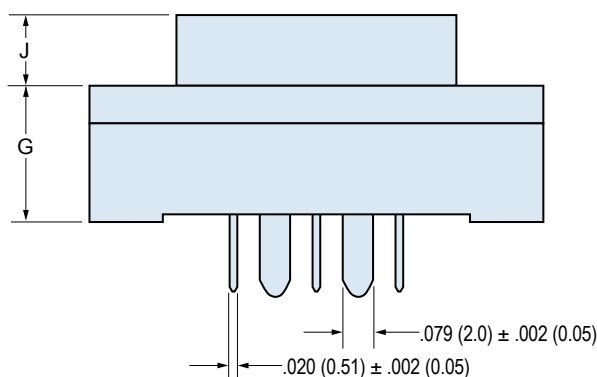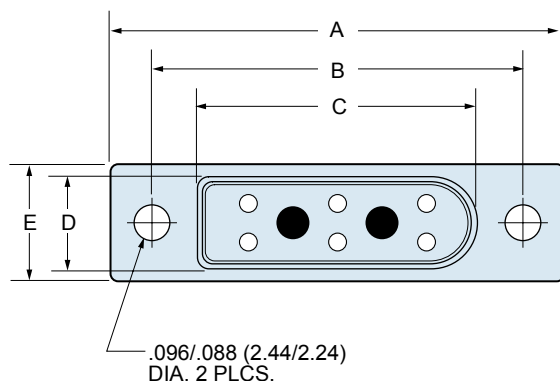


E

## DIMENSIONS

| Layout | A Max. |       | B             |               | C Max. |       | D Max. |      | E Max. |      | G Max. |      | J Max. |      |
|--------|--------|-------|---------------|---------------|--------|-------|--------|------|--------|------|--------|------|--------|------|
|        | In.    | mm.   | In.<br>± .003 | mm.<br>± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.    | mm.  | In.    | mm.  |
| B112P  | .935   | 23.75 | .715          | 18.16         | .481   | 12.21 | .242   | 6.15 | .315   | 8.00 | .355   | 9.02 | .184   | 4.68 |
| B112R  | .935   | 23.75 | .715          | 18.16         | .547   | 13.92 | .315   | 8.00 | .315   | 8.00 | .355   | 9.02 | .197   | 5.01 |
| D112P  | 1.185  | 30.01 | .965          | 24.51         | .731   | 18.56 | .242   | 6.15 | .315   | 8.00 | .355   | 9.02 | .184   | 4.68 |
| D112R  | 1.185  | 30.01 | .965          | 24.51         | .798   | 20.27 | .315   | 8.00 | .315   | 8.00 | .355   | 9.02 | .197   | 5.01 |
| D113P  | 1.185  | 30.01 | .965          | 24.51         | .731   | 18.56 | .242   | 6.15 | .315   | 8.00 | .355   | 9.02 | .184   | 4.68 |
| D113R  | 1.185  | 30.01 | .965          | 24.51         | .798   | 20.27 | .315   | 8.00 | .315   | 8.00 | .355   | 9.02 | .197   | 5.01 |
| E113P  | 1.335  | 33.91 | 1.115         | 28.32         | .881   | 22.37 | .242   | 6.15 | .315   | 8.00 | .355   | 9.02 | .184   | 4.68 |
| E113R  | 1.335  | 33.91 | 1.115         | 28.32         | .948   | 24.08 | .315   | 8.00 | .315   | 8.00 | .355   | 9.02 | .197   | 5.01 |

## RECOMMENDED PANEL CUTOUT

| Layout | B             |               | C                       |                       | D                       |                       |
|--------|---------------|---------------|-------------------------|-----------------------|-------------------------|-----------------------|
|        | In.<br>± .003 | mm.<br>± 0.08 | In.<br>+ .004<br>- .000 | mm.<br>+0.06<br>-0.00 | In.<br>+ .004<br>- .000 | mm.<br>+0.06<br>-0.00 |
| B112   | .715          | 18.16         | .550                    | 13.95                 | .316                    | 8.02                  |
| D112   | .965          | 24.51         | .800                    | 20.30                 | .316                    | 8.02                  |
| D113   | .965          | 24.51         | .800                    | 20.30                 | .316                    | 8.02                  |
| E113   | 1.115         | 28.32         | .950                    | 24.11                 | .316                    | 8.02                  |

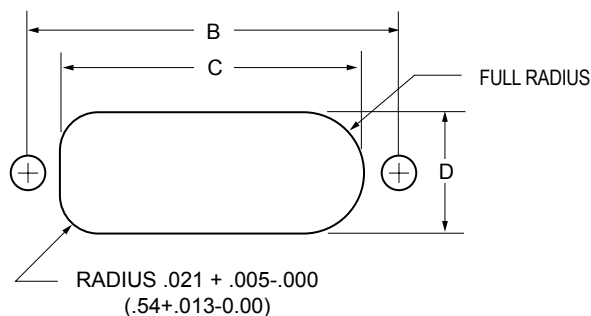


## COMBO MICRO-D PCB LAYOUTS


Patterns shown are for connector mounting side of PC board.

Plated thru-holes to accept .081 (2.06) maximum diameter power pins marked A, B and C, and .022 maximum diameter signal pins marked 1 – 8.


### Plug Connectors




**B112P**

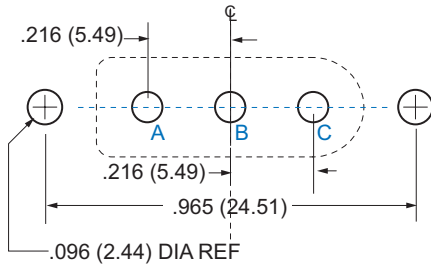

**D112P**

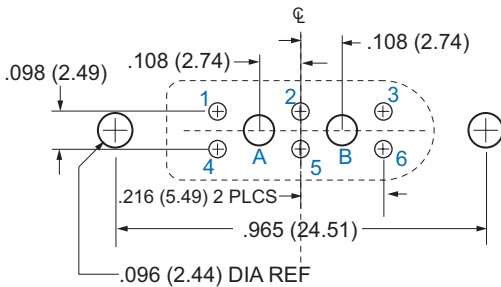


**D113P**

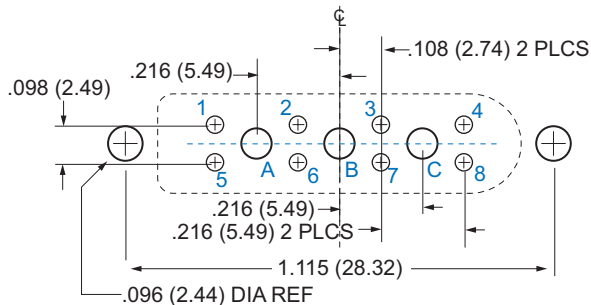


**E113P**


### Receptacle Connectors

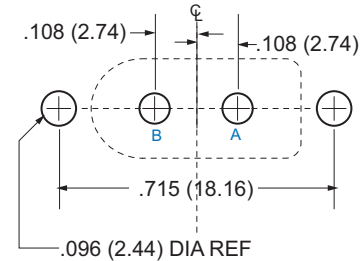


**B112R**

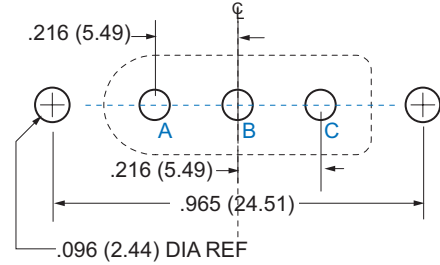

**D112R**

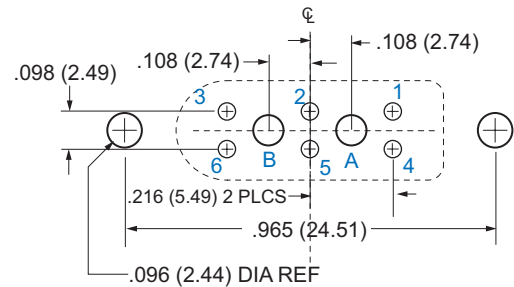


**D113R**

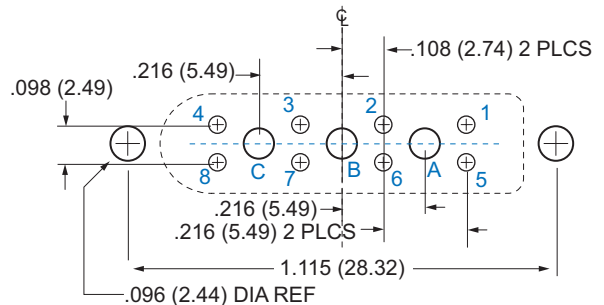

**E113R**

E

# Good Things Come In Small Packages

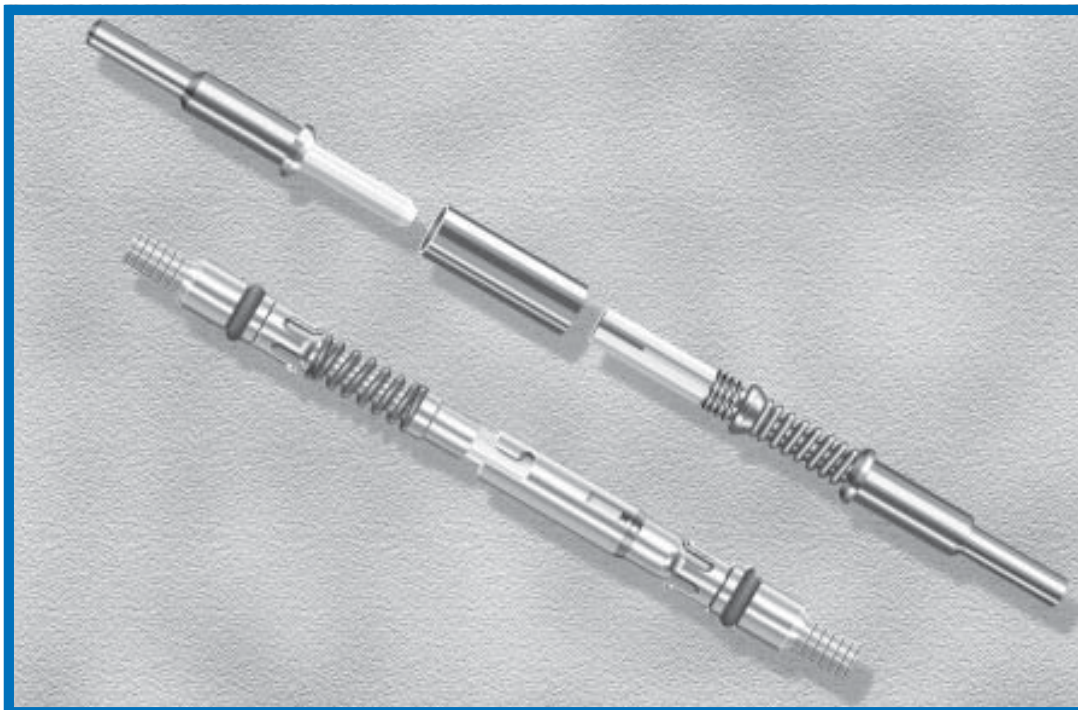

## And at Glenair, They Ship the Same Day

**T**ired of long lead times for F/O connectors and contacts? Then consider the Glenair difference: We've placed our products in stock, in quantity, and ready for immediate shipment—including both our MIL-T-29504 qualified pin and socket contacts as well as our new front-

release 181-011 and 181-012 designs. Consider as well Glenair's "no minimum order" policy and our lightning fast turnaround on quotes for price and delivery. At Glenair, we're committed to keeping our products and services current with your every need.



1211 Air Way  
Glendale, California 91201-2497  
Telephone: 818-247-6000 · Facsimilie: 818-500-9912 · EMail: [sales@glenair.com](mailto:sales@glenair.com)

United States · United Kingdom · Germany · Nordic · France · Italy · Spain

[www.glenair.com](http://www.glenair.com)

PRODUCT SELECTION GUIDE

**Filter With Solder Cup Contacts**

Available in 9, 15, 21, 25, 31, and 37 contacts, these aluminum shell filtered Micro-D connectors are backfilled with thermally conductive epoxy to allow soldering without heat damage to sensitive filter elements.



*Solder Cup Filter  
Page F-5*

**Pre-Wired Pigtail Filter Connector**

These pre-wired connectors save labor and provide added reliability. Choose from 9 to 37 contacts. Mates to standard M83513 type Micro-D connectors.



*Pre-Wired Filter  
Page F-7*

**Vertical Printed Circuit Board Micro-D Filter**

Featuring a one piece aluminum shell, these thru-hole board mount connectors can be ordered with jackposts or with jackscrews for flex-to-board applications. PC terminals are .018" (0.46 mm.) diameter and are spaced .050" (1.27 mm.) apart.



*Vertical PCB Filter  
Page F-11*

**90° Printed Circuit Board Micro-D Filter**

These right angle thru-hole headers replicate the popular "CBR" .100" by .100" terminal spacing. Filter elements are housed in a wider shell. A molded rear tray withstands soldering heat and is impervious to chemicals. Terminals are encapsulated in epoxy.



*Right Angle  
PCB Filter  
Page F-15*

**In-Line Filter Adapter**

Avoid costly redesign with pin/socket feed-thru adapters. These adapters plug into any standard M83513 connector. Simply unplug your existing cable, install the filter adapter and reconnect the cable.



*Feed-Thru Adapter  
Page F-9*

F

## ABOUT MICRO-D FILTER CONNECTORS

Glenair Filter Micro-D connectors are low-pass filters, transmitting DC and low frequency signals while attenuating unwanted high frequency noise. These connectors are available with **C** filter elements or **Pi** filters. The filter substrates are constructed with a ceramic planar capacitor array.

Glenair Filter Micro-D's meet the demanding performance requirements of MIL-DTL-83513, except for a reduction in the dielectric withstanding voltage rating to 200 volts DC (higher voltages available on request). The TwistPin contact system assures superior performance in the most demanding applications.


### C Filter

Single capacitor with low self inductance. This configuration is generally used to attenuate high frequency signals. The simple design allows high-frequency EMI to discharge to ground via the surrounding electromagnetic field. C filters occupy the least amount of space and offer lower cost compared to other filter types.



### Pi Filter

Dual capacitors with a ferrite inductor positioned between them. The Pi filter provides excellent high-frequency performance due to its sharper rolloff.

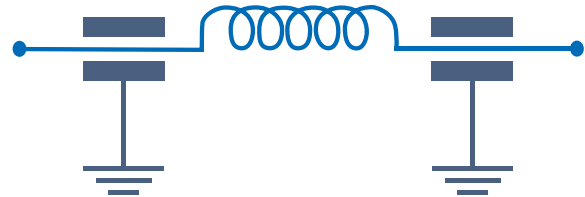

## MICRO-D C FILTER ATTENUATION AND CAPACITANCE VALUES



C Filter

| Filter Class | Capacitance pF  | No Load Insertion Loss (dB Minimum) |        |         |              |
|--------------|-----------------|-------------------------------------|--------|---------|--------------|
|              |                 | 1 MHz                               | 10 MHz | 100 MHz | 500–1000 MHz |
| A            | 19,000 — 28,000 | 6                                   | 24     | 41      | 50           |
| B            | 16,000 — 22,500 | 5                                   | 23     | 39      | 49           |
| C            | 9,000 — 16,500  | 3                                   | 16     | 35      | 46           |
| D            | 4,000 — 6,000   | —                                   | 8      | 28      | 41           |
| E            | 1,650 — 2500    | —                                   | 4      | 21      | 34           |
| F            | 400 — 650       | —                                   | —      | 10      | 23           |
| G            | 200 — 300       | —                                   | —      | 5       | 17           |

## MICRO-D PI FILTER ATTENUATION AND CAPACITANCE VALUES










Pi Filter

| Filter Class | Capacitance pF  | No Load Insertion Loss (dB Minimum) |        |         |              |
|--------------|-----------------|-------------------------------------|--------|---------|--------------|
|              |                 | 1 MHz                               | 10 MHz | 100 MHz | 500–1000 MHz |
| A            | 38,000 — 56,000 | 10                                  | 40     | 62      | 66           |
| B            | 32,000 — 45,000 | 8                                   | 35     | 60      | 62           |
| C            | 18,000 — 33,000 | 5                                   | 25     | 57      | 60           |
| D            | 8,000 — 12,000  | 1                                   | 14     | 50      | 58           |
| E            | 3300 — 5000     | —                                   | 8      | 40      | 52           |
| F            | 800 — 1300      | —                                   | 2      | 15      | 32           |
| G            | 400 — 600       | —                                   | 0.8    | 13      | 22           |

# Micro-D Filter Connectors General Information



## MICRO-D FILTER CONNECTOR CONTACT ARRANGEMENTS (FACE VIEW PIN CONNECTOR)

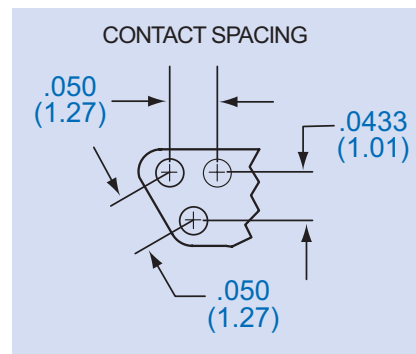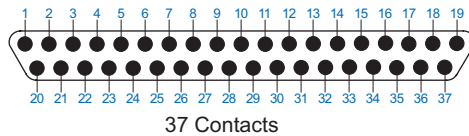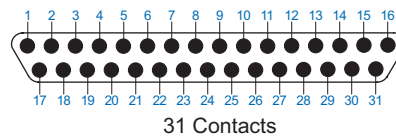

### PERFORMANCE SPECIFICATIONS

|                                 |                               |
|---------------------------------|-------------------------------|
| Current Rating                  | 3 AMP                         |
| Dielectric Withstanding Voltage | 250 VDC                       |
| Working Voltage                 | 100 VDC                       |
| Insulation Resistance           | 5000 Megohms Minimum          |
| Contact Resistance              | 8 Milliohms Maximum           |
| Low Level Contact Resistance    | 32 Milliohms Maximum          |
| Magnetic Permeability           | 2 $\mu$ Maximum               |
| Operating Temperature           | -55° C. to +125° C.           |
| Shock                           | 50 g.                         |
| Vibration                       | 20 g.                         |
| Mating Force                    | (10 Ounces) X (# of Contacts) |
| Capacitance and Attenuation     | (See Table on Preceding Page) |

### MATERIALS AND FINISHES

|                   |   |
|-------------------|---|
| Connector Shell   | Aluminum Alloy 6061 or Stainless Steel, 300 Series, Passivated<br>See Ordering Info for Aluminum Plating Options. |
| Insulator         | Liquid Crystal Polymer (LCP)  |
| Seals             | Fluorosilicone Rubber, Blue   |
| Pin Contact       | Beryllium Copper With 50 Microinches Gold over Nickel Plating   |
| Socket Contact    | Copper Alloy With 50 Microinches Gold Over Nickel Plating   |
| Hardware          | 300 Series Stainless Steel  |
| PCB Terminals     | Gold-Plated Copper Alloy, Solder Dipped   |
| Capacitors        | Planar Ceramic Array  |
| Inductors         | Ferrite   |
| EMI Ground Spring | Beryllium Copper, Gold Plated   |
| Encapsulant       | Thermally Conductive Epoxy  |

SPECIAL PRODUCT INFORMATION

**Innovative Designs to Meet Every Need**

Sometimes a standard part just won't do. For these situations Glenair welcomes your custom requirements. Whatever the need, we can propose a solution and back it up with rapid design and prototyping.



# Micro-D Filter Connectors Solder Cup



*Glenair's Filtered Solder Cup Micro-D's* provide EMI solutions in a miniaturized M83513 type connector. These connectors feature ceramic capacitor planar arrays and ferrite inductors. Solder cups accept #26 thru #30 AWG wire, or specify oversize contacts for #24 gage wire.

*Choose Pi or C Filter Arrays* in seven filter classes and six layouts. Glenair filtered Micro-D connectors comply with applicable MIL-DTL-83513 requirements and are 100% intermateable with standard connectors.

*Choose 9 to 37 Contacts*, with standard cadmium or nickel plating on the connector housing or choose optional finishes such as gold or chem film.

## HOW TO ORDER FILTER MICRO-D CONNECTORS WITH SOLDER CUPS

| Series                    | Shell Finish  | Number of Contacts         | Contact Type  | Filter Type                   | Filter Class                           | Hardware   |
|---------------------------|---|----------------------------|---|-------------------------------|--|--|
| 240-030                   | <b>Aluminum Shell</b>   | <b>9</b>                   | <b>Solder Cup Contacts for #24 AWG or Smaller Wire</b><br><br>P – Pin<br>S – Socket | C – C Filter<br>P – Pi Filter | A<br>B<br>C<br>D<br>E<br>F<br>G        | B<br>P<br>M<br>M1<br>S<br>S1<br>L<br>K<br>F<br>R |
|                           | 1 – Cadmium<br>2 – Nickel<br>4 – Black Anodize<br>5 – Gold<br>6 – Chem Film | 15<br>21<br>25<br>31<br>37 |   |                               |  |  |
|                           | <b>Stainless Steel Shell</b>  |                            |   |                               |  |  |
|                           | 3 – Passivated  |                            |   |                               | See "Filter Classes" on Following Page |  |
| <b>Sample Part Number</b> |   |                            |   |                               |  |  |
| 240-030                   | - 2   | - 25                       | P   | P                             | B                                      | B  |

## MICRO-D MOUNTING HARDWARE


| B   | P  | M   | M1   | S  | S1  | L  | K  | F  | R   |
|---|--|---|--|--|---|--|--|--|---|
|   |  |   |  |  |   |  |  |  |   |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head Removable E-ring | <b>Jackscrew</b><br>Hex Head Removable E-ring Extended | <b>Jackscrew</b><br>Slot Head Removable E-ring | <b>Jackscrew</b><br>Slot Head Removable E-ring Extended | <b>Jackscrew</b><br>Hex Head Non-Removable | <b>Jackscrew</b><br>Slot Head Non-Removable Extended | <b>Float Mount</b><br>For Front Panel Mounting | <b>Float Mount</b><br>For Rear Panel Mounting |



## MICRO-D FILTER CLASSES AND PERFORMANCE

| Filter Class →                            | A           |    | B           |    | C           |    | D          |    | E         |    | F        |    | G       |     |
|---|-------------|----|-------------|----|-------------|----|------------|----|-----------|----|----------|----|---------|-----|
| <b>Capacitance, Picofarads (pF)</b>       |             |    |             |    |             |    |            |    |           |    |          |    |         |     |
| <b>C Filter</b>                           | 19000-28000 |    | 16000-22500 |    | 9000-16500  |    | 4000-6000  |    | 1650-2500 |    | 400-650  |    | 200-300 |     |
| <b>Pi Filter</b>                          | 38000-56000 |    | 32000-45000 |    | 18000-33000 |    | 8000-12000 |    | 3300-5000 |    | 800-1300 |    | 400-600 |     |
| <b>Insertion Loss, dB Minimum, 25° C.</b> |             |    |             |    |             |    |            |    |           |    |          |    |         |     |
| Filter Type →                             | C           |    | Pi          |    | C           |    | Pi         |    | C         |    | Pi       |    | C       |     |
| <b>1 MHz</b>                              | 6           | 10 | 5           | 8  | 3           | 5  | —          | 1  | —         | —  | —        | —  | —       | —   |
| <b>10 MHz</b>                             | 24          | 40 | 23          | 35 | 16          | 25 | 8          | 14 | 4         | 8  | —        | 2  | —       | 0.8 |
| <b>100 MHz</b>                            | 41          | 62 | 39          | 60 | 35          | 57 | 28         | 50 | 21        | 40 | 10       | 15 | 5       | 13  |
| <b>500-1000 MHz</b>                       | 50          | 66 | 49          | 62 | 46          | 60 | 41         | 58 | 34        | 52 | 23       | 32 | 17      | 22  |

F

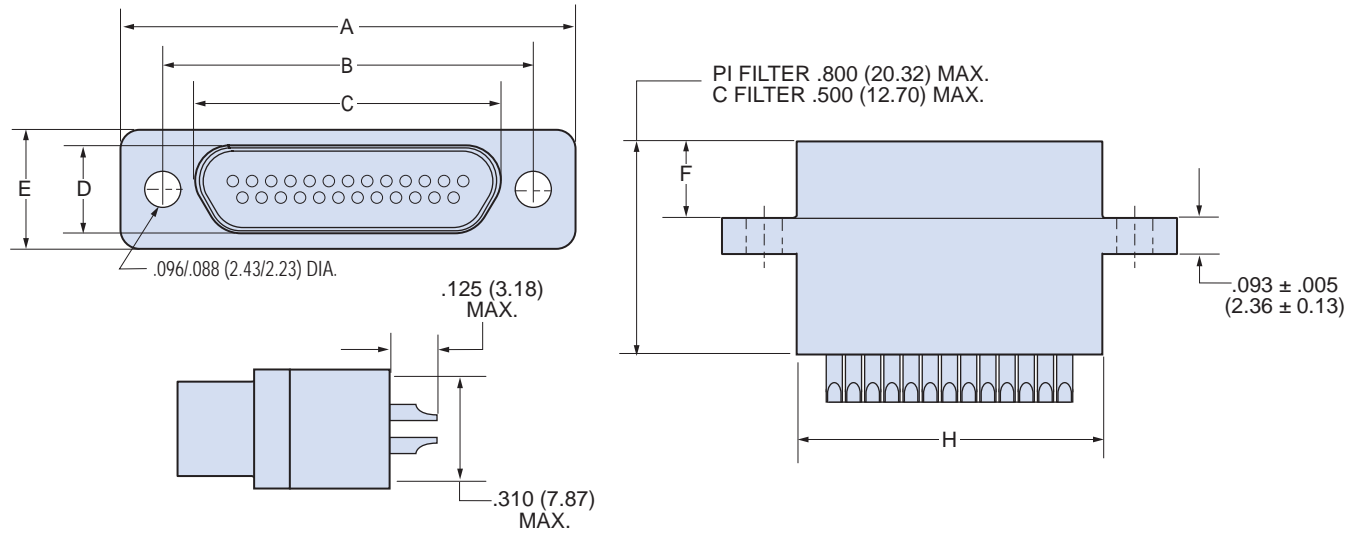

## DIMENSIONS

| Layout | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |      | F          |            | H Max. |       |
|--------|--------|-------|------------|------------|--------|-------|--------|------|--------|------|------------|------------|--------|-------|
|        | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In. ± .004 | mm. ± 0.10 | In.    | mm.   |
| 9P     | .785   | 19.94 | .565       | 14.35      | .333   | 8.46  | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .400   | 10.16 |
| 9S     | .785   | 19.94 | .565       | 14.35      | .400   | 10.16 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .400   | 10.16 |
| 15P    | .935   | 23.75 | .715       | 18.16      | .483   | 12.27 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .550   | 13.97 |
| 15S    | .935   | 23.75 | .715       | 18.16      | .551   | 14.00 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .550   | 13.97 |
| 21P    | 1.085  | 27.56 | .865       | 21.97      | .633   | 16.08 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .700   | 17.78 |
| 21S    | 1.085  | 27.56 | .865       | 21.97      | .701   | 17.81 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .700   | 17.78 |
| 25P    | 1.185  | 30.01 | .965       | 24.51      | .733   | 18.62 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .800   | 20.32 |
| 25S    | 1.185  | 30.01 | .965       | 24.51      | .801   | 20.35 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .800   | 20.32 |
| 31P    | 1.335  | 33.91 | 1.115      | 28.32      | .883   | 22.43 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .950   | 24.13 |
| 31S    | 1.335  | 33.91 | 1.115      | 28.32      | .951   | 24.16 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .950   | 24.13 |
| 37P    | 1.485  | 37.72 | 1.265      | 32.13      | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | 1.100  | 27.94 |
| 37S    | 1.485  | 37.72 | 1.265      | 32.13      | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | 1.100  | 27.94 |

# Micro-D Filter Connectors Pre-Wired Pigtails with Insulated Wire



Micro-D  
Filter



**Glenair's Filtered Pigtail Micro-D's** provide EMI solutions in a miniaturized M83513 Micro-D connector. These connectors feature ceramic capacitor planar arrays and ferrite inductors. Insulated wire is factory precision-crimped to TwistPin contacts for superior reliability in the most demanding environments.

**Choose Pi or C Filter Arrays** in seven filter classes and six layouts. Glenair filtered Micro-D connectors comply with applicable MIL-DTL-83513 requirements and are 100% intermateable with standard connectors.

**Choose 9 to 37 Contacts**, with standard cadmium or nickel plating on the connector housing or choose optional finishes such as gold or chem film.

## HOW TO ORDER FILTER MICRO-D CONNECTORS WITH INSULATED WIRE PIGTAILS


| Series  | Shell Finish                 | Number of Contacts        | Contact Type     | Filter Type  | Filter Class  | Wire Gage (AWG)      | Wire Type                                  | Wire Color    | Wire Length Inches                                     | Hardware |         |            |
|---------|------------------------------|---------------------------|------------------|--|---|----------------------|--|---------------|--|----------|---------|------------|
| 240-032 | <b>Aluminum Shell</b>        | 9                         | P<br>Pin         | C – C Filter   | A   | 4 – #24              | K – M22759/11<br>600 Vrms<br>Teflon® (TFE) | 1 – White     | 18<br>Wire Length In Inches. "18" Specifies 18 Inches. | B        |         |            |
|         |                              | 15                        |                  |  |   | S<br>Socket          |  | P – Pi Filter |  | B        | 6 – #26 | 2 – Yellow |
|         |                              | 21                        | D<br>E<br>F<br>G | J – M22759/33<br>600 Vrms<br>Modified<br>Cross-Linked<br>Tefzel®<br>(ETFE) | 5 – Color-Coded Stripes Per MIL-STD-681 (#24 and #26 gage only) |                      |  |               |  |          | M       |            |
|         |                              | 25                        |                  |  | L<br>K<br>F<br>R  | 7 – Ten Color Repeat |  | M1            |  |          |         |            |
|         |                              | 31                        |                  |  |   |                      |  |               |  | S1       |         |            |
|         |                              | 37                        |                  |  | R   |                      |  |               |  |          |         |            |
|         | <b>Stainless Steel Shell</b> | 3 – Passivated            |                  |  |   |                      |  |               |  |          |         |            |
|         |                              | <b>Sample Part Number</b> |                  |  |   |                      |  |               |  |          |         |            |
|         |                              | 240-032                   | 2                | – 25   | P   | P                    | B  | 6             | K  | 1        | – 18    | B          |

## MICRO-D MOUNTING HARDWARE

| B   | P  | M   | M1   | S  | S1  | L  | K  | F  | R   |
|---|--|---|--|--|---|--|--|--|---|
|   |  |   |  |  |   |  |  |  |   |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head Removable E-ring | <b>Jackscrew</b><br>Hex Head Removable E-ring Extended | <b>Jackscrew</b><br>Slot Head Removable E-ring | <b>Jackscrew</b><br>Slot Head Removable E-ring Extended | <b>Jackscrew</b><br>Hex Head Non-Removable | <b>Jackscrew</b><br>Slot Head Non-Removable Extended | <b>Float Mount</b><br>For Front Panel Mounting | <b>Float Mount</b><br>For Rear Panel Mounting |



# Micro-D Filter Connectors Pre-Wired Pigtails with Insulated Wire

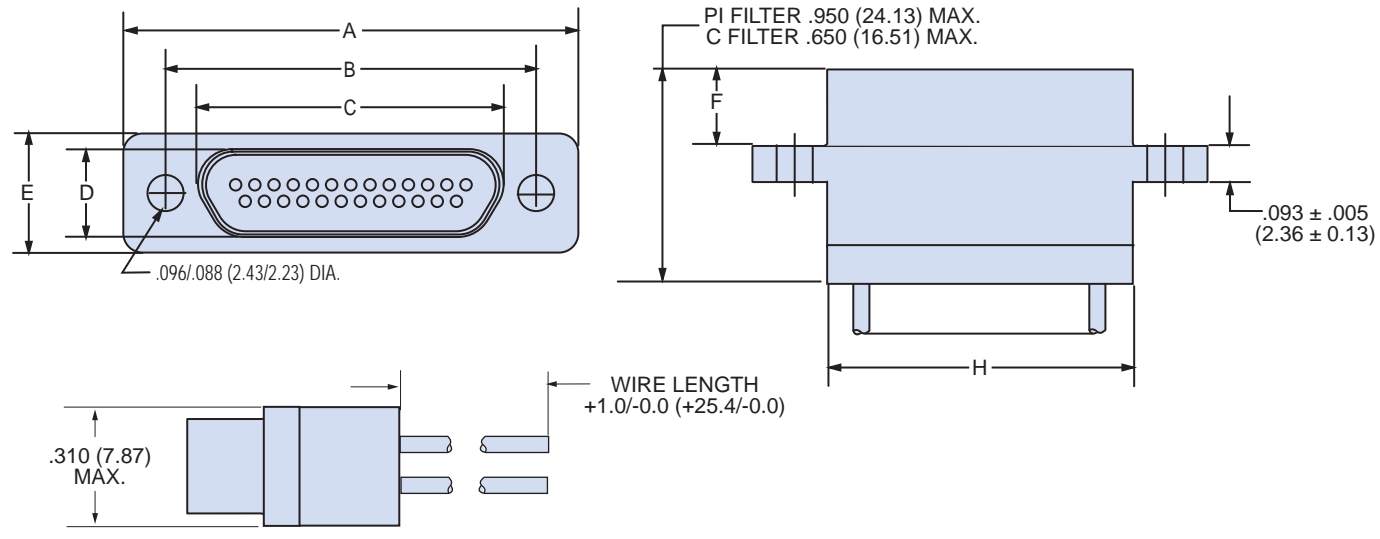

F

## DIMENSIONS

| Layout     | A Max. |       | B             |               | C Max. |       | D Max. |      | E Max. |      | F             |               | H Max. |       |
|------------|--------|-------|---------------|---------------|--------|-------|--------|------|--------|------|---------------|---------------|--------|-------|
|            | In.    | mm.   | In.<br>± .003 | mm.<br>± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.<br>± .004 | mm.<br>± 0.10 | In.    | mm.   |
| <b>9P</b>  | .785   | 19.94 | .565          | 14.35         | .333   | 8.46  | .184   | 4.67 | .310   | 7.87 | .183          | 4.65          | .400   | 10.16 |
| <b>9S</b>  | .785   | 19.94 | .565          | 14.35         | .400   | 10.16 | .250   | 6.35 | .310   | 7.87 | .195          | 4.95          | .400   | 10.16 |
| <b>15P</b> | .935   | 23.75 | .715          | 18.16         | .483   | 12.27 | .184   | 4.67 | .310   | 7.87 | .183          | 4.65          | .550   | 13.97 |
| <b>15S</b> | .935   | 23.75 | .715          | 18.16         | .551   | 14.00 | .250   | 6.35 | .310   | 7.87 | .195          | 4.95          | .550   | 13.97 |
| <b>21P</b> | 1.085  | 27.56 | .865          | 21.97         | .633   | 16.08 | .184   | 4.67 | .310   | 7.87 | .183          | 4.65          | .700   | 17.78 |
| <b>21S</b> | 1.085  | 27.56 | .865          | 21.97         | .701   | 17.81 | .250   | 6.35 | .310   | 7.87 | .195          | 4.95          | .700   | 17.78 |
| <b>25P</b> | 1.185  | 30.01 | .965          | 24.51         | .733   | 18.62 | .184   | 4.67 | .310   | 7.87 | .183          | 4.65          | .800   | 20.32 |
| <b>25S</b> | 1.185  | 30.01 | .965          | 24.51         | .801   | 20.35 | .250   | 6.35 | .310   | 7.87 | .195          | 4.95          | .800   | 20.32 |
| <b>31P</b> | 1.335  | 33.91 | 1.115         | 28.32         | .883   | 22.43 | .184   | 4.67 | .310   | 7.87 | .183          | 4.65          | .950   | 24.13 |
| <b>31S</b> | 1.335  | 33.91 | 1.115         | 28.32         | .951   | 24.16 | .250   | 6.35 | .310   | 7.87 | .195          | 4.95          | .950   | 24.13 |
| <b>37P</b> | 1.485  | 37.72 | 1.265         | 32.13         | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87 | .183          | 4.65          | 1.100  | 27.94 |
| <b>37S</b> | 1.485  | 37.72 | 1.265         | 32.13         | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87 | .195          | 4.95          | 1.100  | 27.94 |

# Micro-D Filter Connectors Pin-Socket In-Line Filter Adapters



### Avoid Costly Redesign with Micro-D Filter Adapters.

Upgrade your existing cables and boxes to meet EMI requirements. These pin-socket adapters can be plugged into any standard M83513 connectors. Simply unplug your existing cable, install the filter adapter, and plug the cable into the adapter.

**In-Line Filter Adapters** feature gold plated TwistPin contacts, machined aluminum shells, and either Pi or C filter elements. These environmentally sealed adapters are designed to meet the requirements of MIL-DTL-83513.

## HOW TO ORDER MICRO-D IN-LINE FILTER ADAPTERS

| Series                    | Shell Finish      | Number of Contacts | Contact Type     | Filter Type                   | Filter Class | Hardware  |
|---------------------------|-------------------|--------------------|------------------|-------------------------------|--------------|---|
| 240-033                   | 1 – Cadmium       | 9                  | PS<br>Pin/Socket | C – C Filter<br>P – Pi Filter | A            | N – No Hardware<br>P – Combination Jackscrew and Jackpost<br>(See photograph on this page). |
|                           | 2 – Nickel        | 15                 |                  |                               | B            |   |
|                           | 4 – Black Anodize | 21                 |                  |                               | C            |   |
|                           | 5 – Gold          | 25                 |                  |                               | D            |   |
|                           | 6 – Chem Film     | 31                 |                  |                               | E            |   |
|                           |                   | 37                 |                  |                               | F            |   |
| <b>Sample Part Number</b> |                   |                    |                  |                               |              |   |
| 240-033                   | 2                 | – 25               | PS               | C                             | D            | P   |

## MICRO-D IN-LINE FILTER ADAPTER CONTACT ARRANGEMENTS



Mating Face View of Pin Connector. Socket connectors have reversed cavity numbers.

## MICRO-D FILTER CLASSES AND PERFORMANCE

| Filter Class →                            | A           |           | B           |           | C           |           | D          |           | E         |           | F        |           | G        |           |
|---|-------------|-----------|-------------|-----------|-------------|-----------|------------|-----------|-----------|-----------|----------|-----------|----------|-----------|
| <b>Capacitance, Picofarads (pF)</b>       |             |           |             |           |             |           |            |           |           |           |          |           |          |           |
| <b>C Filter</b>                           | 19000-28000 |           | 16000-22500 |           | 9000-16500  |           | 4000-6000  |           | 1650-2500 |           | 400-650  |           | 200-300  |           |
| <b>Pi Filter</b>                          | 38000-56000 |           | 32000-45000 |           | 18000-33000 |           | 8000-12000 |           | 3300-5000 |           | 800-1300 |           | 400-600  |           |
| <b>Insertion Loss, dB Minimum, 25° C.</b> |             |           |             |           |             |           |            |           |           |           |          |           |          |           |
| <b>Filter Type →</b>                      | <b>C</b>    | <b>Pi</b> | <b>C</b>    | <b>Pi</b> | <b>C</b>    | <b>Pi</b> | <b>C</b>   | <b>Pi</b> | <b>C</b>  | <b>Pi</b> | <b>C</b> | <b>Pi</b> | <b>C</b> | <b>Pi</b> |
| <b>1 MHz</b>                              | 6           | 10        | 5           | 8         | 3           | 5         | —          | 1         | —         | —         | —        | —         | —        | —         |
| <b>10 MHz</b>                             | 24          | 40        | 23          | 35        | 16          | 25        | 8          | 14        | 4         | 8         | —        | 2         | —        | 0.8       |
| <b>100 MHz</b>                            | 41          | 62        | 39          | 60        | 35          | 57        | 28         | 50        | 21        | 40        | 10       | 15        | 5        | 13        |
| <b>500-1000 MHz</b>                       | 50          | 66        | 49          | 62        | 46          | 60        | 41         | 58        | 34        | 52        | 23       | 32        | 17       | 22        |




# Micro-D Filter Connectors Pin-Socket In-Line Filter Adapters

## PERFORMANCE SPECIFICATIONS

|                                 |                               |
|---------------------------------|-------------------------------|
| Current Rating                  | 3 AMP                         |
| Dielectric Withstanding Voltage | 250 VDC                       |
| Working Voltage                 | 100 VDC                       |
| Insulation Resistance           | 5000 Megohms Minimum          |
| Contact Resistance              | 8 Milliohms Maximum           |
| Low Level Contact Resistance    | 32 Milliohms Maximum          |
| Magnetic Permeability           | 2 $\mu$ Maximum               |
| Operating Temperature           | -55° C. to +125° C.           |
| Shock                           | 50 g.                         |
| Vibration                       | 20 g.                         |
| Mating Force                    | (10 Ounces) X (# of Contacts) |
| Capacitance and Attenuation     | (See Table on Preceding Page) |

## MATERIALS AND FINISHES

|                   |   |
|-------------------|---|
| Connector Shell   | Aluminum Alloy 6061 or Stainless Steel, 300 Series, Passivated<br>See Ordering Info for Aluminum Plating Options. |
| Insulator         | Liquid Crystal Polymer (LCP)  |
| Seals             | Flourosilicone Rubber, Blue   |
| Pin Contact       | Beryllium Copper With 50 Microinches Gold over Nickel Plating   |
| Socket Contact    | Copper Alloy With 50 Microinches Gold Over Nickel Plating   |
| Hardware          | 300 Series Stainless Steel  |
| PCB Terminals     | Gold-Plated Copper Alloy, Solder Dipped   |
| Capacitors        | Planar Ceramic Array  |
| Inductors         | Ferrite   |
| EMI Ground Spring | Beryllium Copper, Gold Plated   |
| Encapsulant       | Thermally Conductive Epoxy  |

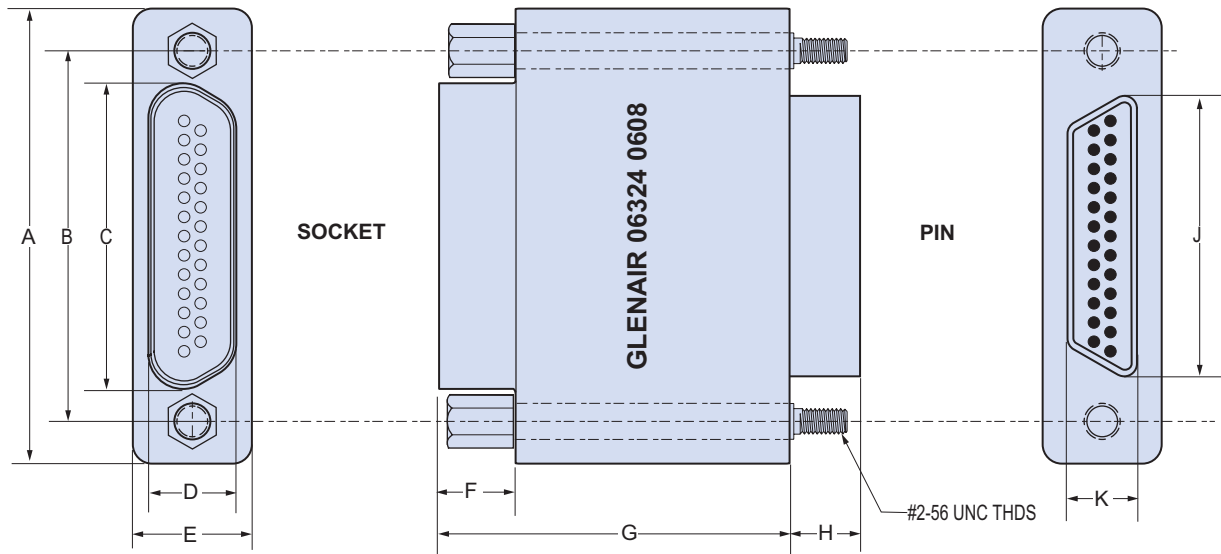

## DIMENSIONS

| Layout | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |      | F          |            | G Max. |       | H          |            | J Max. |       | K Max. |      |
|--------|--------|-------|------------|------------|--------|-------|--------|------|--------|------|------------|------------|--------|-------|------------|------------|--------|-------|--------|------|
|        | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In. ± .004 | mm. ± 0.10 | In.    | mm.   | In. ± .004 | mm. ± 0.10 | In.    | mm.   | In.    | mm.  |
| 9PS    | .785   | 19.94 | .565       | 14.35      | .333   | 8.46  | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | 1.400  | 35.56 | .183       | 4.65       | .333   | 8.46  | .184   | 4.67 |
| 15PS   | .935   | 23.75 | .715       | 18.16      | .483   | 12.27 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | 1.400  | 35.56 | .183       | 4.65       | .483   | 12.27 | .184   | 4.67 |
| 21PS   | 1.085  | 27.56 | .865       | 21.97      | .633   | 16.08 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | 1.400  | 35.56 | .183       | 4.65       | .633   | 16.08 | .184   | 4.67 |
| 25PS   | 1.185  | 30.01 | .965       | 24.51      | .733   | 18.62 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | 1.400  | 35.56 | .183       | 4.65       | .733   | 18.62 | .184   | 4.67 |
| 31PS   | 1.335  | 33.91 | 1.115      | 28.32      | .883   | 22.43 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | 1.400  | 35.56 | .183       | 4.65       | .883   | 22.43 | .184   | 4.67 |
| 37PS   | 1.485  | 37.72 | 1.265      | 32.13      | 1.033  | 26.24 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | 1.400  | 35.56 | .183       | 4.65       | 1.033  | 26.24 | .184   | 4.67 |

# Micro-D Filter Connectors Vertical Printed Circuit Board



**Printed Circuit Board Micro-D Filter Connectors.** These vertical mount PCB connectors are ideal for flexible circuit or motherboard applications.

**Key Features include** gold plated TwistPin contacts, machined aluminum shells, and either Pi or C filter elements. These environmentally sealed connectors are designed to meet the requirements of MIL-DTL-83513.

**Integral Board Standoffs and Pre-Tinned Tails**—These connectors are solder dipped (63/37 SnPb) and feature a full complement of mounting hardware options.


## HOW TO ORDER MICRO-D FILTER VERTICAL MOUNT PCB CONNECTORS

| Series                    | Shell Finish      | Number of Contacts | Contact Type | Filter Type    | Filter Class | PC Tail Length                       | Hardware Option  |
|---------------------------|-------------------|--------------------|--------------|----------------|--------------|--------------------------------------|--|
| 240-031                   | 1 – Cadmium       | 9                  | P<br>Pin     | C<br>C Filter  | A            | 1 – .110 Inches<br>(2.79)            | <b>NN</b> – No Jackpost, No Threaded Insert<br><b>PN</b> – Extended Jackpost for .062" (1.6) PCB, No Threaded Insert<br><b>RN</b> – Extended Jackpost for .196" (5.0) PCB, No Threaded Insert<br><b>NU</b> – Threaded Insert Only, No Jackposts<br><b>PU</b> – Short Jackpost and Threaded Insert<br><br><b>Rear Panel Jackposts With Threaded Inserts</b><br><b>R6U</b> – 0.125" (3.2) Panel<br><b>R5U</b> – 0.094" (2.4) Panel<br><b>R4U</b> – 0.062" (1.6) Panel<br><b>R3U</b> – 0.047" (1.2) Panel<br><b>R2U</b> – 0.031" (0.8) Panel<br><br><b>JackscREW Options</b><br><b>M</b> – Hex Head Jackscrews<br><b>S</b> – Slot Head Jackscrews |
|                           | 2 – Nickel        | 15                 |              |                | B            |                                      |  |
|                           | 4 – Black Anodize | 21                 | S<br>Socket  | P<br>Pi Filter | C            | 2 – .250 Inches<br>(6.35)            |  |
|                           |                   | 25                 |              |                | D            |                                      |  |
|                           | 5 – Gold          | 31                 |              |                | E            | Length in Inches<br>± .015<br>(0.38) |  |
|                           | 6 – Chem Film     | 37                 |              |                | F<br>G       |                                      |  |
| <b>Sample Part Number</b> |                   |                    |              |                |              |                                      |  |
| 240-031                   | 2                 | – 25               | P            | C              | D            | 1                                    | PN   |

F




# Micro-D Filter Connectors Vertical Printed Circuit Board

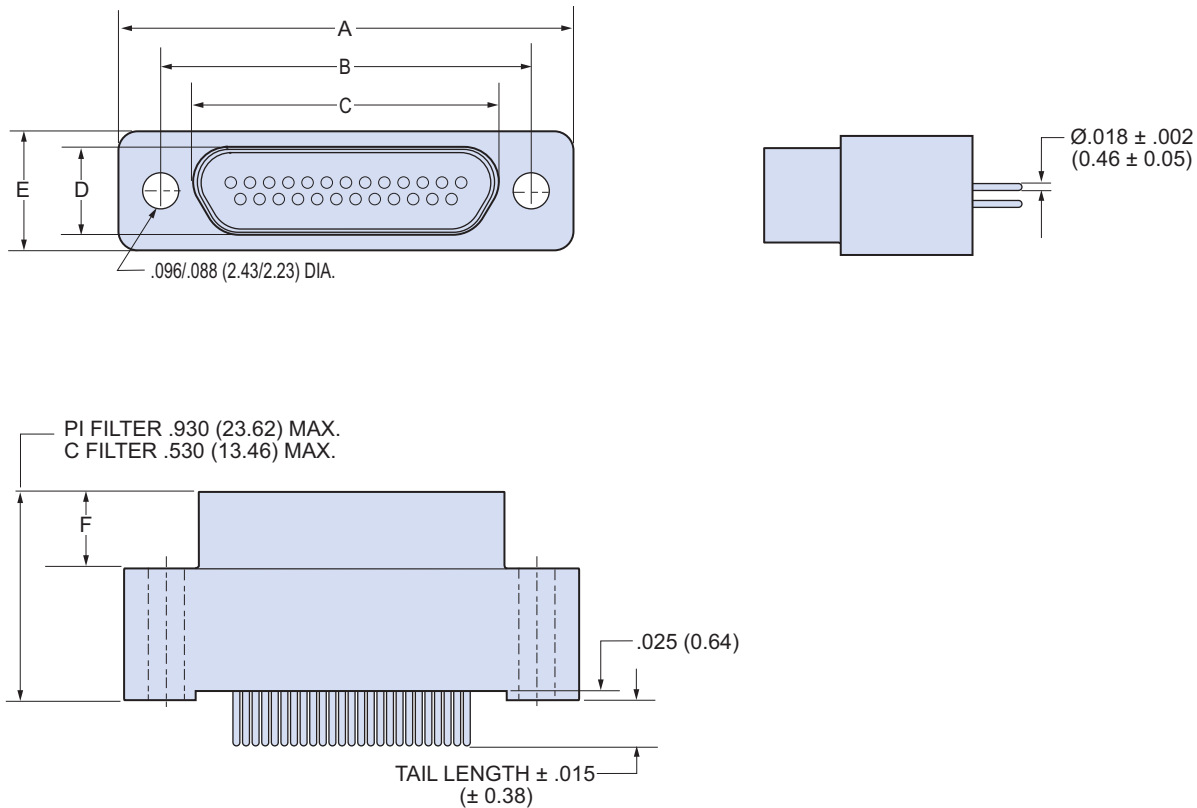

## MICRO-D FILTER VERTICAL PCB DIMENSIONS


| Layout     | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |      | F          |            |
|------------|--------|-------|------------|------------|--------|-------|--------|------|--------|------|------------|------------|
|            | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In. ± .004 | mm. ± 0.10 |
| <b>9P</b>  | .785   | 19.94 | .565       | 14.35      | .333   | 8.46  | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       |
| <b>9S</b>  | .785   | 19.94 | .565       | 14.35      | .400   | 10.16 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       |
| <b>15P</b> | .935   | 23.75 | .715       | 18.16      | .483   | 12.27 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       |
| <b>15S</b> | .935   | 23.75 | .715       | 18.16      | .551   | 14.00 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       |
| <b>21P</b> | 1.085  | 27.56 | .865       | 21.97      | .633   | 16.08 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       |
| <b>21S</b> | 1.085  | 27.56 | .865       | 21.97      | .701   | 17.81 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       |
| <b>25P</b> | 1.185  | 30.01 | .965       | 24.51      | .733   | 18.62 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       |
| <b>25S</b> | 1.185  | 30.01 | .965       | 24.51      | .801   | 20.35 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       |
| <b>31P</b> | 1.335  | 33.91 | 1.115      | 28.32      | .883   | 22.43 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       |
| <b>31S</b> | 1.335  | 33.91 | 1.115      | 28.32      | .951   | 24.16 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       |
| <b>37P</b> | 1.485  | 37.72 | 1.265      | 32.13      | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       |
| <b>37S</b> | 1.485  | 37.72 | 1.265      | 32.13      | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       |

MICRO-D FILTER VERTICAL PCB HARDWARE OPTIONS

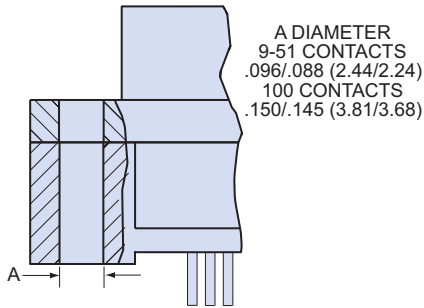


**NN Style**

Connector Supplied Without Hardware  
Thru-Hole, No Hardware

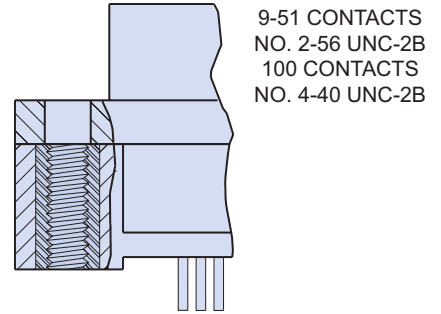


**NU Style**

Connector Supplied With Threaded Inserts




**PU Style**

Jackpost with Threaded Insert




**RU Style**

Rear Panel Jackpost with Threaded Insert




**Extended Jackpost**  
**PN Style for .062" PCB**  
**RN Style for .196" PCB**



**M Style**

Hex Head Jackscrew with E-Ring



**S Style**

Slot Head Jackscrew with E-Ring

F




## MICRO-D FILTER VERTICAL PCB LAYOUTS— PIN CONNECTOR SHOWN


PC Tail Diameter  $.018 \pm .002$  ( $0.46 \pm 0.05$ )

Contact numbers shown are for pin connectors. Reverse for socket.


Patterns shown are for connector mounting side of PC board.

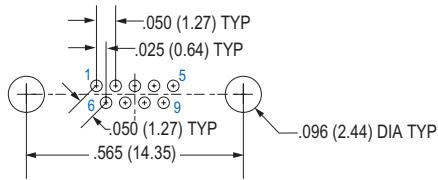


**9 Contacts**

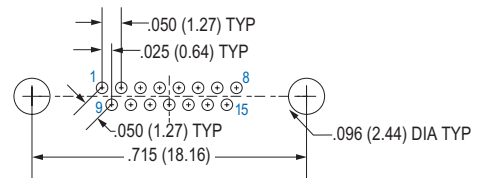


**15 Contacts**

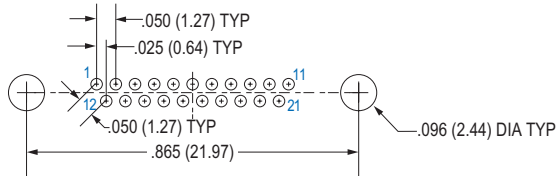


**21 Contacts**

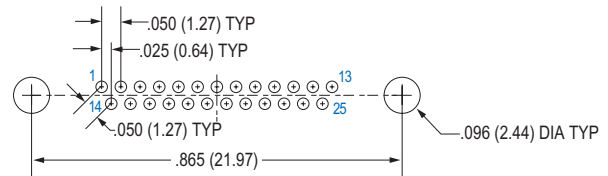

**25 Contacts**

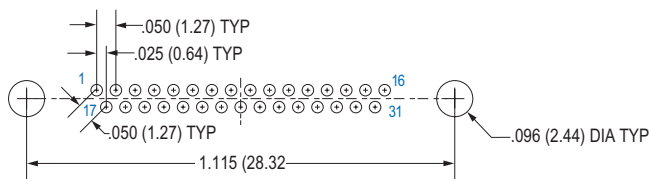

**31 Contacts**

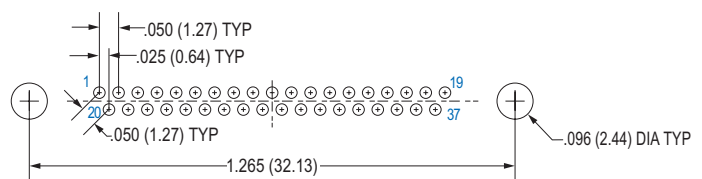

**37 Contacts**

# Micro-D Filter Connectors Right Angle Printed Circuit Board



**Right Angle Board Mount Filtered Micro-D's.** These connectors feature low-pass EMI filtering in a right angle header for PCB termination.





**Key Features** include gold plated TwistPin contacts, machined aluminum shells, and either Pi or C filter elements. These environmentally sealed connectors are designed to meet the requirements of MIL-DTL-83513.

**.100" x .100" Board Spacing** – These connectors are similar to “CBR” style Micro-D's and share the same board footprint, allowing retrofit to existing boards.

## HOW TO ORDER MICRO-D FILTERED RIGHT ANGLE PCB

F

| Series  | Shell Finish              | Number of Contacts | Contact Type | Filter Type    | Filter Class | Hardware Option                               | Tail Length  |   |      |  |  |
|---------|---------------------------|--------------------|--------------|----------------|--------------|---|--|---|------|--|--|
| 240-034 | 1 – Cadmium               | 9                  | P<br>Pin     | C<br>C Filter  | A            | NN – No Jackpost, No Threaded Insert          | .080   |   |      |  |  |
|         | 2 – Nickel                | 15                 |              |                | B            | PN – Jackpost, No Threaded Insert             | .110   |   |      |  |  |
|         | 4 – Black Anodize         | 21                 |              |                | C            | NU – Threaded Insert Only, No Jackposts       | .125   |   |      |  |  |
|         |                           | 25                 | S<br>Socket  | P<br>Pi Filter | D            | PU – Jackpost and Threaded Insert             | .150   |   |      |  |  |
|         | 5 – Gold                  | 31                 |              |                | E            | Rear Panel Jackposts<br>With Threaded Inserts | .190   |   |      |  |  |
|         | 6 – Chem Film             | 37                 |              |                | F            |   | R6U – 0.125" (3.2) Panel<br>R5U – 0.094" (2.4) Panel<br>R4U – 0.062" (1.6) Panel<br>R3U – 0.047" (1.2) Panel<br>R2U – 0.031" (0.8) Panel | Length in<br>Inches<br>± .015<br>(0.38) |      |  |  |
|         |                           |                    |              |                |              |   |  |   | .250 |  |  |
|         |                           |                    |              |                |              |   |  |   |      |  |  |
|         | <b>Sample Part Number</b> |                    |              |                |              |   |  |   |      |  |  |
|         | 240-034                   | – 2                | – 37         | S              | P            | E   | PU   | – .080                                  |      |  |  |

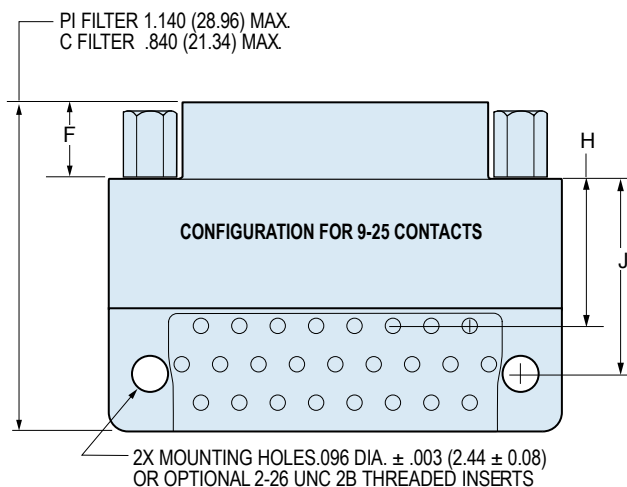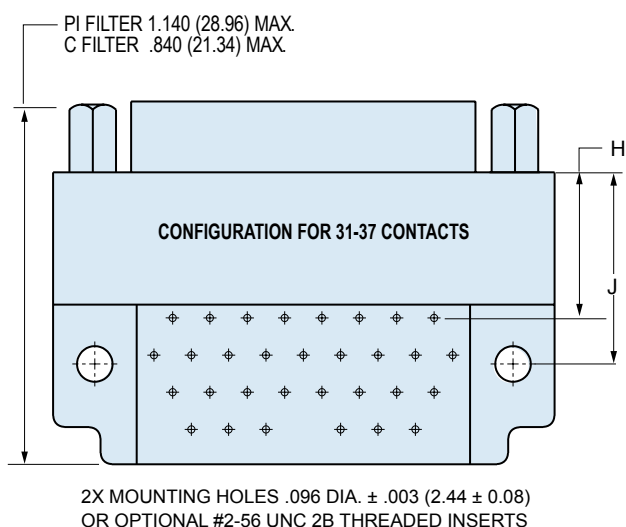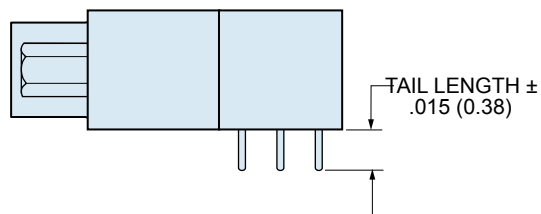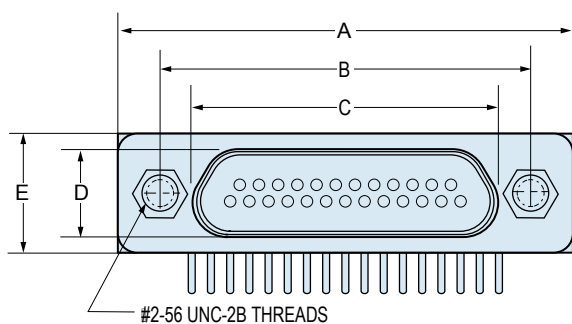

F

## DIMENSIONS

| Layout     | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |      | F          |            | G Max. |       | C Filter   |            |            |            | Pi Filter  |            |            |            |
|------------|--------|-------|------------|------------|--------|-------|--------|------|--------|------|------------|------------|--------|-------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | In.    | mm.   | In.        | mm.        | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.        | mm.        | In.    | mm.   | H          | J          | H          | J          | H          | J          |            |            |
|            |        |       | $\pm$ .003 | $\pm$ 0.08 |        |       |        |      |        |      | $\pm$ .004 | $\pm$ 0.10 |        |       | $\pm$ .010 | $\pm$ 0.25 | $\pm$ .010 | $\pm$ 0.25 | $\pm$ .010 | $\pm$ 0.25 | $\pm$ .010 | $\pm$ 0.25 |
| <b>9P</b>  | .785   | 19.94 | .565       | 14.35      | .333   | 8.46  | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .420   | 10.67 | .440       | 11.18      | .460       | 11.68      | .740       | 18.80      | .760       | 19.30      |
| <b>9S</b>  | .785   | 19.94 | .565       | 14.35      | .400   | 10.16 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .420   | 10.67 | .440       | 11.18      | .460       | 11.68      | .740       | 18.80      | .760       | 19.30      |
| <b>15P</b> | .935   | 23.75 | .715       | 18.16      | .483   | 12.27 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .420   | 10.67 | .340       | 8.64       | .460       | 11.68      | .640       | 16.26      | .760       | 19.30      |
| <b>15S</b> | .935   | 23.75 | .715       | 18.16      | .551   | 14.00 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .420   | 10.67 | .340       | 8.64       | .460       | 11.68      | .640       | 16.26      | .760       | 19.30      |
| <b>21P</b> | 1.085  | 27.56 | .865       | 21.97      | .633   | 16.08 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .420   | 10.67 | .340       | 8.64       | .460       | 11.68      | .640       | 16.26      | .760       | 19.30      |
| <b>21S</b> | 1.085  | 27.56 | .865       | 21.97      | .701   | 17.81 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .420   | 10.67 | .340       | 8.64       | .460       | 11.68      | .640       | 16.26      | .760       | 19.30      |
| <b>25P</b> | 1.185  | 30.01 | .965       | 24.51      | .733   | 18.62 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .420   | 10.67 | .340       | 8.64       | .460       | 11.68      | .640       | 16.26      | .760       | 19.30      |
| <b>25S</b> | 1.185  | 30.01 | .965       | 24.51      | .801   | 20.35 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .420   | 10.67 | .340       | 8.64       | .460       | 11.68      | .640       | 16.26      | .760       | 19.30      |
| <b>31P</b> | 1.335  | 33.91 | 1.115      | 28.32      | .883   | 22.43 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .520   | 13.21 | .340       | 8.64       | .460       | 11.68      | .640       | 16.26      | .760       | 19.30      |
| <b>31S</b> | 1.335  | 33.91 | 1.115      | 28.32      | .951   | 24.16 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .520   | 13.21 | .340       | 8.64       | .460       | 11.68      | .640       | 16.26      | .760       | 19.30      |
| <b>37P</b> | 1.485  | 37.72 | 1.265      | 32.13      | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87 | .183       | 4.65       | .520   | 13.21 | .340       | 8.64       | .460       | 11.68      | .640       | 16.26      | .760       | 19.30      |
| <b>37S</b> | 1.485  | 37.72 | 1.265      | 32.13      | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87 | .195       | 4.95       | .520   | 13.21 | .340       | 8.64       | .460       | 11.68      | .640       | 16.26      | .760       | 19.30      |

# Micro-D Filter Connectors Right Angle Printed Circuit Board




## MICRO-D FILTER RIGHT ANGLE PCB LAYOUTS— PIN CONNECTOR


PC Tail Diameter  $.018 \pm .002$  ( $0.46 \pm 0.05$ )

Contact numbers shown are for pin connectors.


Patterns shown are for connector mounting side of PC board.

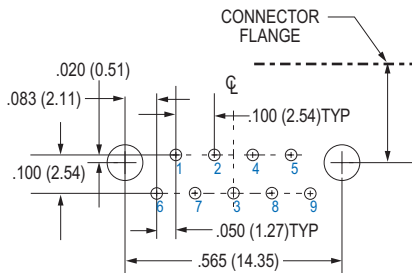


**9 Contacts**

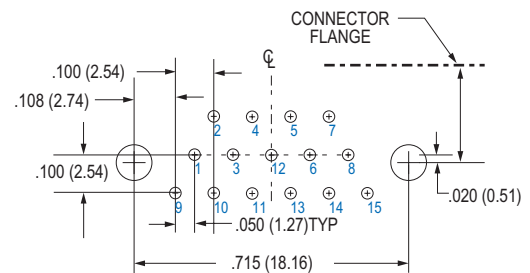


**15 Contacts**

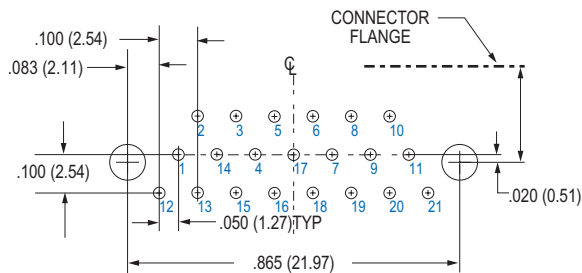


**21 Contacts**

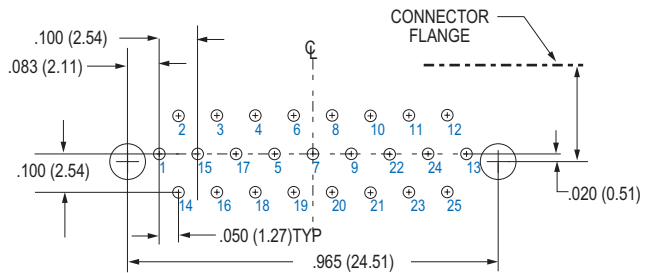

**25 Contacts**

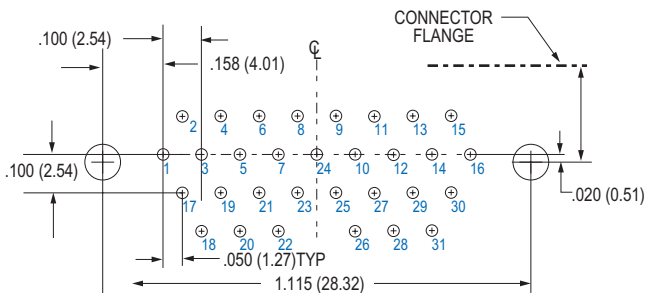

**31 Contacts**

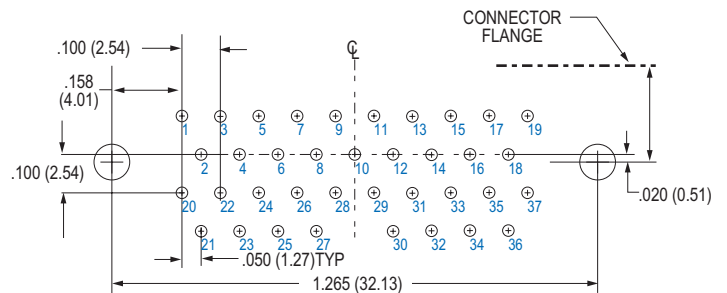

**37 Contacts**




## MICRO-D FILTER RIGHT ANGLE PCB LAYOUTS— SOCKET CONNECTOR


PC Tail Diameter  $.018 \pm .002$  ( $0.46 \pm 0.05$ )

Contact numbers shown are for socket connectors.


Patterns shown are for connector mounting side of PC board.

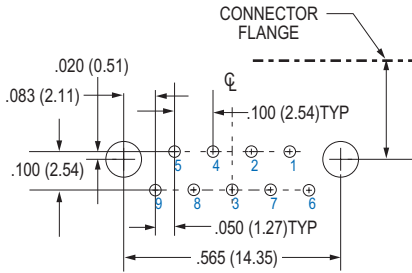


**9 Contacts**

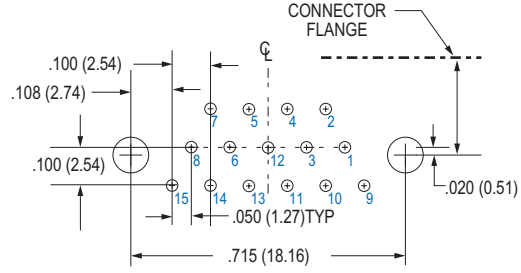


**15 Contacts**

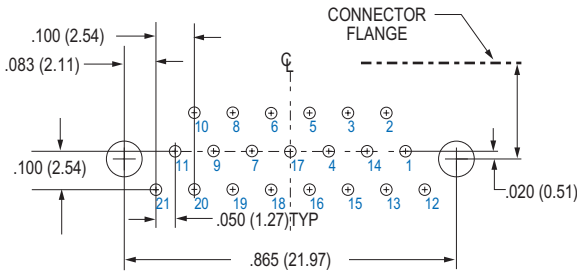


**21 Contacts**

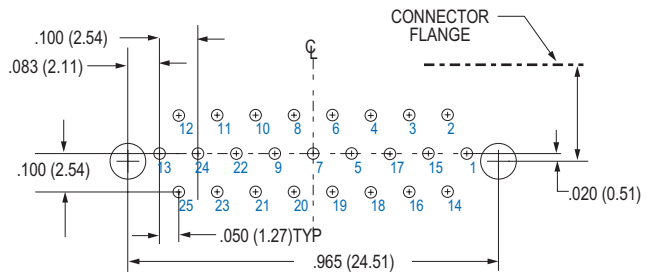

**25 Contacts**

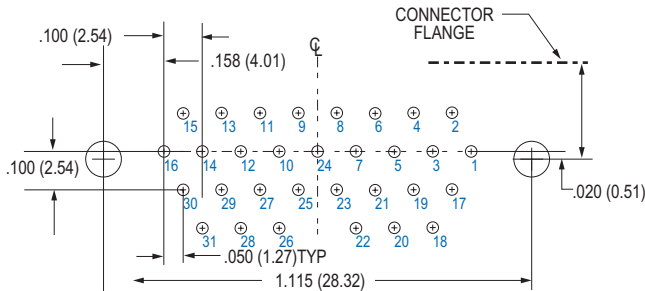


**31 Contacts**

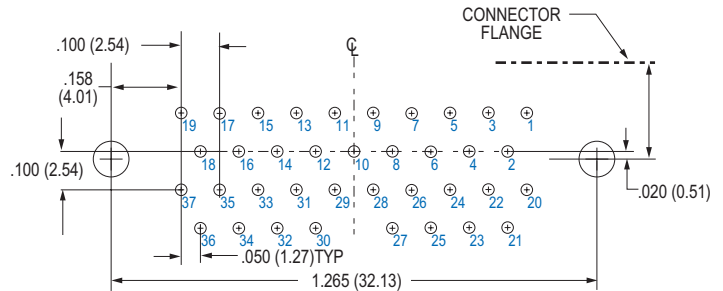

**37 Contacts**

PRODUCT SELECTION GUIDE

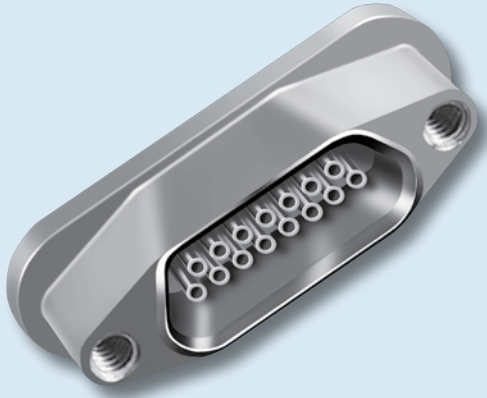


**Glenair's Hermetic Micro-D Connectors** feature fused glass insulators to provide an airtight seal. These connectors are 100% tested to meet a maximum leak rate of  $1 \times 10^{-8}$  cc's per second of helium.

**Matched Kovar® Seal** – The shells and contacts are machined from Kovar®, an iron-nickel-cobalt alloy which forms a chemical bond with the vitreous glass insulator. The contacts are gold-plated and the shell is nickel-plated.


**Choose Solder Cup, PC Tails or Pre-Wired** in two styles: panel mount for welding, soldering or brazing, or o-ring mount.

**MWDM Weldmount/Soldermount Hermetic**

These Kovar® alloy connectors are available in three styles: solder cup contacts, PC tail contacts or pre-wired and epoxy-sealed. Socket contacts are Kovar® alloy with gold plating. These connectors can be front- or rear-panel mounted. Installation requires soldering, brazing or welding to the bulkhead. Helium leak rate is  $1 \times 10^{-9}$  cc's per second.




**Weld Mount Hermetic Solder Cup Contacts**  
Page G-5



**Weld Mount Hermetic PC Tail Contacts**  
Page G-5

**MWDM Hermetic for Rear-Panel Mounting**

Avoid the expense of soldering or welding with this o-ring version. Blind tapped mounting holes and integral jackposts provide easy installation. Three termination options are available: solder cup contacts for #26 AWG or smaller wire, PC tails for rigid or flexible circuit boards, or pre-wired with extended epoxy encapsulation to protect and insulate the solder joints.

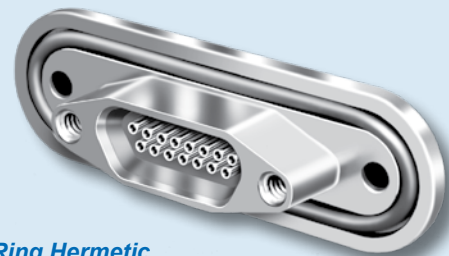

**O-Ring Hermetic**  
Page G-7

## MICRO-D HERMETIC CONNECTORS

Hermeticity is defined as "the state or condition of being airtight". Sophisticated military electronics enclosures can experience electrical failure from ingress of moisture. System engineers can design the enclosure to withstand exposure to moisture and condensation by using "moisture-hardened" components and conformal coatings, but often the most practical approach is to install hermetically sealed electrical I/O connectors. Glass-to-metal seals provide assurance that, over the life of the enclosure, the accumulated amount of water vapor inside the box will not exceed the amount necessary to form condensation. Other applications for Micro-D hermetic connectors include vacuum chambers, cryogenics, and enclosures filled with inert gas.

### Kovar® Alloy

Glenair's hermetic Micro-D shells and contacts are made from a special alloy called Kovar®, an iron-nickel-cobalt alloy consisting of 54% Fe, 29% Ni, and 17% Co. This alloy is covered by SAE specification AMS-I-23011. Kovar has a relatively low coefficient of thermal expansion.

### Matched Glass-To-Metal Seals

Matched seals rely on a chemical bond between the metal and the glass. Kovar contacts and shells are first exposed to high temperatures in order to develop an oxide coating. Then, the borosilicate glass and metal components are assembled with fixtures and are fused in a firing furnace at 900° C. A strong chemical bond is created between the metal and glass. Unlike compression seals which rely on different thermal coefficients of expansion between the glass and metal, a matched seal offers better resistance to stress from thermal extremes.

### Hermetic Testing


All Micro-D hermetic connectors are 100% tested prior to shipment. A helium leak test is performed to certify the hermetic seal. This test is conducted by inducing a 1 ATM vacuum on one side of the connector. Helium gas is released on the other side, and a mass spectrometer "counts" the number of helium molecules that penetrate the connector seal. Helium leak testing takes advantage of the small size of a helium molecule compared to air or water vapor. Helium is inert, rare in our atmosphere, and is easy to detect with a mass spectrometer.

### Micro-D Hermetic Plating Options

Unlike regular connectors which are plated as components prior to assembly, hermetic connectors are electroplated after the parts are fired and cleaned of oxides. Typically the contacts are gold-plated and the connector shell is nickel-plated.

### Connector Installation

Hermetic connectors are typically soldered or welded into panels or bulkheads. Laser welding is a good option if the connector is mounted onto a Kovar or stainless steel panel. If the panel is aluminum alloy, then soldering is recommended. Micro-D's with o-ring seals offer another alternative. O-rings, when installed properly, will provide a very low permeability seal. The seating surface must be free from scratches or imperfections. A 32 finish is acceptable, but a 16 finish is preferred. The o-ring can be coated with a light coat of vacuum grease.

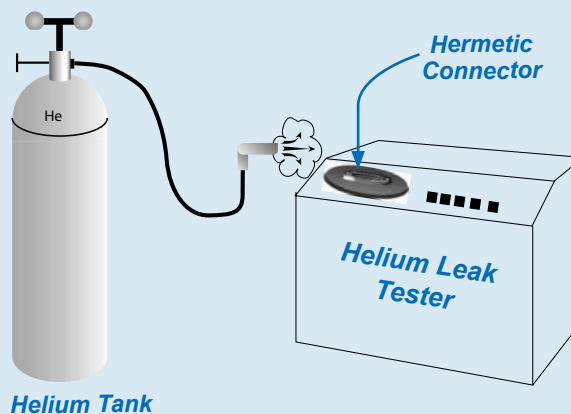

## MICRO-D HERMETIC CONNECTOR DESIGN NOTES


### “Why can't I get a hermetic Micro-D with pin contacts instead of sockets?”

The Micro-D TwistPin contact cannot be made from the materials that are required for hermetic contacts. Hermetic contacts are made from ferrous alloys such as Kovar® or Alloy 52. These alloys do not have spring properties. The Micro-D TwistPin contact is made from spring-temper beryllium copper. The Micro-D socket contact is a cylinder and does not provide any spring force, so Micro-D hermetic connectors are always receptacle connectors with socket contacts.


### “What about high pressure?” “What is the maximum recommended pressure rating for a hermetic Micro-D?”

Glenair hermetic Micro-D's are built to safely withstand 1000 PSI of hydrostatic pressure in an open face (unmated) condition.


## MICRO-D CONTACT ARRANGEMENTS (FACE VIEW SOCKET CONNECTOR)




9 Socket




15 Socket




21 Socket



25 Socket



31 Socket



37 Socket





## Micro-D Hermetic Connectors General Information

### MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Kovar® Alloy in Accordance With SAE AMS-I-23011 Class 1, Plated with Electrodeposited Nickel In Accordance With SAE-AMS-QQ-N-290 Class 2, 0.0002-0.0003 Inches Thick.   |
| Insulator        | Borosilicate Glass  |
| Interfacial Seal | Flourosilicone Rubber, Blue   |
| Socket Contact   | Kovar® Alloy in Accordance With SAE AMS-I-23011 Class 1, Gold Plated In Accordance With ASTM B 488 Type II, Class 1.27 (50 microinches minimum) over Nickel Underplate in Accordance With SAE-AMS-QQ-N-290 Class 2. |
| Hardware         | 300 Series Stainless Steel  |
| O-Ring           | Flourosilicone Rubber, Blue   |
| Encapsulant      | Epoxy   |

### PERFORMANCE SPECIFICATIONS

|                                 |   |
|---------------------------------|---|
| Current Rating                  | 3 AMP   |
| Dielectric Withstanding Voltage | 150 VAC   |
| Working Voltage                 | 100 VDC   |
| Insulation Resistance           | 5000 Megohms Minimum  |
| Contact Resistance              | 30 Milliohms Maximum  |
| Hermeticity                     | Maximum Helium Leak Rate $1 \times 10^{-8}$ cc's per Second at One Atmosphere |
| Operating Temperature           | -55° C. to +125° C.   |
| Shock                           | 50 g.   |
| Vibration                       | 20 g.   |
| Outgassing                      | Meets NASA Outgassing Requirements  |
| Mating Force                    | (10 Ounces) X (# of Contacts)   |

For additional performance requirements, please refer to MIL-DTL-83513

### CONNECTOR WEIGHTS FOR 177-140H HERMETIC SOLDER MOUNT


#### Maximum Weight In Grams

| Layout | Solder Cup | PCB  |
|--------|------------|------|
| 9      | 4.7        | 4.5  |
| 15     | 7.1        | 6.8  |
| 21     | 8.2        | 8.0  |
| 25     | 8.7        | 8.4  |
| 31     | 9.5        | 9.2  |
| 37     | 10.8       | 10.4 |

# Micro-D Hermetic Connectors Solder Mount 177-140H and 177-704H



Micro-D  
Hermetic

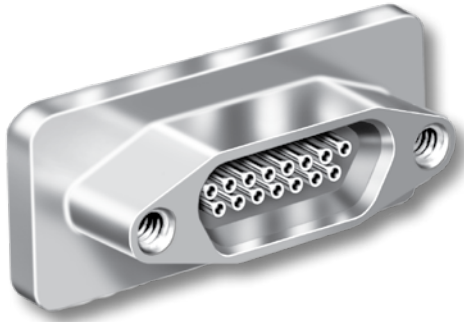

**Solder, Braze or Weld** these 177-140 hermetic Micro-D connectors. Featuring a matched glass-to-metal seal, these socket receptacles are designed for panel mounting.

**Kovar® Shells and Contacts** comply with applicable MIL-DTL-83513 requirements and are 100% intermateable with standard connectors.

**Choose 9 to 37 Contacts**, with gold-plated contacts and nickel-plated shells. These connectors feature integral female jackposts.







## HOW TO ORDER SOLDER CUP AND PC TAIL CONNECTORS

| Series   | Layout<br>Number of Contacts  | Contact Type      | Termination Type                            |
|--|---|-------------------|---|
| <b>177-140H</b><br>Micro-D Hermetic Socket<br>Receptacle, Solder or Weld<br>Mounting | <b>9</b><br><b>15</b><br><b>21</b><br><b>25</b><br><b>31</b><br><b>37</b> | <b>S</b> – Socket | <b>S</b> – Solder Cup<br><b>P</b> – PC Tail |
| <b>Sample Part Number</b>  |   |                   |   |
| <b>177-140H</b>  | <b>15</b>   | <b>S</b>          | <b>P</b>                                    |

G

## HOW TO ORDER PRE-WIRED CONNECTORS

| Series                    | Layout  | Contact Type      | Wire Gage<br>(AWG)                                 | Wire Type  | Wire Color  | Wire Length<br>Inches  |
|---------------------------|---|-------------------|--|--|---|--|
| <b>177-704H</b>           | <b>9</b><br><b>15</b><br><b>21</b><br><b>25</b><br><b>31</b><br><b>37</b> | <b>S</b> – Socket | <b>6</b> – #26<br><b>8</b> – #28<br><b>0</b> – #30 | <b>K</b> – M22759/11<br>600 Vrms<br>Teflon® (TFE)<br>(Not Available<br>in #30 AWG)<br><b>J</b> – M22759/33<br>600 Vrms<br>Modified<br>Cross-Linked<br>Tefzel® (ETFE) | <b>1</b> – White<br><b>2</b> – Yellow<br><b>5</b> – Color-Coded<br>Stripes Per<br>MIL-STD-681<br>(#26 gage<br>only)<br><b>7</b> – Ten Color<br>Repeat | <b>18</b><br>Wire Length In Inches.<br>"18" Specifies 18 Inches. |
| <b>Sample Part Number</b> |   |                   |  |  |   |  |
| <b>177-704H</b>           | <b>25</b>   | <b>S</b>          | <b>6</b>   | <b>K</b>   | <b>1</b>  | <b>– 18</b>  |

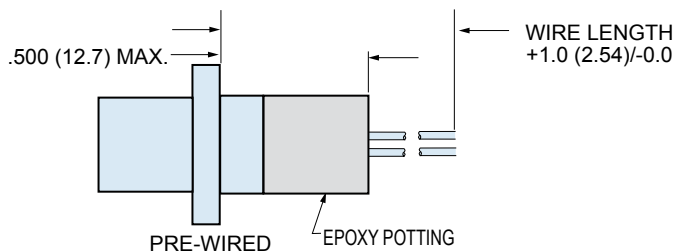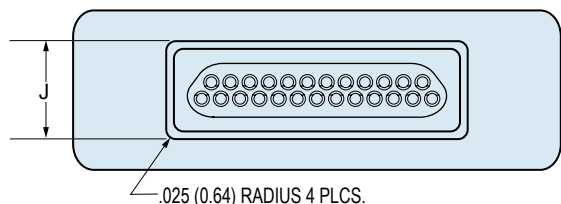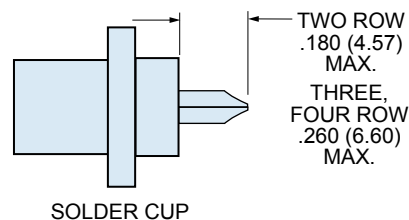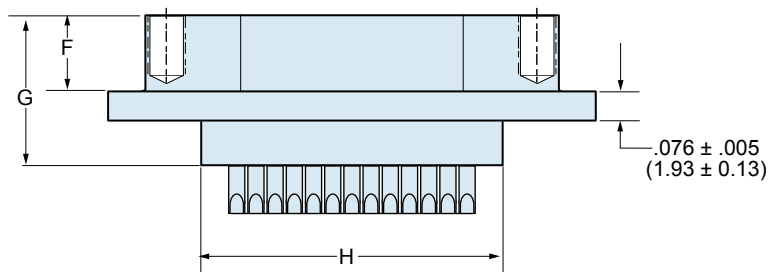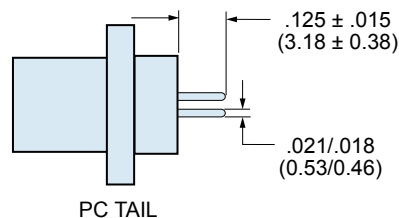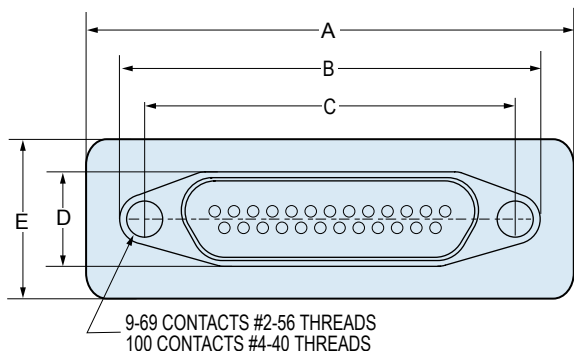


## DIMENSIONS

| Layout     | A Max. |       | B MAX. |       | C     |       | D Max. |      | E Max. |       | F    |      | G Max. |       | H     |       | J    |      |
|------------|--------|-------|--------|-------|-------|-------|--------|------|--------|-------|------|------|--------|-------|-------|-------|------|------|
|            | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.  | In.    | mm.   | In.  | mm.  | In.    | mm.   | In.   | mm.   | In.  | mm.  |
| <b>9S</b>  | .785   | 19.94 | .695   | 14.35 | .565  | 14.35 | .250   | 6.35 | .310   | 7.87  | .195 | 4.95 | .394   | 10.01 | .398  | 10.11 | .268 | 6.81 |
| <b>15S</b> | 1.030  | 26.16 | .855   | 21.71 | .715  | 18.16 | .250   | 6.35 | .425   | 10.80 | .195 | 4.95 | .394   | 10.01 | .535  | 13.59 | .255 | 6.48 |
| <b>21S</b> | 1.180  | 29.97 | 1.005  | 25.53 | .865  | 21.97 | .250   | 6.35 | .425   | 10.80 | .195 | 4.95 | .394   | 10.01 | .750  | 19.05 | .255 | 6.48 |
| <b>25S</b> | 1.280  | 32.51 | 1.105  | 28.06 | .965  | 24.51 | .250   | 6.35 | .425   | 10.80 | .195 | 4.95 | .394   | 10.01 | .785  | 19.94 | .255 | 6.48 |
| <b>31S</b> | 1.430  | 36.32 | 1.255  | 31.88 | 1.115 | 28.32 | .250   | 6.35 | .425   | 10.80 | .195 | 4.95 | .394   | 10.01 | .935  | 23.75 | .255 | 6.48 |
| <b>37S</b> | 1.580  | 40.13 | 1.425  | 36.20 | 1.265 | 32.13 | .250   | 6.35 | .425   | 10.80 | .195 | 4.95 | .394   | 10.01 | 1.085 | 27.56 | .255 | 6.48 |

# Micro-D Hermetic Connectors Rear Panel Mount With O-Ring 177-705H and 177-706H



Micro-D  
Hermetic

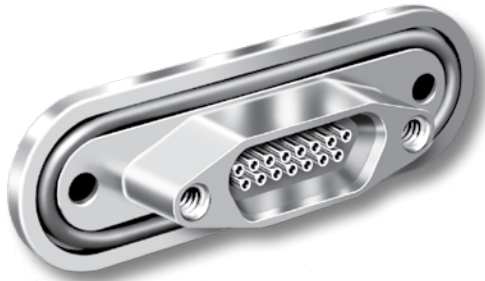

**Fluorosilicone O-Ring** eliminates the cost of soldering or welding the connector to a bulkhead.

**Kovar® Shells and Contacts** comply with applicable MIL-DTL-83513 requirements and are 100% intermateable with standard connectors.

**Solder Cup, PC Tail or Pre-Wired and Fully Potted**  
Suitable for #26 gage wire or smaller, solder cup versions feature gold-plated contacts. Choose PC tails for attachment to flex circuits or rigid boards. Solder cup versions are also available pre-wired and potted.







## HOW TO ORDER SOLDER CUP AND PC TAIL CONNECTORS

| Series   | Layout<br>Number of Contacts  | Contact Type      | Termination Type                            |
|--|---|-------------------|---|
| <b>177-705H</b><br>Micro-D Hermetic Socket<br>Receptacle, Rear Panel Mount with<br>O-Ring, Solder Cup or PC Tail | <b>9</b><br><b>15</b><br><b>21</b><br><b>25</b><br><b>31</b><br><b>37</b> | <b>S</b> – Socket | <b>S</b> – Solder Cup<br><b>P</b> – PC Tail |
| <b>Sample Part Number</b>  |   |                   |   |
| <b>177-705H</b>  | <b>15</b>   | <b>S</b>          | <b>P</b>                                    |

## HOW TO ORDER PRE-WIRED CONNECTORS

| Series                    | Layout  | Contact Type      | Wire Gage (AWG)                                    | Wire Type  | Wire Color   | Wire Length Inches   |
|---------------------------|---|-------------------|--|--|--|--|
| <b>177-706H</b>           | <b>9</b><br><b>15</b><br><b>21</b><br><b>25</b><br><b>31</b><br><b>37</b> | <b>S</b> – Socket | <b>6</b> – #26<br><b>8</b> – #28<br><b>0</b> – #30 | <b>K</b> – M22759/11<br>600 Vrms Teflon (TFE) (Not Available in #30 AWG)<br><br><b>J</b> – M22759/33<br>600 Vrms Modified Cross-Linked Tefzel (ETFE) | <b>1</b> – White<br><b>2</b> – Yellow<br><b>5</b> – Color-Coded Stripes Per MIL-STD-681 (#26 gage only)<br><br><b>7</b> – Ten Color Repeat | <b>18</b><br><br>Wire Length In Inches.<br>"18" Specifies 18 Inches. |
| <b>Sample Part Number</b> |   |                   |  |  |  |  |
| <b>177-706H</b>           | <b>25</b>   | <b>S</b>          | <b>6</b>   | <b>K</b>   | <b>1</b>   | <b>– 18</b>  |

# Micro-D Hermetic Connectors Rear Panel Mount With O-Ring 177-705H and 177-706H

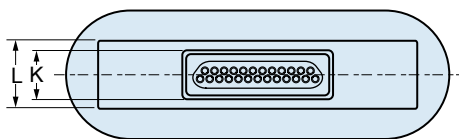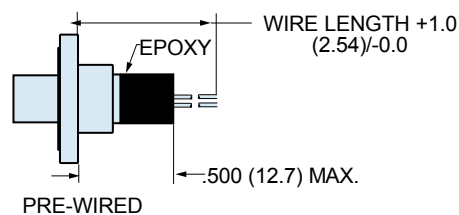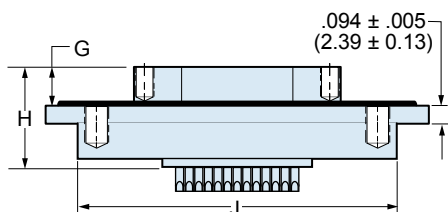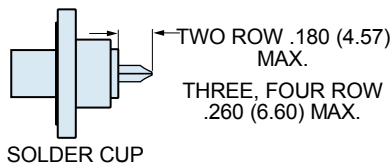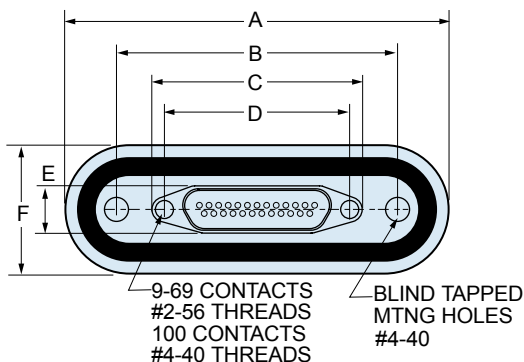

G

## DIMENSIONS


| Layout     | A Max. |       | B         |           | C MAX. |       | D         |           | E MAX. |      | F Max. |       | G         |           | H Max. |       | J     |       | K         |           | L Max. |      |
|------------|--------|-------|-----------|-----------|--------|-------|-----------|-----------|--------|------|--------|-------|-----------|-----------|--------|-------|-------|-------|-----------|-----------|--------|------|
|            | In.    | mm.   | In. ±.005 | mm. ±0.13 | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.  | In.    | mm.   | In. ±.004 | mm. ±0.10 | In.    | mm.   | In.   | mm.   | In. ±.004 | mm. ±0.10 | In.    | mm.  |
| <b>9S</b>  | 1.488  | 37.80 | 1.011     | 25.67     | .728   | 18.49 | .565      | 14.35     | .250   | 6.35 | .675   | 17.14 | .195      | 4.95      | .526   | 13.36 | 1.254 | 31.85 | .254      | 6.45      | .358   | 9.09 |
| <b>15S</b> | 1.638  | 41.61 | 1.161     | 29.48     | .878   | 22.30 | .715      | 18.16     | .250   | 6.35 | .675   | 17.14 | .195      | 4.95      | .526   | 13.36 | 1.414 | 36.91 | .254      | 6.45      | .358   | 9.09 |
| <b>21S</b> | 1.788  | 45.42 | 1.311     | 33.29     | 1.028  | 32.51 | .865      | 21.97     | .250   | 6.35 | .675   | 17.14 | .195      | 4.95      | .526   | 13.36 | 1.564 | 39.72 | .254      | 6.45      | .358   | 9.09 |
| <b>25S</b> | 1.888  | 47.96 | 1.411     | 35.83     | 1.128  | 28.65 | .965      | 24.51     | .250   | 6.35 | .675   | 17.14 | .195      | 4.95      | .526   | 13.36 | 1.664 | 42.26 | .254      | 6.45      | .358   | 9.09 |
| <b>31S</b> | 2.038  | 51.76 | 1.561     | 39.64     | 1.278  | 32.46 | 1.115     | 28.32     | .250   | 6.35 | .675   | 17.14 | .195      | 4.95      | .526   | 13.36 | 1.814 | 46.07 | .254      | 6.45      | .358   | 9.09 |
| <b>37S</b> | 2.188  | 55.57 | 1.711     | 43.45     | 1.428  | 36.27 | 1.265     | 32.13     | .250   | 6.35 | .675   | 17.14 | .195      | 4.95      | .526   | 13.36 | 1.984 | 50.39 | .254      | 6.45      | .358   | 9.09 |

# Micro-D Hermetic Connectors Rear Panel Mount With O-Ring 177-705H and 177-706H



Micro-D  
Hermetic

## PANEL CUTOUT DIMENSIONS FOR 177-705 AND 177-706

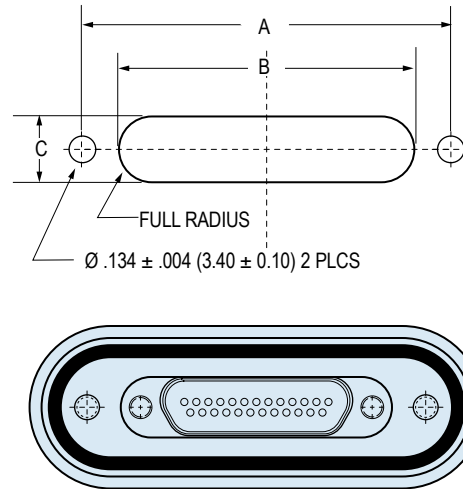

| Layout    | A          |            | B          |            | C               |                 |
|-----------|------------|------------|------------|------------|-----------------|-----------------|
|           | In. ± .003 | mm. ± 0.08 | In. ± .005 | mm. ± 0.13 | In. + .005/-0.0 | mm. + 0.13/-0.0 |
| <b>9</b>  | 1.011      | 25.69      | .731       | 18.56      | .252            | 6.40            |
| <b>15</b> | 1.161      | 29.50      | .881       | 22.37      | .252            | 6.40            |
| <b>21</b> | 1.311      | 33.31      | 1.031      | 26.18      | .252            | 6.40            |
| <b>25</b> | 1.411      | 35.85      | 1.131      | 28.72      | .252            | 6.40            |
| <b>31</b> | 1.561      | 39.66      | 1.281      | 32.53      | .252            | 6.40            |
| <b>37</b> | 1.711      | 43.47      | 1.431      | 36.34      | .252            | 6.40            |

G

# Four Reasons to Add Glenair to Your Short List of Suppliers:

## First and foremost you need availability.

Are the products and components you need either in stock or able to be manufactured in a short period of time? Glenair has built its reputation on fast turnaround. We maintain the world's largest inventory of connector accessories and deliver faster turnaround on quotes and orders than anyone else in our business. Today, Glenair is changing the way the interconnect industry operates: from a long lead-time, custom order problem, to a fast response, in-stock solution.

## Second, you need capacity.

Can the supplier respond to your evolving requirements with the factory capacity and labor necessary to meet every demand—from one piece to one hundred thousand? Glenair has built the largest capacity, broadest capability factory in the interconnect accessory industry. We have the knowledge, experience and equipment necessary to handle any production requirement, no matter how large or complex, and the manpower to tackle even the most aggressive production schedules.

## Third, you need convenience in ordering.

Do your current suppliers insist on quantity or dollar minimums whenever you place an order? Are their products available only from distributors with limited product knowledge and equally limited shelf stock? Is it hard to get samples when and where you need them? If your answer to any of these questions is yes, we encourage you to consider Glenair, where complete convenience in ordering—your convenience, not ours—has been a guiding principle since 1956.

## Finally, you need top quality products backed by outstanding technical support.

At Glenair, we've made product quality and worldwide technical support a major part of our approach to earning your trust and loyalty—and we've been doing so since 1956. We've established an unsurpassed sales, support and engineering presence in every major market in the world, and we've designed quality into every product we ship.


***In every respect, our formula for serving our filter connector customers is identical to the "best-value" service model we've relied on to maintain our leadership position in our core, connector accessory business:***

- ***Same-Day Delivery on Our Most Popular Part Numbers***
- ***Lightning-Fast Turnaround on Quotes for Price and Delivery***
- ***No Price or Quantity Minimums***
- ***Outstanding Application Engineering and Worldwide Technical Support***

MICRO-D MOD CODE LIST

**Mod 474 Keying Option**

Specially modified shells feature keys and keyways for up to five keying positions. Compatible with standard hardware and backshells.

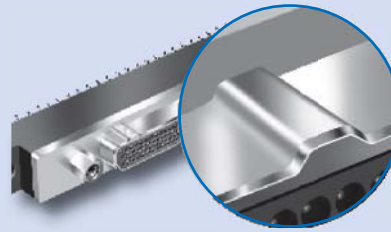

Page H-2

**Mod 497 Ground Spring**


Improve EMI shielding with plug connector ground springs. These gold-plated springs offer lower shell-to-shell resistance and are compatible with standard mating receptacles.



Page H-4

**Mod 428 for 200° C. Continuous Temperature**


Standard Micro-D connectors are rated for 150° C. maximum continuous temperature. Mod 428 changes the potting compound to provide a 200° C. rating.

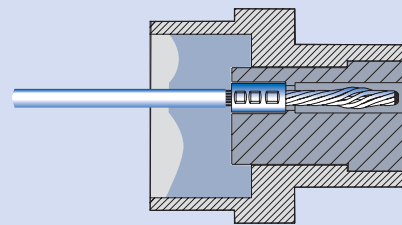

Page H-5

**Mod 429 Space Grade Micro-D**


Save time and cost with the Mod 429 solution. Specify special NASA requirements without the expense of having to create special procurement documentation. This section also contains valuable information on Micro-D's for space applications.

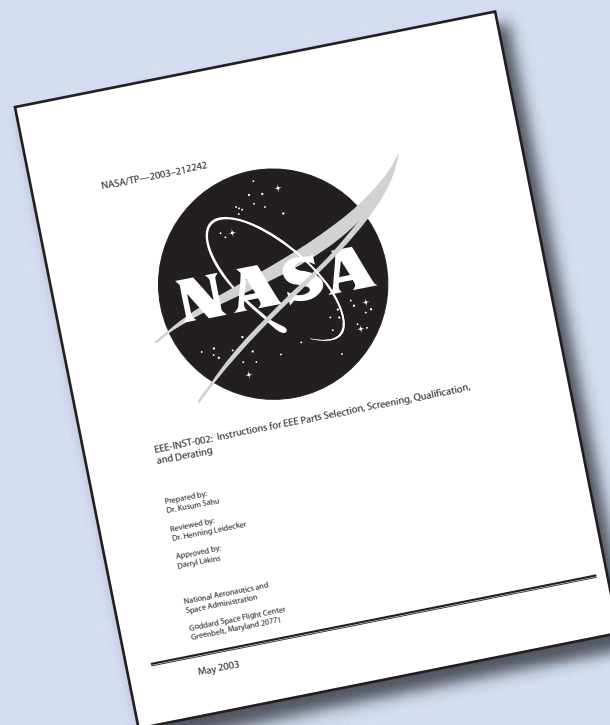

Page H-6



Plug Connector With  
Mod 474 Keying  
Option

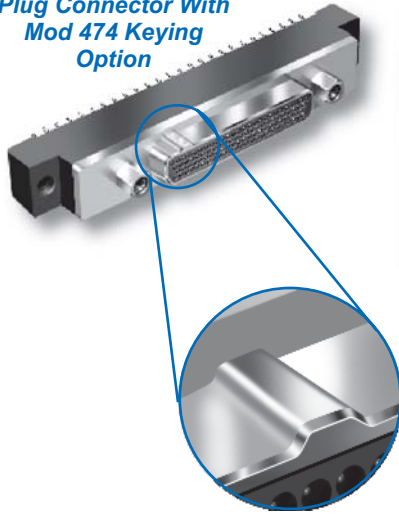

## Prevent Mis-Mating with Mod 474 Keying Option

Keyed Micro-D connectors for “fail-safe” circuits feature specially modified shells to prevent mis-mating. The plug shell has a raised key, and the receptacle shell has a keyway.

The nine pin connector accommodates three key positions. All other sizes have five positions available. The letter code following Mod 474 specifies the key position. “474A” plugs mate to “474A” receptacles.

*Keyed plugs will not mate to unkeyed receptacles, but keyed receptacles will plug into standard unkeyed plugs.*

### HOW TO ORDER MICRO-D CONNECTORS WITH MOD 474

#### Step 1: Find a Standard Micro-D Part Number

Mod 474 keying is available on all standard metal shell Micro-D connectors, including solder cup, pre-wired and printed circuit board versions. This feature is not available on plastic Micro-D or M83513 connectors.

**Example: MWDM2L-51PCBRP-.110**

#### Step 2: Pick a Keying Position

A letter code identifies the key position. The table on the following page shows the keying options for each shell size. Mod 474A plugs mate to 474A receptacles, and so on.

**Example: 474B**

#### Step 3: Add the Mod Code to the Part Number

A letter code identifies the key position. The table on the following page shows the keying options for each shell size. Mod 474A plugs mate to 474A receptacles, and so on.

**Example: MWDM2L-51PCBRP-.110-474B**

## MICRO-D KEY POSITIONS: MODIFICATION CODE 474


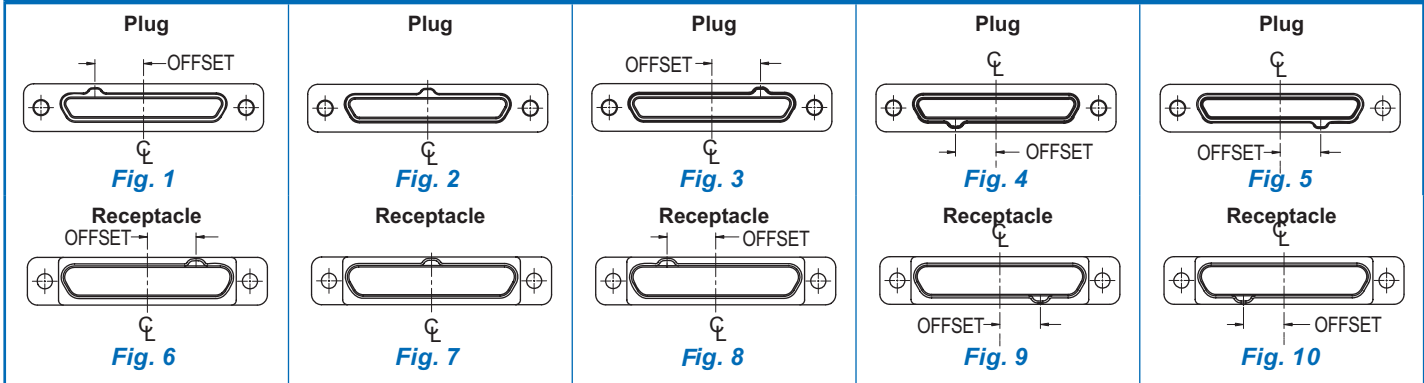


Figure 1 plug connector mates to Figure 6 receptacle, figure 2 mates to figure 7, and so on. Figure 11 mates to figure 12.



Mating face of connector shown.


| Layout      | Key Position A<br>Offset |      |       | Key Position B<br>Offset |      |      | Key Position C<br>Offset |      |      | Key Position D<br>Offset |      |      | Key Position E<br>Offset |      |       |
|-------------|--------------------------|------|-------|--------------------------|------|------|--------------------------|------|------|--------------------------|------|------|--------------------------|------|-------|
|             | Figure                   | In.  | mm.   | Figure                   | In.  | mm.  | Figure                   | In.  | mm.  | Figure                   | In.  | mm.  | Figure                   | In.  | mm.   |
| <b>9P</b>   | 1                        | .025 | 0.64  | 3                        | .025 | 0.64 | 11                       | .000 | 0.00 | NA                       | —    | —    | NA                       | —    | —     |
| <b>9S</b>   | 6                        | .025 | 0.64  | 8                        | .025 | 0.64 | 12                       | .000 | 0.00 | NA                       | —    | —    | NA                       | —    | —     |
| <b>15P</b>  | 1                        | .090 | 2.29  | 2                        | .000 | 0.00 | 3                        | .090 | 2.29 | 4                        | .050 | 1.25 | 5                        | .050 | 1.25  |
| <b>15S</b>  | 6                        | .090 | 2.29  | 7                        | .000 | 0.00 | 8                        | .090 | 2.29 | 9                        | .050 | 1.27 | 10                       | .050 | 1.27  |
| <b>21P</b>  | 1                        | .130 | 3.30  | 2                        | .000 | 0.00 | 3                        | .130 | 3.30 | 4                        | .100 | 2.54 | 5                        | .100 | 2.54  |
| <b>21S</b>  | 6                        | .130 | 3.30  | 7                        | .000 | 0.00 | 8                        | .130 | 3.30 | 9                        | .100 | 2.54 | 10                       | .100 | 2.54  |
| <b>25P</b>  | 1                        | .180 | 4.57  | 2                        | .000 | 0.00 | 3                        | .180 | 4.57 | 4                        | .125 | 3.18 | 5                        | .125 | 3.18  |
| <b>25S</b>  | 6                        | .180 | 4.57  | 7                        | .000 | 0.00 | 8                        | .180 | 4.57 | 9                        | .125 | 3.18 | 10                       | .125 | 3.18  |
| <b>31P</b>  | 1                        | .200 | 5.08  | 2                        | .000 | 0.00 | 3                        | .200 | 5.08 | 4                        | .150 | 3.81 | 5                        | .150 | 3.81  |
| <b>31S</b>  | 6                        | .200 | 5.08  | 7                        | .000 | 0.00 | 8                        | .200 | 5.08 | 9                        | .150 | 3.81 | 10                       | .150 | 3.81  |
| <b>37P</b>  | 1                        | .300 | 7.62  | 2                        | .000 | 0.00 | 3                        | .300 | 7.62 | 4                        | .250 | 6.35 | 5                        | .250 | 6.35  |
| <b>37S</b>  | 6                        | .300 | 7.62  | 7                        | .000 | 0.00 | 8                        | .300 | 7.62 | 9                        | .250 | 6.35 | 10                       | .250 | 6.35  |
| <b>51P</b>  | 1                        | .225 | 5.72  | 2                        | .000 | 0.00 | 3                        | .225 | 5.72 | 4                        | .175 | 4.45 | 5                        | .175 | 4.45  |
| <b>51S</b>  | 6                        | .225 | 5.72  | 7                        | .000 | 0.00 | 8                        | .225 | 5.72 | 9                        | .175 | 4.45 | 10                       | .175 | 4.45  |
| <b>100P</b> | 1                        | .500 | 12.70 | 1                        | .250 | 6.35 | 2                        | .000 | 0.00 | 3                        | .250 | 6.35 | 3                        | .500 | 12.70 |
| <b>100S</b> | 6                        | .500 | 12.70 | 6                        | .250 | 6.35 | 7                        | .000 | 0.00 | 8                        | .250 | 6.35 | 8                        | .500 | 12.70 |




## Improve EMI Performance with Mod 497 Ground Springs

Today's military and aerospace electronics systems require improved EMI protection. Micro-D connectors are widely used in EMI applications; however, the shell-to-shell resistance of a mated pair can vary, resulting in inconsistent levels of shielding effectiveness. Ground springs assure consistent shell-to-shell resistance for improved EMI protection.


**Ground Spring and EMI Shielding Effectiveness** – A gold-plated stainless steel ground spring on the pin connector mating face offers substantial improvement in EMI protection. The graphs compare identical connectors tested with and without ground springs.



EMI Performance with Ground Spring

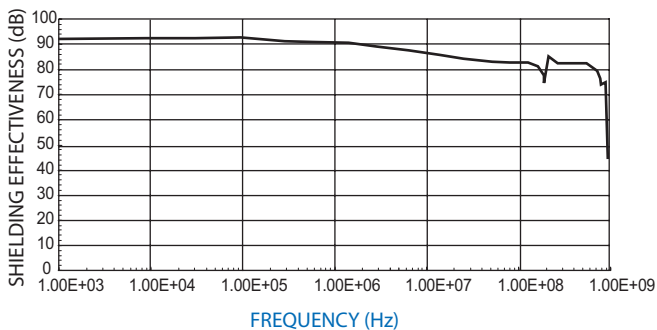

EMI Performance without Ground Spring

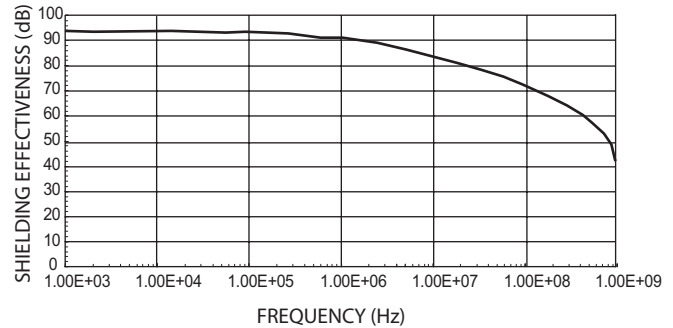

### HOW TO ORDER MICRO-D CONNECTORS WITH MOD 497 SPRINGS

#### Step 1: Find a Standard Micro-D Part Number

Ground springs are available on all standard Micro-D plug connectors with solder cups, insulated wire, or printed circuit board. Ground spring usage is limited to pin connectors with electroless-nickel plated shells.

#### Example: MWDM2L-100P-6K7-18B

1. Plugs only (pin connectors)
2. Nickel-plated aluminum shells only

#### Step 2: Add the Mod Code to the Part Number

#### Example: MWDM2L-100P-6K7-18B-497




**Potting a Micro-D with Epoxy-Filled Syringe**

## Upgrade to 400° Fahrenheit with Mod 428 High Temperature Epoxy

The search for oil and gas has led to deeper reservoirs where extreme temperatures and pressures test the limits of electronics design. Oil well logging instruments must be able to withstand temperatures beyond the limits of standard connectors.

Micro-D connectors are made from temperature-resistant materials. The Liquid Crystal Polymer (LCP) glass-filled thermoplastic insulators easily withstand 400° F. The fluoro-silicone seals, TwistPin contacts and aluminum shells also are rated for continuous exposure to 400° F. The epoxy potting compound is the only component not rated for high temperature. Mod 428 replaces the standard epoxy with a special 600° F. epoxy made by Cotronics, a leader in high temperature epoxies and ceramics.

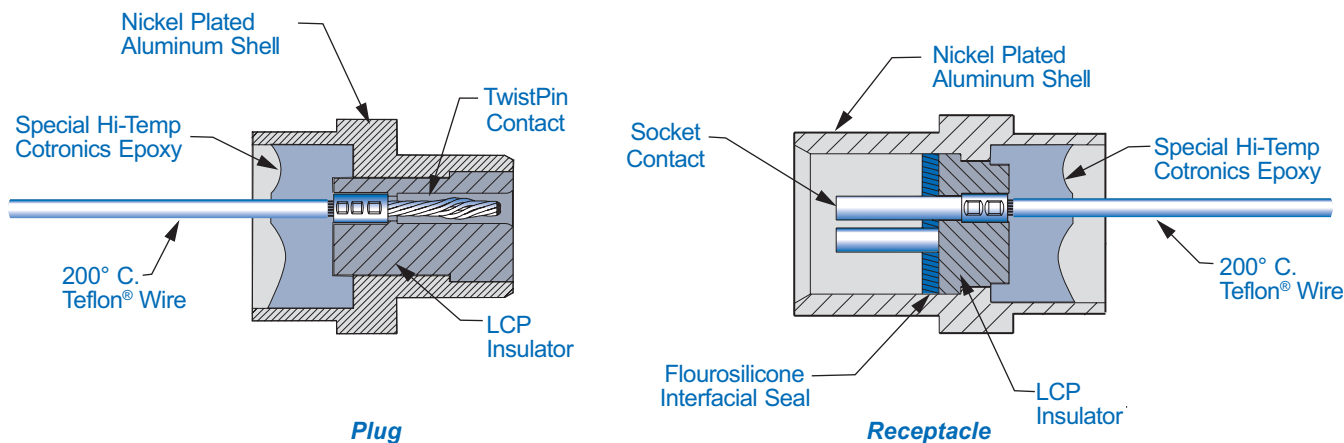

### HOW TO ORDER MICRO-D CONNECTORS WITH MOD 428 HI TEMP

#### Step 1: Find a Standard Micro-D part Number

Mod 428 is available on all standard metal shell Micro-D connectors, including solder cup, pre-wired and printed circuit board versions. Not available on plastic Micro-D or M83513 connectors.

#### Example: MWDM2L-37PSL

1. Metal shell only
2. Nickel-plated aluminum or stainless steel shells only.

#### Step 2: Add the Mod Code to the Part Number

#### Example: MWDM2L-37PSL-428

### APPLICATION NOTES

1. Shell Material & Finish: Electroless nickel plated aluminum is commonly used for high temperature connectors. Cadmium plated aluminum is not recommended for temperatures exceeding 175° C. because of discoloration and breakdown of the chromate seal applied to the cadmium. Stainless steel shells provide the best resistance to temperature and corrosive environments, but at the expense of weight and cost.
2. Epoxy: Cotronics 600° F. Catalog #4460.



**Detail of the Atmospheric Infrared Sounder Instrument (AIRS) with Glenair Micro-D Cables and Connectors**

Photo courtesy JPL

## Save Time and Cost with Mod 429 Space Grade Micro-D's

*Micro-D TwistPin connectors are a good choice for all types of orbital and deep space projects. Glenair's Mod 429 upgrades Micro-D's to NASA requirements without the need for a customer Statement of Work or Specification Control Drawing. This section explains Glenair Mod 429 ordering, and provides valuable information on outgassing and other space flight topics.*

### Six things you should know about Micro-D connectors for space flight

**1 Outgassing:** What is outgassing, why is it important, and how does it affect connector selection? Is special processing required to meet outgassing requirements?

**2 Screening:** What is NASA screening and what level of screening is required?

**3 Magnetic permeability:** Are nonmagnetic connectors required?

**4 Cryogenic exposure:** Are Micro-D connectors suitable for -200° C. exposure?

**5 Materials:** Micro-D connectors offer a variety of materials and plating finishes. Which ones are recommended for space flight?

**6 Wire Corrosion:** M22759/33 irradiated Tefzel® wire is preferred for space applications. What about corrosion problems caused by this wire?

### HOW TO ORDER SPACE GRADE MICRO-D'S

#### Step 1: Find a Standard Micro-D Part Number

Electroless nickel plated shells and Tefzel® wire are preferred for space flight. Cadmium plating is prohibited.

#### Step 2: Select a NASA Screening Level

The term "Screening Level" refers to the final inspection procedure.

Level 1 for mission-critical highest reliability

Level 2 for high reliability

Level 3 for standard reliability

#### Step 3: Outgassing Processing

A detailed explanation of outgassing is on the following pages. The interfacial seal on Micro-D receptacles does not meet NASA outgassing requirements unless it is baked or thermal vacuum outgassed. Some customers specify deleting the seal, some opt for a bakeout, and some customers specify thermal vacuum outgassing. Both the bakeout and thermal vacuum outgassing are extra cost.

#### Step 4: Select the Mod 429 Code that Matches the Desired Level of Screening and Outgassing

Use the following table to choose the right modification code. Add the mod code to the connector part number. Example: MWDM2L-37P-6J5-18L-**429C**

| NASA Screening Level         | Special Screening Only        |                             | Special Screening Plus Outgassing Processing |   |
|------------------------------|-------------------------------|-----------------------------|--|---|
|                              | Interfacial Seal is Installed | Interfacial Seal is Deleted | 8 Hour Oven Bake 400° F.                     | Thermal Vacuum Outgassing 24 hrs. 125° C. |
| Level 1 Highest Reliability  | Mod 429B                      | Mod 429F                    | Mod 429J                                     | Mod 429C                                  |
| Level 2 High Reliability     | Mod 429                       | Mod 429D                    | Mod 429K                                     | Mod 429A                                  |
| Level 3 Standard Reliability | (Use standard part number)    | Mod 432                     | Mod 186                                      | Mod 186M                                  |

**1 Outgassing:** What is outgassing and how does it affect connector selection? Is special processing required to meet outgassing requirements?

### What is outgassing?

Plastic and rubber materials give off gaseous molecules. For example, the smell inside a new car is caused by polymer outgassing. Heat and vacuum increase the rate of diffusion. In a spacecraft the gases coming off polymers can contaminate optical surfaces and instruments. The result is degraded performance.

### How is outgassing measured?

The space industry has adopted a standardized test procedure, **ASTM E 595**, to evaluate out-gassing properties of polymers. Small samples of material are heated to 125° C. at a vacuum of 5 X 10<sup>-5</sup> torr for 24 hours. Then the sample is weighed to calculate the **Total Mass Loss** (TML). The TML cannot exceed 1.00% of the total initial mass. During the test, outgassed matter condenses on a cooled collector plate. The quantity of outgassed matter is calculated to determine the **Collected Volatile Condensable Material** (CVCM). The CVCM cannot exceed 0.10% of the original specimen mass.

**MIL-DTL-83513 specifies that Micro-D connectors must meet outgassing requirements, but the interfacial seal exceeds the limit. How can this be?**

The mil spec allows the TML and CVCM to be calculated based on the total mass of the nonmetallic components. The interfacial seal can exceed outgassing limits as long as the insulator and potting compound are well below maximum outgassing limits.

### Is special outgassing necessary?

It depends on the customer. Some programs specify that all connectors be oven baked or thermal vacuum outgassed. For example, NASA GSFC programs typically require that the interfacial seals are deleted, along with level I screening and thermal vacuum outgassing processing.

### Why pay extra for bakeout or thermal vacuum outgassing?

If the interfacial seal is not removed, NASA recommends a bakeout process. Table 1 demonstrates that a simple oven bake is sufficient to reduce volatile matter. The choice is up to the customer. Whatever level of processing, the Glenair mod 429 codes make ordering easy.

### Outgassing At-a-Glance

- 1** Fluorosilicone Interfacial Seals exceed NASA outgassing limits.
- 2** NASA recommends removing the seal or performing a bakeout.
- 3** An inexpensive oven bakeout has better results than the more costly thermal vacuum outgassing.
- 4** Glenair Mod 429 codes provide an easy ordering solution, whatever the outgassing option.



**TABLE 1: OUTGASSING PROPERTIES OF MICRO-D CONNECTORS**

| Component  | Material               | Brand Name    | % Total Mass Loss (TML) | % Collected Volatile Condensable Material (CVCM) | Test Report         |
|--|------------------------|---------------|-------------------------|--|---------------------|
| Thermoplastic Insulators and PCB Trays                       | Liquid Crystal Polymer | Vectra® C-130 | 0.03                    | 0.00   | NASA Test #GSC17478 |
| Potting Compound   | Epoxy                  | Hysol C9-4215 | 0.48                    | 0.01   | Glenair Test        |
| Interfacial Seal "as received"                               | Flourosilicone         | (none)        | 0.99                    | 0.13   | Glenair Test        |
| Interfacial Seal with Oven Bakeout 8 hrs. 400° F.            | Flourosilicone         | (none)        | 0.03                    | 0.01   | Glenair Test        |
| Interfacial Seal with Thermal Vacuum Bakeout 24 hrs. 125° C. | Flourosilicone         | (none)        | 0.08                    | 0.02   | Glenair Test        |
| Wire   | Tefzel®                | Tefzel®       | 0.22                    | 0.01   | NASA Test #GSC19998 |

## 2 Screening: What is NASA screening and what level of screening is required?

### What is NASA screening?

NASA specification EEE-INST-002 provides instructions on selecting, screening and qualifying parts for use on NASA GSFC space flight projects. Table 2C in the NASA spec contains specific inspection instructions for MIL-DTL-83513 connectors. These screening requirements exceed the standard mil spec inspection levels.

### What screening level is required?

NASA defines three levels of screening: level 1 for highest reliability, level 2 for high reliability, and level 3 for standard reliability. Level 3 equates to standard M83513 Group A and B lot acceptance testing, and levels 1 and 2 call for additional testing.

### Why does Glenair perform extra screening tests?

Glenair has test procedures that go beyond the letter of the NASA spec. Meeting NASA requirements means not only inspecting per EEE-INST-002, but also building parts in accordance with NASA Technical Standard NASA-STD-8739.4 "Crimping, Interconnecting Cables, Harnesses, and Wiring". Glenair fully meets these requirements and has obtained NASA certification. Our extra inspection steps reflect the fact that pre-wired connectors not only require best practices on the assembly floor, but also require thorough final electrical and mechanical testing.

### What about qualification requirements?

Qualification is not required if the manufacturer has performed qualification testing per MIL-DTL-83513. Qualification by similarity is usually invoked for those Micro-D's not specifically covered by the mil spec.

Figure 1: Excerpt from NASA EEE-INST-002

Due to the dynamic nature of this document, users are advised to check the <http://nepp.nasa.gov> website prior to every usage to obtain the latest document revision.

**1.0 PURPOSE**

The purpose of this document is to establish baseline criteria for selection, screening, qualification, and derating of EEE parts for use on NASA GSFC space flight projects. This document shall provide a mechanism to assure that appropriate parts are used in the fabrication of space hardware that will meet mission reliability objectives within budget constraints.

**2.0 SCOPE**

This document provides instructions for meeting three reliability levels of EEE parts requirements (see 6.0) based on mission needs. The terms "grade" and "level" are considered synonymous; i.e., a grade 1 part is consistent with reliability level 1. Levels of part reliability confidence decrease by reliability level, with level 1 being the highest reliability and level 3 the lowest. A reliability level 1 part has the highest level of manufacturing control and testing per military or DSCC specifications. Level 2 parts have reduced manufacturing control and testing. Level 3 Parts have no guaranteed reliability controls in the manufacturing process and no standardized testing requirements. The reliability of level 3 parts can vary significantly with each manufacturer, part type and LDC due to unreported and frequent changes in design, construction and materials.

GSFC projects and contractors shall incorporate this guideline into their Project EEE Parts Program.

**3.0 DEFINITIONS**

*Screening.* Screening tests are intended to remove nonconforming parts (parts with random defects that are likely to result in early failures, known as infant mortality) from an otherwise acceptable lot and thus increase confidence in the reliability of the parts selected for use.

TABLE 2: NASA SCREENING REQUIREMENTS

| Inspection/ Test                           | NASA Level 1  | NASA Level 2 | Glenair Level 1 (Mod 429B) | Glenair Level 2 (Mod 429) |
|--|---|--------------|----------------------------|---------------------------|
| Visual Inspection                          | 100%  | 100%         | 100% (10X)                 | 100%                      |
| Mechanical                                 | 2 pcs.  | 2 pcs.       | 100%                       | 2 pcs.                    |
| Voltage (DWV)                              | 100%  | 2 pcs.       | 100%                       | 100%                      |
| Insulation Resistance                      | 2 pcs.  | 2 pcs.       | 100%                       | 100%                      |
| Low Level Contact Resistance               | 2 pcs.  | 2 pcs.       | 100% (Read and Record)     | 2 pcs. (Read and Record)  |
| Contact Separation Force (pins only)       | N/A   | N/A          | 100%                       | N/A                       |
| Mating Force                               | 2 pcs.  | N/A          | 2 pcs.                     | N/A                       |
| Contact/Wire Retention                     | N/A   | N/A          | 2 pcs.                     | N/A                       |
| Solderability/Resistance to Soldering Heat | 2 pcs.  | N/A          | 2 pcs.                     | N/A                       |
| Notes:                                     | 1. NASA screening requirements from Table 2C of EEE-INST-002. |              |                            |                           |

### 3 Magnetic permeability: Are nonmagnetic connectors required?

Spacecraft designers generally avoid the use of ferromagnetic materials, which can become magnetized and can interfere with sensitive instruments. Micro-D connectors do not contain ferromagnetic materials, so magnetic permeability is not a concern. MIL-DTL-83513 requires a maximum permeability of 2 mu. Glenair hermetic Micro-D connectors are made from Kovar® alloy, a highly magnetic material. The stainless steel e-rings commonly used for Micro-D jackscrew attachment also exceed the 2 mu requirement.

### 4 Cryogenic exposure: Are Micro-D connectors suitable for -200° C. ?

Micro-D connectors are rated to -55° C. Glenair has not performed testing below this temperature. EEE-INST-002 states "...experience has proven it is possible for (non-certified) connector types to be used successfully at cryogenic temperatures. It is recommended that connector samples should be subjected to five cycles of cryogenic temperature...(followed by examination for cracks and DWV)".

### 5 Materials: Micro-D connectors offer a variety of materials and plating finishes. Which ones are recommended for space flight?

NASA recommends electroless nickel plated connector shells and crosslinked high strength ETFE (Tefzel®) wire. Cadmium plating is prohibited because it sublimates in a vacuum environment. Gold plating is acceptable but rarely used on Micro-D connector shells.

### 6 Wire Corrosion: M22759/33 irradiated Tefzel® wire is preferred for space applications. What about corrosion problems caused by this wire?

#### Does M22759/33 wire have an outgassing problem?

Irradiated Tefzel® wire is known to cause tarnishing and corrosion of metal parts in close proximity, usually in sealed bags. Both MIL-DTL-83513 and NASA EEE-INST-002 contain cautionary notes regarding this problem. Wire manufacturers have not been able to eliminate this problem, which might be caused by the insulation extrusion process. This corrosion problem is referred to as "wire outgassing", which has led to confusion over the term outgassing. This problem has nothing to do with the ability of the wire to meet the TML and CVCM outgassing requirements of ASTM E595. M22759/33 irradiated Tefzel wire continues to be the wire of choice for spacecraft. This wire complies with outgassing requirements.

#### The corrosion problem

Micro-D connectors supplied as pre-wired assemblies should not be stored in sealed bags for extended periods. NASA recommends that parts be inspected for shell discoloration ("a dull "gun metal" appearance) and contact corrosion ("a flat black appearance"). Connectors with corroded contacts should be scrapped.

#### New Unit Pack Minimizes Corrosion

Glenair has adopted a new packaging standard to protect the connector from tarnishing or corrosion. Figure 2 shows Glenair's standard packaging for metal shell connectors supplied with M22759/33 wire. The connector is wrapped in Teflon® tape and placed in a ventilated sulphur-free paper envelope.



**Figure 2**  
*Teflon-wrapped Connector and Perforated Bag*

***"Users are advised that some ETFE insulations are known to outgas trace amounts of corrosive fluorine over time. When this wire is used with nickel coated metal shell connectors and stored in sealed plastic or ESD bags, trapped fluorine can attack exposed metal shells and contacts."***

Excerpt from Note 9, Table 2,  
NASA EEE-INST-002



# The Space Shuttle Orbiter escapes earth at the speed of 17,000 miles per hour.



## But a damaged connector can scratch the mission in the blink of an eye.

**G**lenair's Sav-Con® Connector Savers are designed to mate with circular and rectangular Mil Spec connectors and test cables which are subject to repetitive mating cycles during manufacture and test. One of the most dramatic applications of our Sav-Con® connectors is on the Space Shuttle Orbiter where they pro-

vide protection for the umbilical connectors from lift-off to touch-down on every mission.

Glenair's Sav-Cons® are available in general duty, environmental and high-performance versions, and provide outstanding reliability and protection with only minimal affect on circuit resistance. Visit



Commercial and Mil Spec connector accessories



Convoluted tubing and metal-core conduit



Electrical and fiber optic cable assemblies



Composite thermoplastic components



Microminiature connectors and accessories



Backshell assembly and termination tools



1211 Air Way  
Glendale, California 91201-2497  
Telephone: 818-247-6000 · Facsimilie: 818-500-9912 · EMail: [sales@glenair.com](mailto:sales@glenair.com)

United States · United Kingdom · Germany · Nordic · France · Italy · Spain

[www.glenair.com](http://www.glenair.com)

PRODUCT SELECTION GUIDE

*Glenair's Complete Micro-D Product Line* includes all M83513 Micro-D connectors. Choose **Solder Cup**, **Pre-Wired** or **PCB** versions. Glenair M83513 connectors always use **TwistPin Contacts** for high performance, made in U.S.A.

**M83513/01, /02, /06, /07**  
**Solder Cup Metal or Plastic Shell**

These connectors feature gold-plated solder cup contacts for termination to #26 AWG or smaller wire.



*Metal Shell*  
*M83513/01 & 02*  
*Page J-4*

*Plastic Shell*  
*M83513/06 & 07*  
*Page J-8*

**M83513/03, /04, /08, /09**  
**Pre-Wired Pigtails, Metal or Plastic Shell**

These crimped, epoxy-potted assemblies are available with insulated 19 strand #26 AWG wire or with #25 AWG uninsulated single strand wire. Insulated wire options include wire type, color code and length. Uninsulated wires are gold-plated or SnPb 63/37 solder dipped.




*Metal Shell*  
*M83513/03 & 04*  
*Page J-5*

*Plastic Shell*  
*M83513/08 & 09*  
*Page J-9*

**M83513/05**  
**Jack screws and Jackposts**


These hardware kits contain stainless steel jack screws in two lengths. Choose slot head or hex head. Jack screws attach with e-rings. Jackposts also are stainless steel.



*M83513/05*  
*Hardware Kits*  
*Page J-7*

**M83513/10 Thru 27**  
**.100" Pitch Printed Circuit Board Connectors**

These metal shell connectors feature SnPb 63/37 solder-dipped PC tails. Select vertical or right angle mounting. PC tails are .020 inch (0.50 mm.) diameter on a .100 inch (2.54 mm.) offset grid. Jackposts and threaded inserts are available.

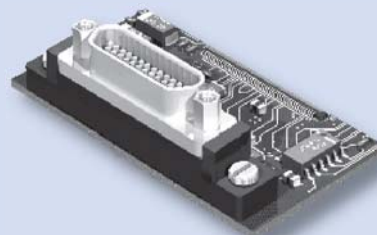


*M83513/10 to 15*  
*Right Angle*  
*Narrow PCB*  
*Page J-11*

*M83513/16 to 21*  
*Right Angle*  
*Wide Style PCB*  
*Page J-15*

*M83513/22 to 27*  
*Vertical Mount PCB*  
*Page J-19*

**M83513/28 Thru 33**  
**Compact Vertical Mount Printed Circuit Board**


These recent additions to the mil spec feature .075 inch by .100 inch PC terminal spacing. The plastic tray does not extend beyond the envelope of the metal connector shell.



*M83513/28 Thru 33*  
*Compact Vertical*  
*PCB*  
*Page J-23*



## MIL-DTL-83513 At-A-Glance

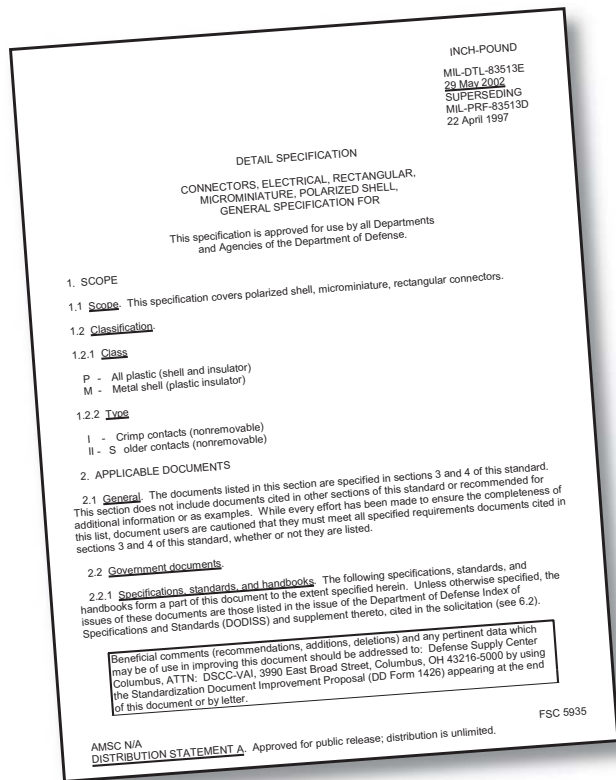

### About The Mil Spec

The United States Department of Defense, Defense Logistics Agency, Defense Supply Center, Columbus, Ohio (DSCC, pronounced "Dessy"), maintains a vast library of military specifications covering all kinds of components used in defense equipment. These mil specs simplify system design and procurement, because mil spec parts do not require costly testing for suitability. Easy multiple sourcing is another key advantage of a mil spec part. MIL-DTL-83513 is a detail spec controlling dimensions, materials, performance and testing. This spec covers plastic and metal shell Micro-D connectors.

### The QPL At-A-Glance

Manufacturers are required to perform a series of mechanical, electrical and environmental tests in order to be eligible for listing as an approved supplier. When DSCC approval is granted, the manufacturer is added to the Qualified Products List (QPL). Glenair is QPL approved for all M83513 variations.

### What is the difference between a Glenair COTS Micro-D and a Glenair Mil Spec Micro-D? Which is less expensive?

All Glenair Micro-D's, whether mil spec or COTS, are built with the same components and meet identical requirements. A COTS Micro-D is not a lower cost version of a mil spec part. COTS versions offer more options than the mil spec versions.

### Which is more readily available: Mil Spec or COTS?

All M83513 aluminum shell connectors are in stock. All standard COTS versions are also stocked.

### What is the difference between a Glenair Mil Spec connector and another brand?

MIL-DTL-83513 allows the use of low-cost stamped contacts; however, the Glenair Micro-D connector features the high performance TwistPin contact system. Glenair M83513 connectors are 100% Made in USA. Glenair's industry-leading Micro-D capacity and capabilities offer quick worldwide access to the full range of QPL items.

### The "Slash Sheets" At-A-Glance

In addition to the general specification, MIL-DTL-83513 contains a total of 33 Detail Specification Sheets, nicknamed "slash sheets" because a forward slash is used in the numbering system.

### How to get a copy of the spec

DSCC specs are available for download. The documents include:

MIL-DTL-83513 Detail Specification (the general spec)  
MIL-DTL-83513 Slash Sheets (33 individual specs)

These specs can be found at:

<http://www.dsccl.dla.mil/Programs/MilSpec/DocSearch.asp>

The QPL can be found at:

<http://www.dsccl.dla.mil/programs/qmlqpl/default.asp>


### Glenair CAGE Codes

A **CAGE** (**C**ommercial **A**nd **G**overnment **E**ntity) Code is a five position code that identifies companies doing or wishing to do business with the Federal Government. Glenair uses two CAGE codes to identify M83513 products:

**06324**, Glenair, Glendale, California

**0CA77**, Glenair Microway Division, Lincolnwood Illinois.

## MIL-DTL-83513 CONTACT ARRANGEMENTS (FACE VIEW PIN CONNECTOR)

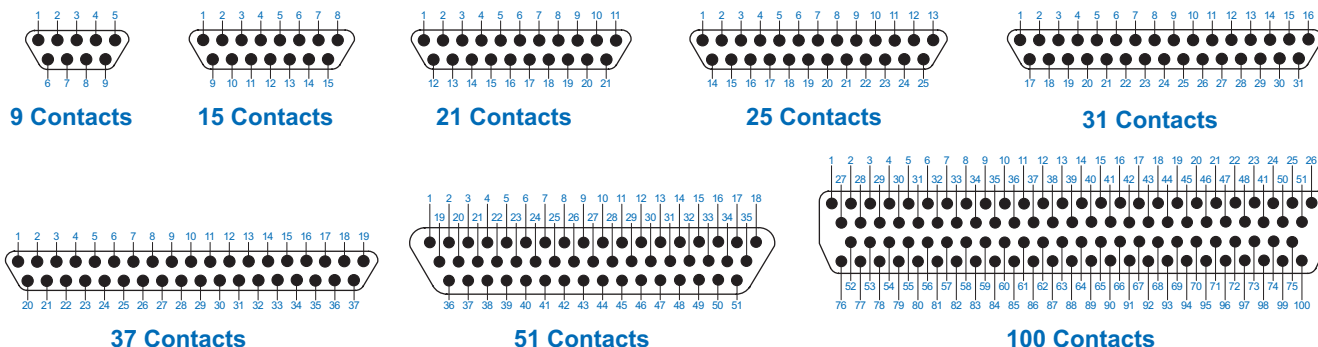

## MIL-DTL-83513 MATERIALS AND FINISHES (SPECIFIC TO GLENAIR)




|                                |   |
|--------------------------------|---|
| Connector Shell, Metal         | Aluminum Alloy 6061 In Accordance With SAE-AMS-QQ-A-250/11<br>Plating Code C: Cadmium With Yellow Chromate Conversion Coating in Accordance With SAE-AMS-QQ-P-416, Type II, Class 3<br>Plating Code N: Electroless Nickel In Accordance With SAE-AMS-26074, Class 3<br>Stainless Steel, 300 Series, Passivated In Accordance With SAE-AMS-QQ-P-35 |
| Connector Shell, Plastic       | Liquid Crystal Polymer, 30% Glass-Filled, In Accordance With MIL-M-24519  |
| Insulator                      | Liquid Crystal Polymer, 30% Glass-Filled, In Accordance With MIL-M-24519  |
| Interfacial Seal               | Flourosilicone Rubber In Accordance With A-A-59588  |
| Terminal Block, PCB            | Liquid Crystal Polymer, 30% Glass-Filled, In Accordance With MIL-M-24519  |
| Pin Contact (TwistPin)         | Beryllium Copper, Gold Plated In Accordance With ASTM B 488 Type II Class 1.27 (50 Microinches Minimum) Code C, Over Nickel Underplate In Accordance With SAE-AMS-QQ-N-290, Class 2 (30 Microinches Minimum)  |
| Socket Contact                 | Phos Bronze In accordance With ASTM 139 Gold Plated In Accordance With ASTM B 488 Type II Class 1.27 (50 Microinches Minimum) Code C, Over Nickel Underplate In Accordance With SAE-AMS-QQ-N-290, Class 2 (30 Microinches Minimum)  |
| Encapsulant (Potting)          | Epoxy Resin, Hysol EE4215/HD3561  |
| Jackscrews, Jackposts          | Stainless Steel, Passivated In Accordance With SAE-AMS-QQ-P-35  |
| Pigtail Wire, Insulated Hookup | MIL-W-22759/11: 19 Strand Silver-Coated Copper Wire, Extruded PTFE Insulation, 600 Volts RMS, 200° C.<br>MIL-W-22759/33: 19 Strand High-Strength Silver-Coated Copper Alloy Wire, Crosslinked Modified ETFE Insulation, 600 Volts RMS, 200° C.  |
| Pigtail Wire, Uninsulated      | Wire Type 07 and 08: Solid Copper Wire In Accordance With A-A-59551, 90% Tin/10% Lead Coated<br>Wire Type 05 and 06: Solid Copper Wire In Accordance With A-A-59551, Gold-Plated  |

## MIL-DTL-83513 PERFORMANCE SPECIFICATIONS

|                                 |  |
|---------------------------------|--|
| Current Rating                  | 3 AMP  |
| Dielectric Withstanding Voltage | 600 VAC Sea Level, 150 VAC 70,000 Feet       |
| Insulation Resistance           | 5000 Megohms Minimum                         |
| Contact Resistance              | 8 Milliohms Maximum                          |
| Low Level Contact Resistance    | 32 Milliohms Maximum                         |
| Magnetic Permeability           | 2 μ Maximum                                  |
| Operating Temperature           | -55° C. to +150° C.                          |
| Shock                           | 50 g.  |
| Vibration                       | 20 g.  |
| Outgassing                      | Meets NASA Outgassing Requirements           |
| Mating Force                    | (10 Ounces Maximum) X (# Of Contacts)        |
| Salt Spray                      | 48 Hours Aluminum Shell With Cadmium Plating |
| Durability                      | 500 Mating Cycles Minimum                    |



**Metal Shell Solder Cup M83513 Connectors** feature gold-plated TwistPin non-removable contacts for solder termination to AWG #26 or smaller wire.

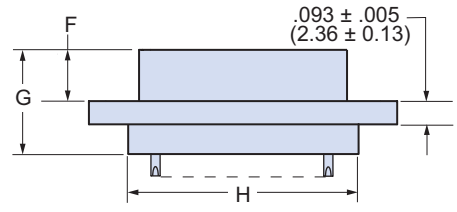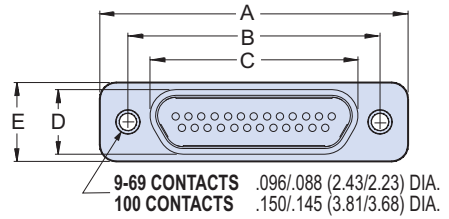

## M83513/01 & /02 SOLDER CUP PART NUMBERS

| Layout | Config.    | Electroless Nickel Plated Aluminum Shell | Cadmium Plated Aluminum Shell | Passivated Stainless Steel Shell |
|--------|------------|--|-------------------------------|----------------------------------|
| 9P     | Plug       | M83513/01-AN                             | M83513/01-AC                  | M83513/01-AP                     |
| 9S     | Receptacle | M83513/02-AN                             | M83513/02-AC                  | M83513/02-AP                     |
| 15P    | Plug       | M83513/01-BN                             | M83513/01-BC                  | M83513/01-BP                     |
| 15S    | Receptacle | M83513/02-BN                             | M83513/02-BC                  | M83513/02-BP                     |
| 21P    | Plug       | M83513/01-CN                             | M83513/01-CC                  | M83513/01-CP                     |
| 21S    | Receptacle | M83513/02-CN                             | M83513/02-CC                  | M83513/02-CP                     |
| 25P    | Plug       | M83513/01-DN                             | M83513/01-DC                  | M83513/01-DP                     |
| 25S    | Receptacle | M83513/02-DN                             | M83513/02-DC                  | M83513/02-DP                     |
| 31P    | Plug       | M83513/01-EN                             | M83513/01-EC                  | M83513/01-EP                     |
| 31S    | Receptacle | M83513/02-EN                             | M83513/02-EC                  | M83513/02-EP                     |
| 37P    | Plug       | M83513/01-FN                             | M83513/01-FC                  | M83513/01-FP                     |
| 37S    | Receptacle | M83513/02-FN                             | M83513/02-FC                  | M83513/02-FP                     |
| 51P    | Plug       | M83513/01-GN                             | M83513/01-GC                  | M83513/01-GP                     |
| 51S    | Receptacle | M83513/02-GN                             | M83513/02-GC                  | M83513/02-GP                     |
| 100P   | Plug       | M83513/01-HN                             | M83513/01-HC                  | M83513/01-HP                     |
| 100S   | Receptacle | M83513/02-HN                             | M83513/02-HC                  | M83513/02-HP                     |

## DIMENSIONS

| Layout | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |       | F          |            | G Max. |       | H Max. |       | J Max. |      |
|--------|--------|-------|------------|------------|--------|-------|--------|------|--------|-------|------------|------------|--------|-------|--------|-------|--------|------|
|        | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.   | In.    | mm.  |
| 9P     | .785   | 19.94 | .565       | 14.35      | .333   | 8.46  | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | .400   | 10.16 | .270   | 6.86 |
| 9S     | .785   | 19.94 | .565       | 14.35      | .400   | 10.16 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | .400   | 10.16 | .270   | 6.86 |
| 15P    | .935   | 23.75 | .715       | 18.16      | .483   | 12.27 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | .550   | 13.97 | .270   | 6.86 |
| 15S    | .935   | 23.75 | .715       | 18.16      | .551   | 14.00 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | .550   | 13.97 | .270   | 6.86 |
| 21P    | 1.085  | 27.56 | .865       | 21.97      | .633   | 16.08 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | .700   | 17.78 | .270   | 6.86 |
| 21S    | 1.085  | 27.56 | .865       | 21.97      | .701   | 17.81 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | .700   | 17.78 | .270   | 6.86 |
| 25P    | 1.185  | 30.01 | .965       | 24.51      | .733   | 18.62 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | .800   | 20.32 | .270   | 6.86 |
| 25S    | 1.185  | 30.01 | .965       | 24.51      | .801   | 20.35 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | .800   | 20.32 | .270   | 6.86 |
| 31P    | 1.335  | 33.91 | 1.115      | 28.32      | .883   | 22.43 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | .950   | 24.13 | .270   | 6.86 |
| 31S    | 1.335  | 33.91 | 1.115      | 28.32      | .951   | 24.16 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | .950   | 24.13 | .270   | 6.86 |
| 37P    | 1.485  | 37.72 | 1.265      | 32.13      | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | 1.100  | 27.94 | .270   | 6.86 |
| 37S    | 1.485  | 37.72 | 1.265      | 32.13      | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | 1.100  | 27.94 | .270   | 6.86 |
| 51P    | 1.435  | 36.45 | 1.215      | 30.86      | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .183       | 4.65       | .416   | 10.57 | 1.050  | 26.67 | .310   | 7.87 |
| 51S    | 1.435  | 36.45 | 1.215      | 30.86      | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195       | 4.95       | .429   | 10.90 | 1.050  | 26.67 | .310   | 7.87 |
| 100P   | 2.170  | 55.12 | 1.800      | 45.72      | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | .183       | 4.65       | .416   | 10.57 | 1.442  | 36.63 | .360   | 9.14 |
| 100S   | 2.170  | 55.12 | 1.800      | 45.72      | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195       | 4.95       | .429   | 10.90 | 1.442  | 36.63 | .360   | 9.14 |

# MIL-DTL-83513/03 & /04 Micro-D Connectors Metal Shell Crimp, Pre-Wired



**Micro-D Pre-Wired Pigtails** — These connectors feature gold-plated TwistPin contacts and mil spec crimp termination. Specify aluminum shells for best availability. 100% tested and backpotted, ready for use.

**Choose the Wire Type To Fit Your Application** — For lightest weight and smallest diameter, select M22759/33 space grade insulated wire.

## HOW TO ORDER METAL SHELL PRE-WIRED CRIMP MIL-DTL-83513 MICRO-D CONNECTORS



| Base Part Number          | Slash Number                            | Shell Size   | Wire Type  | Shell Finish   |
|---------------------------|---|--|--|--|
| M83513                    | /03<br>Pin Connector<br>(Plug)          | A<br>B<br>C<br>D<br>E<br>F<br>G<br>H   | <b>M22759/11-26 Teflon®-Insulated Hookup Wire</b><br><b>01</b> – 18 Inches (457mm), White<br><b>02</b> – 36 Inches (914mm), White<br><b>03</b> – 18 Inches (457mm), 10 Color Repeating<br><b>04</b> – 36 Inches (914mm), 10 Color Repeating<br><b>13</b> – 72 Inches (1829mm), White<br><b>14</b> – 72 Inches (1829mm), 10 Color Repeating<br><b>M22759/33-26 Irradiated Tefzel® Insulated Hookup Wire</b><br><b>09</b> – 18 Inches (457mm), White<br><b>10</b> – 36 Inches (914mm), White<br><b>11</b> – 18 Inches (457mm), 10 Color Repeating<br><b>12</b> – 36 Inches (914mm), 10 Color Repeating<br><b>15</b> – 72 Inches (1829mm), White<br><b>16</b> – 72 Inches (1829mm), 10 Color Repeating<br><b>Single Strand Uninsulated Wire</b><br><b>05</b> – .500 Inch (12.7mm), Gold Plated<br><b>06</b> – 1.000 Inch (25.4mm), Gold Plated<br><b>07</b> – .500 Inch (12.7mm), Tin-Lead Plated <sup>(2)</sup><br><b>08</b> – 1.000 Inch (25.4mm), Tin-Lead Plated <sup>(2)</sup> | <b>C</b> – Cadmium<br><b>N</b> – Electroless Nickel<br><b>P</b> – Passivated SST |
|                           | /04<br>Socket Connector<br>(Receptacle) | Codes A - H specify the shell size. The number of contacts is shown below for reference.<br><br>A – 9<br>B – 15<br>C – 21<br>D – 25<br>E – 31<br>F – 37<br>G – 51<br>H – 100 |  |  |
| <b>Sample Part Number</b> |   |  |  |  |
| M83513                    | /04                                     | — B  | 09   | N  |

## APPLICATION NOTES



- Shell Material & Finish:** Cadmium plating offers better corrosion resistance compared to nickel, but cad is not acceptable for space or RoHS applications. Electroless nickel plated aluminum is recommended for new design activity. Or, choose stainless steel shells for corrosive environments.
- Tin-Plated Wire:** The next revision of the mil spec is expected to prohibit the use of pure tin. Glenair M83513 connectors do not contain any components exceeding 97% tin.
- M22759/33 Corrosion:** The M83513 spec contains a cautionary note regarding M22759/33 wire. The wire insulation is known to cause corrosion to metal parts when stored in a sealed environment. This corrosion has been observed on M83513 connectors. Glenair has implemented a packaging procedure to minimize or eliminate this problem. Connectors are individually wrapped with teflon tape, and the unit pack is a perforated paper envelope. M22759/33 continues to be the preferred wire for space applications.



# MIL-DTL-83513/03 & /04 Micro-D Connectors Metal Shell Crimp, Pre-Wired

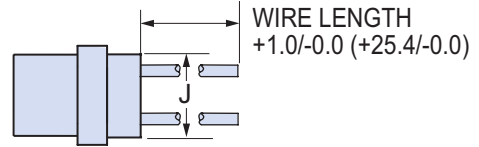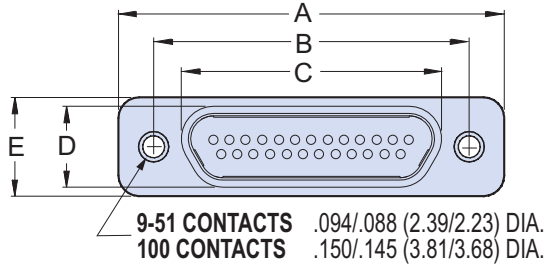

LENGTH FOR INSULATED STRANDED WIRE

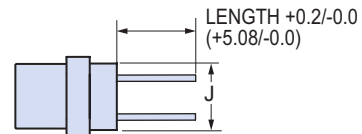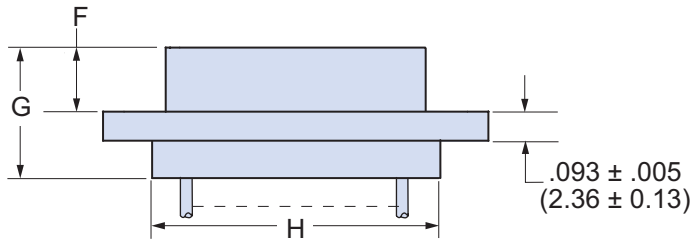

LENGTH FOR UNINSULATED WIRE

## DIMENSIONS


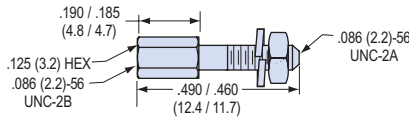
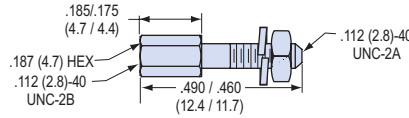

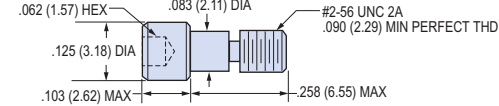
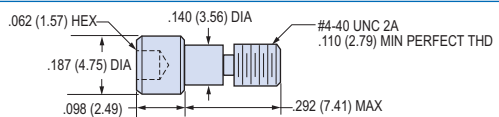

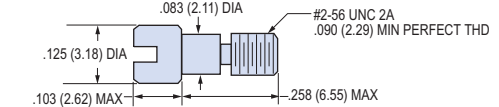
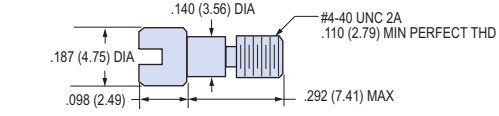

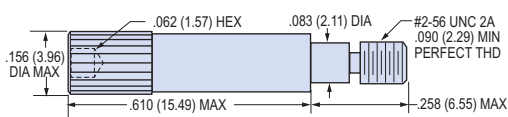
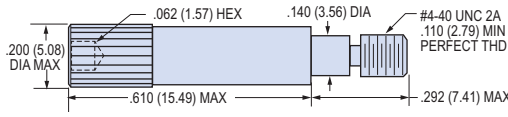

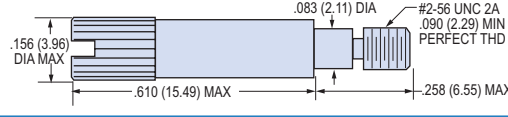
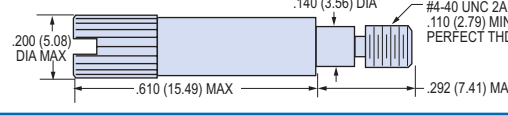
| Layout | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |       | F          |            | G Max. |       | H Max. |       | J Max. |      |
|--------|--------|-------|------------|------------|--------|-------|--------|------|--------|-------|------------|------------|--------|-------|--------|-------|--------|------|
|        | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.   | In.    | mm.  |
| 9P     | .785   | 19.94 | .565       | 14.35      | .333   | 8.46  | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | .400   | 10.16 | .270   | 6.86 |
| 9S     | .785   | 19.94 | .565       | 14.35      | .400   | 10.16 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | .400   | 10.16 | .270   | 6.86 |
| 15P    | .935   | 23.75 | .715       | 18.16      | .483   | 12.27 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | .550   | 13.97 | .270   | 6.86 |
| 15S    | .935   | 23.75 | .715       | 18.16      | .551   | 14.00 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | .550   | 13.97 | .270   | 6.86 |
| 21P    | 1.085  | 27.56 | .865       | 21.97      | .633   | 16.08 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | .700   | 17.78 | .270   | 6.86 |
| 21S    | 1.085  | 27.56 | .865       | 21.97      | .701   | 17.81 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | .700   | 17.78 | .270   | 6.86 |
| 25P    | 1.185  | 30.01 | .965       | 24.51      | .733   | 18.62 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | .800   | 20.32 | .270   | 6.86 |
| 25S    | 1.185  | 30.01 | .965       | 24.51      | .801   | 20.35 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | .800   | 20.32 | .270   | 6.86 |
| 31P    | 1.335  | 33.91 | 1.115      | 28.32      | .883   | 22.43 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | .950   | 24.13 | .270   | 6.86 |
| 31S    | 1.335  | 33.91 | 1.115      | 28.32      | .951   | 24.16 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | .950   | 24.13 | .270   | 6.86 |
| 37P    | 1.485  | 37.72 | 1.265      | 32.13      | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87  | .183       | 4.65       | .416   | 10.57 | 1.100  | 27.94 | .270   | 6.86 |
| 37S    | 1.485  | 37.72 | 1.265      | 32.13      | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87  | .195       | 4.95       | .429   | 10.90 | 1.100  | 27.94 | .270   | 6.86 |
| 51P    | 1.435  | 36.45 | 1.215      | 30.86      | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .183       | 4.65       | .416   | 10.57 | 1.050  | 26.67 | .310   | 7.87 |
| 51S    | 1.435  | 36.45 | 1.215      | 30.86      | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195       | 4.95       | .429   | 10.90 | 1.050  | 26.67 | .310   | 7.87 |
| 100P   | 2.170  | 55.12 | 1.800      | 45.72      | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | .183       | 4.65       | .416   | 10.57 | 1.442  | 36.63 | .360   | 9.14 |
| 100S   | 2.170  | 55.12 | 1.800      | 45.72      | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195       | 4.95       | .429   | 10.90 | 1.442  | 36.63 | .360   | 9.14 |

# MIL-DTL-83513/05 Micro-D Hardware Jackscrews and Jackposts



**Order One Kit Per Connector.** Jackpost kits contain two posts, two hex nuts and 2 lockwashers. Jackscrew kits contain 2 screws and 2 e-rings. Packaged one kit (two screws or posts) per bag.

**Mil Spec Hardware Kits** feature 300 series stainless steel.

| MIL SPEC JACKSCREW KITS   |   |                      |                     |  |
|---|---|----------------------|---------------------|--|
| Configuration   | Connector Size, Thread Size                               | Mil Spec Part Number | Glenair Part Number | Dimensions   |
| <br><b>Jackpost</b>                          | Sizes 9 to 69 Contacts. Mil Spec Size A to G #2-56 UNC    | M83513/05-07         | 080-00-00-100       |    |
|   | Size 100 Only Mil Spec Size H #4-40 UNC                   | M83513/05-17         | 080-00-00-101       |    |
| <br><b>Hex Head Jackscrew Low Profile</b>   | Sizes 9 to 69 Contacts. Mil Spec Size A to G #2-56 UNC-2A | M83513/05-02         | 080-00-00-502       |    |
|   | Size 100 Only Mil Spec Size H #4-40 UNC-2A                | M83513/05-12         | 080-00-00-512       |  |
| <br><b>Slot Head Jackscrew Low Profile</b> | Sizes 9 to 69 Contacts. Mil Spec Size A to G #2-56 UNC-2A | M83513/05-05         | 080-00-00-505       |  |
|   | Size 100 Only Mil Spec Size H #4-40 UNC-2A                | M83513/05-15         | 080-00-00-515       |  |
| <br><b>Hex Head Jackscrew Extended</b>     | Sizes 9 to 69 Contacts. Mil Spec Size A to G #2-56 UNC-2A | M83513/05-03         | 080-00-00-503       |  |
|   | Size 100 Only Mil Spec Size H #4-40 UNC-2A                | M83513/05-13         | 080-00-00-513       |  |
| <br><b>Slot Head Jackscrew Extended</b>    | Sizes 9 to 69 Contacts. Mil Spec Size A to G #2-56 UNC-2A | M83513/05-06         | 080-00-00-506       |  |
|   | Size 100 Only Mil Spec Size H #4-40 UNC-2A                | M83513/05-16         | 080-00-00-516       |  |








# MIL-DTL-83513/06 & /07 Micro-D Connectors Plastic Shell Solder Cup



**Plastic Shell Solder Cup M83513 Connectors** feature goldplated TwistPin non-removable contacts for solder termination to AWG #26 or smaller wire. These all-plastic connectors are more economical, lighter and smaller than metal shell versions.

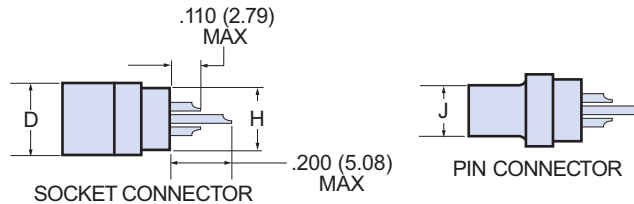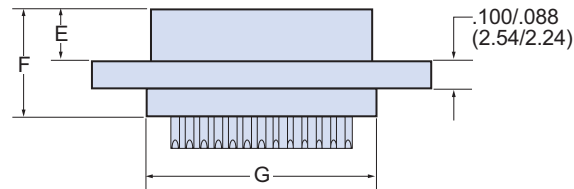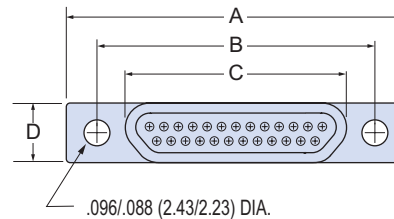

## PART NUMBERS

| Layout | Config.    | Part Number |
|--------|------------|-------------|
| 9P     | Plug       | M83513/06-A |
| 9S     | Receptacle | M83513/07-A |
| 15P    | Plug       | M83513/06-B |
| 15S    | Receptacle | M83513/07-B |
| 21P    | Plug       | M83513/06-C |
| 21S    | Receptacle | M83513/07-C |
| 25P    | Plug       | M83513/06-D |
| 25S    | Receptacle | M83513/07-D |
| 31P    | Plug       | M83513/06-E |
| 31S    | Receptacle | M83513/07-E |
| 37P    | Plug       | M83513/06-F |
| 37S    | Receptacle | M83513/07-F |
| 51P    | Plug       | M83513/06-G |
| 51S    | Receptacle | M83513/07-G |

## DIMENSIONS

| Layout | A Max. |       | B         |           | C Max. |       | D Max. |      | E Max. |      | F Max. |       | G Max. |       | H Max. |      | J Max. |      |
|--------|--------|-------|-----------|-----------|--------|-------|--------|------|--------|------|--------|-------|--------|-------|--------|------|--------|------|
|        | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.    | mm.   | In.    | mm.   | In.    | mm.  | In.    | mm.  |
| 9P     | .785   | 19.94 | .565      | 14.35     | .292   | 7.42  | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .408   | 10.36 | .173   | 4.39 | .139   | 3.53 |
| 9S     | .785   | 19.94 | .565      | 14.35     | .380   | 9.65  | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .408   | 10.36 | .173   | 4.39 |        |      |
| 15P    | .935   | 23.75 | .715      | 18.16     | .442   | 11.23 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .558   | 14.17 | .173   | 4.39 | .139   | 3.53 |
| 15S    | .935   | 23.75 | .715      | 18.16     | .530   | 13.46 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .558   | 14.17 | .173   | 4.39 |        |      |
| 21P    | 1.080  | 27.43 | .865      | 21.97     | .592   | 15.04 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .708   | 17.98 | .173   | 4.39 | .139   | 3.53 |
| 21S    | 1.080  | 27.43 | .865      | 21.97     | .680   | 17.27 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .708   | 17.98 | .173   | 4.39 |        |      |
| 25P    | 1.185  | 30.01 | .965      | 24.51     | .692   | 17.58 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .808   | 20.52 | .173   | 4.39 | .139   | 3.53 |
| 25S    | 1.185  | 30.01 | .965      | 24.51     | .780   | 19.81 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .808   | 20.52 | .173   | 4.39 |        |      |
| 31P    | 1.335  | 33.91 | 1.115     | 28.32     | .842   | 21.39 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .958   | 24.33 | .173   | 4.39 | .139   | 3.53 |
| 31S    | 1.335  | 33.91 | 1.115     | 28.32     | .930   | 23.62 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .958   | 24.33 | .173   | 4.39 |        |      |
| 37P    | 1.485  | 37.72 | 1.265     | 32.13     | .992   | 25.20 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | 1.108  | 28.14 | .173   | 4.39 | .139   | 3.53 |
| 37S    | 1.485  | 37.72 | 1.265     | 32.13     | 1.080  | 27.43 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | 1.108  | 28.14 | .173   | 4.39 |        |      |
| 51P    | 1.435  | 36.45 | 1.215     | 30.86     | .942   | 23.93 | .260   | 6.60 | .202   | 5.13 | .395   | 10.03 | 1.058  | 26.87 | .220   | 5.59 | .182   | 4.62 |
| 51S    | 1.435  | 36.45 | 1.215     | 30.86     | 1.030  | 26.16 | .260   | 6.60 | .185   | 4.70 | .375   | 9.53  | 1.058  | 26.87 | .220   | 5.59 |        |      |

# MIL-DTL-83513/08 & /09 Micro-D Connectors Plastic Shell Crimp, Pre-Wired



**Micro-D Pre-Wired Pigtails** — These connectors feature gold-plated TwistPin contacts and mil spec crimp termination. 100% tested and backpotted, ready for use.

**Choose the Wire Type To Fit Your Application** — For lightest weight and smallest diameter, select M22759/33 space grade insulated wire.

## HOW TO ORDER PLASTIC SHELL PRE-WIRED CRIMP MIL-DTL-83513/08 AND /09 CONNECTORS



| Base Part Number          | Slash Number                            | Insert Arrangement  | Wire Type  |
|---------------------------|---|---|--|
| M83513                    | /08<br>Pin Connector<br>(Plug)          | A<br>B<br>C<br>D<br>E<br>F<br>G   | <b>M22759/11-26 Teflon®-Insulated Hookup Wire</b><br><b>01</b> – 18 Inches (457mm), White<br><b>02</b> – 36 Inches (914mm), White<br><b>03</b> – 18 Inches (457mm), 10 Color Repeating<br><b>04</b> – 36 Inches (914mm), 10 Color Repeating<br><b>13</b> – 72 Inches (1829mm), White<br><b>14</b> – 72 Inches (1829mm), 10 Color Repeating<br><b>M22759/33-26 Irradiated Tefzel® Insulated Hookup Wire</b><br><b>09</b> – 18 Inches (457mm), White<br><b>10</b> – 36 Inches (914mm), White<br><b>11</b> – 18 Inches (457mm), 10 Color Repeating<br><b>12</b> – 36 Inches (914mm), 10 Color Repeating<br><b>15</b> – 72 Inches (1829mm), White<br><b>16</b> – 72 Inches (1829mm), 10 Color Repeating<br><b>Single Strand Uninsulated Wire</b><br><b>05</b> – .500 Inch (12.7mm), Gold Plated<br><b>06</b> – 1.000 Inch (25.4mm), Gold Plated<br><b>07</b> – .500 Inch (12.7mm), Tin-Lead Plated <sup>(2)</sup><br><b>08</b> – 1.000 Inch (25.4mm), Tin-Lead Plated <sup>(2)</sup> |
|                           | /09<br>Socket Connector<br>(Receptacle) | Codes A - G specify the shell size. The number of contacts is shown below for reference.<br><br>A – 9<br>B – 15<br>C – 21<br>D – 25<br>E – 31<br>F – 37<br>G – 51 |  |
| <b>Sample Part Number</b> |   |   |  |
| M83513                    | /09                                     | — G   | 12   |

## APPLICATION NOTES



- Intermatibility:** M83513 plastic shell connectors are not intermateable with metal shell M83513 connectors.
- Tin-Plated Wire:** The next revision of the mil spec is expected to prohibit the use of pure tin. Glenair M83513 connectors do not contain any components exceeding 97% tin.
- M22759/33 Corrosion:** The M83513 spec contains a cautionary note regarding M22759/33 wire. The wire insulation is known to cause corrosion to metal parts when stored in a sealed environment. This corrosion has been observed on M83513 connectors. Glenair has implemented a packaging procedure to minimize or eliminate this problem. Connectors are individually wrapped with teflon tape, and the unit pack is a perforated paper envelope. M22759/33 continues to be the preferred wire for space applications.



# MIL-DTL-83513 Micro-D Connectors Plastic Shell Crimp, Pre-Wired M83513/08 & /09

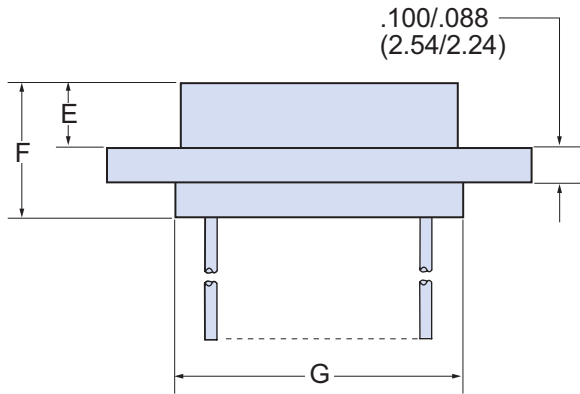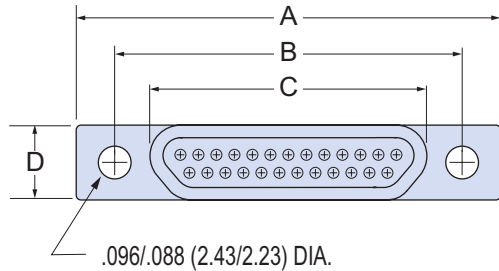


## LENGTH FOR INSULATED STRANDED WIRE

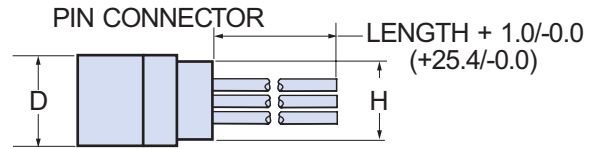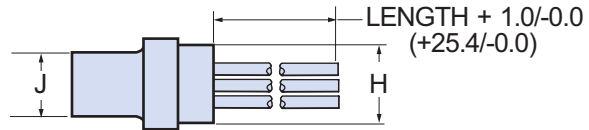


## SOCKET CONNECTOR

## LENGTH FOR UNINSULATED WIRE

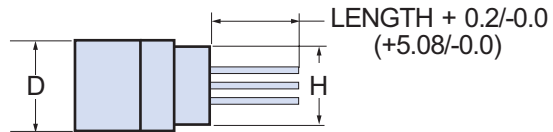

## SOCKET CONNECTOR

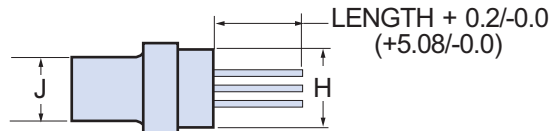


## PIN CONNECTOR

## DIMENSIONS

| Layout | A Max. |       | B          |            | C Max. |       | D Max. |      | E Max. |      | F Max. |       | G Max. |       | H Max. |      | J Max. |      |
|--------|--------|-------|------------|------------|--------|-------|--------|------|--------|------|--------|-------|--------|-------|--------|------|--------|------|
|        | In.    | mm.   | In. ± .003 | mm. ± 0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.    | mm.   | In.    | mm.   | In.    | mm.  | In.    | mm.  |
| 9P     | .785   | 19.94 | .565       | 14.35      | .292   | 7.42  | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .408   | 10.36 | .173   | 4.39 | .139   | 3.53 |
| 9S     | .785   | 19.94 | .565       | 14.35      | .380   | 9.65  | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .408   | 10.36 | .173   | 4.39 |        |      |
| 15P    | .935   | 23.75 | .715       | 18.16      | .442   | 11.23 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .558   | 14.17 | .173   | 4.39 | .139   | 3.53 |
| 15S    | .935   | 23.75 | .715       | 18.16      | .530   | 13.46 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .558   | 14.17 | .173   | 4.39 |        |      |
| 21P    | 1.080  | 27.43 | .865       | 21.97      | .592   | 15.04 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .708   | 17.98 | .173   | 4.39 | .139   | 3.53 |
| 21S    | 1.080  | 27.43 | .865       | 21.97      | .680   | 17.27 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .708   | 17.98 | .173   | 4.39 |        |      |
| 25P    | 1.185  | 30.01 | .965       | 24.51      | .692   | 17.58 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .808   | 20.52 | .173   | 4.39 | .139   | 3.53 |
| 25S    | 1.185  | 30.01 | .965       | 24.51      | .780   | 19.81 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .808   | 20.52 | .173   | 4.39 |        |      |
| 31P    | 1.335  | 33.91 | 1.115      | 28.32      | .842   | 21.39 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .958   | 24.33 | .173   | 4.39 | .139   | 3.53 |
| 31S    | 1.335  | 33.91 | 1.115      | 28.32      | .930   | 23.62 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .958   | 24.33 | .173   | 4.39 |        |      |
| 37P    | 1.485  | 37.72 | 1.265      | 32.13      | .992   | 25.20 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | 1.108  | 28.14 | .173   | 4.39 | .139   | 3.53 |
| 37S    | 1.485  | 37.72 | 1.265      | 32.13      | 1.080  | 27.43 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | 1.108  | 28.14 | .173   | 4.39 |        |      |
| 51P    | 1.435  | 36.45 | 1.215      | 30.86      | .942   | 23.93 | .260   | 6.60 | .202   | 5.13 | .395   | 10.03 | 1.058  | 26.87 | .220   | 5.59 | .182   | 4.62 |
| 51S    | 1.435  | 36.45 | 1.215      | 30.86      | 1.030  | 26.16 | .260   | 6.60 | .185   | 4.70 | .375   | 9.53  | 1.058  | 26.87 | .220   | 5.59 |        |      |

# MIL-DTL-83513/10 Thru /15 Micro-D Connectors Right Angle PCB Connectors (CBR)

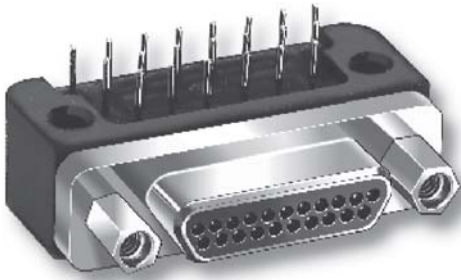

**High Performance** — These connectors feature gold-plated TwistPin contacts for best performance. PC tails are .020 inch diameter. Specify nickel-plated shells or cadmium plated shells for best availability.



**Solder-Dipped** — Terminals are coated with SN63/Pb37 tin-lead solder for best solderability.

## HOW TO ORDER M83513/10 THRU /15 NARROW PROFILE RIGHT ANGLE PCB CONNECTORS

| Spec Number                | Slash Number- Shell Size            | PC Tail Length                  | Shell Finish  | Hardware Option  |
|----------------------------|-------------------------------------|---------------------------------|---|--|
| <b>M83513/</b>             | <b>Plug (Pin Contacts)</b>          |                                 | <b>01</b> - .109 Inch (2.77 mm)<br><b>02</b> - .140 Inch (3.56 mm)<br><b>03</b> - .172 Inch (4.37 mm) | <b>C</b> - Cadmium<br><b>N</b> - Electroless Nickel<br><b>P</b> - Passivated SST<br><br><b>N</b> - No Jackpost<br><b>P</b> - Jackposts Installed<br><b>T</b> - Threaded Insert in Board Mount Hole (No Jackposts)<br><b>W</b> - Threaded Insert in Board Mount Hole and jackposts Installed<br><br>See "Hardware Options" below for Illustrations<br><br>Shell sizes A (9) through G (51) are #2-56 UNC-2 threads.<br><br>Shell size H (100) is #4-40 UNC-2 threads. |
|                            | <b>10-A</b> - 9 Contacts            | PC Tail Length<br>± .015 (0.38) |   |  |
|                            | <b>10-B</b> - 15 Contacts           |                                 |   |  |
|                            | <b>10-C</b> - 21 Contacts           |                                 |   |  |
|                            | <b>10-D</b> - 25 Contacts           |                                 |   |  |
|                            | <b>10-E</b> - 31 Contacts           |                                 |   |  |
|                            | <b>10-F</b> - 37 Contacts           |                                 |   |  |
|                            | <b>11-G</b> - 51 Contacts           |                                 |   |  |
|                            | <b>12-H</b> - 100 Contacts          |                                 |   |  |
|                            | <b>Receptacle (Socket Contacts)</b> |                                 |   |  |
|                            | <b>13-A</b> - 9 Contacts            |                                 |   |  |
|                            | <b>13-B</b> - 15 Contacts           |                                 |   |  |
|                            | <b>13-C</b> - 21 Contacts           |                                 |   |  |
|                            | <b>13-D</b> - 25 Contacts           |                                 |   |  |
|                            | <b>13-E</b> - 31 Contacts           |                                 |   |  |
| <b>13-F</b> - 37 Contacts  |                                     |                                 |   |  |
| <b>14-G</b> - 51 Contacts  |                                     |                                 |   |  |
| <b>15-H</b> - 100 Contacts |                                     |                                 |   |  |
| <b>Sample Part Number</b>  |                                     |                                 |   |  |
| <b>M83513/</b>             | <b>13-B</b>                         | <b>02</b>                       | <b>N</b>  | <b>P</b>   |


## HARDWARE OPTIONS

| N                  | P               | T                      | W                                |
|--------------------|-----------------|------------------------|----------------------------------|
|                    |                 |                        |                                  |
| THRU HOLE          | THRU HOLE       | 2X THREADED INSERTS    | 2X THREADED INSERTS              |
| <b>No Jackpost</b> | <b>Jackpost</b> | <b>Threaded Insert</b> | <b>Jackpost, Threaded Insert</b> |

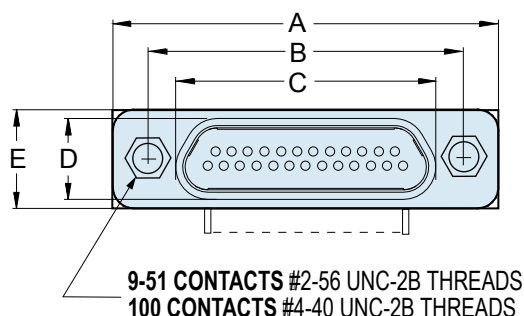

THREAD SIZES  
9-51 CONTACTS #2-56 UNC  
100 CONTACTS #4-40 UNC


### CONFIGURATION FOR 9-25 CONTACTS

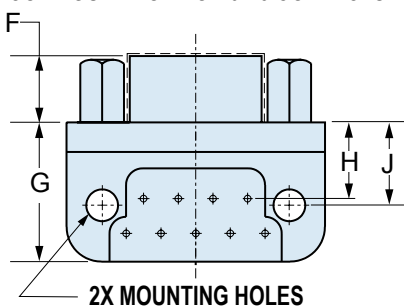

### PCB MOUNTING HOLES

9-51 CONTACTS .096 DIA.  $\pm .003$  (2.44  $\pm$  0.08)  
100 CONTACTS .125 DIA.  $\pm .003$  (3.18  $\pm$  0.08)

### CONFIGURATION FOR 31-100 CONTACTS

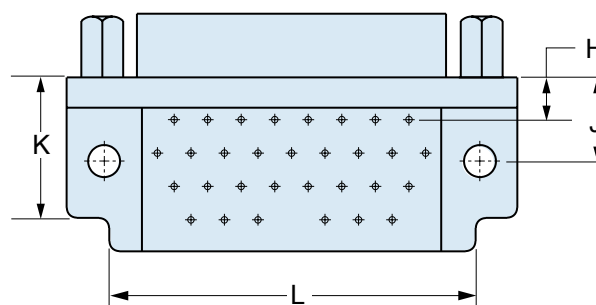

## DIMENSIONS


| Layout | A Max. |       | B     |       | C Max. |       | D Max. |      | E Max. |       | F    |      | G Max. |       | H    |      | J    |       | K Max. |       | L Max. |       |
|--------|--------|-------|-------|-------|--------|-------|--------|------|--------|-------|------|------|--------|-------|------|------|------|-------|--------|-------|--------|-------|
|        | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.    | mm.  | In.    | mm.   | In.  | mm.  | In.    | mm.   | In.  | mm.  | In.  | mm.   | In.    | mm.   | In.    | mm.   |
| 9P     | .787   | 19.94 | .565  | 14.35 | .333   | 8.46  | .184   | 4.67 | .310   | 7.87  | .183 | 4.65 | .425   | 10.80 | .230 | 5.84 | .250 | 6.35  |        |       |        |       |
| 9S     | .787   | 19.94 | .565  | 14.35 | .400   | 10.16 | .250   | 6.35 | .310   | 7.87  | .195 | 4.95 | .425   | 10.80 | .230 | 5.84 | .250 | 6.35  |        |       |        |       |
| 15P    | .937   | 23.75 | .715  | 18.16 | .483   | 12.27 | .184   | 4.67 | .310   | 7.87  | .183 | 4.65 | .425   | 10.80 | .130 | 3.30 | .250 | 6.35  |        |       |        |       |
| 15S    | .937   | 23.75 | .715  | 18.16 | .551   | 14.00 | .250   | 6.35 | .310   | 7.87  | .195 | 4.95 | .425   | 10.80 | .130 | 3.30 | .250 | 6.35  |        |       |        |       |
| 21P    | 1.087  | 27.56 | .865  | 21.97 | .633   | 16.08 | .184   | 4.67 | .310   | 7.87  | .183 | 4.65 | .425   | 10.80 | .130 | 3.30 | .250 | 6.35  |        |       |        |       |
| 21S    | 1.087  | 27.56 | .865  | 21.97 | .701   | 17.81 | .250   | 6.35 | .310   | 7.87  | .195 | 4.95 | .425   | 10.80 | .130 | 3.30 | .250 | 6.35  |        |       |        |       |
| 25P    | 1.187  | 30.01 | .965  | 24.51 | .733   | 18.62 | .184   | 4.67 | .310   | 7.87  | .183 | 4.65 | .425   | 10.80 | .130 | 3.30 | .250 | 6.35  |        |       |        |       |
| 25S    | 1.187  | 30.01 | .965  | 24.51 | .801   | 20.35 | .250   | 6.35 | .310   | 7.87  | .195 | 4.95 | .425   | 10.80 | .130 | 3.30 | .250 | 6.35  |        |       |        |       |
| 31P    | 1.337  | 33.91 | 1.115 | 28.32 | .883   | 22.43 | .184   | 4.67 | .310   | 7.87  | .183 | 4.65 | .525   | 13.34 | .130 | 3.30 | .250 | 6.35  | .450   | 11.43 | 1.085  | 27.56 |
| 31S    | 1.337  | 33.91 | 1.115 | 28.32 | .951   | 24.16 | .250   | 6.35 | .310   | 7.87  | .195 | 4.95 | .525   | 13.34 | .130 | 3.30 | .250 | 6.35  | .450   | 11.43 | 1.085  | 27.56 |
| 37P    | 1.487  | 37.72 | 1.265 | 32.13 | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87  | .183 | 4.65 | .525   | 13.34 | .130 | 3.30 | .250 | 6.35  | .450   | 11.43 | 1.185  | 30.10 |
| 37S    | 1.487  | 37.72 | 1.265 | 32.13 | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87  | .195 | 4.95 | .525   | 13.34 | .130 | 3.30 | .250 | 6.35  | .450   | 11.43 | 1.185  | 30.10 |
| 51P    | 1.435  | 36.45 | 1.215 | 30.86 | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .183 | 4.65 | .660   | 16.76 | .150 | 3.81 | .300 | 7.62  | .450   | 11.43 | 1.225  | 31.12 |
| 51S    | 1.435  | 36.45 | 1.215 | 30.86 | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195 | 4.95 | .660   | 16.76 | .150 | 3.81 | .300 | 7.62  | .450   | 11.43 | 1.225  | 31.12 |
| 100P   | 2.175  | 55.12 | 1.800 | 45.72 | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | .183 | 4.65 | 1.010  | 25.65 | .200 | 5.08 | .400 | 10.16 | .590   | 14.99 | 1.820  | 46.23 |
| 100S   | 2.175  | 55.12 | 1.800 | 45.72 | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195 | 4.95 | 1.010  | 25.65 | .200 | 5.08 | .400 | 10.16 | .590   | 14.99 | 1.820  | 46.23 |

# MIL-DTL-83513/10 Thru /15 Micro-D Connectors Right Angle PCB Connectors (CBR)




## M83513/10 THRU /12 CONNECTOR PCB LAYOUTS – PIN CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

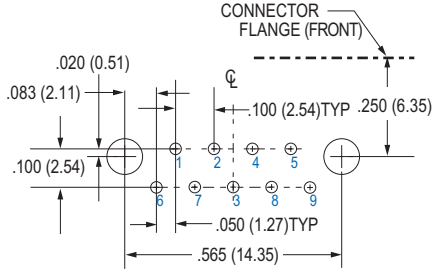


**9 PIN M83513/10-A**

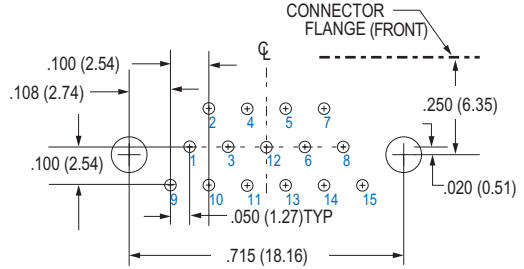


**15 PIN M83513/10-B**

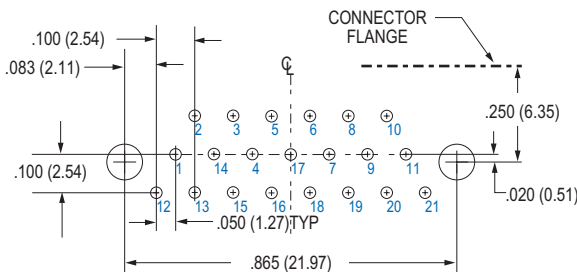


**21 PIN M83513/10-C**

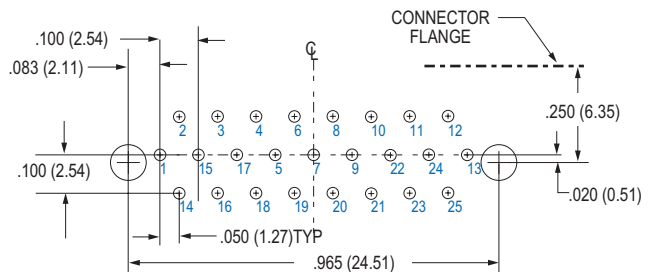


**25 PIN M83513/10-D**

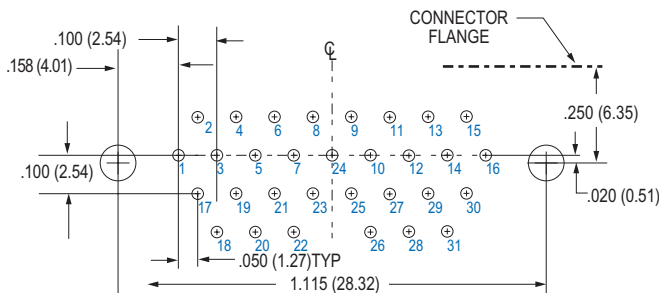


**31 PIN M83513/10-E**

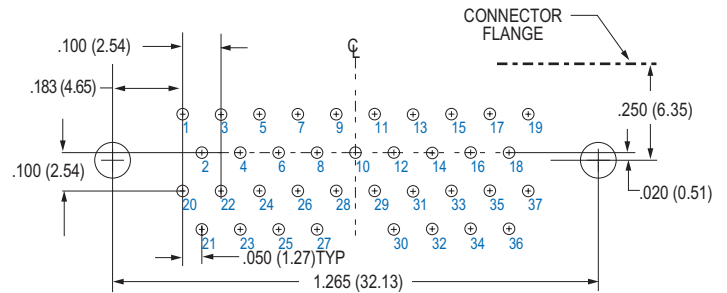

**37 PIN M83513/10-F**

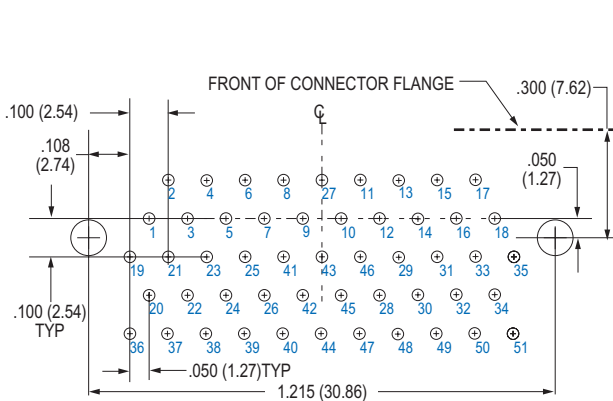

**51 PIN M83513/11-G**

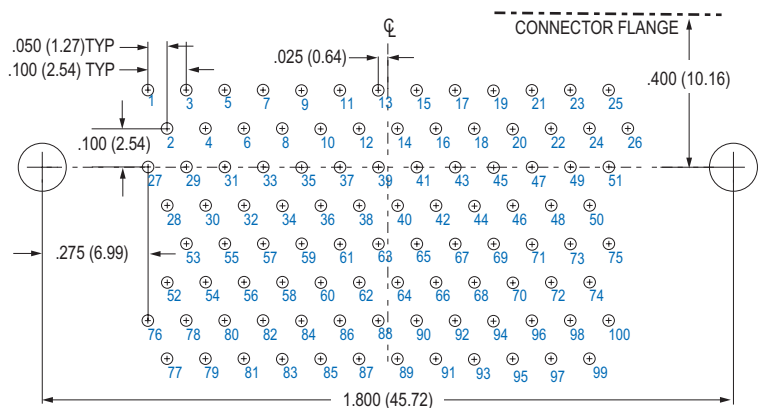


**100 PIN M83513/12-H**




# MIL-DTL-83513/10 Thru /15 Micro-D Connectors Right Angle PCB Connectors (CBR)

## M83513/13 THRU /15 CONNECTOR PCB LAYOUTS – SOCKET CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

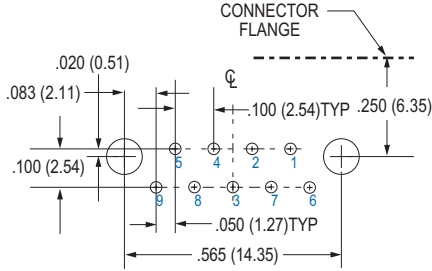


**9 SOCKET M83513/13-A**

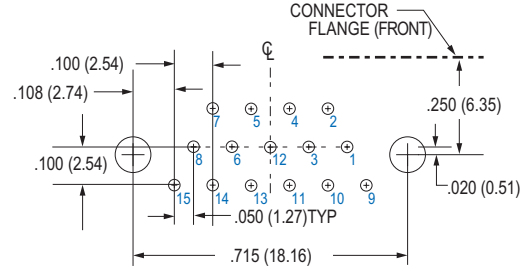


**15 SOCKET M83513/13-B**

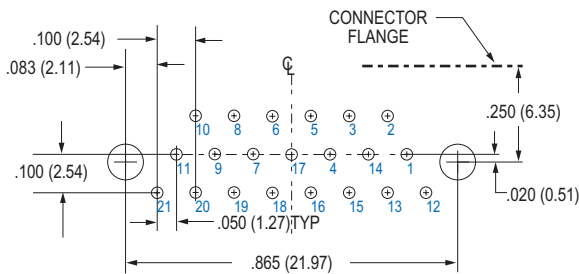


**21 SOCKET M83513/13-C**

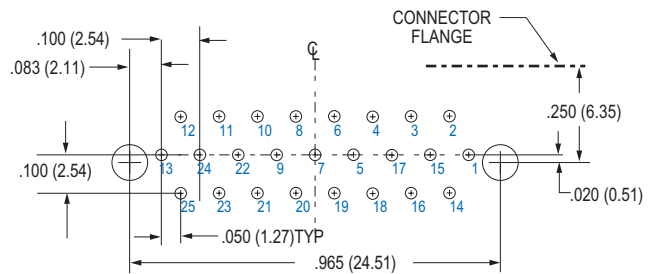


**25 SOCKET M83513/13-D**

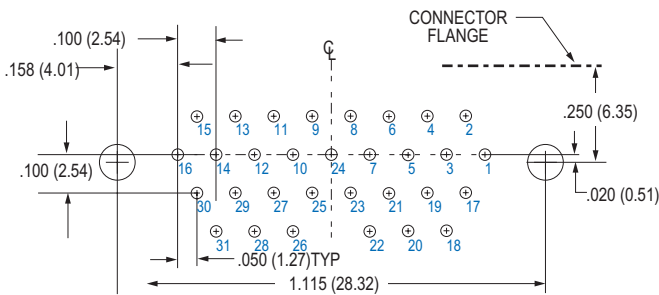


**31 SOCKET M83513/13-E**

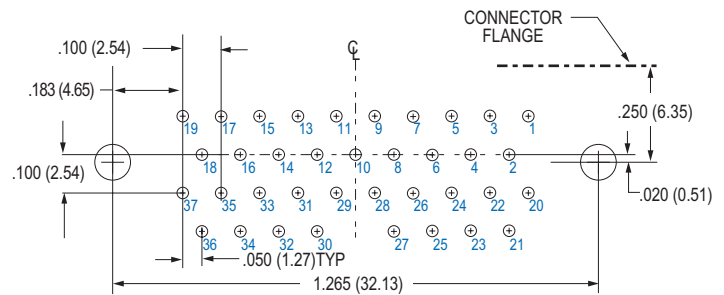

**37 SOCKET M83513/13-F**

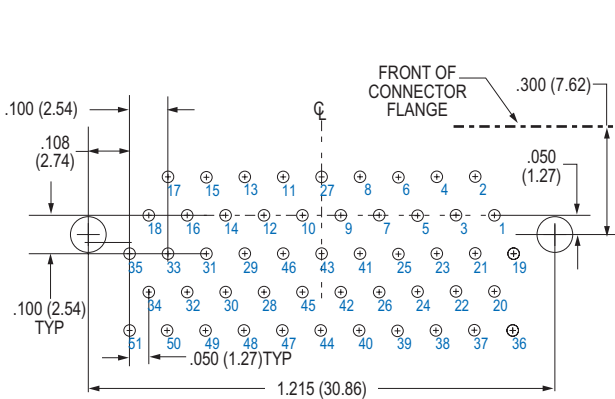

**51 SOCKET M83513/14-G**

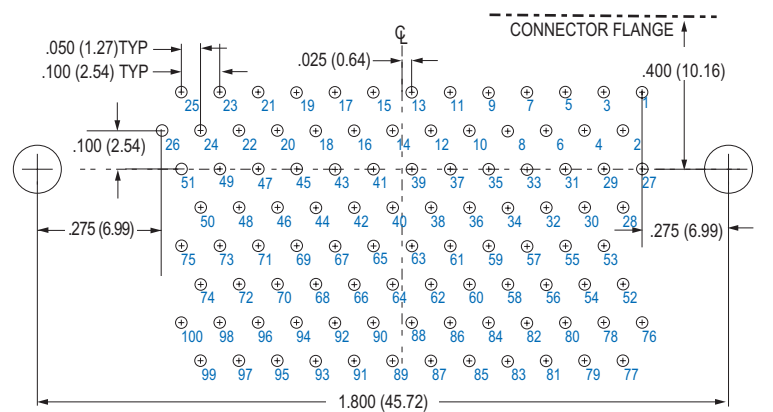

**100 SOCKET M83513/15-H**

# MIL-DTL-83513/16 Thru /21 Micro-D Connectors Right Angle PCB Connectors (BR)



**High Performance** — These connectors feature gold-plated TwistPin contacts for best performance. PC tails are .020 inch diameter. Specify nickel-plated shells or cadmium plated shells for best availability.

**Solder-Dipped** — Terminals are coated with SN63/Pb37 tin-lead solder for best solderability.



## HOW TO ORDER M83513/16 THRU /21 RIGHT ANGLE PCB CONNECGTORS

| Spec Number                | Slash Number- Shell Size            | PC Tail Length                  | Shell Finish  | Hardware Option  |  |
|----------------------------|-------------------------------------|---------------------------------|---|--|--|
| <b>M83513</b>              | <b>Plug (Pin Contacts)</b>          |                                 | <b>01</b> - .109 Inch (2.77 mm)<br><b>02</b> - .140 Inch (3.56 mm)<br><b>03</b> - .172 Inch (4.37 mm) | <b>C</b> - Cadmium<br><b>N</b> - Electroless Nickel<br><b>P</b> - Passivated SST | <b>N</b> - No Jackpost<br><b>P</b> - Jackposts Installed<br><b>T</b> - Threaded Insert in Board Mount Hole (No Jackposts)<br><b>W</b> - Threaded Insert in Board Mount Hole and jackposts Installed<br><br>(See "Hardware Options" below for Illustrations)<br><br>Shell sizes A (9) through G (51) are #2-56 UNC-2 threads.<br><br>Shell size H (100) is #4-40 UNC-2 threads. |
|                            | <b>16-A</b> - 9 Contacts            | PC Tail Length<br>± .015 (0.38) |   |  |  |
|                            | <b>16-B</b> - 15 Contacts           |                                 |   |  |  |
|                            | <b>16-C</b> - 21 Contacts           |                                 |   |  |  |
|                            | <b>16-D</b> - 25 Contacts           |                                 |   |  |  |
|                            | <b>16-E</b> - 31 Contacts           |                                 |   |  |  |
|                            | <b>16-F</b> - 37 Contacts           |                                 |   |  |  |
|                            | <b>17-G</b> - 51 Contacts           |                                 |   |  |  |
|                            | <b>18-H</b> - 100 Contacts          |                                 |   |  |  |
|                            | <b>Receptacle (Socket Contacts)</b> |                                 |   |  |  |
|                            | <b>19-A</b> - 9 Contacts            |                                 |   |  |  |
|                            | <b>19-B</b> - 15 Contacts           |                                 |   |  |  |
|                            | <b>19-C</b> - 21 Contacts           |                                 |   |  |  |
|                            | <b>19-D</b> - 25 Contacts           |                                 |   |  |  |
| <b>19-E</b> - 31 Contacts  |                                     |                                 |   |  |  |
| <b>19-F</b> - 37 Contacts  |                                     |                                 |   |  |  |
| <b>20-G</b> - 51 Contacts  |                                     |                                 |   |  |  |
| <b>21-H</b> - 100 Contacts |                                     |                                 |   |  |  |
| <b>Sample Part Number</b>  |                                     |                                 |   |  |  |
| <b>M83513/</b>             | <b>19-F</b>                         | <b>02</b>                       | <b>N</b>  | <b>P</b>   |  |

## HARDWARE OPTIONS

| N                  | P               | T                      | W                                |
|--------------------|-----------------|------------------------|----------------------------------|
|                    |                 |                        |                                  |
| <b>No Jackpost</b> | <b>Jackpost</b> | <b>Threaded Insert</b> | <b>Jackpost, Threaded Insert</b> |



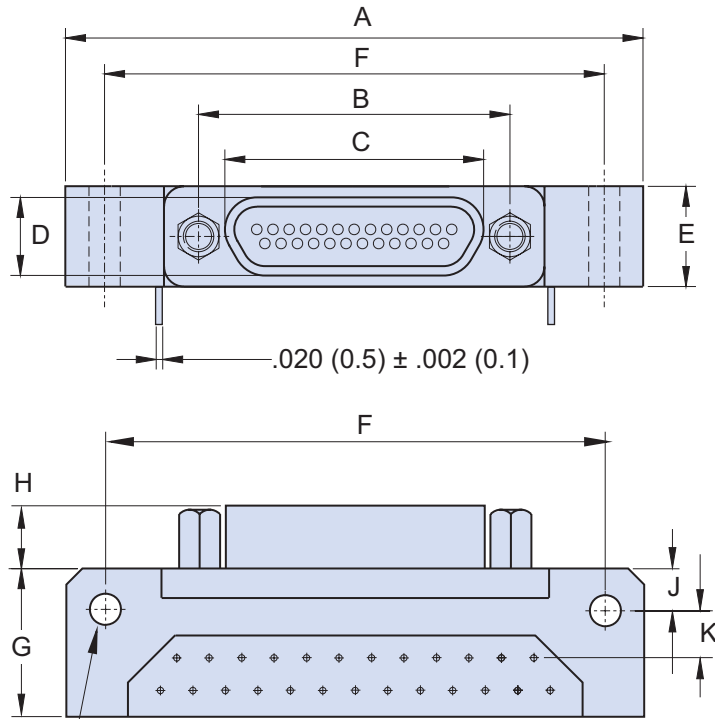

THREAD SIZES  
9-51 CONTACTS #2-56 UNC  
100 CONTACTS #4-40 UNC

2 X PCB MTNG HOLES  
9-51 CONTACTS .096 ± .005 (2.43 ± 0.13)  
100 CONTACTS .125 ± .005 (23.18 ± 0.13)

## DIMENSIONS


| Layout | A Max. |       | B            |              | C Max. |       | D Max. |      | E Max. |       | F            |              | G Max. |       | H            |              | J            |              | K            |              |
|--------|--------|-------|--------------|--------------|--------|-------|--------|------|--------|-------|--------------|--------------|--------|-------|--------------|--------------|--------------|--------------|--------------|--------------|
|        | In.    | mm.   | In.<br>±.005 | mm.<br>±0.10 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In.<br>±.007 | mm.<br>±0.18 | In.    | mm.   | In.<br>±.003 | mm.<br>±0.08 | In.<br>±.015 | mm.<br>±0.38 | In.<br>±.010 | mm.<br>±0.25 |
| 9P     | 1.390  | 35.31 | .565         | 14.35        | .333   | 8.46  | .185   | 4.70 | .325   | 8.26  | 1.150        | 29.21        | .465   | 11.81 | .183         | 4.65         | .125         | 3.18         | .150         | 3.81         |
| 9S     | 1.390  | 35.31 | .565         | 14.35        | .400   | 10.16 | .253   | 6.26 | .325   | 8.26  | 1.150        | 29.21        | .465   | 11.81 | .195         | 4.95         | .125         | 3.18         | .150         | 3.81         |
| 15P    | 1.540  | 39.12 | .715         | 18.16        | .483   | 12.27 | .185   | 4.70 | .325   | 8.26  | 1.300        | 33.02        | .465   | 11.81 | .183         | 4.65         | .125         | 3.18         | .150         | 3.81         |
| 15S    | 1.540  | 39.12 | .715         | 18.16        | .551   | 14.00 | .253   | 6.26 | .325   | 8.26  | 1.300        | 33.02        | .465   | 11.81 | .195         | 4.95         | .125         | 3.18         | .150         | 3.81         |
| 21P    | 1.690  | 42.93 | .865         | 21.97        | .633   | 16.08 | .185   | 4.70 | .325   | 8.26  | 1.450        | 36.83        | .465   | 11.81 | .183         | 4.65         | .125         | 3.18         | .150         | 3.81         |
| 21S    | 1.690  | 42.93 | .865         | 21.97        | .701   | 17.81 | .253   | 6.26 | .325   | 8.26  | 1.450        | 36.83        | .465   | 11.81 | .195         | 4.95         | .125         | 3.18         | .150         | 3.81         |
| 25P    | 1.790  | 45.47 | .965         | 24.51        | .733   | 18.62 | .185   | 4.70 | .325   | 8.26  | 1.550        | 39.37        | .465   | 11.81 | .183         | 4.65         | .125         | 3.18         | .150         | 3.81         |
| 25S    | 1.790  | 45.47 | .965         | 24.51        | .801   | 20.35 | .253   | 6.26 | .325   | 8.26  | 1.550        | 39.37        | .465   | 11.81 | .195         | 4.95         | .125         | 3.18         | .150         | 3.81         |
| 31P    | 2.040  | 51.82 | 1.115        | 28.32        | .883   | 22.43 | .185   | 4.70 | .325   | 8.26  | 1.800        | 45.72        | .465   | 11.81 | .183         | 4.65         | .125         | 3.18         | .150         | 3.81         |
| 31S    | 2.040  | 51.82 | 1.115        | 28.32        | .951   | 24.16 | .253   | 6.26 | .325   | 8.26  | 1.800        | 45.72        | .465   | 11.81 | .195         | 4.95         | .125         | 3.18         | .150         | 3.81         |
| 37P    | 2.340  | 59.44 | 1.265        | 32.13        | 1.033  | 26.24 | .185   | 4.70 | .325   | 8.26  | 2.100        | 53.34        | .465   | 11.81 | .183         | 4.65         | .125         | 3.18         | .150         | 3.81         |
| 37S    | 2.340  | 59.44 | 1.265        | 32.13        | 1.101  | 27.96 | .253   | 6.26 | .325   | 8.26  | 2.100        | 53.34        | .465   | 11.81 | .195         | 4.95         | .125         | 3.18         | .150         | 3.81         |
| 51P    | 1.875  | 47.63 | 1.215        | 30.86        | .983   | 24.97 | .228   | 5.79 | .360   | 9.14  | 1.600        | 40.64        | .565   | 14.35 | .183         | 4.65         | .125         | 3.18         | .150         | 3.81         |
| 51S    | 1.875  | 47.63 | 1.215        | 30.86        | 1.051  | 26.70 | .296   | 7.52 | .360   | 9.14  | 1.600        | 40.64        | .565   | 14.35 | .195         | 4.95         | .125         | 3.18         | .150         | 3.81         |
| 100P   | 2.780  | 70.60 | 1.800        | 45.72        | 1.383  | 35.13 | .271   | 6.88 | .420   | 10.67 | 2.500        | 63.50        | .765   | 19.43 | .183         | 4.65         | .225         | 5.72         | .150         | 3.81         |
| 100S   | 2.780  | 70.60 | 1.800        | 45.72        | 1.451  | 36.86 | .333   | 8.64 | .420   | 10.67 | 2.500        | 63.50        | .765   | 19.43 | .195         | 4.95         | .225         | 5.72         | .150         | 3.81         |

# MIL-DTL-83513/16 Thru /21 Micro-D Connectors Right Angle PCB Connectors (BR)




## M83513/16 THRU /18 PCB LAYOUTS – PIN CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

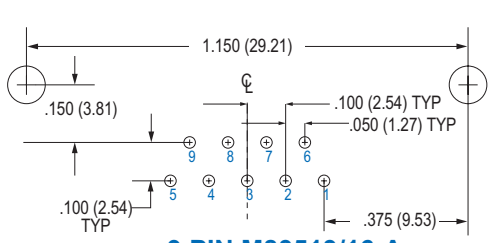


**9 PIN M83513/16-A**

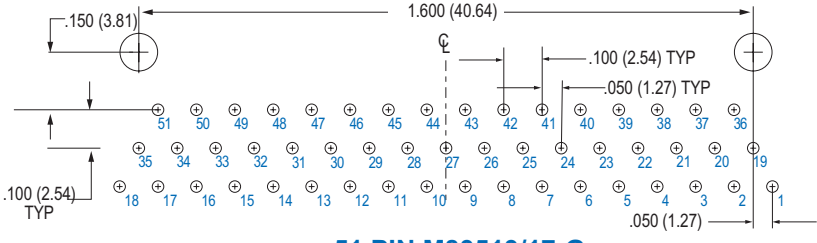


**51 PIN M83513/17-G**

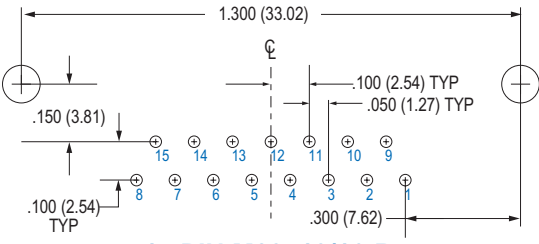


**15 PIN M83513/16-B**

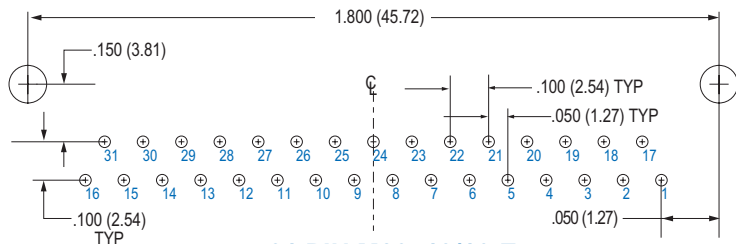


**31 PIN M83513/16-E**

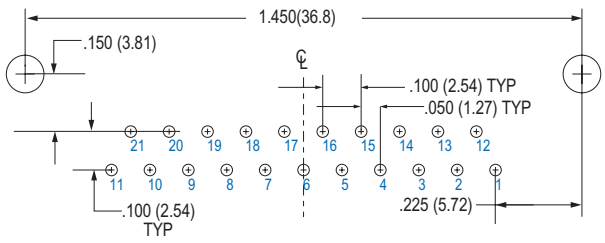


**21 PIN M83513/16-C**

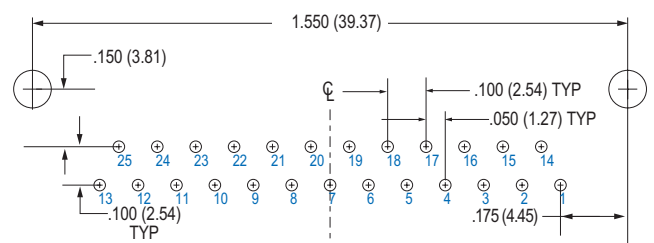

**25 PIN M83513/16-D**

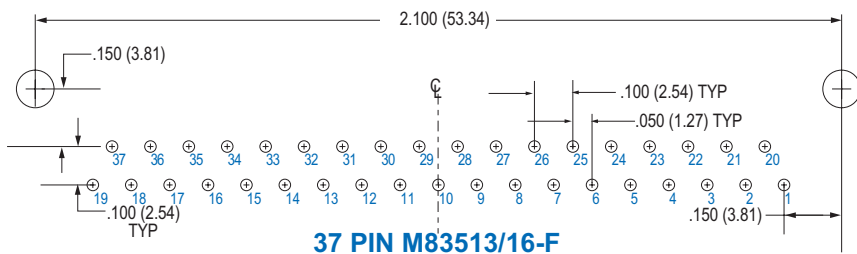

**37 PIN M83513/16-F**

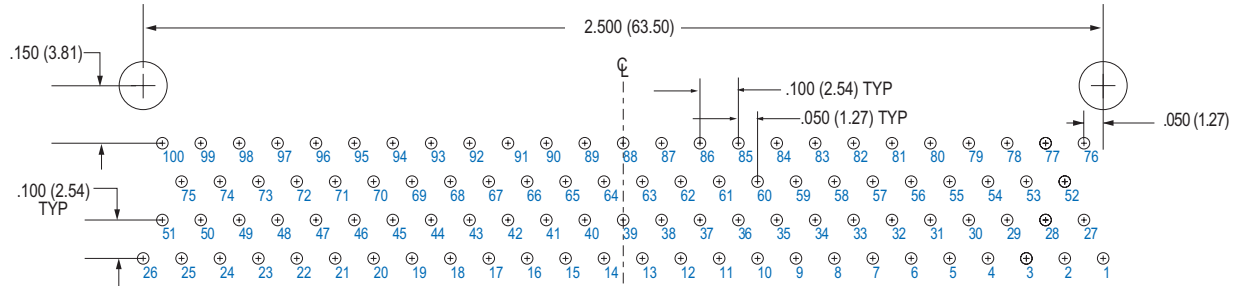


**100 PIN M83513/18-H**




## M83513/19 THRU /21 PCB LAYOUTS – SOCKET CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

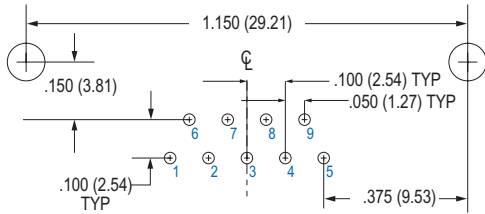


**9 SOCKET M83513/19-A**

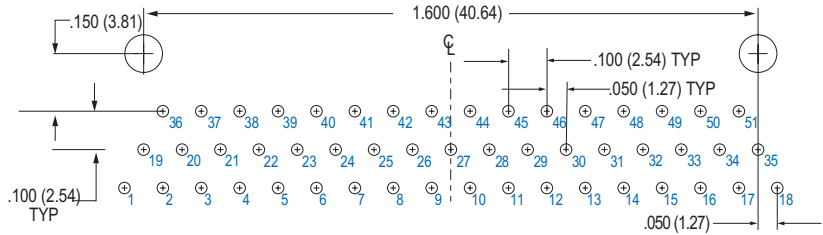


**51 SOCKET M83513/20-G**

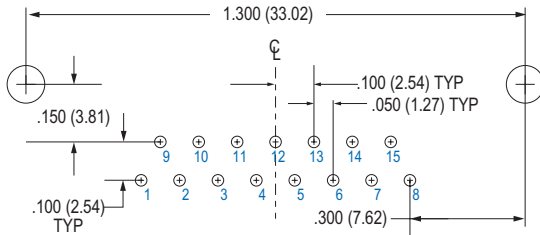


**15 SOCKET M83513/19-B**

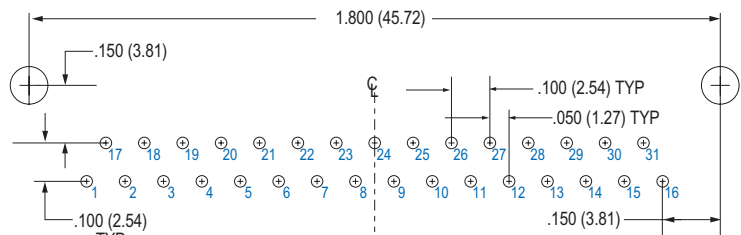


**31 SOCKET M83513/19-E**

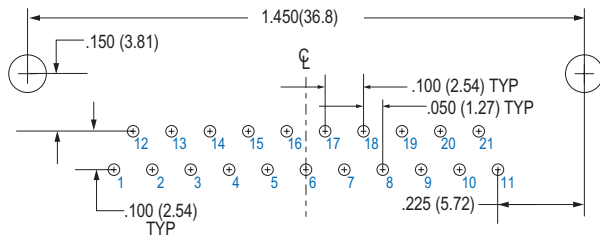


**21 SOCKET M83513/19-C**

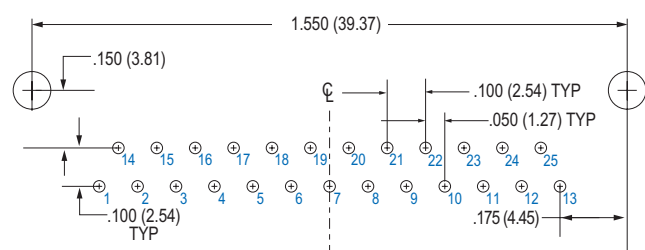

**25 SOCKET M83513/19-D**

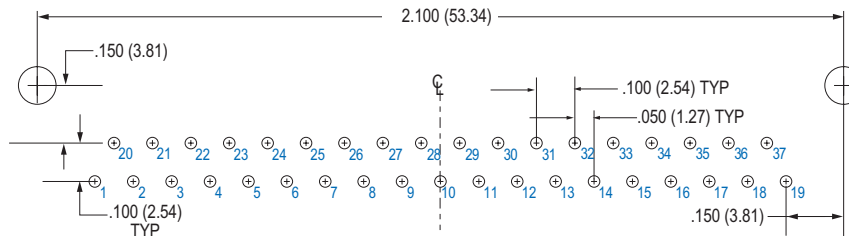


**37 SOCKET M83513/19-F**

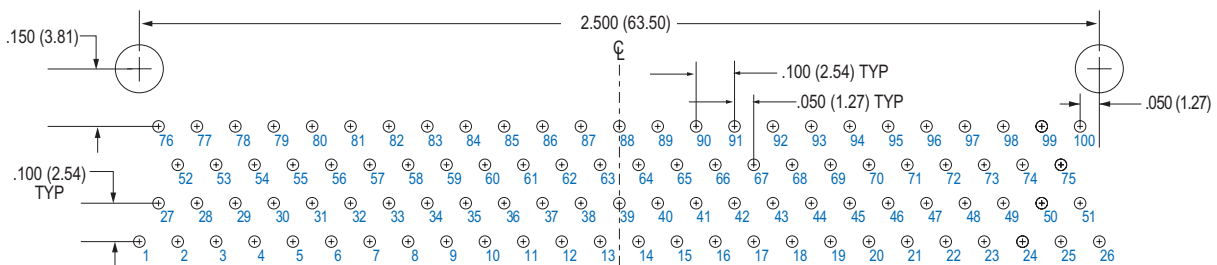

**100 SOCKET M83513/21-H**

# MIL-DTL-83513/22 Thru /27 Micro-D Connectors Straight PCB Connectors (BS)

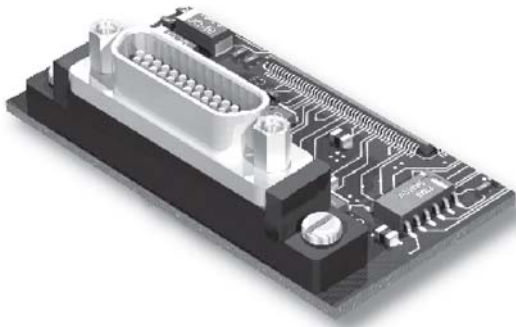


**High Performance** — These connectors feature goldplated TwistPin contacts for best performance. PC tails are .020 inch diameter. Specify nickel-plated shells or cadmium plated shells for best availability.

**Solder-Dipped** — Terminals are coated with SN63/Pb37 tin-lead solder for best solderability.

## HOW TO ORDER M83513/22 THRU /27 STRAIGHT PCB CONNECGTORS


| Spec Number                | Slash Number- Insert Arrangement    | PC Tail Length   | Shell Finish   | Hardware Option  |
|----------------------------|-------------------------------------|--|--|--|
| <b>M83513/</b>             | <b>Plug (Pin Contacts)</b>          | <b>01</b> - .109 Inch (2.77 mm)<br><b>02</b> - .140 Inch (3.56 mm)<br><b>03</b> - .172 Inch (4.37 mm)<br><br>PC Tail Length<br>± .015 (0.38) | <b>C</b> - Cadmium<br><b>N</b> - Electroless Nickel<br><b>P</b> - Passivated SST | <b>N</b> - No Jackpost<br><b>P</b> - Jackposts Installed<br><b>T</b> - Threaded Insert in Board Mount Hole (No Jackposts)<br><b>W</b> - Threaded Insert in Board Mount Hole and jackposts Installed<br><br>(See "Hardware Options" below for Illustrations)<br><br>Shell sizes A (9) through G (51) are #2-56 UNC-2 threads.<br><br>Shell size H (100) is #4-40 UNC-2 threads. |
|                            | <b>22-A</b> - 9 Contacts            |  |  |  |
|                            | <b>22-B</b> - 15 Contacts           |  |  |  |
|                            | <b>22-C</b> - 21 Contacts           |  |  |  |
|                            | <b>22-D</b> - 25 Contacts           |  |  |  |
|                            | <b>22-E</b> - 31 Contacts           |  |  |  |
|                            | <b>22-F</b> - 37 Contacts           |  |  |  |
|                            | <b>23-G</b> - 51 Contacts           |  |  |  |
|                            | <b>24-H</b> - 100 Contacts          |  |  |  |
|                            | <b>Receptacle (Socket Contacts)</b> |  |  |  |
|                            | <b>25-A</b> - 9 Contacts            |  |  |  |
|                            | <b>25-B</b> - 15 Contacts           |  |  |  |
|                            | <b>25-C</b> - 21 Contacts           |  |  |  |
|                            | <b>25-D</b> - 25 Contacts           |  |  |  |
|                            | <b>25-E</b> - 31 Contacts           |  |  |  |
|                            | <b>25-F</b> - 37 Contacts           |  |  |  |
| <b>26-G</b> - 51 Contacts  |                                     |  |  |  |
| <b>27-H</b> - 100 Contacts |                                     |  |  |  |
| <b>Sample Part Number</b>  |                                     |  |  |  |
| <b>M83513/</b>             | <b>26-G</b>                         | <b>03</b>  | <b>C</b>   | <b>W</b>   |

## HARDWARE OPTIONS

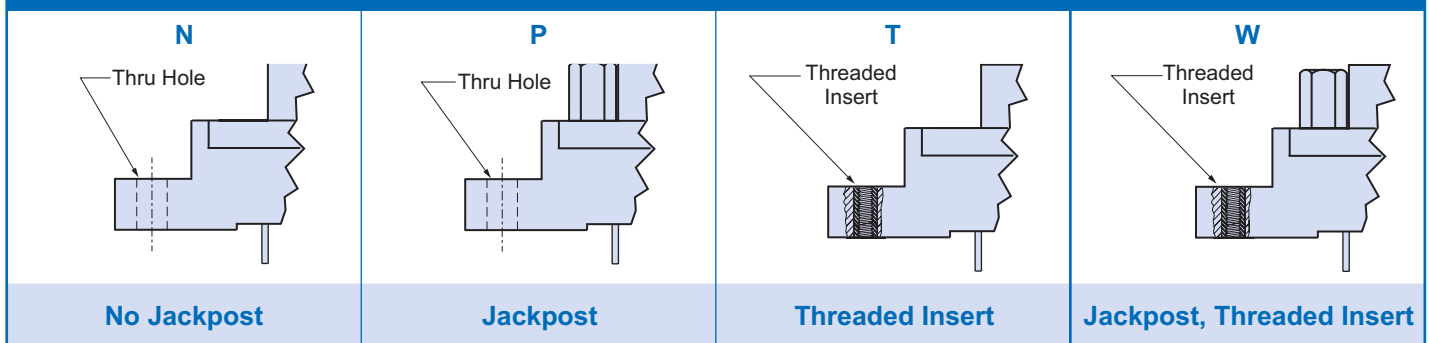




# MIL-DTL-83513/22 Thru /27 Micro-D Connectors Straight PCB Connectors (BS)

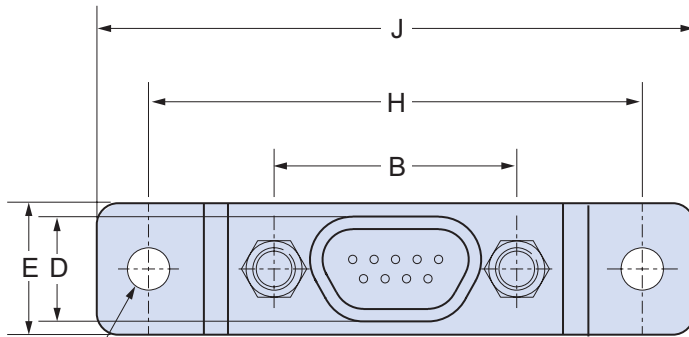


2 X PCB MTNG HOLES  
 9-51 CONTACTS  $.096 \pm .005$  ( $2.43 \pm 0.13$ )  
 100 CONTACTS  $.125 \pm .005$  ( $23.18 \pm 0.13$ )

THREAD SIZES  
 9-51 CONTACTS #2-56 UNC  
 100 CONTACTS #4-40 UNC

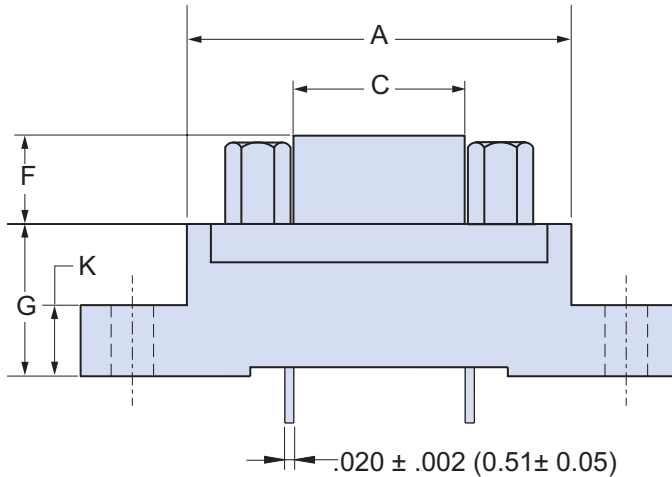

$.020 \pm .002$  ( $0.51 \pm 0.05$ )

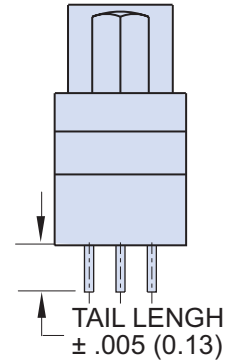

TAIL LENGTH  
 $\pm .005$  ( $0.13$ )

## DIMENSIONS


| Layout | A Max. |       | B                 |                   | C Max. |       | D Max. |      | E Max. |       | F                 |                   | G                 |                   | H                 |                   | J Max. |       | K                 |                   |
|--------|--------|-------|-------------------|-------------------|--------|-------|--------|------|--------|-------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|--------|-------|-------------------|-------------------|
|        | In.    | mm.   | In.<br>$\pm .003$ | mm.<br>$\pm .008$ | In.    | mm.   | In.    | mm.  | In.    | mm.   | In.<br>$\pm .004$ | mm.<br>$\pm .010$ | In.<br>$\pm .010$ | mm.<br>$\pm .025$ | In.<br>$\pm .007$ | mm.<br>$\pm .018$ | In.    | mm.   | In.<br>$\pm .010$ | mm.<br>$\pm .025$ |
| 9P     | .790   | 20.07 | .565              | 14.35             | .333   | 8.46  | .184   | 4.67 | .310   | 7.87  | .183              | 4.65              | .333              | 8.46              | 1.150             | 29.21             | 1.390  | 35.31 | .155              | 3.94              |
| 9S     | .790   | 20.07 | .565              | 14.35             | .400   | 10.16 | .250   | 6.35 | .310   | 7.87  | .195              | 4.95              | .333              | 8.46              | 1.150             | 29.21             | 1.390  | 35.31 | .155              | 3.94              |
| 15P    | .940   | 23.88 | .715              | 18.16             | .483   | 12.27 | .184   | 4.67 | .310   | 7.87  | .183              | 4.65              | .333              | 8.46              | 1.150             | 29.21             | 1.390  | 35.31 | .155              | 3.94              |
| 15S    | .940   | 23.88 | .715              | 18.16             | .551   | 14.00 | .250   | 6.35 | .310   | 7.87  | .195              | 4.95              | .333              | 8.46              | 1.150             | 29.21             | 1.390  | 35.31 | .155              | 3.94              |
| 21P    | 1.180  | 29.97 | .865              | 21.97             | .633   | 16.08 | .184   | 4.67 | .310   | 7.87  | .183              | 4.65              | .333              | 8.46              | 1.450             | 36.83             | 1.690  | 42.93 | .155              | 3.94              |
| 21S    | 1.180  | 29.97 | .865              | 21.97             | .701   | 17.81 | .250   | 6.35 | .310   | 7.87  | .195              | 4.95              | .333              | 8.46              | 1.450             | 36.83             | 1.690  | 42.93 | .155              | 3.94              |
| 25P    | 1.275  | 32.39 | .965              | 24.51             | .733   | 18.62 | .184   | 4.67 | .310   | 7.87  | .183              | 4.65              | .333              | 8.46              | 1.500             | 38.10             | 1.740  | 44.20 | .155              | 3.94              |
| 25S    | 1.275  | 32.39 | .965              | 24.51             | .801   | 20.35 | .250   | 6.35 | .310   | 7.87  | .195              | 4.95              | .333              | 8.46              | 1.500             | 38.10             | 1.740  | 44.20 | .155              | 3.94              |
| 31P    | 1.575  | 40.01 | 1.115             | 28.32             | .883   | 22.43 | .184   | 4.67 | .310   | 7.87  | .183              | 4.65              | .333              | 8.46              | 1.800             | 45.72             | 2.040  | 51.82 | .155              | 3.94              |
| 31S    | 1.575  | 40.01 | 1.115             | 28.32             | .951   | 24.16 | .250   | 6.35 | .310   | 7.87  | .195              | 4.95              | .333              | 8.46              | 1.800             | 45.72             | 2.040  | 51.82 | .155              | 3.94              |
| 37P    | 1.875  | 47.63 | 1.265             | 32.13             | 1.033  | 26.24 | .184   | 4.67 | .310   | 7.87  | .183              | 4.65              | .333              | 8.46              | 2.100             | 53.34             | 2.340  | 59.44 | .155              | 3.94              |
| 37S    | 1.875  | 47.63 | 1.265             | 32.13             | 1.101  | 27.96 | .250   | 6.35 | .310   | 7.87  | .195              | 4.95              | .333              | 8.46              | 2.100             | 53.34             | 2.340  | 59.44 | .155              | 3.94              |
| 51P    | 1.775  | 45.09 | 1.215             | 30.86             | .983   | 24.97 | .224   | 5.69 | .351   | 8.92  | .183              | 4.65              | .333              | 8.46              | 2.000             | 50.80             | 2.270  | 57.64 | .155              | 3.94              |
| 51S    | 1.775  | 45.09 | 1.215             | 30.86             | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195              | 4.95              | .333              | 8.46              | 2.000             | 50.80             | 2.270  | 57.64 | .155              | 3.94              |
| 100P   | 2.585  | 65.66 | 1.800             | 45.72             | 1.383  | 35.13 | .270   | 6.86 | .394   | 10.01 | .183              | 4.65              | .525              | 13.34             | 2.800             | 71.12             | 3.250  | 82.55 | .293              | 7.44              |
| 100S   | 2.585  | 65.66 | 1.800             | 45.72             | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195              | 4.95              | .525              | 13.34             | 2.800             | 71.12             | 3.250  | 82.55 | .293              | 7.44              |

# MIL-DTL-83513/22 Thru /27 Micro-D Connectors Straight PCB Connectors (BS)




## M83513/22 THRU /24 PCB LAYOUTS – PIN CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

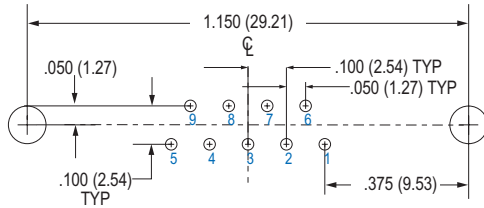


**9 PIN M83513/22-A**

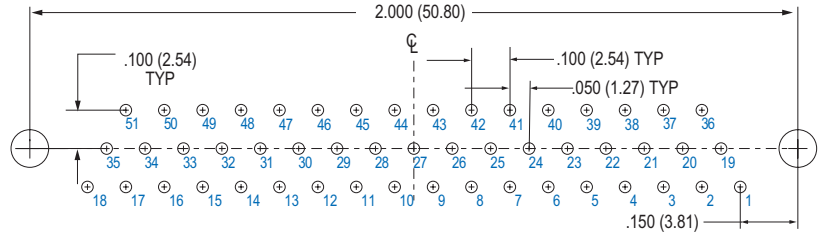


**51 PIN M83513/13-G**

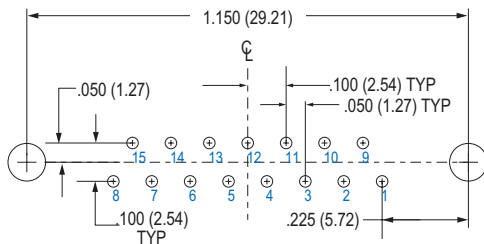


**15 PIN M83513/22-B**

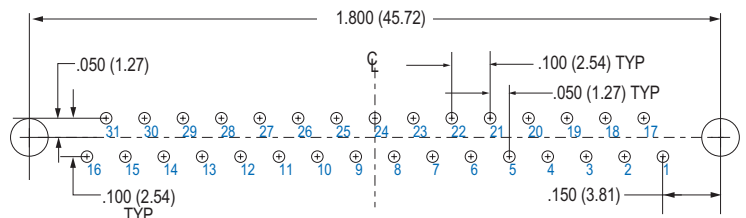

**31 PIN M83513/22-E**


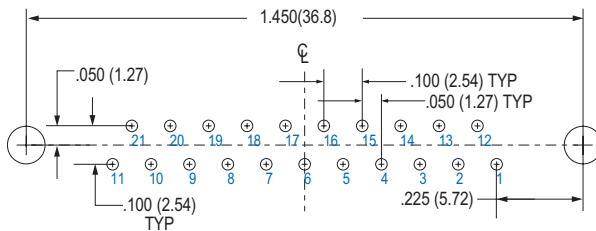


**21 PIN M83513/22-C**

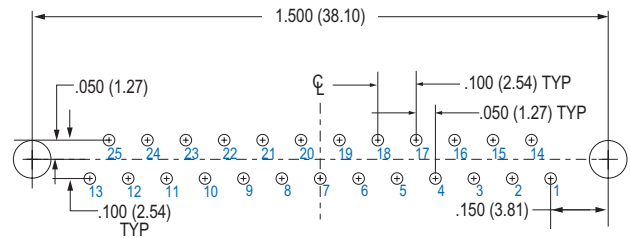


**25 PIN M83513/22-D**

### Connector Orientation

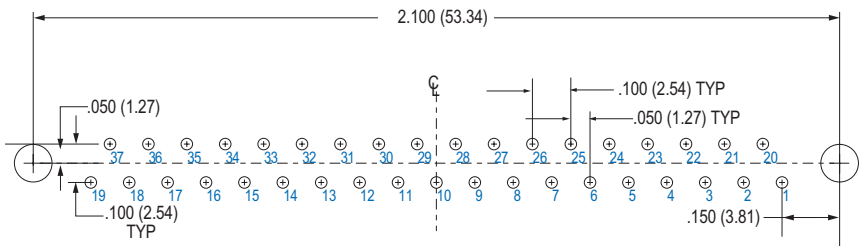


**37 PIN M83513/22-F**

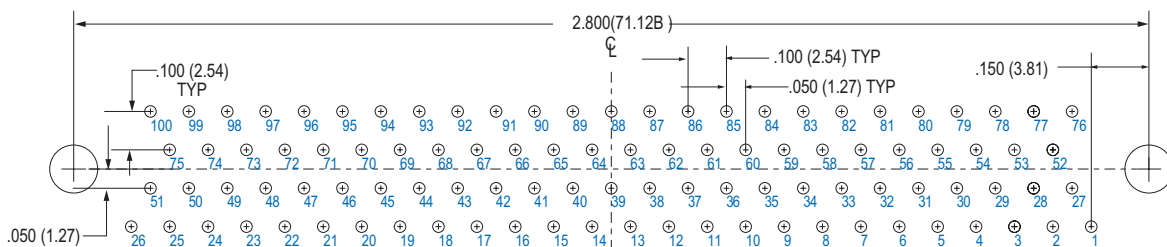


**100 PIN M83513/24-H**

## M83513/25 THRU /27 PCB LAYOUTS – SOCKET CONNECTORS


Patterns shown are for connector mounting side of PC board. 9 Thru 51 Contacts .096 (2.44) Diameter Mounting Holes, 100 Pin .125 (3.18) Diameter

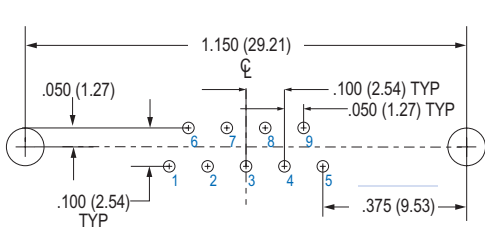


**9 SOCKET M83513/25-A**

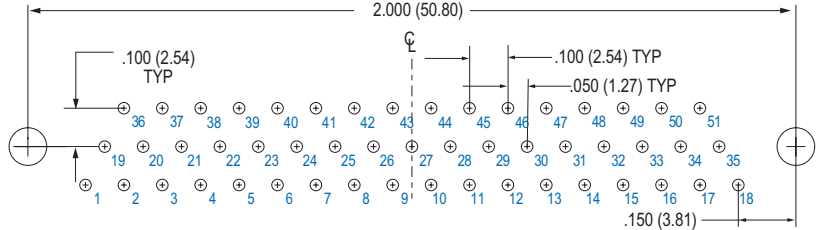


**51 SOCKET M83513/26-G**

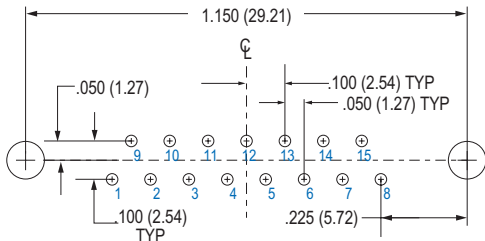


**15 SOCKET M83513/25-B**

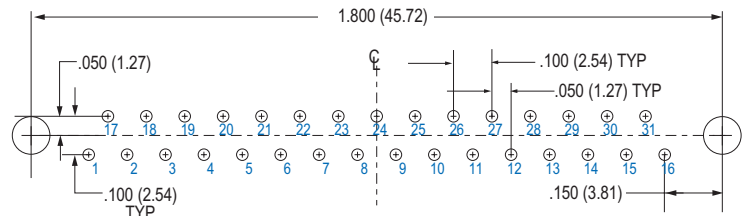

**31 SOCKET M83513/25-E**


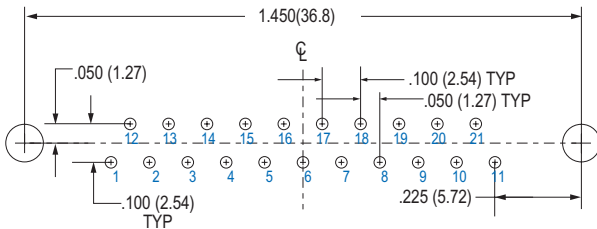


**21 SOCKET M83513/25-C**

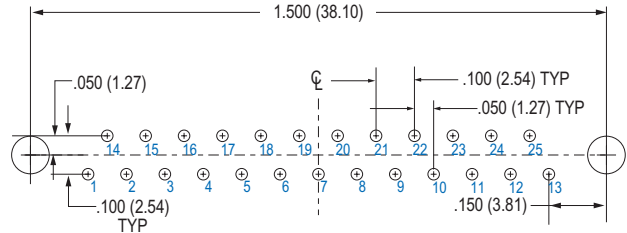


**25 SOCKET M83513/25-D**

**Connector Orientation**

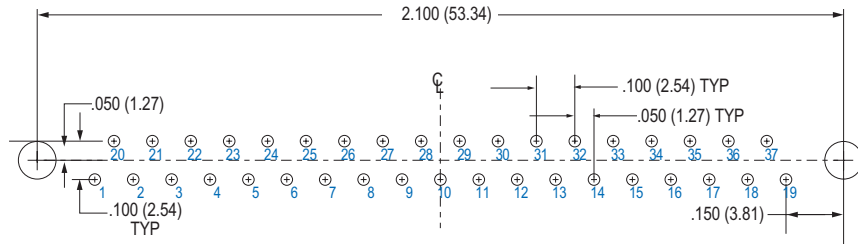

**37 SOCKET M83513/25-F**

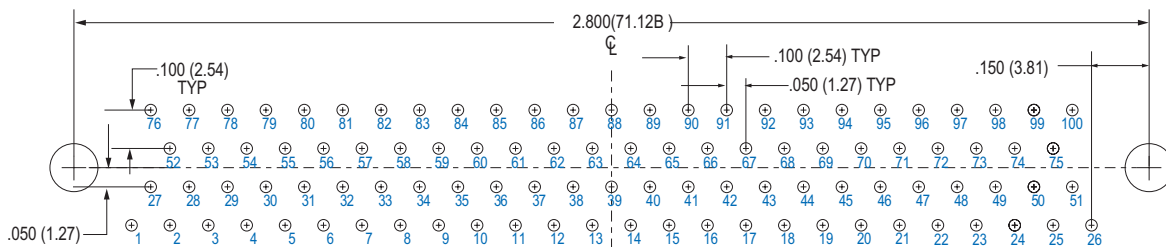

**100 SOCKET M83513/27-H**

# MIL-DTL-83513/28 Thru /33 Micro-D Connectors Straight PCB Connectors (CBS)



**Space-Saving** — These connectors take up less room on the PC board. PC tail spacing is .075 inch (1.9mm), compared to .100 inch (2.54mm.).

**Threaded Inserts** — Stainless steel inserts are insert molded into plastic trays. These inserts provide a ground path from the PC board to the mating cable.

**Solder-Dipped** — Terminals are coated with SN63/Pb37 tin-lead solder for best solderability.

## HOW TO ORDER M83513/22 THRU /27 STRAIGHT PCB CONNECGTORS

| Spec Number   | Slash Number- Shell Size            | PC Tail Length | Shell Finish   | Hardware Option  |  |           |          |          |
|---------------|-------------------------------------|----------------|--|--|--|-----------|----------|----------|
| <b>M83513</b> | <b>Plug (Pin Contacts)</b>          |                | <b>01</b> – .109 Inch (2.77 mm)<br><b>02</b> – .140 Inch (3.56 mm)<br><b>03</b> – .172 Inch (4.37 mm)<br><br>PC Tail Length<br>± .015 (0.38) | <b>C</b> – Cadmium<br><b>N</b> – Electroless Nickel<br><b>P</b> – Passivated SST | <b>N</b> – No Jackpost<br><b>P</b> – Jackposts Installed<br><b>T</b> – Threaded Insert in Board Mount Hole (No Jackposts)<br><b>W</b> – Threaded Insert in Board Mount Hole and jackposts Installed<br><br>(See "Hardware Options" below for Illustrations)<br><br>Shell sizes A (9) through G (51) are #2-56 UNC-2 threads.<br><br>Shell size H (100) is #4-40 UNC-2 threads. |           |          |          |
|               | <b>28-A</b> - 9 Contacts            |                |  |  |  |           |          |          |
|               | <b>28-B</b> - 15 Contacts           |                |  |  |  |           |          |          |
|               | <b>28-C</b> - 21 Contacts           |                |  |  |  |           |          |          |
|               | <b>28-D</b> - 25 Contacts           |                |  |  |  |           |          |          |
|               | <b>28-E</b> - 31 Contacts           |                |  |  |  |           |          |          |
|               | <b>28-F</b> - 37 Contacts           |                |  |  |  |           |          |          |
|               | <b>29-G</b> - 51 Contacts           |                |  |  |  |           |          |          |
|               | <b>30-H</b> - 100 Contacts          |                |  |  |  |           |          |          |
|               | <b>Receptacle (Socket Contacts)</b> |                |  |  |  |           |          |          |
|               | <b>31-A</b> - 9 Contacts            |                |  |  |  |           |          |          |
|               | <b>31-B</b> - 15 Contacts           |                |  |  |  |           |          |          |
|               | <b>31-C</b> - 21 Contacts           |                |  |  |  |           |          |          |
|               | <b>31-D</b> - 25 Contacts           |                |  |  |  |           |          |          |
|               | <b>31-E</b> - 31 Contacts           |                |  |  |  |           |          |          |
|               | <b>31-F</b> - 37 Contacts           |                |  |  |  |           |          |          |
|               | <b>32-G</b> - 51 Contacts           |                |  |  |  |           |          |          |
|               | <b>33-H</b> - 100 Contacts          |                |  |  |  |           |          |          |
|               | <b>Sample Part Number</b>           |                |  |  |  |           |          |          |
|               | <b>M83513/</b>                      | <b>33-H</b>    |  |  |  | <b>01</b> | <b>C</b> | <b>P</b> |




## HARDWARE OPTIONS

| N                  | P               | T                      | W                                |
|--------------------|-----------------|------------------------|----------------------------------|
|                    |                 |                        |                                  |
| <b>No Jackpost</b> | <b>Jackpost</b> | <b>Threaded Insert</b> | <b>Jackpost, Threaded Insert</b> |






# MIL-DTL-83513/28 Thru /33 Micro-D Connectors Straight PCB Connectors (CBS)

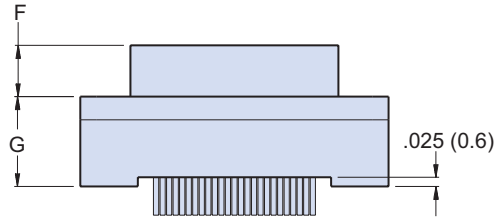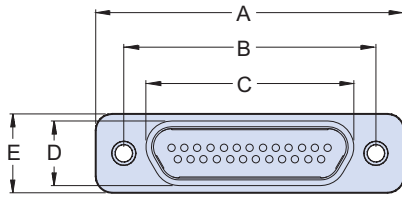

## M83513/28 THRU 33 HARDWARE OPTIONS

### HARDWARE OPTION N


NO JACKPOST, NO  
THREADED INSERT



**MTNG HOLE DIA.**  
9-51 CONTACTS  
.096/.088 (2.44/2.24)  
100 CONTACTS  
.128/.122 (3.25/3.10)

### HARDWARE OPTION T


THREADED INSERT, NO  
POST



**THREAD SIZE**  
9-51 CONTACTS # 2-56 UNC-2B  
100 CONTACTS # 4-40 UNC-2B

### HARDWARE OPTION P


JACKPOST AND THRU-HOLE



**THREAD SIZE**  
9-51 CONTACTS # 2-56 UNC  
100 CONTACTS # 4-40 UNC  
**USE WITH .156 (3.96) MAX. PC BOARD THICKNESS**

### HARDWARE OPTION W

JACKPOST AND THREADED  
INSERT




**THREAD SIZE**  
9-51 CONTACTS #2-56 UNC  
100 CONTACTS #4-40 UNC  
.160 (4.1) MIN. (9-51 PINS)  
.225 (5.7) MIN. (100 PIN)

## DIMENSIONS


| Layout | A Max. |       | B            |              | C Max. |       | D Max. |      | E Max. |       | F            |              | G Max. |       |
|--------|--------|-------|--------------|--------------|--------|-------|--------|------|--------|-------|--------------|--------------|--------|-------|
|        | In.    | mm.   | In.<br>±.005 | mm.<br>±0.13 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In.<br>±.003 | mm.<br>±0.08 | In.    | mm.   |
| 9P     | .785   | 19.94 | .565         | 14.35        | .333   | 8.46  | .185   | 4.70 | .310   | 7.87  | .183         | 4.65         | .355   | 9.02  |
| 9S     | .785   | 19.94 | .565         | 14.35        | .400   | 10.16 | .253   | 6.43 | .310   | 7.87  | .195         | 4.95         | .355   | 9.02  |
| 15P    | .935   | 23.75 | .715         | 18.16        | .483   | 12.27 | .185   | 4.70 | .310   | 7.87  | .183         | 4.65         | .355   | 9.02  |
| 15S    | .935   | 23.75 | .715         | 18.16        | .551   | 14.00 | .253   | 6.43 | .310   | 7.87  | .195         | 4.95         | .355   | 9.02  |
| 21P    | 1.085  | 27.56 | .865         | 21.97        | .633   | 16.08 | .185   | 4.70 | .310   | 7.87  | .183         | 4.65         | .355   | 9.02  |
| 21S    | 1.085  | 27.56 | .865         | 21.97        | .701   | 17.81 | .253   | 6.43 | .310   | 7.87  | .195         | 4.95         | .355   | 9.02  |
| 25P    | 1.185  | 30.01 | .965         | 24.51        | .733   | 18.62 | .185   | 4.70 | .310   | 7.87  | .183         | 4.65         | .355   | 9.02  |
| 25S    | 1.185  | 30.01 | .965         | 24.51        | .801   | 20.35 | .253   | 6.43 | .310   | 7.87  | .195         | 4.95         | .355   | 9.02  |
| 31P    | 1.335  | 33.91 | 1.115        | 28.32        | .883   | 22.43 | .185   | 4.70 | .310   | 7.87  | .183         | 4.65         | .355   | 9.02  |
| 31S    | 1.335  | 33.91 | 1.115        | 28.32        | .951   | 24.16 | .253   | 6.43 | .310   | 7.87  | .195         | 4.95         | .355   | 9.02  |
| 37P    | 1.485  | 37.72 | 1.265        | 32.13        | 1.033  | 26.24 | .185   | 4.70 | .310   | 7.87  | .183         | 4.65         | .355   | 9.02  |
| 37S    | 1.485  | 37.72 | 1.265        | 32.13        | 1.101  | 27.96 | .253   | 6.43 | .310   | 7.87  | .195         | 4.95         | .355   | 9.02  |
| 51P    | 1.435  | 36.45 | 1.215        | 30.86        | .983   | 24.97 | .228   | 5.79 | .400   | 10.16 | .183         | 4.65         | .355   | 9.02  |
| 51S    | 1.435  | 36.45 | 1.215        | 30.86        | 1.051  | 26.70 | .296   | 7.52 | .400   | 10.16 | .195         | 4.95         | .355   | 9.02  |
| 100P   | 2.170  | 55.12 | 1.800        | 45.72        | 1.383  | 35.13 | .271   | 6.88 | .510   | 12.95 | .183         | 4.65         | .430   | 10.92 |
| 100S   | 2.170  | 55.12 | 1.800        | 45.72        | 1.451  | 36.86 | .340   | 8.64 | .510   | 12.95 | .195         | 4.95         | .430   | 10.92 |

Patterns shown are for connector mounting side of PC board.

## M83513/28 THRU 30 PCB LAYOUTS – PIN CONNECTORS

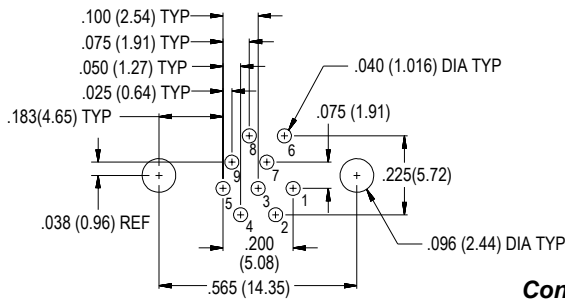


9 PIN M83513/28-A

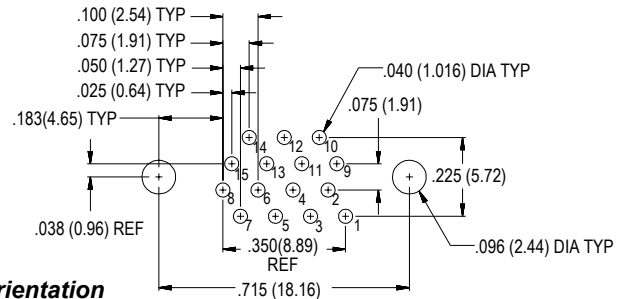


15 PIN M83513/28-B


Connector Orientation




Pin #1

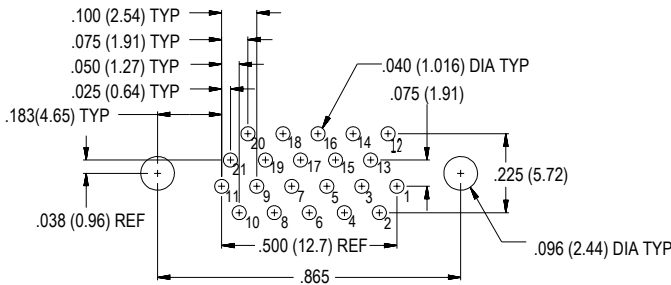


21 PIN M83513/28-C

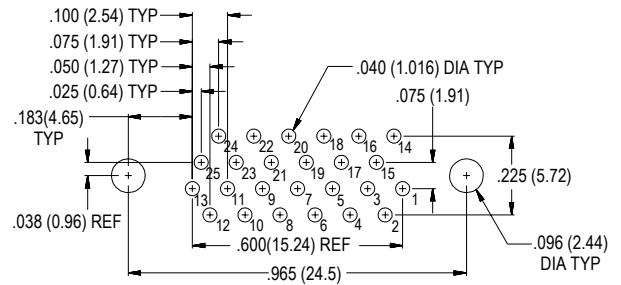


25 PIN M83513/28-D

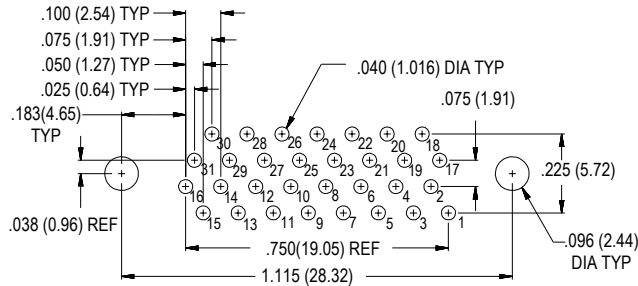


31 PIN M83513/28-E

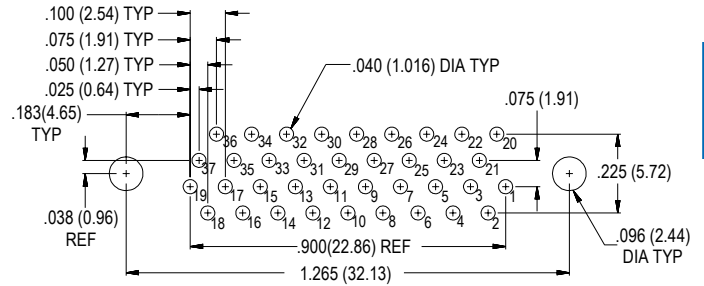

37 PIN M83513/28-F

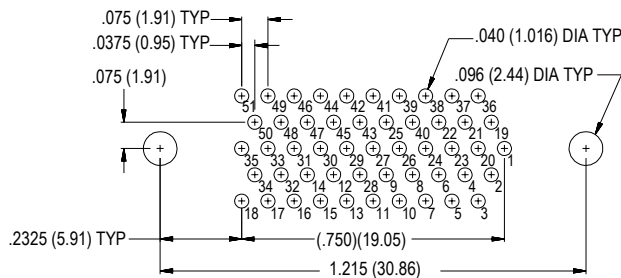


51 PIN M83513/29-G

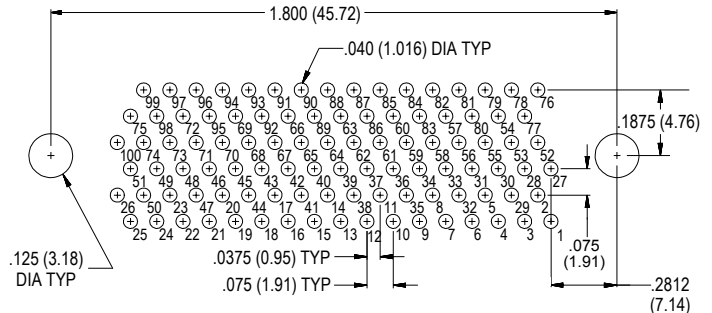


100 PIN M83513/30-H

Patterns shown are for connector mounting side of PC board.

## MM83513/31 THRU /33 PCB LAYOUTS – SOCKET CONNECTORS

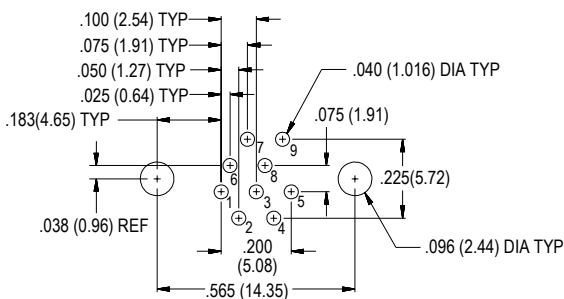


**9 Socket M83513/31-A**

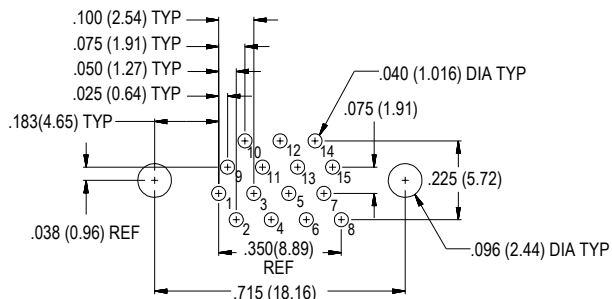


**15 Socket M83513/31-B**


**Connector Orientation**




Socket #1

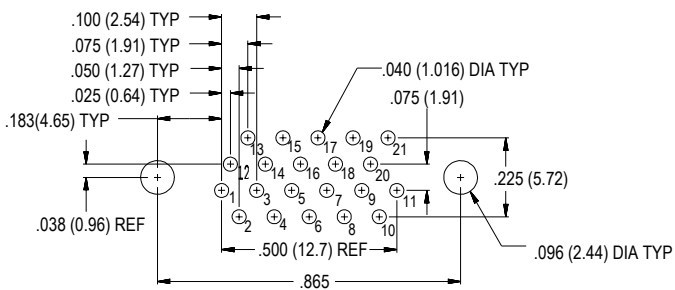


**21 Socket M83513/31-C**

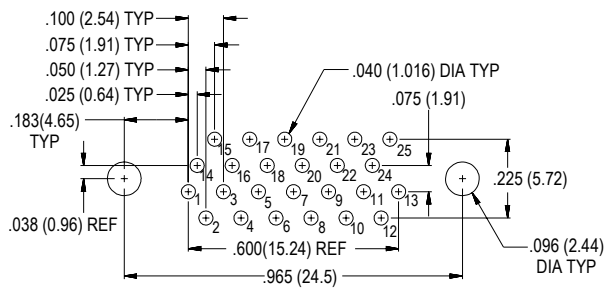


**25 Socket M83513/31-D**

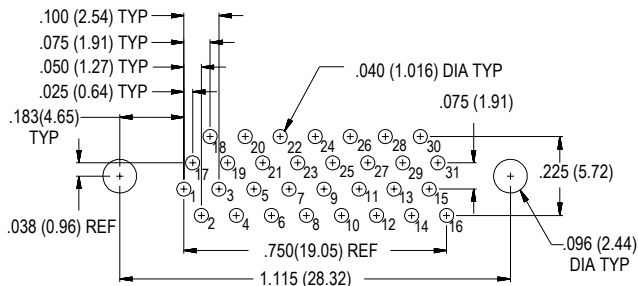


**31 Socket M83513/31-E**

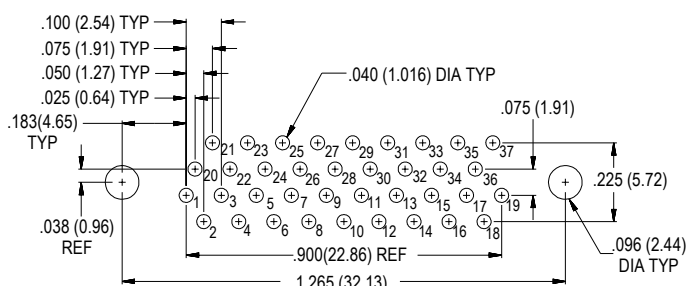

**37 Socket M83513/31-F**

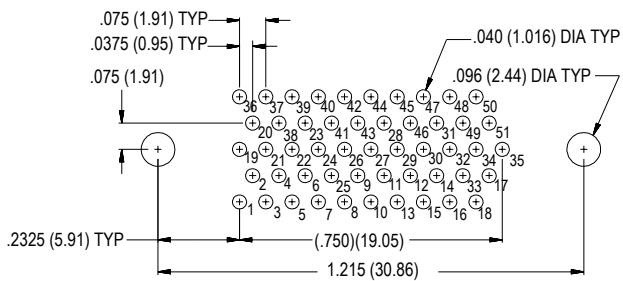

**51 Socket M83513/32-G**

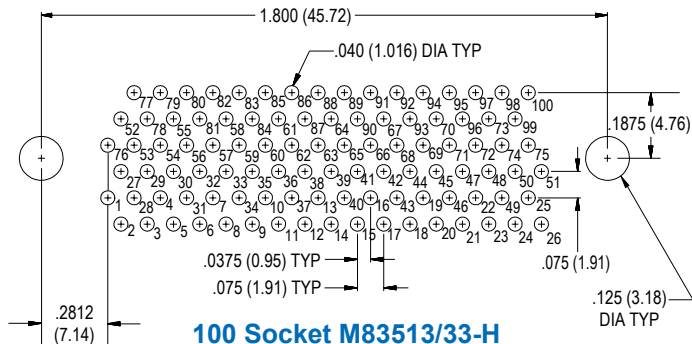

**100 Socket M83513/33-H**

PRODUCT SELECTION GUIDE

**MWD Series Plastic Micro-D With Solder Cups**

These connectors are available with nine through 51 contacts. Featuring the same TwistPin contact system as the MWDM metal shell connector, the MWD is smaller and more economical. MWD connectors do not have interfacial seals.



*MWD Solder Cup  
Page K-2*

**MWD Series Plastic Micro-D With Insulated Wire**


These crimp-terminated pre-wired assemblies offer an alternative to the time-consuming job of soldering wires. Connectors are available with general purpose Teflon® wire or with aerospace rated Tefzel® wire. MWD series connectors are not compatible with MWDM metal shell connectors.



*MWD Pigtails  
Page K-4*

**MWD Series Plastic Micro-D With Uninsulated Wire**

Plastic Micro-D's with single strand copper wire can be used for attachment to flexible circuits or for installation on printed circuit boards. Terminals are gold plated or SnPb 63/37 solder-dipped.



*MWD with Solid  
Leads  
Page K-6*

K



**MWD Plastic** – These connectors feature gold plated TwistPin contacts and mil spec crimp termination. High temperature liquid crystal polymer (LCP) housings are 30% glass-filled.

**Solder Cup Contacts** – Choose standard size contacts for #26 gage, or select oversize contacts for #24 AWG solid or stranded wire.

**MWD Low-Profile Plastic Micro-D's** do not have an interfacial seal, and are smaller and lighter weight than metal shell versions.

## HOW TO ORDER MWD PLASTIC SHELL PRE-WIRED MICRO-D CONNECTORS

| Series  | Contact Layout | Contact Type  | Termination    | Hardware |
|---|----------------|---|----------------|----------|
| <b>MWDL</b><br>MWD Series<br>("L" designates LCP thermoplastic housing) | 9              | Size #26 Solder Cup<br>Contacts (Standard)<br>P – Pin<br>S – Socket | S – Solder Cup | B        |
|   | 15             |   |                | P        |
|   | 21             | S   |                | M        |
|   | 25             | Size #24 Solder Cup<br>Contacts<br>N – Pin<br>T – Socket            |                | M1       |
|   | 31             |   |                | S        |
|   | 37             |   |                | S1       |
|   | 51             |   |                |          |
| <b>Sample Part Number</b>   |                |   |                |          |
| MWDL  | – 25           | S   | S              | B        |

## MICRO-D MOUNTING HARDWARE

| B   | P   | M   | M1  | S  | S1   |
|---|---|---|---|--|--|
|   |   |   |   |  |  |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable<br>Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head<br>Removable<br>E-ring | <b>Jackscrew</b><br>Hex Head<br>Removable<br>E-ring<br>Extended | <b>Jackscrew</b><br>Slot Head<br>Removable<br>E-ring | <b>Jackscrew</b><br>Slot Head<br>Removable<br>E-ring<br>Extended |

# MWD Series Micro-D Plastic Shell Solder Cup







## PERFORMANCE SPECIFICATIONS

|                       |                               |
|-----------------------|-------------------------------|
| Current Rating        | 3 AMP                         |
| DWV                   | 600 VAC Sea level             |
| Insulation Resistance | 5000 Megohms Minimum          |
| Contact Resistance    | 8 Milliohms Maximum           |
| Operating Temperature | -55° C. to +150° C.           |
| Shock, Vibration      | 50 g., 20g.                   |
| Mating Force          | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                  |   |
|------------------|---|
| Connector Shell  | Liquid Crystal Polymer (LCP)              |
| Insulator        | Liquid Crystal Polymer (LCP)              |
| Interfacial Seal | Flourosilicone Rubber, Blue               |
| Pin Contact      | Beryllium Copper Gold over Nickel Plating |
| Socket Contact   | Copper Alloy Gold Over Nickel Plating     |
| Hardware         | 300 Series Stainless Steel                |
| Encapsulant      | Epoxy Resin Hysol EE4215                  |

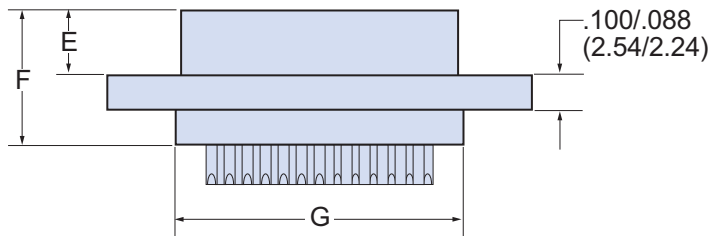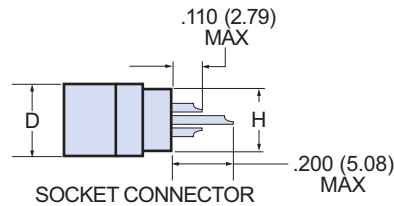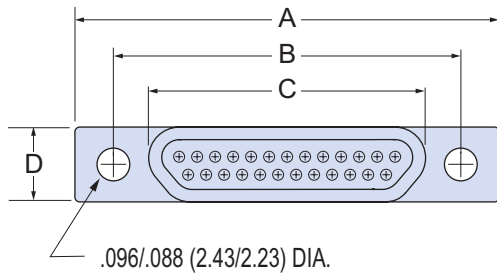

## DIMENSIONS

| Layout | A Max. |       | B         |           | C Max. |       | D Max. |      | E Max. |      | F Max. |       | G Max. |       | H Max. |      | J Max. |      |
|--------|--------|-------|-----------|-----------|--------|-------|--------|------|--------|------|--------|-------|--------|-------|--------|------|--------|------|
|        | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.    | mm.   | In.    | mm.   | In.    | mm.  | In.    | mm.  |
| 9P     | .785   | 19.94 | .565      | 14.35     | .292   | 7.42  | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .408   | 10.36 | .173   | 4.39 | .139   | 3.53 |
| 9S     | .785   | 19.94 | .565      | 14.35     | .380   | 9.65  | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .408   | 10.36 | .173   | 4.39 |        |      |
| 15P    | .935   | 23.75 | .715      | 18.16     | .442   | 11.23 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .558   | 14.17 | .173   | 4.39 | .139   | 3.53 |
| 15S    | .935   | 23.75 | .715      | 18.16     | .530   | 13.46 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .558   | 14.17 | .173   | 4.39 |        |      |
| 21P    | 1.080  | 27.43 | .865      | 21.97     | .592   | 15.04 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .708   | 17.98 | .173   | 4.39 | .139   | 3.53 |
| 21S    | 1.080  | 27.43 | .865      | 21.97     | .680   | 17.27 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .708   | 17.98 | .173   | 4.39 |        |      |
| 25P    | 1.185  | 30.01 | .965      | 24.51     | .692   | 17.58 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .808   | 20.52 | .173   | 4.39 | .139   | 3.53 |
| 25S    | 1.185  | 30.01 | .965      | 24.51     | .780   | 19.81 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .808   | 20.52 | .173   | 4.39 |        |      |
| 31P    | 1.335  | 33.91 | 1.115     | 28.32     | .842   | 21.39 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .958   | 24.33 | .173   | 4.39 | .139   | 3.53 |
| 31S    | 1.335  | 33.91 | 1.115     | 28.32     | .930   | 23.62 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .958   | 24.33 | .173   | 4.39 |        |      |
| 37P    | 1.485  | 37.72 | 1.265     | 32.13     | .992   | 25.20 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | 1.108  | 28.14 | .173   | 4.39 | .139   | 3.53 |
| 37S    | 1.485  | 37.72 | 1.265     | 32.13     | 1.080  | 27.43 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | 1.108  | 28.14 | .173   | 4.39 |        |      |
| 51P    | 1.435  | 36.45 | 1.215     | 30.86     | .942   | 23.93 | .260   | 6.60 | .202   | 5.13 | .395   | 10.03 | 1.058  | 26.87 | .220   | 5.59 | .182   | 4.62 |
| 51S    | 1.435  | 36.45 | 1.215     | 30.86     | 1.030  | 26.16 | .260   | 6.60 | .185   | 4.70 | .375   | 9.53  | 1.058  | 26.87 | .220   | 5.59 |        |      |



## Micro-D Plastic Shell Pre-Wired Pigtails, Insulated Wire



**Micro-D Pre-Wired Pigtails** – These connectors feature gold plated TwistPin contacts and mil spec crimp termination. High temperature liquid crystal polymer (LCP) housings are 30% glass-filled.

**Choose the Wire Type and Size To Fit Your Application** – If on-hand availability is most important, choose #26 AWG Type K mil spec Teflon® wire.

**MWD Low-Profile Plastic Micro-D's** are non-environmental and are smaller and lighter weight than metal shell versions.

### HOW TO ORDER MWD PLASTIC SHELL PRE-WIRED MICRO-D CONNECTORS

| Series  | Contact Layout | Contact Type      | Wire Gage (AWG)  | Wire Type                                      | Wire Color  | Wire Length Inches   | Hardware   |                                |
|---|----------------|-------------------|--|--|---|--|--|--------------------------------|
| <b>MWDL</b><br>MWD Series<br>("L" designates LCP thermoplastic housing) | <b>9</b>       | <b>P</b> – Pin    | <b>4</b> – #24   | <b>K</b> – M22759/11<br>600 Vrms Teflon® (TFE) | <b>1</b> – White  | <b>18</b><br>Wire Length In Inches.<br>"18" Specifies 18 Inches. | <b>B</b><br><b>P</b><br><b>M</b><br><b>M1</b><br><b>S</b><br><b>S1</b> |                                |
|   | <b>15</b>      | <b>S</b> – Socket | <b>6</b> – #26   |  | <b>J</b> – M22759/33<br>600 Vrms Modified Cross-Linked Tefzel® (ETFE) |  |  | <b>2</b> – Yellow              |
|   | <b>21</b>      |                   | <b>8</b> – #28   | <b>5</b> – Color-Coded Stripes Per MIL-STD-681 |   |  |  |                                |
|   | <b>25</b>      |                   | <b>0</b> – #30   |  |   |  |  | <b>7</b> – Ten Color Repeating |
|   | <b>31</b>      |                   | <b>E</b> – NEMA HP3-EB<br>600 Vrms Type E M16878/4 (TFE) (replaced by M22759/11 for mil spec applications) |  |   |  |  |                                |
|   | <b>37</b>      |                   |  |  |   |  |  |                                |
| <b>51</b>   |                |                   |  |  |   |  |  |                                |

#### Sample Part Number

**K**

|      |      |   |     |   |   |      |   |
|------|------|---|-----|---|---|------|---|
| MWDL | - 25 | S | - 4 | K | 7 | - 18 | B |
|------|------|---|-----|---|---|------|---|

### MICRO-D MOUNTING HARDWARE

| B   | P   | M   | M1  | S  | S1   |
|---|---|---|---|--|--|
|   |   |   |   |  |  |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable<br>Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head<br>Removable<br>E-ring | <b>Jackscrew</b><br>Hex Head<br>Removable<br>E-ring<br>Extended | <b>Jackscrew</b><br>Slot Head<br>Removable<br>E-ring | <b>Jackscrew</b><br>Slot Head<br>Removable<br>E-ring<br>Extended |

# Micro-D Plastic Shell Pre-Wired Pigtails, Insulated Wire






## PERFORMANCE SPECIFICATIONS

|                       |                               |
|-----------------------|-------------------------------|
| Current Rating        | 3 AMP                         |
| DWV                   | 600 VAC Sea level             |
| Insulation Resistance | 5000 Megohms Minimum          |
| Contact Resistance    | 8 Milliohms Maximum           |
| Operating Temperature | -55° C. to +150° C.           |
| Shock, Vibration      | 50 g., 20g.                   |
| Mating Force          | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                   |   |
|-------------------|---|
| Connector Housing | Liquid Crystal Polymer (LCP)              |
| Interfacial Seal  | Flourosilicone Rubber, Blue               |
| Pin Contact       | Beryllium Copper Gold over Nickel Plating |
| Socket Contact    | Copper Alloy Gold Over Nickel Plating     |
| Hardware          | 300 Series Stainless Steel                |
| Encapsulant       | Epoxy Resin Hysol EE4215                  |

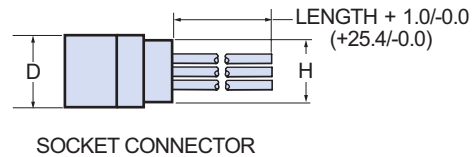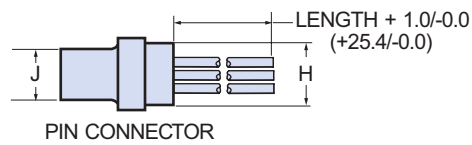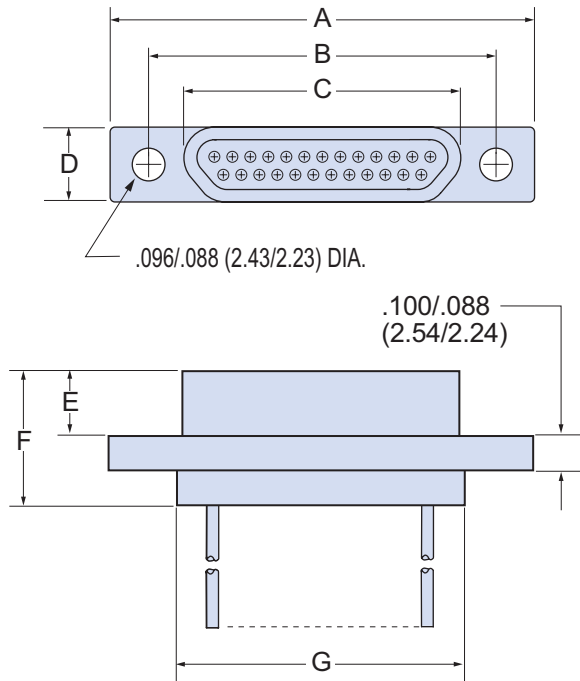


## DIMENSIONS

| Layout | A Max. |       | B         |           | C Max. |       | D Max. |      | E Max. |      | F Max. |       | G Max. |       | H Max. |      | J Max. |      |
|--------|--------|-------|-----------|-----------|--------|-------|--------|------|--------|------|--------|-------|--------|-------|--------|------|--------|------|
|        | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.    | mm.   | In.    | mm.   | In.    | mm.  | In.    | mm.  |
| 9P     | .785   | 19.94 | .565      | 14.35     | .292   | 7.42  | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .408   | 10.36 | .173   | 4.39 | .139   | 3.53 |
| 9S     | .785   | 19.94 | .565      | 14.35     | .380   | 9.65  | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .408   | 10.36 | .173   | 4.39 |        |      |
| 15P    | .935   | 23.75 | .715      | 18.16     | .442   | 11.23 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .558   | 14.17 | .173   | 4.39 | .139   | 3.53 |
| 15S    | .935   | 23.75 | .715      | 18.16     | .530   | 13.46 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .558   | 14.17 | .173   | 4.39 |        |      |
| 21P    | 1.080  | 27.43 | .865      | 21.97     | .592   | 15.04 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .708   | 17.98 | .173   | 4.39 | .139   | 3.53 |
| 21S    | 1.080  | 27.43 | .865      | 21.97     | .680   | 17.27 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .708   | 17.98 | .173   | 4.39 |        |      |
| 25P    | 1.185  | 30.01 | .965      | 24.51     | .692   | 17.58 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .808   | 20.52 | .173   | 4.39 | .139   | 3.53 |
| 25S    | 1.185  | 30.01 | .965      | 24.51     | .780   | 19.81 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .808   | 20.52 | .173   | 4.39 |        |      |
| 31P    | 1.335  | 33.91 | 1.115     | 28.32     | .842   | 21.39 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .958   | 24.33 | .173   | 4.39 | .139   | 3.53 |
| 31S    | 1.335  | 33.91 | 1.115     | 28.32     | .930   | 23.62 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .958   | 24.33 | .173   | 4.39 |        |      |
| 37P    | 1.485  | 37.72 | 1.265     | 32.13     | .992   | 25.20 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | 1.108  | 28.14 | .173   | 4.39 | .139   | 3.53 |
| 37S    | 1.485  | 37.72 | 1.265     | 32.13     | 1.080  | 27.43 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | 1.108  | 28.14 | .173   | 4.39 |        |      |
| 51P    | 1.435  | 36.45 | 1.215     | 30.86     | .942   | 23.93 | .260   | 6.60 | .202   | 5.13 | .395   | 10.03 | 1.058  | 26.87 | .220   | 5.59 | .182   | 4.62 |
| 51S    | 1.435  | 36.45 | 1.215     | 30.86     | 1.030  | 26.16 | .260   | 6.60 | .185   | 4.70 | .375   | 9.53  | 1.058  | 26.87 | .220   | 5.59 |        |      |



# Micro-D Plastic Shell Uninsulated Wire Pigtails

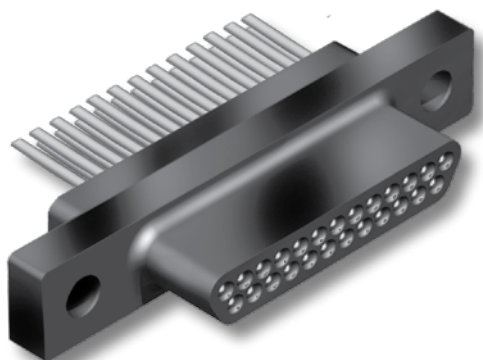

**Solder-Dipped or Gold Plated Wire** – These connectors feature TwistPin contacts and mil spec crimp termination to solid copper wire. High temperature liquid crystal polymer (LCP) housings are 30% glass-filled.

**Choose Gold Plated or Solder Dipped Wire** in #24 AWG (.020 inch diameter), #25 AWG (.018 inch diameter) or #26 AWG (.016 inch diameter).

**MWD Plastic Micro-D's** are non-environmental and are smaller and lighter weight than metal shell versions.

## HOW TO ORDER MWD PLASTIC UNINSULATED WIRE PIGTAILS

| Series  | Contact Layout | Contact Type          | Wire Gage (AWG) | Wire Type                 | Wire Finish   | Wire Length Inches | Hardware |
|---|----------------|-----------------------|-----------------|---------------------------|---|--------------------|----------|
| <b>MWDL</b><br>MWD Series<br>("L" designates LCP thermoplastic housing) | 9              | P – Pin<br>S – Socket | 4 – #24         | C<br>Single Strand Copper | 3<br>Solder Dipped (63/37 SnPb)<br>4<br>Gold-Plated | .125               | B        |
|   | 15             |                       | .250            |                           |   | P                  |          |
|   | 21             |                       | .375            |                           |   | M                  |          |
|   | 25             |                       | .500            |                           |   | M1                 |          |
|   | 31             |                       | .750            |                           |   | S                  |          |
|   | 37             |                       | 1.000           |                           |   | S1                 |          |
|   | 51             |                       | 2.000           |                           |   |                    |          |
| Wire Length In Inches. ".500" Specifies Half Inch.                      |                |                       |                 |                           |   |                    |          |
| Sample Part Number  |                |                       |                 |                           |   |                    |          |
| MWDL  | - 31           | P                     | - 5             | C                         | 4   | - .250             | B        |

## K

### MICRO-D MOUNTING HARDWARE

| B   | P   | M   | M1  | S  | S1   |
|---|---|---|---|--|--|
|   |   |   |   |  |  |
| <b>Thru-Hole</b><br>Order Hardware Separately | <b>Jackpost</b><br>Removable<br>Includes Nut and Washer | <b>Jackscrew</b><br>Hex Head<br>Removable<br>E-ring | <b>Jackscrew</b><br>Hex Head<br>Removable<br>E-ring<br>Extended | <b>Jackscrew</b><br>Slot Head<br>Removable<br>E-ring | <b>Jackscrew</b><br>Slot Head<br>Removable<br>E-ring<br>Extended |

# Micro-D Plastic Shell Uninsulated Wire Pigtails





## PERFORMANCE SPECIFICATIONS


|                       |                               |
|-----------------------|-------------------------------|
| Current Rating        | 3 AMP                         |
| DWV                   | 600 VAC Sea level             |
| Insulation Resistance | 5000 Megohms Minimum          |
| Contact Resistance    | 8 Milliohms Maximum           |
| Operating Temperature | -55° C. to +150° C.           |
| Shock, Vibration      | 50 g., 20g.                   |
| Mating Force          | (10 Ounces) X (# of Contacts) |

## MATERIALS AND FINISHES

|                   |   |
|-------------------|---|
| Connector Housing | Liquid Crystal Polymer (LCP)              |
| Interfacial Seal  | Flourosilicone Rubber, Blue               |
| Pin Contact       | Beryllium Copper Gold over Nickel Plating |
| Socket Contact    | Copper Alloy Gold Over Nickel Plating     |
| Hardware          | 300 Series Stainless Steel                |
| Encapsulant       | Epoxy Resin Hysol EE4215                  |

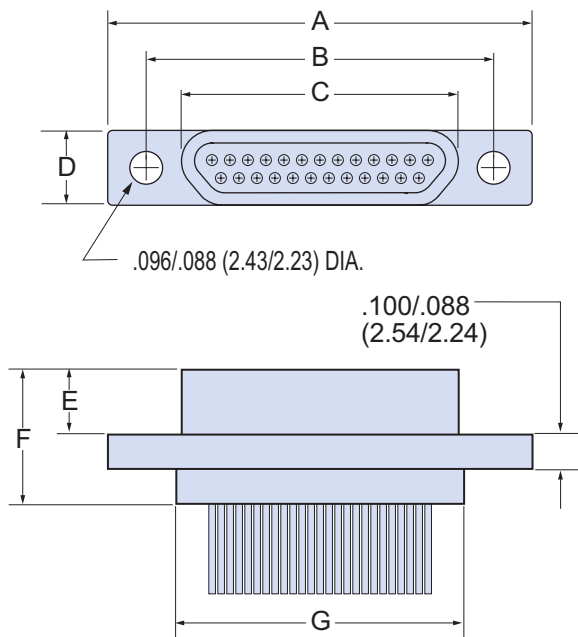

SOCKET CONNECTOR



PIN CONNECTOR

## MICRO-D PLASTIC SHELL UNINSULATED WIRE PIGTAIL DIMENSIONS

| Layout | A Max. |       | B         |           | C Max. |       | D Max. |      | E Max. |      | F Max. |       | G Max. |       | H Max. |      | J Max. |      |
|--------|--------|-------|-----------|-----------|--------|-------|--------|------|--------|------|--------|-------|--------|-------|--------|------|--------|------|
|        | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.  | In.    | mm.   | In.    | mm.   | In.    | mm.  | In.    | mm.  |
| 9P     | .785   | 19.94 | .565      | 14.35     | .292   | 7.42  | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .408   | 10.36 | .173   | 4.39 | .139   | 3.53 |
| 9S     | .785   | 19.94 | .565      | 14.35     | .380   | 9.65  | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .408   | 10.36 | .173   | 4.39 |        |      |
| 15P    | .935   | 23.75 | .715      | 18.16     | .442   | 11.23 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .558   | 14.17 | .173   | 4.39 | .139   | 3.53 |
| 15S    | .935   | 23.75 | .715      | 18.16     | .530   | 13.46 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .558   | 14.17 | .173   | 4.39 |        |      |
| 21P    | 1.080  | 27.43 | .865      | 21.97     | .592   | 15.04 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .708   | 17.98 | .173   | 4.39 | .139   | 3.53 |
| 21S    | 1.080  | 27.43 | .865      | 21.97     | .680   | 17.27 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .708   | 17.98 | .173   | 4.39 |        |      |
| 25P    | 1.185  | 30.01 | .965      | 24.51     | .692   | 17.58 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .808   | 20.52 | .173   | 4.39 | .139   | 3.53 |
| 25S    | 1.185  | 30.01 | .965      | 24.51     | .780   | 19.81 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .808   | 20.52 | .173   | 4.39 |        |      |
| 31P    | 1.335  | 33.91 | 1.115     | 28.32     | .842   | 21.39 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | .958   | 24.33 | .173   | 4.39 | .139   | 3.53 |
| 31S    | 1.335  | 33.91 | 1.115     | 28.32     | .930   | 23.62 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | .958   | 24.33 | .173   | 4.39 |        |      |
| 37P    | 1.485  | 37.72 | 1.265     | 32.13     | .992   | 25.20 | .218   | 5.54 | .202   | 5.13 | .395   | 10.03 | 1.108  | 28.14 | .173   | 4.39 | .139   | 3.53 |
| 37S    | 1.485  | 37.72 | 1.265     | 32.13     | 1.080  | 27.43 | .218   | 5.54 | .185   | 4.70 | .375   | 9.53  | 1.108  | 28.14 | .173   | 4.39 |        |      |
| 51P    | 1.435  | 36.45 | 1.215     | 30.86     | .942   | 23.93 | .260   | 6.60 | .202   | 5.13 | .395   | 10.03 | 1.058  | 26.87 | .220   | 5.59 | .182   | 4.62 |
| 51S    | 1.435  | 36.45 | 1.215     | 30.86     | 1.030  | 26.16 | .260   | 6.60 | .185   | 4.70 | .375   | 9.53  | 1.058  | 26.87 | .220   | 5.59 |        |      |

# It's Cold, It's Wet, It's Out in the Middle of Nowhere



## The Perfect Place for Glenair Composite Junction Boxes and Accessories

**F**or many applications, junction boxes and accessories made from aluminum or stainless steel are satisfactory. But for situations where additional weight savings and corrosion resistance are required, most design engineers are now specifying composite thermoplastic materials. And as you'll see throughout the next

section of this catalog, Glenair has built a comprehensive composite box solution. So whether your housing a fiber optic interconnection in a jet fighter or a communication system on an aircraft carrier you can count on Glenair for the best box designs the industry has to offer—in EMI/RFI hardened composite thermoplastic.



Conductive & nonconductive  
conduit fittings



Lightweight  
cable junction boxes



Ruggedized multichannel  
fiber optic connectors



A full selection of cable  
strain relief configurations



Fiber optic connector  
backshells with strain relief



Hybrid fiber optic/electric  
connectors and accessories



1211 Air Way  
Glendale, California 91201-2497  
Telephone: 818-247-6000 · Facsimilie: 818-500-9912 · EMail: [sales@glenair.com](mailto:sales@glenair.com)

United States · United Kingdom · Germany · Nordic · France · Italy · Spain  
[www.glenair.com](http://www.glenair.com)

## PRODUCT SELECTION GUIDE

### 500-010 EMI Backshells With Circular Cable Entry

Always in stock, these one piece aluminum backshells are our most popular Micro-D backshells. Terminate cable shields with BAND-IT® stainless steel straps. Finish the cable with heat-shrink tubing or boots, sold separately. Stocked in top, side and 45° entries. Accepts standard and micro shield bands.



**500T010**  
Page L-6



**500S010**  
Page L-6



**500E010**  
Page L-6

### Elliptical Entry EMI Micro-D Backshells for Larger Wire Bundles

If your wire bundle exceeds the diameter of the circular entry backshells, then the answer is an elliptical entry backshell. See the table on page L-5 for more information on wire bundle sizes. Choose one piece or split elliptical shells.



**One Piece Top Entry**  
500-047  
Page L-12



**One Piece Top, Side and 45°**  
507-175  
Page L-19



**Split Top Entry, with Screwlocks**  
507-178  
Page L-21

### Composite EMI Micro-D Backshells

These nickel-plated thermoplastic backshells offer weight savings compared to aluminum versions.



**Composite**  
507-088  
Page L-14

### EMI Micro-D Backshells With Braid Attached

These backshells are terminated to tinned copper braid.



**Shield Sock**  
500-011  
Page L-8

### Split EMI Micro-D Backshell With Circular Entry and Screwlocks

This backshell features screwlocks, allowing the connectors to be fully mated before the hardware is fastened.



**Split Screwlock**  
507-145  
Page L-17

### EMI Dual Entry Micro-D Backshells

These backshells allow 2 cables to be secured with bands.



**45°**  
500D010  
Page L-6



**Top Entry**  
507-142  
Page L-16

### Strain Relief Backshells (not for EMI)

These backshells are used for wire or cable strain relief. Three styles are provided.



**Bar Clamp**  
507-198  
Page L-23



**Bar Clamp**  
507-146  
Page L-18



**Tie Wrap**  
500-012  
Page L-10

### Potting Shell

Potting shells are attached to the connector and filled with epoxy or similar encapsulants to provide environmental protection and strain relief.



**Potting Shell**  
507-035  
Page L-13

### Switching Shell

Switching shells are used to house connector wiring on the back of the connector.



**Switching Shell**  
500-016  
Page L-11



# Micro-D Backshells General Information and Product Selection Guide

## MICRO-D BACKSHELL SELECTION GUIDE

| Part Number | Backshell Type |                                    |                         |               |                 |                |                        |                      |                 |                  | Cable Entry     |                     |                     | Hardware                          |                     |                             | Other                        |                             |                              | Page Number |                                |                                      |
|-------------|----------------|------------------------------------|-------------------------|---------------|-----------------|----------------|------------------------|----------------------|-----------------|------------------|-----------------|---------------------|---------------------|-----------------------------------|---------------------|-----------------------------|------------------------------|-----------------------------|------------------------------|-------------|--------------------------------|--------------------------------------|
|             | EMI backshell  | Available in Lightweight Composite | Strain Relief Backshell | Potting Shell | Switching Shell | Circular Shell | Elliptical Cable Entry | Straight Cable Entry | 45° Cable Entry | Side Cable Entry | Slot Head Entry | Hex Head Jackscrews | Extended Jackscrews | Screw Locks Instead of Jackscrews | One Piece Backshell | Split (Two Piece) Backshell | Accepts Standard Shield Band | Connector Micro Shield Band | Connector Attaches with Clip |             | Connector Attaches with E-Ring | Connector is Captivated by Backshell |
| 500-010     | ●              |                                    |                         |               |                 | ●              |                        | ●                    | ●               | ●                | ●               | (1)                 |                     | ●                                 |                     | ●                           | ●                            |                             |                              |             |                                | L-6                                  |
| 500-011     | ●              |                                    |                         |               |                 | ●              |                        | ●                    | ●               | ●                | ●               | (1)                 |                     | ●                                 |                     | ●                           | ●                            |                             |                              |             |                                | L-8                                  |
| 500-012     |                | ●                                  |                         |               |                 | ●              |                        | ●                    | ●               | ●                | ●               | (1)                 |                     | ●                                 |                     | ●                           | ●                            |                             |                              |             |                                | L-10                                 |
| 500-016     |                |                                    | ●                       |               |                 |                |                        |                      |                 |                  |                 |                     |                     | ●                                 |                     | ●                           | ●                            |                             |                              |             |                                | L-11                                 |
| 500-047     | ●              |                                    |                         |               |                 | ●              | ●                      |                      |                 | ●                | ●               | ●                   |                     | ●                                 |                     | ●                           | ●                            |                             |                              |             |                                | L-12                                 |
| 507-035     |                |                                    | ●                       |               |                 |                |                        |                      |                 | ●                | ●               | ●                   |                     | ●                                 |                     | ●                           | ●                            |                             |                              |             |                                | L-13                                 |
| 507-088     | ●              | ●                                  |                         |               |                 | ●              |                        | ●                    | ●               | ●                | ●               | (1)                 |                     | ●                                 |                     | ●                           | ●                            |                             |                              |             |                                | L-14                                 |
| 507-145     | ●              |                                    |                         |               |                 | ●              |                        | ●                    |                 |                  |                 |                     | ●                   | ●                                 |                     | ●                           | ●                            |                             | ●                            |             |                                | L-17                                 |
| 507-146     |                | ●                                  |                         |               |                 |                |                        |                      |                 | ●                | ●               | ●                   |                     | ●                                 |                     | ●                           | (2)                          | (2)                         |                              |             |                                | L-18                                 |
| 507-175     | ●              |                                    |                         |               |                 | ●              | ●                      | ●                    | (3)             | ●                | ●               | ●                   |                     | ●                                 |                     | ●                           | ●                            |                             |                              |             |                                | L-19                                 |
| 507-178     | ●              |                                    |                         |               |                 | ●              | ●                      |                      |                 |                  |                 |                     | ●                   | ●                                 |                     | ●                           | ●                            |                             | ●                            |             |                                | L-21                                 |
| 507-198     |                | ●                                  |                         |               |                 |                |                        | ●                    |                 | ●                | ●               | ●                   |                     | ●                                 |                     | ●                           | ●                            |                             |                              |             |                                | L-23                                 |

- (1) Extended jackscrew will not work with 45° cable entry or with dual 45° entry backshells.
- (2) Sizes 9 thru 69 use e-rings or c-clips for connector attachment, 100 pin uses c-clip only.
- (3) The cable entry is on the long side of shell. See ordering information for clarification.

## GLENAIR QWIK CONNECTIONS

|   | 500-010 | 500-011 | 500-012 | 500-016 | 500-047 | 507-035 | 507-088 | 507-145 | 507-146 | 507-175 | 507-178 | 507-198 |
|---|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Same Day Stock*                                 | A       | C       | A       | C       | A       | A       | C       | B       | A       | D       | D       | D       |
| Lightest Weight                                 |         |         |         |         |         |         | ●       |         |         |         |         |         |
| Accepts Standard Width Shield Band              | ●       |         |         |         | ●       |         |         |         |         |         |         |         |
| Meets NASA Outgassing                           | ●       | ●       | ●       | ●       | ●       | ●       | ●       | ●       | ●       | ●       | ●       |         |
| Low Residual Magnetism                          |         |         |         |         |         |         | ●       |         |         |         | ●       |         |
| Oversize Elliptical Cable Entry                 |         |         |         |         | ●       |         |         |         | ●       | ●       |         |         |
| Split Backshell With Screwlocks for Fast Mating |         |         |         |         |         |         | ●       |         |         |         | ●       |         |

\*Availability: **A** — All sizes in stock. **B** — Most sizes in stock. **C** — A few sizes in stock. **D** — Not Stocked.

### ABOUT MICRO-D BACKSHELLS

Micro-D EMI backshells connect cable shields to Micro-D connectors, providing strain relief and mechanical protection. These backshells are made out of aluminum alloy. Electroless nickel is the most widely used finish. These backshells are compatible with industry- standard metal shell M83513 type connectors. The following application notes explain how to select the right type of backshell.


#### EMI Versus Non-EMI Backshells

Select EMI backshells if your cable has a braided copper shield. The cable shield is secured to the backshell with a **BAND-IT®** strap, supplied with the backshell or purchased separately.



Select a strain relief backshell if your connector has individual wires or if your wire bundle does not have a metal shield.

EMI backshells do not normally require additional strain relief. Micro-D wires are typically potted, and the shield braid is a sufficient strain relief. An optional ty-wrap leg is available if necessary. Add "S" to the end of the part number.

**Band Platform  
For EMI Shield**





**Qwik-Ty Option**  
Add "S" to Part  
Number



**Strain Relief  
Clamp**

#### Standard Band Versus Micro Band

Most Micro-D EMI backshells feature low profile band platforms designed for narrow (.125" width) micro band. Some have a taller band platform which also accepts standard bands (.250" width). Please refer to the "Backshell Selection Guide" on the preceding page to identify which backshells are compatible with both the standard band and the micro band.



#### One Piece Backshell Versus Split Backshell

Use one piece backshells if in stock availability is important. Split backshells allow installation after the other end of the cable has been terminated. Some split backshells fit over the connector, eliminating the highly magnetic clip. Split versions also can accommodate screw locks.


#### Jackscrews and Screwlocks

Jackscrews are fixed in position and must be turned in order to mate the connectors together. Screwlocks float and allow the connectors to be coupled before the screwlocks are engaged. Screwlocks allow faster mating, while jackscrews offer less risk of contact damage.

#### Elliptical Versus Circular Cable Entry

Choose elliptical backshells if the wire bundle diameter is too big to fit in a circular cable entry. Large Micro-D connectors (51 pins and up) usually exceed the limits of the round entries. Refer to the cable entry and wire bundle tables in this section to find out if an elliptical entry is necessary.

The actual size illustrations to the right show the difference between round and elliptical cable entries. The round entry circular mil area =  $\pi(\frac{1}{2}D)^2 = .11 \text{ In.}^2$ . The formula for the area of an ellipse is  $\pi(\text{Length})(\text{Width}) \div 4 = .36 \text{ In.}^2$



**Round Cable Entry**

100 Pin .375 Inch (9.5 mm.) Diameter



**Elliptical Cable Entry**

100 Pin .360 By 1.29 Inch (9.1 X 32.8 mm.)

## BAND-IT<sup>®</sup> SHIELD TERMINATION SYSTEM

### Fast, Cost-Effective Shield Termination

Attach cable braid shields to EMI backshells with **BAND-IT<sup>®</sup>** stainless steel straps. The **BAND-IT<sup>®</sup>** system offers fast termination and the flexibility to handle different diameters with the same band.

The aerospace industry has adopted this system for every type of application where reliability and durability are essential.

### IMPORTANT NOTE: ALWAYS DOUBLE-WRAP BANDS!

Contact Glenair or visit our website ([glenair.com](http://glenair.com)) to view our complete line of **BAND-IT<sup>®</sup>** products, including pneumatic tools for high production and calibration kits.

### Micro Band Tool

Part Number **600-061**  
1.18 lbs.  
6.75 Inches (172mm.) Length



### Standard Length Micro Band

8.125 Inches (206 mm.)  
Part Number **600-057**  
**600-057-1** Pre-Coiled  
Up to .88 Inches (22 mm.) Diameter

### Extended Length Micro Band

14.25 Inches (362 mm.)  
Part Number **600-083**  
**600-083-1** Pre-Coiled  
Up to 1.88 Inches (47 mm) Diameter



### Step One Cable Prep

Lay individual shields over the band platform. Pull overall braid shield over the band platform so that all braid strands will be captured by the band.



### Step Two Install Band

Wrap the band through the buckle twice. Insert the free end into the banding tool in the direction shown on the tool. Squeeze the short grey handle to insert the band. Slide the band onto the cable. Close the black handle repeatedly until the handle no longer opens. Close the long grey handle until the tool cuts the band. Remove the excess strap from the tool by closing the small grey handle.



### Step Three Trim Braid

It's a snap! Just trim the excess braid and you're done.

# Micro-D Backshells General Information and Reference Data



## ROUND CABLE ENTRY DIAMETER AND WIRE BUNDLE SIZE

Micro-D backshells have a cable entry code in the part number. This code determines the inside diameter of the wire opening.

### CABLE ENTRY CODES

| Code | Inside Diameter |
|------|-----------------|
| 04   | .125            |
| 05   | .156            |
| 06   | .188            |
| 07   | .219            |
| 08   | .250            |
| 09   | .281            |
| 10   | .312            |
| 11   | .344            |
| 12   | .375            |

### Round Cable Entry Backshells May Not Be Large Enough to Accomodate Standard Micro-D Wire Bundles

Backshells with round cable entry might not have enough room for the connector wires. Refer to the table below to find out if the wire bundle exceeds the available backshell cable entry size. These are general guidelines. Twisted wires, tubing or other factors can increase the bundle diameter.

Elliptical backshells are recommended for large bundles.



Round Cable Entry



Elliptical Cable Entry

$$\text{Area} = \pi(\text{Length})(\text{Width}) \div 4$$

## STANDARD MICRO-D WIRE BUNDLE DIAMETERS

| No. of Wires | M22759/11 Wire Bundle Diameter |                   |         |                   |         |                   | M22759/33 Wire Bundle Diameter |                   |         |                   |         |                   |
|--------------|--------------------------------|-------------------|---------|-------------------|---------|-------------------|--------------------------------|-------------------|---------|-------------------|---------|-------------------|
|              | #24 AWG                        | Entry Code        | #26 AWG | Entry Code        | #28 AWG | Entry Code        | #24 AWG                        | Entry Code        | #26 AWG | Entry Code        | #28 AWG | Entry Code        |
| 9            | .155                           | 06                | .138    | 07                | .121    | 05                | .135                           | 05                | .117    | 05                | .100    | 04                |
| 15           | .200                           | 07                | .178    | 07                | .156    | 06                | .174                           | 06                | .151    | 06                | .129    | 05                |
| 21           | .237                           | 08                | .211    | 08                | .184    | 07                | .206                           | 07                | .179    | 07                | .153    | 06                |
| 25           | .259                           | 09                | .230    | 09                | .201    | 07                | .224                           | 08                | .196    | 07                | .167    | 06                |
| 31           | .288                           | 10                | .256    | 09                | .224    | 08                | .250                           | 09                | .218    | 08                | .186    | 07                |
| 37           | .315                           | 11 <sup>(1)</sup> | .280    | 10 <sup>(1)</sup> | .245    | 08                | .273                           | 09                | .238    | 08                | .203    | 07                |
| 51           | .370                           | — <sup>(2)</sup>  | .329    | 11 <sup>(1)</sup> | .287    | 10                | .320                           | 11 <sup>(1)</sup> | .279    | 09                | .238    | 08                |
| 67           | .424                           | — <sup>(2)</sup>  | .377    | — <sup>(2)</sup>  | .329    | 11 <sup>(1)</sup> | .367                           | 12 <sup>(1)</sup> | .320    | 11 <sup>(1)</sup> | .273    | 09                |
| 69           | .430                           | — <sup>(2)</sup>  | .382    | — <sup>(2)</sup>  | .334    | 11 <sup>(1)</sup> | .373                           | — <sup>(2)</sup>  | .325    | 11 <sup>(1)</sup> | .277    | 10                |
| 100          | .518                           | — <sup>(2)</sup>  | .460    | — <sup>(2)</sup>  | .403    | — <sup>(2)</sup>  | .441                           | — <sup>(2)</sup>  | .384    | — <sup>(2)</sup>  | .328    | 11 <sup>(1)</sup> |

(1) Wire bundle diameter exceeds the largest cable entry for top and 45° entry. Side entry is OK.

(2) Wire bundle exceeds maximum cable entry. Use elliptical versions.

## FINISH OPTIONS

| Finish Code | Description   | Specification                    | Corresponding Connector Finish Code |
|-------------|---|----------------------------------|-------------------------------------|
| C           | Black Anodize   | MIL-A-8625 Type II Class 2       | Code 4                              |
| E           | Chem Film   | MIL-C-5541 Class 3               | Code 6                              |
| J           | Cadmium Plate Over Electroless Nickel with Yellow Chromate Conversion Coating | SAE-AMS-QQ-P-416 Type II Class 3 | Code 1                              |
| M           | Electroless Nickel  | SAE-AMS-26074 Class 3            | Code 2                              |
| NF          | Olive Drab Cadmium Plate Over Electroless Nickel (1000 Hour Corrosion Rated)  | SAE-AMS-QQ-P-416                 | NF (Special order)                  |
| XM          | Electroless Nickel (Composite Only)   | SAE-AMS-26074 Class 3            | Code 2                              |
| Z2          | Gold Plated   | ASTM B488                        | Code 5                              |

## MATERIALS

|                                |  |
|--------------------------------|--|
| Shell, Saddle Clamps           | Aluminum Alloy 6061 -T6 Per QQ-A-200, QQ-A-225 (Machined Components)<br>Aluminum Alloy 6061-T6 Per QQ-A-591 (A380) (Die-Cast Components) |
| Clips, E-Rings                 | 17-7PH Stainless Steel   |
| Jackscrews, Washers, Jackposts | 300 Series Stainless Steel, Passivated   |





# Micro-D Backshells

## EMI, Banding, Round Cable Entry, One Piece 500-010











*Glenair's Most Popular Micro-D Backshell* is stocked in all sizes. Choose straight, side or 45° cable entry.

*Rugged One-Piece Aluminum shell* with stainless steel hardware, available in standard nickel plating, or choose optional finishes.

*17-7PH Stainless Steel Clips* attach the backshell to the connector. These backshells accept standard and micro **BAND-IT®** shield termination straps.

### HOW TO ORDER 500-010 EMI BACKSHELLS


| Series   | Shell Finish  | Connector Size   | Hardware Option  | Cable Entry Code   | EMI Band Strap Option  |  |                       |                       |                        |                      |
|--|---|--|--|--|--|--|-----------------------|-----------------------|------------------------|----------------------|
| <b>Top Entry</b><br><b>500T010</b><br> | <b>E</b> – Chem Film (Alodyne)<br><b>J</b> – Cadmium, Yellow Chromate<br><b>M</b> – Electroless Nickel<br><b>NF</b> – Cadmium, Olive Drab<br><b>Z2</b> – Gold | <b>09</b><br><b>15</b><br><b>21</b><br><b>25</b><br><b>31</b><br><b>37</b><br><b>51</b><br><b>51-2</b><br><b>67</b><br><b>69</b><br><b>100</b> | <b>B</b> – Fillister Head Jackscrew<br><br><b>H</b> – Hex Head Jackscrew<br><br><b>E</b> – Extended Jackscrew<br>(Not for 45° Entry)<br><br><b>F</b> – Jackpost, Female<br> | <b>04</b> – .125 (3.2)<br><b>05</b> – .156 (4.0)<br><b>06</b> – .188 (4.8)<br><b>07</b> – .219 (5.6)<br><b>08</b> – .250 (6.4)<br><b>09</b> – .281 (7.1)<br><b>10</b> – .312 (7.9)<br><b>11</b> – .344 (8.7)<br><b>12</b> – .375 (9.5) | <b>Omit</b> (Leave Blank)<br>Band Not Included<br><br>Use the following codes if you want the band strap included with the connector. For best availability, order band separately.<br><br><b>Standard Band</b><br>.250" Wide<br><b>B</b> – Uncoiled Band Included<br><b>K</b> – Coiled Band Included<br><br><b>Micro Band</b><br>.125" Wide<br><b>M</b> – Uncoiled Band Included<br><b>L</b> – Coiled Band Included |  |                       |                       |                        |                      |
|  |   |  |  |  |  | <b>Side Entry</b><br><b>500S010</b><br> |                       |                       |                        |                      |
|  |   |  |  |  |  | <b>45° Entry</b><br><b>500E010</b><br>  |                       |                       |                        |                      |
|  |   |  |  |  |  | <b>Dual 45°</b><br><b>500D010</b><br>   |                       |                       |                        |                      |
|  |   |  |  |  |  | <b>Maximum Cable Entry Code</b>  |                       |                       |                        |                      |
|  |   |  |  |  |  | <b>Size</b>  | <b>T</b><br>Top Entry | <b>E</b><br>45° Entry | <b>S</b><br>Side Entry | <b>D</b><br>Dual 45° |
|  |   |  |  |  |  | <b>09</b>  | 08                    | 08                    | 09                     | 06                   |
|  |   |  |  |  |  | <b>15</b>  | 08                    | 08                    | 10                     | 08                   |
|  |   |  |  |  |  | <b>21</b>  | 08                    | 08                    | 10                     | 08                   |
|  |   |  |  |  |  | <b>25</b>  | 08                    | 08                    | 11                     | 08                   |
| <b>31</b>  | 09  | 09   | 12   | 09   |  |  |                       |                       |                        |                      |
| <b>37</b>  | 09  | 09   | 12   | 09   |  |  |                       |                       |                        |                      |
| <b>51</b>  | 10  | 10   | 12   | 10   |  |  |                       |                       |                        |                      |
| <b>51-2</b>  | 09  | 09   | 12   | 09   |  |  |                       |                       |                        |                      |
| <b>67</b>  | 09  | 09   | 12   | 09   |  |  |                       |                       |                        |                      |
| <b>69</b>  | 10  | 10   | 12   | 10   |  |  |                       |                       |                        |                      |
| <b>100</b>   | 12  | 12   | 12   | 12   |  |  |                       |                       |                        |                      |
| <b>Sample Part Number</b>  |   |  |  |  |  |  |                       |                       |                        |                      |
| <b>500T010</b>   | <b>M</b>  | <b>25</b>  | <b>H</b>   | <b>08</b>  |  |  |                       |                       |                        |                      |

# Micro-D Backshells EMI, Banding, Round Cable Entry, One Piece 500-010



## MATERIALS (SEE ORDERING INFO FOR FINISH OPTIONS)

|                                |  |
|--------------------------------|--|
| Shell                          | Aluminum Alloy 6061 -T6 Per QQ-A-200, QQ-A-225 (Machined Components)<br>Aluminum Alloy 6061-T6 Per QQ-A-591 (A380) (Die-Cast Components) |
| Clips, E-Rings                 | 17-7PH Stainless Steel   |
| Jackscrows, Washers, Jackposts | 300 Series Stainless Steel, Passivated   |

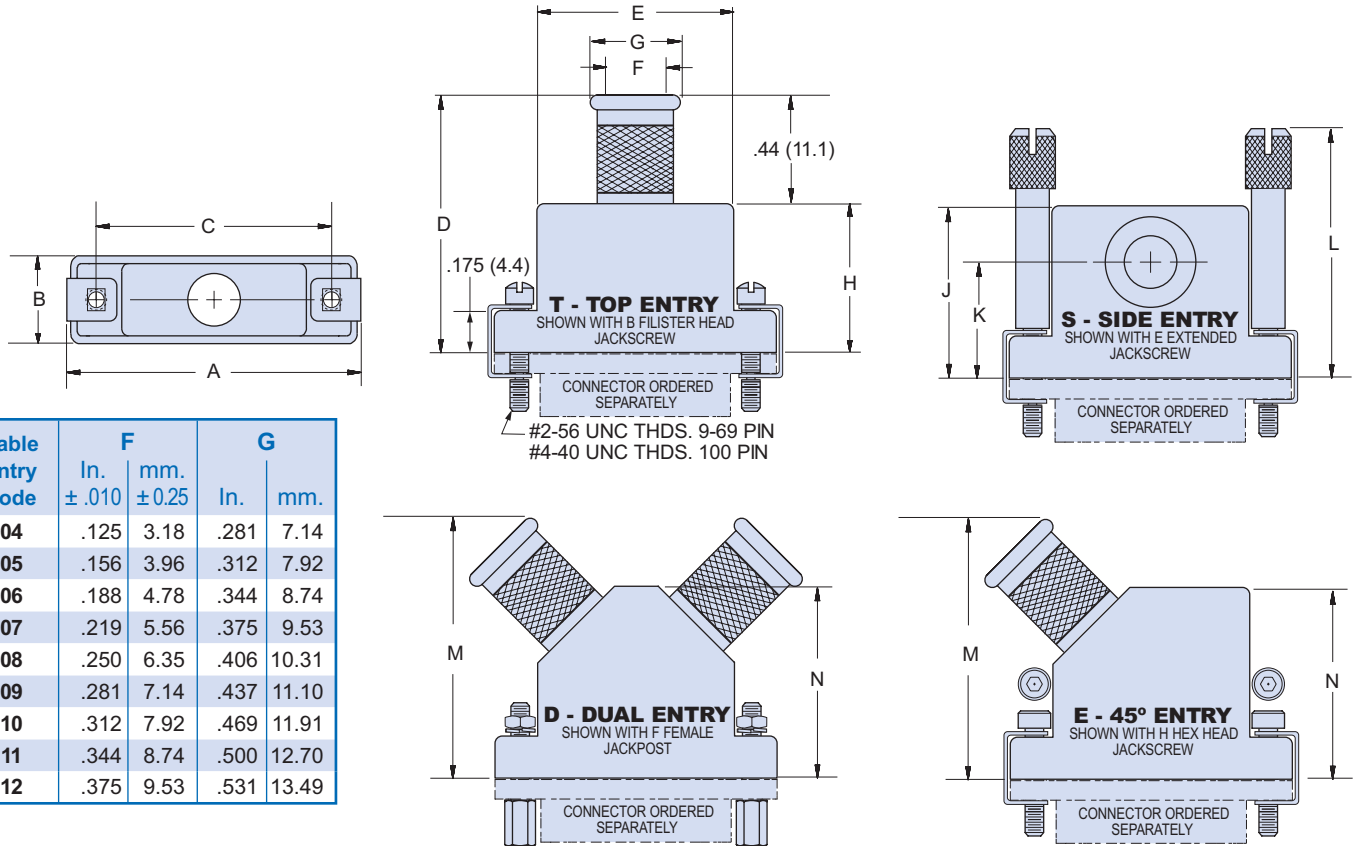

| Cable Entry Code | F         |           | G    |       |
|------------------|-----------|-----------|------|-------|
|                  | In. ±.010 | mm. ±0.25 | In.  | mm.   |
| 04               | .125      | 3.18      | .281 | 7.14  |
| 05               | .156      | 3.96      | .312 | 7.92  |
| 06               | .188      | 4.78      | .344 | 8.74  |
| 07               | .219      | 5.56      | .375 | 9.53  |
| 08               | .250      | 6.35      | .406 | 10.31 |
| 09               | .281      | 7.14      | .437 | 11.10 |
| 10               | .312      | 7.92      | .469 | 11.91 |
| 11               | .344      | 8.74      | .500 | 12.70 |
| 12               | .375      | 9.53      | .531 | 13.49 |

## DIMENSIONS

| Size | A Max. |       | B Max. |       | C     |       | D Max. |       | E Max. |       | H Max. |       | J Max. |       | K    |       | L Max. |       | M Max. |       | N Max. |       |
|------|--------|-------|--------|-------|-------|-------|--------|-------|--------|-------|--------|-------|--------|-------|------|-------|--------|-------|--------|-------|--------|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   | In.  | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| 09   | .850   | 21.59 | .370   | 9.40  | .565  | 14.35 | .780   | 19.81 | .410   | 10.41 | .350   | 8.89  | .637   | 16.18 | .435 | 11.05 | 1.040  | 26.42 | 1.000  | 25.40 | .680   | 17.27 |
| 15   | 1.000  | 25.40 | .370   | 9.40  | .715  | 18.16 | .910   | 23.11 | .580   | 14.73 | .470   | 11.94 | .673   | 17.09 | .440 | 11.2  | 1.170  | 29.72 | 1.030  | 26.16 | .730   | 18.54 |
| 21   | 1.150  | 29.21 | .370   | 9.40  | .865  | 21.97 | 1.030  | 26.16 | .740   | 18.80 | .590   | 14.99 | .707   | 17.95 | .458 | 11.63 | 1.290  | 32.77 | 1.050  | 26.67 | .765   | 19.43 |
| 25   | 1.250  | 31.75 | .370   | 9.40  | .965  | 24.51 | 1.090  | 27.69 | .850   | 21.59 | .650   | 16.51 | .748   | 19.00 | .483 | 12.27 | 1.350  | 34.29 | 1.090  | 27.69 | .830   | 21.08 |
| 31   | 1.400  | 35.56 | .370   | 9.40  | 1.115 | 28.32 | 1.150  | 29.21 | .980   | 24.89 | .710   | 18.03 | .756   | 19.20 | .476 | 12.09 | 1.420  | 36.07 | 1.130  | 28.70 | .890   | 22.61 |
| 37   | 1.550  | 39.37 | .370   | 9.40  | 1.265 | 32.13 | 1.190  | 30.23 | 1.130  | 28.70 | .750   | 19.05 | .774   | 19.66 | .478 | 12.14 | 1.450  | 36.83 | 1.230  | 31.24 | .955   | 24.26 |
| 51   | 1.500  | 38.10 | .410   | 10.41 | 1.215 | 30.86 | 1.220  | 30.99 | 1.080  | 27.43 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| 51-2 | 1.910  | 48.51 | .370   | 9.40  | 1.615 | 41.02 | 1.220  | 30.99 | 1.510  | 38.35 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| 67   | 2.310  | 58.67 | .370   | 9.40  | 2.015 | 51.18 | 1.220  | 30.99 | 1.880  | 47.75 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| 69   | 1.810  | 45.97 | .410   | 10.41 | 1.515 | 38.48 | 1.220  | 30.99 | 1.380  | 35.05 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| 100  | 2.235  | 56.77 | .460   | 11.68 | 1.800 | 45.72 | 1.280  | 32.51 | 1.470  | 37.34 | .840   | 21.34 | 1.014  | 25.76 | .687 | 17.45 | 1.580  | 40.13 | 1.320  | 33.53 | 1.080  | 27.43 |



# Micro-D Backshells EMI, Round Cable Entry, With Shield Sock, One Piece 500-011










**Shield Sock Backshells** save assembly time. These backshells are terminated to tinned copper braid in whatever length you require.

**Available in Top, 45° and Side Entry**, these backshells feature one piece construction and are available in a variety of plating finishes.

**Precision Swaged Braid Termination** adds mechanical strength and lowers resistance compared to hex crimps.

## HOW TO ORDER 500-011 SHIELD SOCK EMI BACKSHELLS


| Series  | Shell Finish  | Connector Size   | Hardware Option  | Cable Entry Code   | Length of Braid   |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
|---|---|--|--|--|---|---|-------------|-------------|--------------|--------------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|----|----|----|----|----|----|----|----|----|----|----|-----|----|----|----|
| <b>Top Entry</b><br><b>500T011</b><br> | <b>E</b> – Chem Film (Alodyne)<br><b>J</b> – Cadmium, Yellow Chromate<br><b>M</b> – Electroless Nickel<br><b>NF</b> – Cadmium, Olive Drab<br><b>Z2</b> – Gold | <b>09</b><br><b>15</b><br><b>21</b><br><b>25</b><br><b>31</b><br><b>37</b><br><b>51</b><br><b>51-2</b><br><b>67</b><br><b>69</b><br><b>100</b> | <b>B</b> – Fillister Head Jackscrew<br><br><b>H</b> – Hex Head Jackscrew<br><br><b>E</b> – Extended Jackscrew<br><br>(Not for 45° Entry) | <b>04</b> – .125 (3.2)<br><b>05</b> – .156 (4.0)<br><b>06</b> – .188 (4.8)<br><b>07</b> – .219 (5.6)<br><b>08</b> – .250 (6.4)<br><b>09</b> – .281 (7.1)<br><b>10</b> – .312 (7.9)<br><b>11</b> – .344 (8.7)<br><b>12</b> – .375 (9.5) | <b>Length in One Inch Increments</b><br><br>Example: "6" equals six inches. |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
|   |   |  |  |  |   | <b>Side Entry</b><br><b>500S011</b><br>  |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
|   |   |  |  |  |   | <b>45° Entry</b><br><b>500E011</b><br>  |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
|   |   |  |  |  |   | <b>F</b> – Jackpost, Female<br>  |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
|   |   |  |  |  |   | <b>Maximum Cable Entry Code</b><br><table border="1"> <thead> <tr> <th>Size</th> <th>T Top Entry</th> <th>E 45° Entry</th> <th>S Side Entry</th> </tr> </thead> <tbody> <tr><td>9</td><td>08</td><td>08</td><td>09</td></tr> <tr><td>15</td><td>08</td><td>08</td><td>12</td></tr> <tr><td>21</td><td>08</td><td>08</td><td>12</td></tr> <tr><td>25</td><td>08</td><td>08</td><td>12</td></tr> <tr><td>31</td><td>09</td><td>09</td><td>12</td></tr> <tr><td>37</td><td>09</td><td>09</td><td>12</td></tr> <tr><td>51</td><td>10</td><td>10</td><td>12</td></tr> <tr><td>51-2</td><td>09</td><td>09</td><td>12</td></tr> <tr><td>67</td><td>09</td><td>09</td><td>12</td></tr> <tr><td>69</td><td>10</td><td>10</td><td>12</td></tr> <tr><td>100</td><td>12</td><td>12</td><td>12</td></tr> </tbody> </table> | Size        | T Top Entry | E 45° Entry  | S Side Entry | 9 | 08 | 08 | 09 | 15 | 08 | 08 | 12 | 21 | 08 | 08 | 12 | 25 | 08 | 08 | 12 | 31 | 09 | 09 | 12 | 37 | 09 | 09 | 12 | 51 | 10 | 10 | 12 | 51-2 | 09 | 09 | 12 | 67 | 09 | 09 | 12 | 69 | 10 | 10 | 12 | 100 | 12 | 12 | 12 |
|   |   |  |  |  |   | Size  | T Top Entry | E 45° Entry | S Side Entry |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
|   |   |  |  |  |   | 9   | 08          | 08          | 09           |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
|   |   |  |  |  |   | 15  | 08          | 08          | 12           |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
|   |   |  |  |  |   | 21  | 08          | 08          | 12           |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
|   |   |  |  |  |   | 25  | 08          | 08          | 12           |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
| 31  | 09  | 09   | 12   |  |   |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
| 37  | 09  | 09   | 12   |  |   |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
| 51  | 10  | 10   | 12   |  |   |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
| 51-2  | 09  | 09   | 12   |  |   |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
| 67  | 09  | 09   | 12   |  |   |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
| 69  | 10  | 10   | 12   |  |   |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
| 100   | 12  | 12   | 12   |  |   |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
| <b>Sample Part Number</b>   |   |  |  |  |   |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |
| <b>500T011</b>  | <b>– M</b>  | <b>25</b>  | <b>H</b>   | <b>08</b>  | <b>– 12</b>   |   |             |             |              |              |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |

# Micro-D Backshells EMI, Round Cable Entry, With Shield Sock, One Piece 500-011




## MATERIALS (SEE ORDERING INFO FOR FINISH OPTIONS)

|                                |  |
|--------------------------------|--|
| Shell                          | Aluminum Alloy 6061 -T6 Per QQ-A-200, QQ-A-225 (Machined Components)<br>Aluminum Alloy 6061-T6 Per QQ-A-591 (A380) (Die-Cast Components) |
| Braid                          | Tinned Copper Braid Per QQ-B-575 ASTM B33, #36 AWG Strands, 90% Coverage   |
| Crimp Ring                     | Copper, Tin Plated   |
| Clips, E-Rings                 | 17-7PH Stainless Steel   |
| Jackscrews, Washers, Jackposts | 300 Series Stainless Steel, Passivated   |

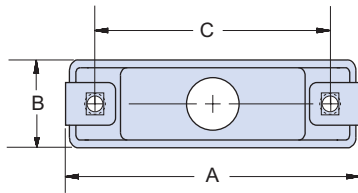

| Cable Entry Code | F         |           | G Max. |       |
|------------------|-----------|-----------|--------|-------|
|                  | In. ±.010 | mm. ±0.25 | In.    | mm.   |
| 04               | .125      | 3.18      | .310   | 7.87  |
| 05               | .156      | 3.96      | .350   | 8.89  |
| 06               | .188      | 4.78      | .380   | 9.65  |
| 07               | .219      | 5.56      | .400   | 10.16 |
| 08               | .250      | 6.35      | .425   | 13.31 |
| 09               | .281      | 7.14      | .450   | 11.43 |
| 10               | .312      | 7.92      | .500   | 12.70 |
| 11               | .344      | 8.74      | .525   | 13.34 |
| 12               | .375      | 9.53      | .550   | 13.97 |

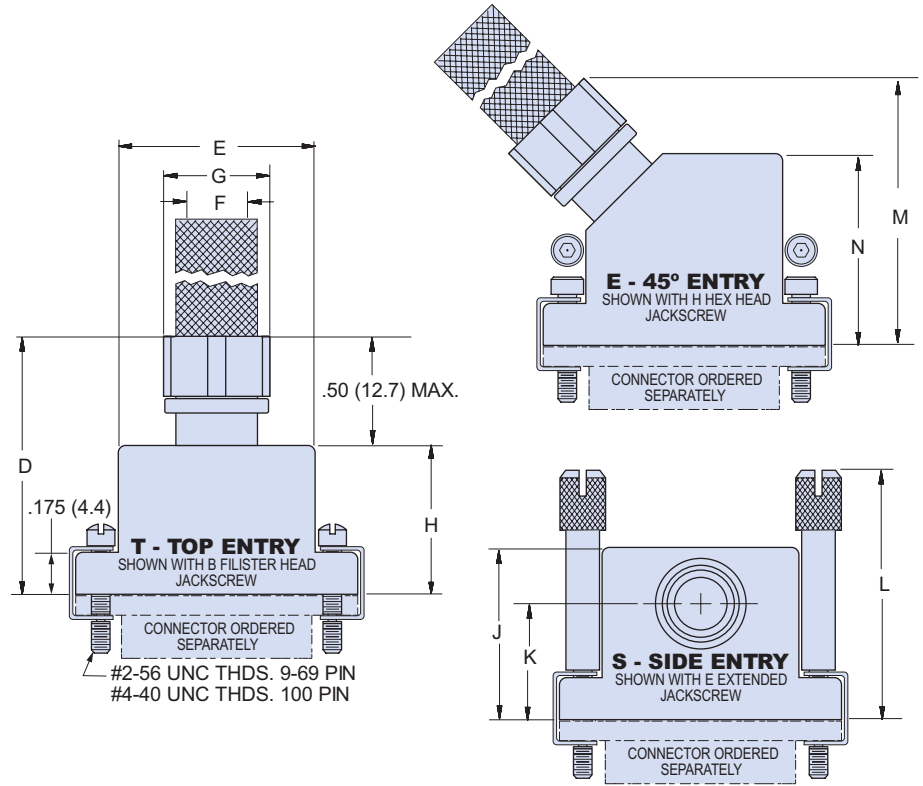

## SHIELD SOCK BACKSHELL DIMENSIONS – 500-011

| Size | A Max. |       | B Max. |       | C     |       | D Max. |       | E Max. |       | H Max. |       | J Max. |       | K    |       | L Max. |       | M Max. |       | N Max. |       |
|------|--------|-------|--------|-------|-------|-------|--------|-------|--------|-------|--------|-------|--------|-------|------|-------|--------|-------|--------|-------|--------|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   | In.  | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| 09   | .850   | 21.59 | .370   | 9.40  | .565  | 14.35 | .780   | 19.81 | .410   | 10.41 | .350   | 8.89  | .637   | 16.18 | .435 | 11.05 | 1.040  | 26.42 | 1.000  | 25.40 | .680   | 17.27 |
| 15   | 1.000  | 25.40 | .370   | 9.40  | .715  | 18.16 | .910   | 23.11 | .580   | 14.73 | .470   | 11.94 | .673   | 17.09 | .440 | 11.20 | 1.170  | 29.72 | 1.030  | 26.16 | .730   | 18.54 |
| 21   | 1.150  | 29.21 | .370   | 9.40  | .865  | 21.97 | 1.030  | 26.16 | .740   | 18.80 | .590   | 14.99 | .707   | 17.95 | .458 | 11.63 | 1.290  | 32.77 | 1.050  | 26.67 | .765   | 19.43 |
| 25   | 1.250  | 31.75 | .370   | 9.40  | .965  | 24.51 | 1.090  | 27.69 | .850   | 21.59 | .650   | 16.51 | .748   | 19.00 | .483 | 12.27 | 1.350  | 34.29 | 1.090  | 27.69 | .830   | 21.08 |
| 31   | 1.400  | 35.56 | .370   | 9.40  | 1.115 | 28.32 | 1.150  | 29.21 | .980   | 24.89 | .710   | 18.03 | .756   | 19.20 | .476 | 12.09 | 1.420  | 36.07 | 1.130  | 28.70 | .890   | 22.61 |
| 37   | 1.550  | 39.37 | .370   | 9.40  | 1.265 | 32.13 | 1.190  | 30.23 | 1.130  | 28.70 | .750   | 19.05 | .774   | 19.66 | .478 | 12.14 | 1.450  | 36.83 | 1.230  | 31.24 | .955   | 24.26 |
| 51   | 1.500  | 38.10 | .410   | 10.41 | 1.215 | 30.86 | 1.220  | 30.99 | 1.080  | 27.43 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| 51-2 | 1.910  | 48.51 | .370   | 9.40  | 1.615 | 41.02 | 1.220  | 30.99 | 1.510  | 38.35 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| 67   | 2.310  | 58.67 | .370   | 9.40  | 2.015 | 51.18 | 1.220  | 30.99 | 1.880  | 47.75 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| 69   | 1.810  | 45.97 | .410   | 10.41 | 1.515 | 38.48 | 1.220  | 30.99 | 1.380  | 35.05 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| 100  | 2.235  | 56.77 | .460   | 11.68 | 1.800 | 45.72 | 1.280  | 32.51 | 1.470  | 37.34 | .840   | 21.34 | 1.014  | 25.76 | .687 | 17.45 | 1.580  | 40.13 | 1.320  | 33.53 | 1.080  | 27.43 |



# Micro-D Backshells Strain Relief, Qwik-Ty, One Piece 500-012




**Qwik-Ty Backshell** is stocked in all sizes. Choose "M" Nickel Finish and "T" top entry for best availability. Customer-furnished cable ties provide strain relief to wire bundles. Suitable for jacketed cable or use with individual wires.

### MATERIALS

|          |                            |
|----------|----------------------------|
| Shell    | Aluminum Alloy 6061 -T6    |
| Clips    | 17-7PH Stainless Steel     |
| Hardware | 300 Series Stainless Steel |

### HOW TO ORDER 500-012 QWIK-TY STRAIN RELIEF BACKSHELLS

| Series                    | Shell Finish                        | Connector Size | Hardware Option                     |
|---------------------------|-------------------------------------|----------------|-------------------------------------|
| <b>Top Entry 500T012</b>  | <b>E</b> - Chem Film (Alodyne)      | <b>09</b>      | <b>B</b> - Fillister Head Jackscrew |
|                           | <b>J</b> - Cadmium, Yellow Chromate | <b>15</b>      | <b>H</b> - Hex Head Jackscrew       |
| <b>Side Entry 500S012</b> | <b>M</b> - Electroless Nickel       | <b>21</b>      | <b>E</b> - Extended Jackscrew       |
|                           | <b>NF</b> - Cadmium, Olive Drab     | <b>25</b>      | <b>F</b> - Jackpost, Female         |
| <b>45° Entry 500E012</b>  | <b>Z2</b> - Gold                    | <b>31</b>      |                                     |
|                           |                                     | <b>37</b>      |                                     |
| Sample Part Number        |                                     |                |                                     |
| <b>500T012</b>            | <b>- M</b>                          | <b>25</b>      | <b>H</b>                            |

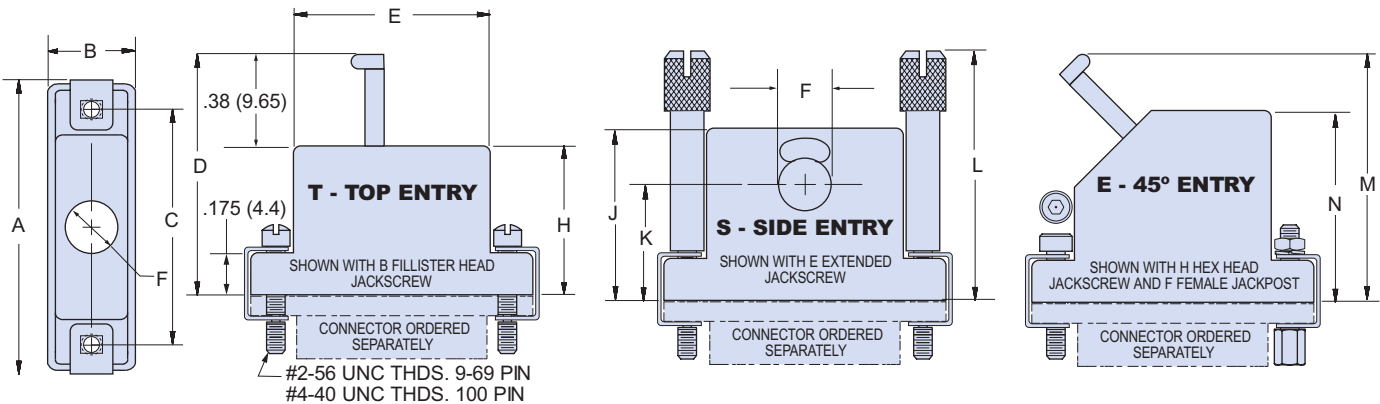

| Size        | A Max. |       | B Max. |       | C     |       | D Max. |       | E Max. |       | F    |      | H Max. |       | J Max. |       | K    |       | L Max. |       | M Max. |       | N Max. |       |
|-------------|--------|-------|--------|-------|-------|-------|--------|-------|--------|-------|------|------|--------|-------|--------|-------|------|-------|--------|-------|--------|-------|--------|-------|
|             | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.    | mm.   | In.  | mm.  | In.    | mm.   | In.    | mm.   | In.  | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| <b>09</b>   | .850   | 21.59 | .370   | 9.40  | .565  | 14.35 | .780   | 19.81 | .410   | 10.41 | .156 | 3.18 | .350   | 8.89  | .637   | 16.18 | .435 | 11.05 | 1.040  | 26.42 | 1.000  | 25.40 | .680   | 17.27 |
| <b>15</b>   | 1.000  | 25.40 | .370   | 9.40  | .715  | 18.16 | .910   | 23.11 | .580   | 14.73 | .188 | 3.96 | .470   | 11.94 | .673   | 17.09 | .440 | 11.20 | 1.170  | 29.72 | 1.030  | 26.16 | .730   | 18.54 |
| <b>21</b>   | 1.150  | 29.21 | .370   | 9.40  | .865  | 21.97 | 1.030  | 26.16 | .740   | 18.80 | .219 | 4.78 | .590   | 14.99 | .707   | 17.95 | .458 | 11.63 | 1.290  | 32.77 | 1.050  | 26.67 | .765   | 19.43 |
| <b>25</b>   | 1.250  | 31.75 | .370   | 9.40  | .965  | 24.51 | 1.090  | 27.69 | .850   | 21.59 | .250 | 5.56 | .650   | 16.51 | .748   | 19.00 | .483 | 12.27 | 1.350  | 34.29 | 1.090  | 27.69 | .830   | 21.08 |
| <b>31</b>   | 1.400  | 35.56 | .370   | 9.40  | 1.115 | 28.32 | 1.150  | 29.21 | .980   | 24.89 | .265 | 6.35 | .710   | 18.03 | .756   | 19.20 | .476 | 12.09 | 1.420  | 36.07 | 1.130  | 28.70 | .890   | 22.61 |
| <b>37</b>   | 1.550  | 39.37 | .370   | 9.40  | 1.265 | 32.13 | 1.190  | 30.23 | 1.130  | 28.70 | .281 | 7.14 | .750   | 19.05 | .774   | 19.66 | .478 | 12.14 | 1.450  | 36.83 | 1.230  | 31.24 | .955   | 24.26 |
| <b>51</b>   | 1.500  | 38.10 | .410   | 10.41 | 1.215 | 30.86 | 1.220  | 30.99 | 1.080  | 27.43 | .312 | 7.92 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| <b>51-2</b> | 1.910  | 48.51 | .370   | 9.40  | 1.615 | 41.02 | 1.220  | 30.99 | 1.510  | 38.35 | .281 | 7.14 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| <b>67</b>   | 2.310  | 58.67 | .370   | 9.40  | 2.015 | 51.18 | 1.220  | 30.99 | 1.880  | 47.75 | .281 | 7.14 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| <b>69</b>   | 1.810  | 45.97 | .410   | 10.41 | 1.515 | 38.48 | 1.220  | 30.99 | 1.380  | 47.75 | .312 | 7.92 | .780   | 19.81 | .859   | 21.82 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| <b>100</b>  | 2.235  | 56.77 | .460   | 11.68 | 1.800 | 45.72 | 1.280  | 32.51 | 1.470  | 37.34 | .375 | 9.53 | .840   | 21.34 | 1.014  | 25.76 | .687 | 17.45 | 1.580  | 40.13 | 1.320  | 33.53 | 1.080  | 27.43 |

# Micro-D Backshells Switching/Shorting, One Piece 500-016



**Shorting Backshells** are closed shells used to provide a convenient way to protect Micro-D connectors used for circuit switching or shorting. Lanyards provide easy attachment to chassis panels.


| MATERIALS |                            |
|-----------|----------------------------|
| Shell     | Aluminum Alloy 6061 -T6    |
| Clips     | 17-7PH Stainless Steel     |
| Hardware  | 300 Series Stainless Steel |

## HOW TO ORDER 500-016 SHORTING BACKSHELLS

| Series  | Shell Finish                        | Connector Size        | Hardware Option                     | Lanyard Option                      | Lanyard Length  | Ring Terminal Ordering Code |
|---------|-------------------------------------|-----------------------|-------------------------------------|-------------------------------------|---|-----------------------------|
| 500-016 | <b>E</b> – Chem Film                | <b>09</b> <b>51</b>   | <b>B</b> – Fillister Head Jackscrew | <b>N</b> – No Lanyard               | <b>Length in One Inch Increments</b><br><br>Example: "6" equals six inches. | <b>06</b> – .125 (3.2)      |
|         | <b>J</b> – Cadmium, Yellow Chromate | <b>15</b> <b>51-2</b> |                                     | <b>F</b> – Wire Rope, Nylon Jacket  |   | <b>01</b> – .140 (3.6)      |
|         | <b>M</b> – Electroless Nickel       | <b>21</b> <b>67</b>   | <b>H</b> – Hex Head Jackscrew       | <b>H</b> – Wire Rope, Teflon Jacket |   | <b>05</b> – .167 (4.2)      |
|         | <b>NF</b> – Cadmium, Olive Drab     | <b>25</b> <b>69</b>   | <b>E</b> – Extended Jackscrew       |                                     |   | <b>04</b> – .197 (5.0)      |
|         | <b>Z2</b> – Gold                    | <b>31</b> <b>100</b>  | <b>F</b> – Jackpost, Female         |                                     |   | I.D. of Ring Terminal       |
|         |                                     |                       | <b>37</b>                           |                                     |   |                             |

### Sample Part Number

|         |     |    |   |   |   |      |
|---------|-----|----|---|---|---|------|
| 500-016 | - M | 25 | H | F | 4 | - 06 |
|---------|-----|----|---|---|---|------|

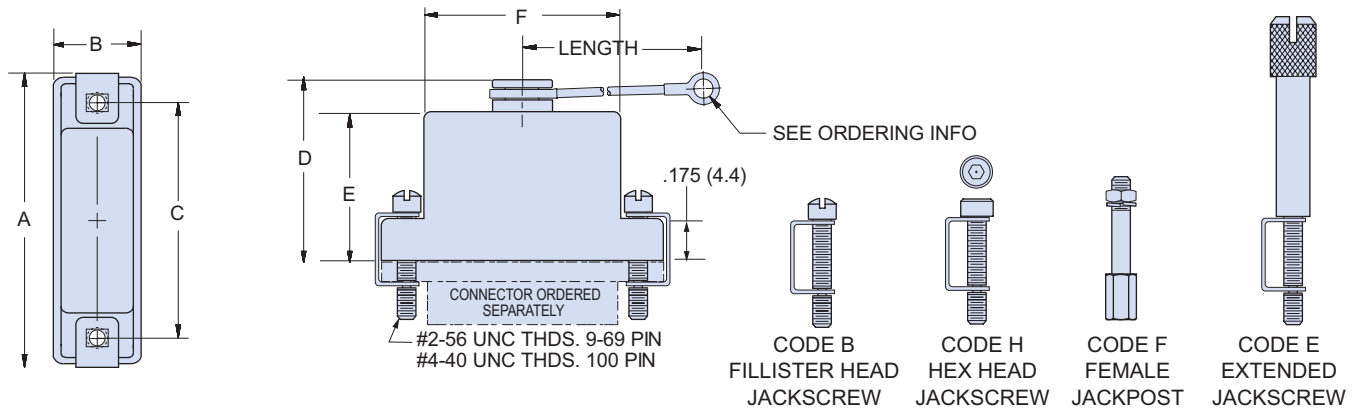

| Size | A Max. |       | B Max. |       | C     |       | D Max. |       | E Max. |       | F Max. |       |
|------|--------|-------|--------|-------|-------|-------|--------|-------|--------|-------|--------|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| 09   | .850   | 21.59 | .370   | 9.40  | .565  | 14.35 | .500   | 12.70 | .350   | 8.89  | .410   | 10.41 |
| 15   | 1.000  | 25.40 | .370   | 9.40  | .715  | 18.16 | .620   | 15.75 | .470   | 11.94 | .580   | 14.73 |
| 21   | 1.150  | 29.21 | .370   | 9.40  | .865  | 21.97 | .740   | 18.80 | .590   | 14.99 | .740   | 18.80 |
| 25   | 1.250  | 31.75 | .370   | 9.40  | .965  | 24.51 | .800   | 20.32 | .650   | 16.51 | .850   | 21.59 |
| 31   | 1.400  | 35.56 | .370   | 9.40  | 1.115 | 28.32 | .860   | 21.84 | .710   | 18.03 | .980   | 24.89 |
| 37   | 1.550  | 39.37 | .370   | 9.40  | 1.265 | 32.13 | .900   | 22.86 | .750   | 19.05 | 1.130  | 28.70 |
| 51   | 1.500  | 38.10 | .410   | 10.41 | 1.215 | 30.86 | .930   | 23.62 | .780   | 19.81 | 1.080  | 27.43 |
| 51-2 | 1.910  | 48.51 | .370   | 9.40  | 1.615 | 41.02 | .930   | 23.62 | .780   | 19.81 | 1.510  | 38.35 |
| 67   | 2.310  | 58.67 | .370   | 9.40  | 2.015 | 51.18 | .930   | 23.62 | .780   | 19.81 | 1.880  | 47.75 |
| 69   | 1.810  | 45.97 | .410   | 10.41 | 1.515 | 38.48 | .930   | 23.62 | .780   | 19.81 | 1.380  | 35.05 |
| 100  | 2.235  | 56.77 | .460   | 11.68 | 1.800 | 45.72 | .990   | 25.15 | .840   | 21.34 | 1.470  | 37.34 |



# Micro-D Backshells EMI, Elliptical, One Piece 500-047




**Elliptical Backshells** provide extra room for large wire bundles. This one piece version features an oversize shield termination area for both standard and micro **BAND-IT®** shield termination straps.

| MATERIALS |                            |
|-----------|----------------------------|
| Shell     | Aluminum Alloy 6061 -T6    |
| Clips     | 17-7PH Stainless Steel     |
| Hardware  | 300 Series Stainless Steel |

## HOW TO ORDER 500-047 ELLIPTICAL BACKSHELLS

| Series             | Shell Finish                        | Connector Size | Hardware Option                     | EMI Band Strap Option                                 |
|--------------------|-------------------------------------|----------------|-------------------------------------|---|
| 500-047            | <b>E</b> – Chem Film                | <b>09</b>      | <b>B</b> – Fillister Head Jackscrew | <b>Omit (Leave Blank)</b><br><b>Band Not Included</b> |
|                    | <b>J</b> – Cadmium, Yellow Chromate | <b>15</b>      |                                     |   |
|                    | <b>M</b> – Electroless Nickel       | <b>21</b>      | <b>H</b> – Hex Head Jackscrew       |   |
|                    | <b>NF</b> – Cadmium, Olive Drab     | <b>25</b>      |                                     |   |
|                    | <b>31</b>                           | <b>67</b>      | <b>E</b> – Extended Jackscrew       |   |
|                    | <b>37</b>                           | <b>100</b>     |                                     |   |
| <b>Z2</b> – Gold   |                                     |                |                                     | <b>B</b> – Standard Band<br>.250" Wide                |
|                    |                                     |                |                                     | <b>M</b> – Micro Band<br>.125" Wide                   |
| Sample Part Number |                                     |                |                                     |   |
| 500-047            | - M                                 | 25             | H                                   |   |

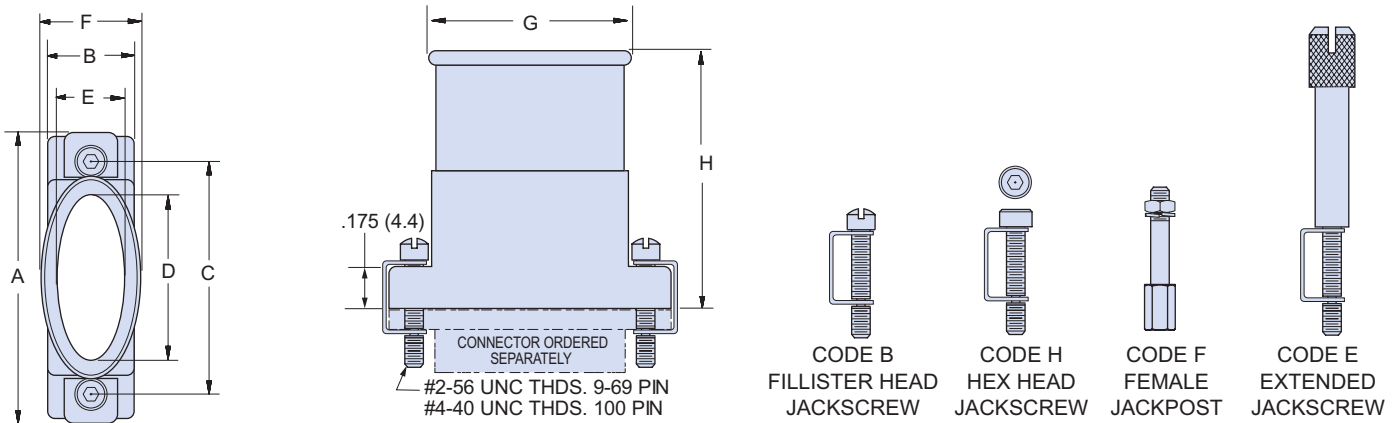

| Size | A Max. |       | B Max. |       | C     |       | D Max. |       | E    |      | F Max. |       | G Max. |       | H Max. |       |
|------|--------|-------|--------|-------|-------|-------|--------|-------|------|------|--------|-------|--------|-------|--------|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.  | mm.  | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| 09   | .850   | 21.59 | .370   | 9.40  | .565  | 14.35 | .312   | 7.92  | .281 | 7.14 | .450   | 11.43 | .481   | 12.22 | .780   | 19.81 |
| 15   | 1.000  | 25.40 | .370   | 9.40  | .715  | 18.16 | .420   | 10.67 | .281 | 7.14 | .450   | 11.43 | .589   | 14.96 | .910   | 23.11 |
| 21   | 1.150  | 29.21 | .370   | 9.40  | .865  | 21.97 | .591   | 15.01 | .281 | 7.14 | .450   | 11.43 | .759   | 19.28 | 1.030  | 26.16 |
| 25   | 1.250  | 31.75 | .370   | 9.40  | .965  | 24.51 | .690   | 17.53 | .281 | 7.14 | .450   | 11.43 | .859   | 21.82 | 1.090  | 27.68 |
| 31   | 1.400  | 35.56 | .370   | 9.40  | 1.115 | 28.32 | .820   | 20.83 | .281 | 7.14 | .450   | 11.43 | .989   | 25.12 | 1.150  | 29.21 |
| 37   | 1.550  | 39.37 | .370   | 9.40  | 1.265 | 32.13 | .970   | 24.64 | .281 | 7.14 | .450   | 11.43 | 1.139  | 28.93 | 1.180  | 29.97 |
| 51   | 1.500  | 38.10 | .410   | 10.41 | 1.215 | 30.86 | .920   | 23.37 | .312 | 7.92 | .481   | 12.22 | 1.089  | 27.66 | 1.220  | 30.99 |
| 51-2 | 1.910  | 48.51 | .370   | 9.40  | 1.615 | 41.02 | 1.030  | 26.16 | .281 | 7.14 | .450   | 11.43 | 1.489  | 37.82 | 1.220  | 30.99 |
| 67   | 2.310  | 58.67 | .370   | 9.40  | 2.015 | 51.18 | 1.720  | 43.69 | .281 | 7.14 | .450   | 11.43 | 1.889  | 47.98 | 1.220  | 30.99 |
| 69   | 1.810  | 45.97 | .410   | 10.41 | 1.515 | 38.48 | 1.220  | 30.99 | .312 | 7.92 | .481   | 12.22 | 1.389  | 35.28 | 1.220  | 30.99 |
| 100  | 2.235  | 56.77 | .460   | 11.68 | 1.800 | 45.72 | 1.290  | 32.77 | .360 | 9.14 | .529   | 13.44 | 1.459  | 37.06 | 1.280  | 32.51 |

# Micro-D Backshells Potting Shell 507-035






**Potting Shells** provide easy encapsulation of Micro-D solder cup terminations. These potting shells provide .25 inches (6.3 mm.) of depth.

| MATERIALS |                            |
|-----------|----------------------------|
| Shell     | Aluminum Alloy 6061 -T6    |
| Clips     | 17-7PH Stainless Steel     |
| Hardware  | 300 Series Stainless Steel |

## HOW TO ORDER 507-035 POTTING SHELLS

| Series             | Shell Finish                        | Connector Size        | Hardware Option   |
|--------------------|-------------------------------------|-----------------------|---|
| 507-035            | <b>E</b> – Chem Film                | <b>09</b> <b>51</b>   | <b>Omit for Fillister Head Jackscrew</b><br><b>H</b> – Hex Head Jackscrew<br><b>E</b> – Extended Jackscrew<br><b>F</b> – Jackpost, Female |
|                    | <b>J</b> – Cadmium, Yellow Chromate | <b>15</b> <b>51-2</b> |   |
|                    | <b>M</b> – Electroless Nickel       | <b>21</b> <b>67</b>   |   |
|                    | <b>NF</b> – Cadmium, Olive Drab     | <b>25</b> <b>69</b>   |   |
|                    | <b>Z2</b> – Gold                    | <b>31</b> <b>100</b>  |   |
|                    |                                     | <b>37</b>             |   |
| Sample Part Number |                                     |                       |   |
| 507-035            | – M                                 | 25                    | H   |

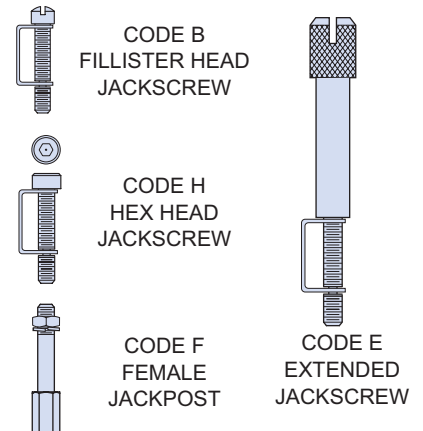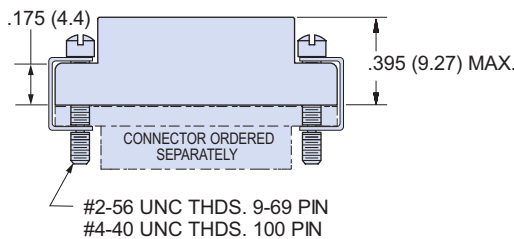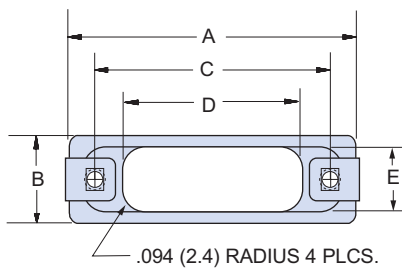

| Size | A Max. |       | B Max. |       | C     |       | D             |              | E             |              | L |
|------|--------|-------|--------|-------|-------|-------|---------------|--------------|---------------|--------------|---|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.<br>± .030 | mm.<br>± 0.8 | In.<br>± .030 | mm.<br>± 0.8 |   |
| 09   | .850   | 21.59 | .370   | 9.40  | .565  | 14.35 | .31           | 7.9          | .26           | 6.6          |   |
| 15   | 1.000  | 25.40 | .370   | 9.40  | .715  | 18.16 | .48           | 12.2         | .26           | 6.6          |   |
| 21   | 1.150  | 29.21 | .370   | 9.40  | .865  | 21.97 | .65           | 16.5         | .26           | 6.6          |   |
| 25   | 1.250  | 31.75 | .370   | 9.40  | .965  | 24.51 | .75           | 19.1         | .26           | 6.6          |   |
| 31   | 1.400  | 35.56 | .370   | 9.40  | 1.115 | 28.32 | .88           | 22.4         | .26           | 6.6          |   |
| 37   | 1.550  | 39.37 | .370   | 9.40  | 1.265 | 32.13 | 1.03          | 26.2         | .26           | 6.6          |   |
| 51   | 1.500  | 38.10 | .410   | 10.41 | 1.215 | 30.86 | .98           | 24.9         | .30           | 7.6          |   |
| 51-2 | 1.910  | 48.51 | .370   | 9.40  | 1.615 | 41.02 | 1.38          | 35.0         | .26           | 6.6          |   |
| 67   | 2.310  | 58.67 | .370   | 9.40  | 2.015 | 51.18 | 1.78          | 45.2         | .26           | 6.6          |   |
| 69   | 1.810  | 45.97 | .410   | 10.41 | 1.515 | 38.48 | 1.28          | 32.5         | .30           | 7.6          |   |
| 100  | 2.235  | 56.77 | .460   | 11.68 | 1.800 | 45.72 | 1.35          | 34.3         | .36           | 9.1          |   |



# Micro-D Backshells

## EMI, Composite, Round Cable Entry 507-088



**Save Weight and Eliminate Corrosion Damage** with composite Micro-D backshells. These round cable entry backshells are injection-molded with high strength Ultem 2300 fiberglass-reinforced thermoplastic.
















**Choose Top, Side or 45° Cable Entry.**

**Electroless Nickel Plated** for excellent EMI shielding effectiveness.

### MATERIALS

|          |                            |
|----------|----------------------------|
| Shell    | Ultem 2300                 |
| Clips    | 17-7PH Stainless Steel     |
| Hardware | 300 Series Stainless Steel |


### HOW TO ORDER 507-088 EMI BACKSHELLS

| Series  | Shell Finish                    | Connector Size   | Hardware Option   | Cable Entry Code   |                                 |  |   |  |                                 |  |   |  |          |           |          |           |
|---|---------------------------------|--|---|--|---------------------------------|--|---|--|---------------------------------|--|---|--|----------|-----------|----------|-----------|
| <b>Top Entry</b><br><b>507T088</b><br> | <b>XM</b><br>Electroless Nickel | <b>0 9</b><br><b>15</b><br><b>21</b><br><b>25</b><br><b>31</b><br><b>37</b><br><b>51</b><br><b>100</b> | <b>B</b> – Fillister Head Jackscrew<br><br><b>H</b> – Hex Head Jackscrew<br><br><b>E</b> – Extended Jackscrew<br>(Not Available for 45° Cable entry)<br><br><b>F</b> – Jackpost, Female<br> | <b>04</b> – .125 (3.2)<br><b>05</b> – .156 (4.0)<br><b>06</b> – .188 (4.8)<br><b>07</b> – .219 (5.6)<br><b>08</b> – .250 (6.4)<br><b>09</b> – .281 (7.1)<br><b>10</b> – .312 (7.9)<br><b>11</b> – .344 (8.7)<br><b>12</b> – .375 (9.5) |                                 |  |   |  |                                 |  |   |  |          |           |          |           |
|   |                                 |  |   | <b>Side Entry</b><br><b>507S088</b><br>   | <b>XM</b><br>Electroless Nickel | <b>0 9</b><br><b>15</b><br><b>21</b><br><b>25</b><br><b>31</b><br><b>37</b><br><b>51</b><br><b>100</b> | <b>B</b> – Fillister Head Jackscrew<br><br><b>H</b> – Hex Head Jackscrew<br><br><b>E</b> – Extended Jackscrew<br>(Not Available for 45° Cable entry)<br><br><b>F</b> – Jackpost, Female<br> | <b>04</b> – .125 (3.2)<br><b>05</b> – .156 (4.0)<br><b>06</b> – .188 (4.8)<br><b>07</b> – .219 (5.6)<br><b>08</b> – .250 (6.4)<br><b>09</b> – .281 (7.1)<br><b>10</b> – .312 (7.9)<br><b>11</b> – .344 (8.7)<br><b>12</b> – .375 (9.5) |                                 |  |   |  |          |           |          |           |
|   |                                 |  |   |  |                                 |  |   | <b>45° Entry</b><br><b>507E088</b><br>  | <b>XM</b><br>Electroless Nickel | <b>0 9</b><br><b>15</b><br><b>21</b><br><b>25</b><br><b>31</b><br><b>37</b><br><b>51</b><br><b>100</b> | <b>B</b> – Fillister Head Jackscrew<br><br><b>H</b> – Hex Head Jackscrew<br><br><b>E</b> – Extended Jackscrew<br>(Not Available for 45° Cable entry)<br><br><b>F</b> – Jackpost, Female<br> | <b>04</b> – .125 (3.2)<br><b>05</b> – .156 (4.0)<br><b>06</b> – .188 (4.8)<br><b>07</b> – .219 (5.6)<br><b>08</b> – .250 (6.4)<br><b>09</b> – .281 (7.1)<br><b>10</b> – .312 (7.9)<br><b>11</b> – .344 (8.7)<br><b>12</b> – .375 (9.5) |          |           |          |           |
|   |                                 |  |   |  |                                 |  |   |  |                                 |  |   | <b>Sample Part Number</b>  |          |           |          |           |
|   |                                 |  |   |  |                                 |  |   |  |                                 |  |   | <b>507T088</b>   | <b>M</b> | <b>25</b> | <b>H</b> | <b>08</b> |

#### Maximum Cable Entry Code

| Size       | T<br>Top<br>Entry | E<br>45°<br>Entry | S<br>Side<br>Entry |
|------------|-------------------|-------------------|--------------------|
| <b>9</b>   | 08                | 08                | 09                 |
| <b>15</b>  | 08                | 08                | 12                 |
| <b>21</b>  | 08                | 08                | 12                 |
| <b>25</b>  | 08                | 08                | 12                 |
| <b>31</b>  | 09                | 09                | 12                 |
| <b>37</b>  | 09                | 09                | 12                 |
| <b>51</b>  | 10                | 10                | 12                 |
| <b>100</b> | 12                | 12                | 12                 |

# Micro-D Backshells EMI, Composite, Round Cable Entry 507-088

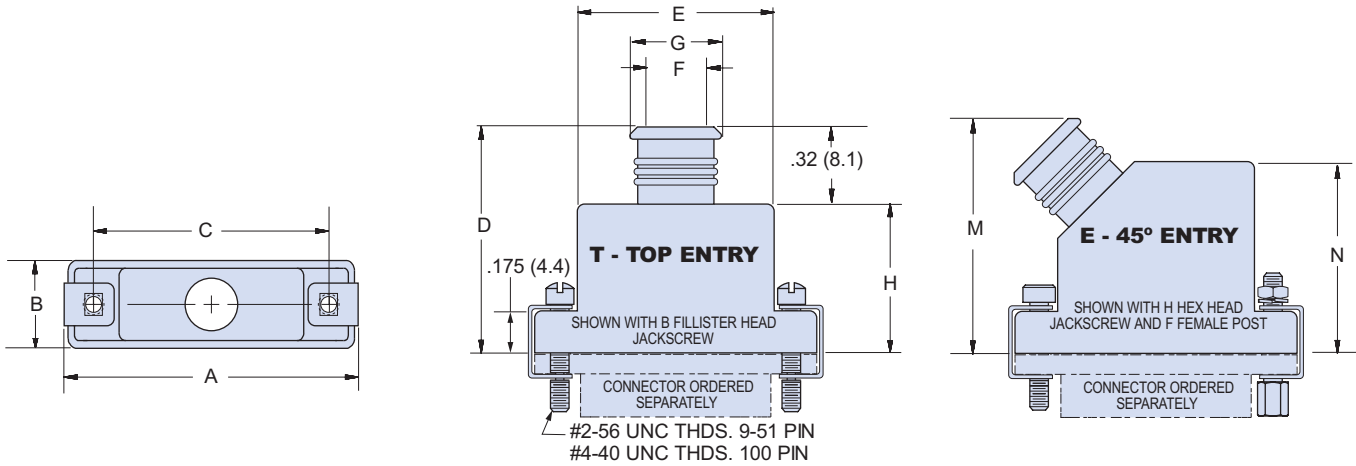


| Cable Entry Code | F         |           | G    |       |
|------------------|-----------|-----------|------|-------|
|                  | In. ±.010 | mm. ±0.25 | In.  | mm.   |
| 04               | .125      | 3.18      | .219 | 5.56  |
| 05               | .156      | 3.96      | .250 | 6.35  |
| 06               | .188      | 4.78      | .281 | 7.14  |
| 07               | .219      | 5.56      | .313 | 7.95  |
| 08               | .250      | 6.35      | .344 | 8.74  |
| 09               | .281      | 7.14      | .375 | 9.53  |
| 10               | .312      | 7.92      | .406 | 10.31 |
| 11               | .344      | 8.74      | .438 | 11.13 |
| 12               | .375      | 9.53      | .469 | 11.92 |

## DIMENSIONS

| Size | A Max. |       | B Max. |       | C     |       | D Max. |       | E Max. |       | H Max. |       | J Max. |       | K    |       | L Max. |       | M Max. |       | N Max. |       |
|------|--------|-------|--------|-------|-------|-------|--------|-------|--------|-------|--------|-------|--------|-------|------|-------|--------|-------|--------|-------|--------|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   | In.  | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| 09   | .850   | 21.59 | .370   | 9.40  | .565  | 14.35 | .780   | 19.81 | .410   | 10.41 | .460   | 8.89  | .680   | 17.27 | .435 | 11.05 | 1.040  | 26.42 | 1.000  | 25.40 | .680   | 17.27 |
| 15   | 1.000  | 25.40 | .370   | 9.40  | .715  | 18.16 | .790   | 20.07 | .580   | 14.73 | .470   | 11.94 | .730   | 18.54 | .440 | 11.2  | 1.170  | 29.72 | 1.030  | 26.16 | .730   | 18.54 |
| 21   | 1.150  | 29.21 | .370   | 9.40  | .865  | 21.97 | .910   | 23.11 | .740   | 18.80 | .590   | 14.99 | .765   | 19.43 | .458 | 11.63 | 1.290  | 32.77 | 1.050  | 26.67 | .765   | 19.43 |
| 25   | 1.250  | 31.75 | .370   | 9.40  | .965  | 24.51 | .970   | 24.64 | .850   | 21.59 | .650   | 16.51 | .830   | 21.08 | .483 | 12.27 | 1.350  | 34.29 | 1.090  | 27.69 | .830   | 21.08 |
| 31   | 1.400  | 35.56 | .370   | 9.40  | 1.115 | 28.32 | 1.030  | 26.16 | .980   | 24.89 | .710   | 18.03 | .890   | 20.32 | .476 | 12.09 | 1.420  | 36.07 | 1.130  | 28.70 | .890   | 22.61 |
| 37   | 1.550  | 39.37 | .370   | 9.40  | 1.265 | 32.13 | 1.070  | 27.18 | 1.130  | 28.70 | .750   | 19.05 | .955   | 24.26 | .478 | 12.14 | 1.450  | 36.83 | 1.230  | 31.24 | .955   | 24.26 |
| 51   | 1.500  | 38.10 | .410   | 10.41 | 1.215 | 30.86 | 1.100  | 27.94 | 1.080  | 27.43 | .780   | 19.81 | 1.005  | 25.53 | .548 | 13.91 | 1.480  | 37.59 | 1.250  | 31.75 | 1.005  | 25.53 |
| 100  | 2.235  | 56.77 | .460   | 11.68 | 1.800 | 45.72 | 1.160  | 29.46 | 1.470  | 37.34 | .810   | 21.34 | 1.080  | 27.43 | .687 | 17.45 | 1.580  | 40.13 | 1.320  | 33.53 | 1.080  | 27.43 |



# Micro-D Backshells Dual Entry EMI, One Piece 507-142




**Dual Cable Entry** EMI backshell allows attachment of two separate wire bundles to the same Micro-D connector. This backshell accepts both standard and micro shield termination straps.

| MATERIALS |                            |
|-----------|----------------------------|
| Shell     | Aluminum Alloy 6061 -T6    |
| Clips     | 17-7PH Stainless Steel     |
| Hardware  | 300 Series Stainless Steel |

## HOW TO ORDER 507-142 DUAL ENTRY BACKSHELLS

| Series             | Shell Finish                        | Connector Size        | Hardware Option                     | EMI Band Strap Option                               |
|--------------------|-------------------------------------|-----------------------|-------------------------------------|---|
| 507-142            | <b>E</b> - Chem Film                | <b>09</b> <b>51</b>   | <b>B</b> - Fillister Head Jackscrew | <b>Omit</b> (Leave Blank)<br>Band Not Included      |
|                    | <b>J</b> - Cadmium, Yellow Chromate | <b>15</b> <b>51-2</b> |                                     |   |
|                    | <b>M</b> - Electroless Nickel       | <b>21</b> <b>67</b>   | <b>H</b> - Hex Head Jackscrew       | <b>B</b> - Standard Band (2 supplied)<br>.250" Wide |
|                    | <b>NF</b> - Cadmium, Olive Drab     | <b>25</b> <b>69</b>   | <b>E</b> - Extended Jackscrew       |   |
|                    | <b>Z2</b> - Gold                    | <b>31</b> <b>100</b>  | <b>F</b> - Jackpost, Female         |   |
|                    |                                     | <b>37</b>             |                                     | <b>M</b> - Micro Band (2 supplied)<br>.125" Wide    |
| Sample Part Number |                                     |                       |                                     |   |
| 507-142            | - M                                 | 25                    | H                                   |   |

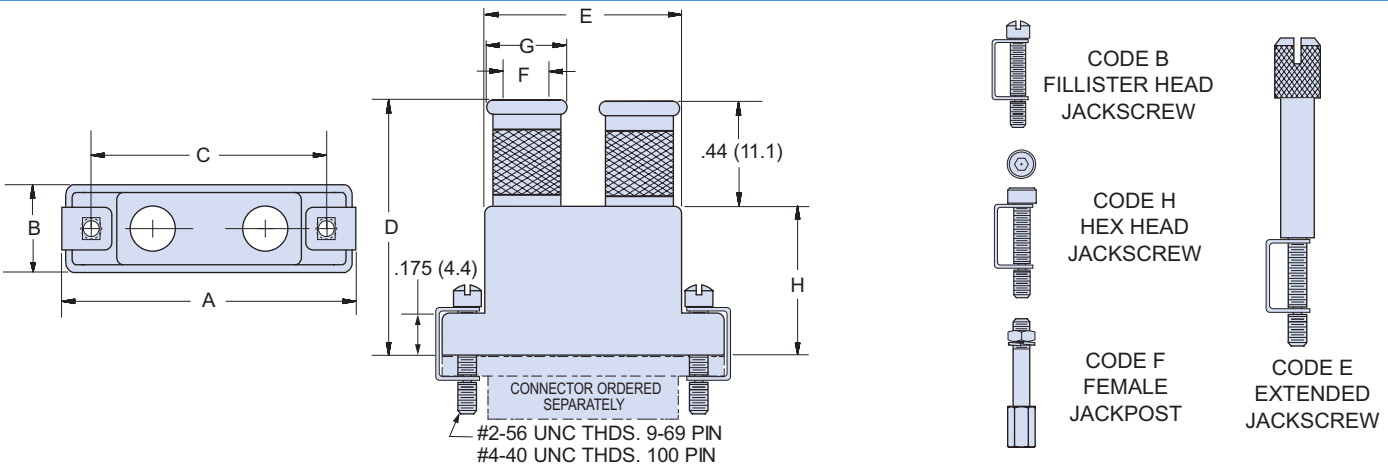

| Size | A Max. |       | B Max. |       | C     |       | D Max. |       | E Max. |       | F    |       | G    |       | H Max. |       |
|------|--------|-------|--------|-------|-------|-------|--------|-------|--------|-------|------|-------|------|-------|--------|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.    | mm.   | In.  | mm.   | In.  | mm.   | In.    | mm.   |
| 21   | 1.150  | 29.21 | .370   | 9.40  | .865  | 21.97 | 1.030  | 26.16 | .740   | 18.80 | .125 | 3.18  | .281 | 7.13  | .590   | 14.99 |
| 25   | 1.250  | 31.75 | .370   | 9.40  | .965  | 24.51 | 1.090  | 27.69 | .850   | 21.59 | .188 | 4.78  | .344 | 8.74  | .650   | 16.51 |
| 31   | 1.400  | 35.56 | .370   | 9.40  | 1.115 | 28.32 | 1.150  | 29.21 | .980   | 24.89 | .250 | 6.35  | .406 | 10.31 | .710   | 18.03 |
| 37   | 1.550  | 39.37 | .370   | 9.40  | 1.265 | 32.13 | 1.190  | 30.23 | 1.130  | 28.70 | .344 | 8.74  | .500 | 12.70 | .750   | 19.05 |
| 51   | 1.500  | 38.10 | .410   | 10.41 | 1.215 | 30.86 | 2.130  | 54.10 | 1.080  | 27.43 | .312 | 7.92  | .469 | 11.91 | .780   | 19.81 |
| 51-2 | 1.910  | 48.51 | .370   | 9.40  | 1.615 | 41.02 | 2.130  | 54.10 | 1.510  | 38.35 | .281 | 7.13  | .469 | 11.91 | .780   | 19.81 |
| 67   | 2.310  | 58.67 | .370   | 9.40  | 2.015 | 51.18 | 2.130  | 54.10 | 1.880  | 47.75 | .281 | 7.13  | .469 | 11.91 | .780   | 19.81 |
| 69   | 1.810  | 45.97 | .410   | 10.41 | 1.515 | 38.48 | 2.130  | 54.10 | 1.380  | 35.05 | .312 | 7.93  | .469 | 11.91 | .780   | 19.81 |
| 100  | 2.235  | 56.77 | .460   | 11.68 | 1.800 | 45.72 | 1.280  | 32.51 | 1.470  | 37.34 | .500 | 12.70 | .688 | 17.48 | .840   | 21.34 |

# Micro-D Backshells EMI Split Backshell, Round Cable Entry 507-145



**Split EMI Backshells** allow installation on wired connector assemblies.


**Captive Screwlocks** for fast connection. Plug in the connector, then fasten the hardware.

## MATERIALS

|          |                            |
|----------|----------------------------|
| Shell    | Aluminum Alloy 6061 -T6    |
| Clips    | 17-7PH Stainless Steel     |
| Hardware | 300 Series Stainless Steel |

## HOW TO ORDER 507-145 SPLIT BACKSHELLS

| Series                    | Shell Finish                        | Connector Size        | Hardware Option                          | EMI Band Strap Option   |
|---------------------------|-------------------------------------|-----------------------|--|---|
| 507-145                   | <b>E</b> - Chem Film                | <b>09</b> <b>51</b>   | <b>Omit</b> for Fillister Head Screwlock | <b>Omit (Leave Blank)</b><br>Band Not Included<br><br><b>B</b> - Micro Band Supplied<br><b>K</b> - Coiled Micro Band Supplied |
|                           | <b>J</b> - Cadmium, Yellow Chromate | <b>15</b> <b>51-2</b> |  |   |
|                           | <b>M</b> - Electroless Nickel       | <b>21</b> <b>67</b>   | <b>H</b> - Hex Head Screwlock            |   |
|                           | <b>NF</b> - Cadmium, Olive Drab     | <b>25</b> <b>69</b>   | <b>E</b> - Extended Screwlock            |   |
|                           | <b>Z2</b> - Gold                    | <b>31</b> <b>100</b>  | <b>F</b> - Jackpost, Female              |   |
|                           |                                     | <b>37</b>             |  |   |
| <b>Sample Part Number</b> |                                     |                       |  |   |
| <b>507-145</b>            | <b>- M</b>                          | <b>25</b>             | <b>H</b>                                 |   |

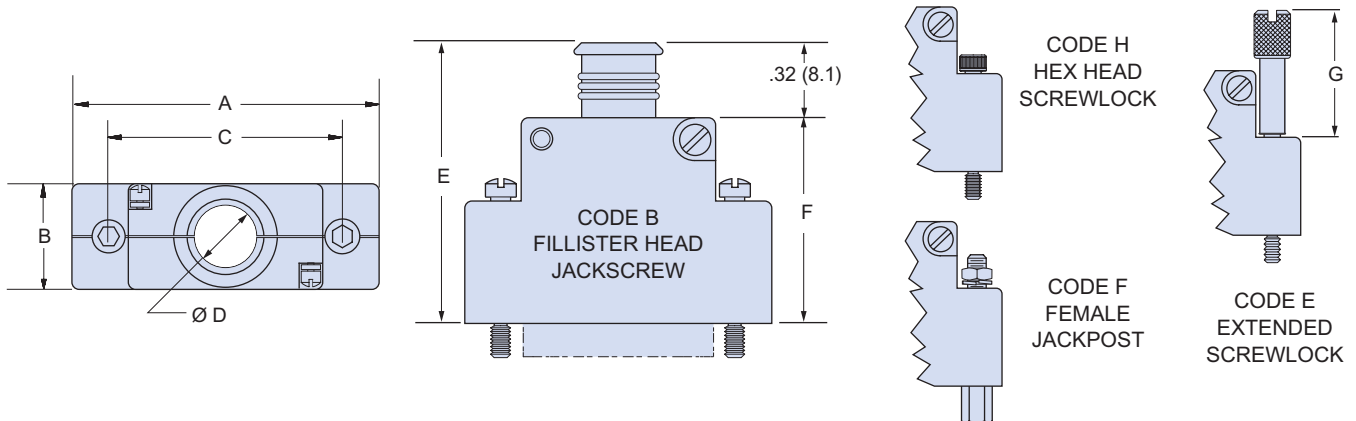

| Size        | A Max. |       | B Max. |       | C     |       | D             |               | E Max. |       | F Max. |       | G Max. |       |
|-------------|--------|-------|--------|-------|-------|-------|---------------|---------------|--------|-------|--------|-------|--------|-------|
|             | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.<br>± .010 | mm.<br>± 0.25 | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| <b>09</b>   | .915   | 23.24 | .450   | 11.43 | .565  | 14.35 | .160          | 4.06          | 1.033  | 26.24 | .721   | 18.31 | .554   | 14.07 |
| <b>15</b>   | 1.065  | 27.05 | .450   | 11.43 | .715  | 18.16 | .190          | 4.83          | 1.096  | 27.84 | .783   | 19.89 | .617   | 15.67 |
| <b>21</b>   | 1.215  | 30.86 | .450   | 11.43 | .865  | 21.97 | .220          | 5.59          | 1.127  | 28.63 | .815   | 20.70 | .649   | 16.48 |
| <b>25</b>   | 1.315  | 33.40 | .450   | 11.43 | .965  | 24.51 | .260          | 6.60          | 1.190  | 30.23 | .877   | 22.28 | .711   | 18.06 |
| <b>31</b>   | 1.465  | 37.21 | .450   | 11.43 | 1.115 | 28.32 | .275          | 6.99          | 1.221  | 31.01 | .908   | 23.06 | .722   | 18.34 |
| <b>37</b>   | 1.615  | 41.02 | .450   | 11.43 | 1.265 | 32.13 | .285          | 7.24          | 1.283  | 32.59 | .971   | 24.66 | .785   | 19.94 |
| <b>51</b>   | 1.565  | 39.75 | .495   | 12.57 | 1.215 | 30.86 | .350          | 8.89          | 1.346  | 34.19 | 1.033  | 26.24 | .867   | 22.02 |
| <b>51-2</b> | 1.965  | 48.91 | .450   | 11.43 | 1.615 | 41.02 | .285          | 7.24          | 1.346  | 34.19 | 1.033  | 26.24 | .867   | 22.02 |
| <b>67</b>   | 2.365  | 60.07 | .450   | 11.43 | 2.015 | 51.18 | .350          | 8.89          | 1.346  | 34.19 | 1.033  | 26.24 | .867   | 22.02 |
| <b>69</b>   | 1.865  | 47.37 | .495   | 12.57 | 1.515 | 38.48 | .350          | 8.89          | 1.346  | 34.19 | 1.033  | 26.24 | .867   | 22.02 |
| <b>100</b>  | 2.305  | 58.55 | .540   | 13.72 | 1.800 | 45.72 | .490          | 12.45         | 1.408  | 35.76 | 1.096  | 27.83 | .930   | 23.62 |



# Micro-D Backshells Strain Relief Backshell, Round Cable Entry 507-146




**507-146 Strain Relief Backshells** feature saddle bar clamps for easy installation.

**E-Rings** attach the backshell to the Micro-D connector.

| MATERIALS |                            |
|-----------|----------------------------|
| Shell     | Aluminum Alloy 6061 -T6    |
| Clips     | 17-7PH Stainless Steel     |
| Hardware  | 300 Series Stainless Steel |

## HOW TO ORDER 507-146 STRAIN RELIEF BACKSHELLS

| Series             | Shell Finish                        | Connector Size        | Hardware Option                           | Jackscrew Attachment Option  |
|--------------------|-------------------------------------|-----------------------|---|--|
| 507-146            | <b>E</b> - Chem Film                | <b>09</b> <b>51</b>   | <b>Omit</b> for Fillister Head Jackscrews | <b>Omit (Leave Blank)</b><br>Jackscrews Attach With E-Ring. This Option Applies to Size 09 -69. Size 100 is Not Available With E-Ring. |
|                    | <b>J</b> - Cadmium, Yellow Chromate | <b>15</b> <b>51-2</b> |   |  |
|                    | <b>M</b> - Electroless Nickel       | <b>21</b> <b>67</b>   | <b>H</b> - Hex Head Jackscrews            |  |
|                    | <b>NF</b> - Cadmium, Olive Drab     | <b>25</b> <b>69</b>   | <b>E</b> - Extended Jackscrews            |  |
|                    | <b>Z2</b> - Gold                    | <b>31</b> <b>100</b>  | <b>F</b> - Jackpost, Female               |  |
|                    |                                     | <b>37</b>             |   | <b>C</b> - "C" Clip  |
| Sample Part Number |                                     |                       |   |  |
| 507-146            | - M                                 | 25                    | H   | C  |

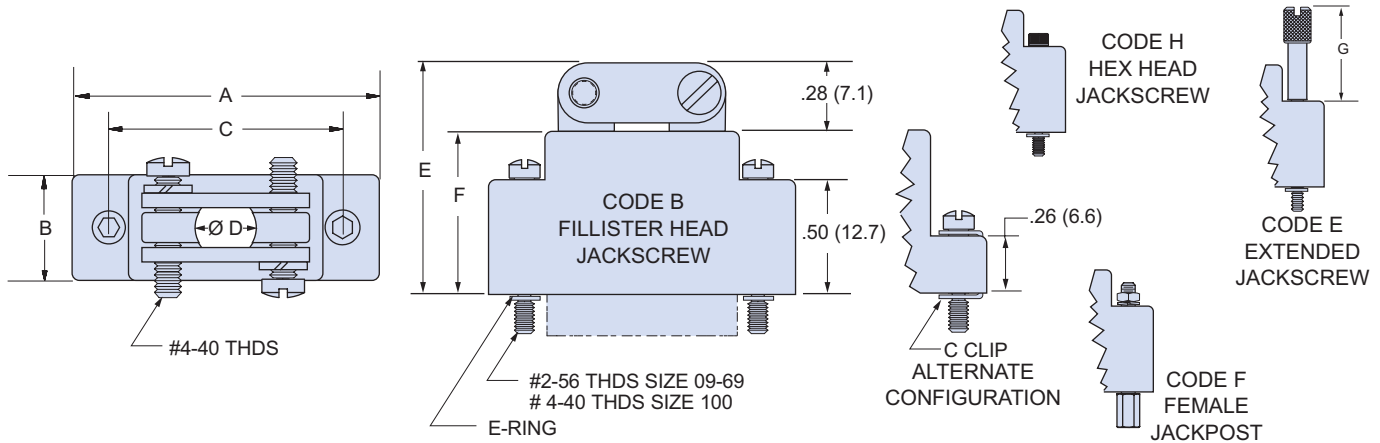

| Size | A Max. |       | B Max. |       | C     |       | D             |               | E Max. |       | F Max. |       | G Max. |       |
|------|--------|-------|--------|-------|-------|-------|---------------|---------------|--------|-------|--------|-------|--------|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.<br>± .010 | mm.<br>± 0.25 | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| 09   | .915   | 23.24 | .450   | 11.43 | .565  | 14.35 | .160          | 4.06          | .780   | 19.81 | .550   | 13.97 | .540   | 13.72 |
| 15   | 1.065  | 27.05 | .450   | 11.43 | .715  | 18.16 | .190          | 4.83          | .830   | 21.08 | .600   | 15.24 | .590   | 14.99 |
| 21   | 1.215  | 30.86 | .450   | 11.43 | .865  | 21.97 | .220          | 5.59          | .940   | 23.88 | .650   | 16.51 | .700   | 17.78 |
| 25   | 1.315  | 33.40 | .450   | 11.43 | .965  | 24.51 | .260          | 6.60          | .990   | 25.15 | .700   | 17.78 | .740   | 18.80 |
| 31   | 1.465  | 37.21 | .450   | 11.43 | 1.115 | 28.32 | .275          | 6.99          | 1.030  | 26.16 | .740   | 18.80 | .790   | 20.07 |
| 37   | 1.615  | 41.02 | .450   | 11.43 | 1.265 | 32.13 | .285          | 7.24          | 1.070  | 27.18 | .780   | 19.81 | .830   | 21.08 |
| 51   | 1.565  | 39.75 | .495   | 12.57 | 1.215 | 30.86 | .350          | 8.89          | 1.150  | 29.21 | .860   | 21.84 | .910   | 23.11 |
| 51-2 | 1.965  | 49.81 | .450   | 11.43 | 1.615 | 41.02 | .285          | 7.24          | 1.150  | 29.21 | .860   | 21.84 | .910   | 23.11 |
| 67   | 2.365  | 60.07 | .450   | 11.43 | 2.015 | 51.18 | .285          | 7.24          | 1.150  | 29.21 | .860   | 21.84 | .910   | 23.11 |
| 69   | 2.265  | 57.53 | .495   | 12.57 | 1.515 | 38.48 | .350          | 8.89          | 1.150  | 29.21 | .860   | 21.84 | .910   | 23.11 |
| 100  | 2.305  | 58.55 | .540   | 13.72 | 1.800 | 45.72 | .490          | 12.45         | 1.210  | 30.73 | .930   | 23.62 | .970   | 24.63 |

# Micro-D Backshells EMI, Banding, Elliptical, One Piece 507-175







**17-7PH Stainless Steel Clips** attach the backshell to the connector. These backshells accept standard and micro **BAND-IT®** shield termination straps.


**Straight, 45° and Right Angle** elliptical backshell provides plenty of working room for complicated wiring situations.

**Rugged One-Piece Aluminum Shell** with stainless steel hardware, available in standard nickel plating, or choose optional finishes.

## HOW TO ORDER 507-175 EMI BACKSHELLS
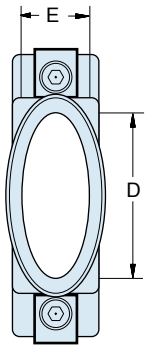
| Series  | Shell Finish  | Connector Size   | Cable Entry Code   |  |        |        | Hardware Option |                         |  |  |  |  |  |  |  |  |
|---|---|--|--|--|--------|--------|-----------------|-------------------------|--|--|--|--|--|--|--|--|
|   |   |  | D  |  | E      |        |                 | Available on Shell Size |  |  |  |  |  |  |  |  |
|   |   |  | Size   | In.  | mm.    | In.    | mm.             |                         |  |  |  |  |  |  |  |  |
| <b>Top Entry</b><br><b>507T175</b><br>  | <b>E</b> – Chem Film (Alodyne)<br><b>J</b> – Cadmium, Yellow Chromate<br><b>M</b> – Electroless Nickel<br><b>NF</b> – Cadmium, Olive Drab<br><b>Z2</b> – Gold | <b>09</b><br><b>15</b><br><b>21</b><br><b>25</b><br><b>31</b><br><b>37</b><br><b>51</b><br><b>51-2</b><br><b>67</b><br><b>69</b><br><b>100</b> | <b>01</b><br><b>02</b><br><b>03</b><br><b>04</b><br><b>05</b><br><b>06</b><br><b>07</b><br><b>08</b> | ± .010   | ± 0.25 | ± .010 | ± 0.25          |                         |  |  |  |  |  |  |  |  |
|   |   |  |  | .344   | 8.74   | .290   | 7.37            | 09 Thru 100             |  |  |  |  |  |  |  |  |
|   |   |  |  | .494   | 12.55  | .290   | 7.37            | 15 Thru 100             |  |  |  |  |  |  |  |  |
|   |   |  |  | .644   | 16.36  | .290   | 7.37            | 21 Thru 100             |  |  |  |  |  |  |  |  |
|   |   |  |  | .744   | 18.90  | .304   | 7.72            | 25 Thru 100             |  |  |  |  |  |  |  |  |
|   |   |  |  | .894   | 21.34  | .304   | 7.72            | 31 Thru 100             |  |  |  |  |  |  |  |  |
|   |   |  |  | .994   | 25.25  | .304   | 7.72            | 37 Thru 100             |  |  |  |  |  |  |  |  |
|   |   |  |  | 1.044  | 26.52  | .304   | 7.72            | 37 and 100              |  |  |  |  |  |  |  |  |
|   |   |  |  | 1.024  | 26.01  | .384   | 9.75            | 100                     |  |  |  |  |  |  |  |  |
|   |   |  |  | <b>Side Entry</b><br><b>507S175</b><br> |        |        |                 |                         |  |  |  |  |  |  |  |  |
| <b>45° Entry</b><br><b>507E175</b><br> |   |  |  |  |        |        |                 |                         |  |  |  |  |  |  |  |  |
|   |   |  |  |  |        |        |                 |                         |  |  |  |  |  |  |  |  |
|                                       |   |  |  |  |        |        |                 |                         |  |  |  |  |  |  |  |  |
| <b>Sample Part Number</b>   |   |  |  |  |        |        |                 |                         |  |  |  |  |  |  |  |  |
| <b>507E175</b>  | <b>M</b>  | <b>25</b>  | <b>04</b>  |  |        |        |                 |                         |  |  |  |  |  |  |  |  |


**Omit (Leave Blank)**  
Fillister Head Jackscrew



**H** – Hex Head Jackscrew



**E** – Extended Jackscrew




**F** – Jackpost, Female




### MATERIALS (SEE ORDERING INFO FOR FINISH OPTIONS)

|                                |  |
|--------------------------------|--|
| Shell                          | Aluminum Alloy 6061 -T6 Per QQ-A-200, QQ-A-225 (Machined Components)<br>Aluminum Alloy 6061-T6 Per QQ-A-591 (A380) (Die-Cast Components) |
| Clips                          | 17-7PH Stainless Steel   |
| Jackscrews, Washers, Jackposts | 300 Series Stainless Steel, Passivated   |

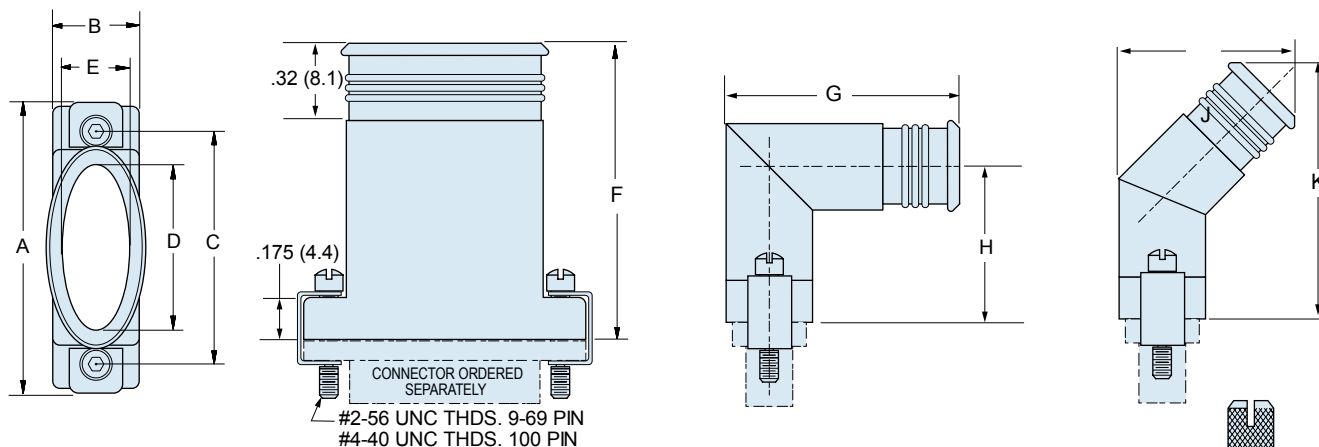

| Cable Entry Code | CABLE ENTRY SIZES |           |           |           | Available on Shell Size |
|------------------|-------------------|-----------|-----------|-----------|-------------------------|
|                  | D                 |           | E         |           |                         |
|                  | In. ±.010         | mm. ±0.25 | In. ±.010 | mm. ±0.25 |                         |
| 01               | .344              | 8.74      | .290      | 7.37      | 09 Thru 100             |
| 02               | .494              | 12.55     | .290      | 7.37      | 15 Thru 100             |
| 03               | .644              | 16.36     | .290      | 7.37      | 21 Thru 100             |
| 04               | .744              | 18.90     | .304      | 7.72      | 25 Thru 100             |
| 05               | .894              | 21.34     | .304      | 7.72      | 31 Thru 100             |
| 06               | .994              | 25.25     | .304      | 7.72      | 37 Thru 100             |
| 07               | 1.044             | 26.52     | .304      | 7.72      | 37 and 100              |
| 08               | 1.024             | 26.01     | .384      | 9.75      | 100                     |

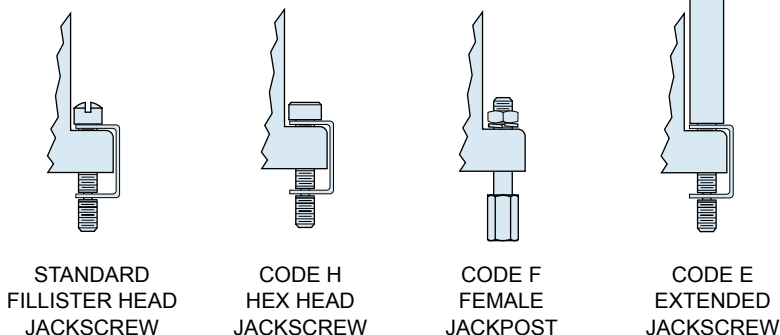

### DIMENSIONS

| Size | A Max. |       | B Max. |       | C     |       | F Max. |       | G Max. |       | H Max. |       | J Max. |       | K Max. |       |
|------|--------|-------|--------|-------|-------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| 09   | .850   | 21.59 | .370   | 9.40  | .565  | 14.35 | .782   | 19.86 | .970   | 24.64 | .668   | 16.97 | .673   | 17.09 | .851   | 21.62 |
| 15   | 1.000  | 25.40 | .370   | 9.40  | .715  | 18.16 | .832   | 21.13 | .970   | 24.64 | .668   | 16.97 | .673   | 17.09 | .876   | 22.25 |
| 21   | 1.150  | 29.21 | .370   | 9.40  | .865  | 21.97 | .882   | 22.40 | .970   | 24.64 | .668   | 16.97 | .673   | 17.09 | .901   | 22.89 |
| 25   | 1.250  | 31.75 | .370   | 9.40  | .965  | 24.51 | .932   | 23.67 | .990   | 25.15 | .678   | 17.22 | .700   | 17.78 | .943   | 23.95 |
| 31   | 1.400  | 35.56 | .370   | 9.40  | 1.115 | 28.32 | .972   | 24.69 | .990   | 25.15 | .678   | 17.22 | .700   | 17.78 | .963   | 24.46 |
| 37   | 1.550  | 39.37 | .370   | 9.40  | 1.265 | 32.13 | .972   | 24.69 | .990   | 25.15 | .678   | 17.22 | .700   | 17.78 | .983   | 24.97 |
| 51   | 1.500  | 38.10 | .410   | 10.41 | 1.215 | 30.86 | 1.092  | 27.74 | 1.030  | 26.16 | .698   | 17.73 | .758   | 19.25 | 1.050  | 26.67 |
| 51-2 | 1.910  | 48.51 | .370   | 9.40  | 1.615 | 41.02 | 1.092  | 27.74 | 1.030  | 26.16 | .698   | 17.73 | .758   | 19.25 | 1.050  | 26.67 |
| 67   | 2.310  | 58.67 | .370   | 9.40  | 2.015 | 51.18 | 1.092  | 27.74 | 1.030  | 26.16 | .698   | 17.73 | .758   | 19.25 | 1.050  | 26.67 |
| 69   | 1.810  | 45.97 | .410   | 10.41 | 1.515 | 38.48 | 1.092  | 27.74 | 1.030  | 26.16 | .698   | 17.73 | .758   | 19.25 | 1.050  | 26.67 |
| 100  | 2.235  | 56.77 | .460   | 11.68 | 1.800 | 45.72 | 1.157  | 29.39 | 1.090  | 27.69 | .723   | 18.36 | .824   | 20.93 | 1.130  | 28.70 |

# Micro-D Backshells

## EMI, Banding, Elliptical, Split, 507-178



**Split Backshell With Elliptical Cable Entry** provides added room for larger wire bundles. Terminate cable shields with **BAND-IT®** microbands.

**Choose Screwlocks or Jackscrews** 507-178 backshells offer two ways to attach mating connectors. **Jackscrews** must be tightened in order to mate the connectors. **Screwlocks** allow the connectors to be mated prior to engaging the screws.

**Rugged Aluminum** housing with stainless steel hardware, available in standard nickel plating, or choose optional finishes.

### HOW TO ORDER 507-178 EMI BACKSHELLS

| Series  | Shell Finish                        | Connector Size | Cable Entry Code |       |       | Hardware Option   | EMI Band Strap Option   |
|---------|-------------------------------------|----------------|------------------|-------|-------|---|---|
| 507-178 | <b>E</b> – Chem Film (Alodyne)      | <b>09</b>      | <b>D</b>         |       |       | <b>B</b> – Fillister Head Screwlock<br><b>BJ</b> – Fillister Head Jackscrew | <b>OMIT-</b> Band Strap Not Supplied  |
|         |                                     |                | <b>Code</b>      | In.   | mm.   |   |   |
|         | <b>J</b> – Cadmium, Yellow Chromate | <b>15</b>      | <b>04</b>        | .250  | 6.35  | 09, 15, 21  | <b>B</b> – Microband Supplied (600-057)<br><br><b>K</b> – Coiled Microband Supplied (600-057-1) |
|         |                                     |                | <b>05</b>        | .312  | 7.92  | 15 Thru 31  |   |
|         | <b>M</b> – Electroless Nickel       | <b>21</b>      | <b>06</b>        | .375  | 9.53  | 21 Thru 51  |   |
|         |                                     |                | <b>07</b>        | .437  | 11.10 | 25 Thru 51  |   |
|         | <b>NF</b> – Cadmium, Olive Drab     | <b>25</b>      | <b>08</b>        | .500  | 12.70 | 25 Thru 51  |   |
|         |                                     |                | <b>09</b>        | .562  | 14.27 | 31 Thru 100   |   |
|         | <b>Z2</b> – Gold                    | <b>31</b>      | <b>10</b>        | .625  | 15.88 | 31 Thru 100   |   |
|         |                                     |                | <b>11</b>        | .688  | 17.48 | 37 Thru 100   |   |
|         |                                     | <b>37</b>      | <b>12</b>        | .750  | 19.05 | 37 Thru 100   |   |
|         |                                     |                | <b>13</b>        | .812  | 20.62 | 37,51-2,67,69,100   |   |
|         |                                     | <b>51-2</b>    | <b>14</b>        | .875  | 22.23 | 51-2, 67, 69, 100   |   |
|         |                                     |                | <b>15</b>        | .938  | 23.83 | 51-2, 67, 69, 100   |   |
|         |                                     | <b>67</b>      | <b>16</b>        | 1.000 | 25.40 | 51-2, 67, 69, 100   |   |
|         |                                     |                | <b>69</b>        |       |       |   |   |
|         |                                     | <b>100</b>     |                  |       |       |   |   |

#### Sample Part Number




507-178 – M 25 06 F K



### MATERIALS (SEE ORDERING INFO FOR FINISH OPTIONS)

|                                |  |
|--------------------------------|--|
| Shell, Saddle Clamps           | Aluminum Alloy 6061 -T6 Per QQ-A-200, QQ-A-225 (Machined Components)<br>Aluminum Alloy 6061-T6 Per QQ-A-591 (A380) (Die-Cast Components) |
| Clips                          | 17-7PH Stainless Steel   |
| Jackscrews, Washers, Jackposts | 300 Series Stainless Steel, Passivated   |

| CABLE ENTRY |           |           |                         |
|-------------|-----------|-----------|-------------------------|
| Code        | D         |           | Available on Shell Size |
|             | In. ±.010 | mm. ±0.25 |                         |
| 04          | .250      | 6.35      | 09, 15, 21              |
| 05          | .312      | 7.92      | 15 Thru 31              |
| 06          | .375      | 9.53      | 21 Thru 51              |
| 07          | .437      | 11.10     | 25 Thru 51              |
| 08          | .500      | 12.70     | 25 Thru 51              |
| 09          | .562      | 14.27     | 31 Thru 100             |
| 10          | .625      | 15.88     | 31 Thru 100             |
| 11          | .688      | 17.48     | 37 Thru 100             |
| 12          | .750      | 19.05     | 37 Thru 100             |
| 13          | .812      | 20.62     | 37,51-2,67,69,100       |
| 14          | .875      | 22.23     | 51-2, 67, 69, 100       |
| 15          | .938      | 23.83     | 51-2, 67, 69, 100       |
| 16          | 1.000     | 25.40     | 51-2, 67, 69, 100       |

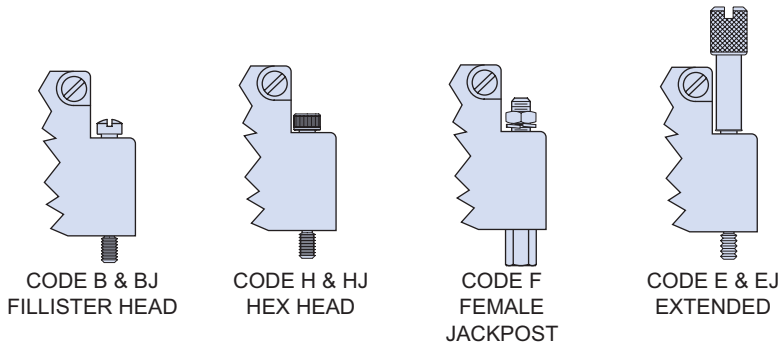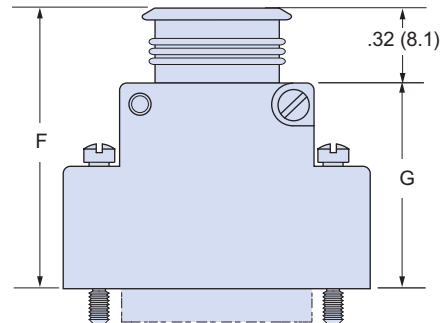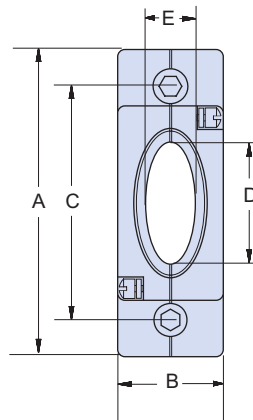

### DIMENSIONS

| Size | A Max. |       | B Max. |       | C     |       | E         |           | F Max. |       | G Max. |       |
|------|--------|-------|--------|-------|-------|-------|-----------|-----------|--------|-------|--------|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In. ±.010 | mm. ±0.25 | In.    | mm.   | In.    | mm.   |
| 09   | .915   | 23.24 | .450   | 11.43 | .565  | 14.35 | .160      | 4.06      | 1.033  | 26.24 | .721   | 18.31 |
| 15   | 1.065  | 27.05 | .450   | 11.43 | .715  | 18.16 | .190      | 4.83      | 1.096  | 27.84 | .783   | 19.89 |
| 21   | 1.215  | 30.86 | .450   | 11.43 | .865  | 21.97 | .220      | 5.59      | 1.127  | 28.63 | .815   | 20.70 |
| 25   | 1.315  | 33.40 | .450   | 11.43 | .965  | 24.51 | .260      | 6.60      | 1.190  | 30.23 | .877   | 22.28 |
| 31   | 1.465  | 37.21 | .450   | 11.43 | 1.115 | 28.32 | .275      | 6.99      | 1.221  | 31.01 | .908   | 23.06 |
| 37   | 1.615  | 41.02 | .450   | 11.43 | 1.265 | 32.13 | .285      | 7.24      | 1.283  | 32.59 | .971   | 24.66 |
| 51   | 1.565  | 39.75 | .495   | 12.57 | 1.215 | 30.86 | .350      | 8.89      | 1.346  | 34.19 | 1.033  | 26.24 |
| 51-2 | 1.965  | 49.91 | .450   | 11.43 | 1.615 | 41.02 | .350      | 8.89      | 1.346  | 34.19 | 1.033  | 26.24 |
| 67   | 2.365  | 60.07 | .450   | 11.43 | 2.015 | 51.18 | .350      | 8.89      | 1.346  | 34.19 | 1.033  | 26.24 |
| 69   | 1.865  | 47.37 | .495   | 12.57 | 1.515 | 38.48 | .350      | 8.89      | 1.346  | 34.19 | 1.033  | 26.24 |
| 100  | 2.305  | 58.55 | .540   | 13.72 | 1.800 | 45.72 | .490      | 12.45     | 1.408  | 35.76 | 1.096  | 27.83 |

# Micro-D Backshells Strain Relief, Saddle Bars 507-198




**507-198 Strain Relief Backshells** feature saddle bar cable clamps for easy installation.

## MATERIALS

|          |                            |
|----------|----------------------------|
| Shell    | Aluminum Alloy 6061 -T6    |
| Clips    | 17-7PH Stainless Steel     |
| Hardware | 300 Series Stainless Steel |

## HOW TO ORDER 507-198 STRAIN RELIEF BACKSHELLS


| Series             | Shell Finish                        | Connector Size |             |
|--------------------|-------------------------------------|----------------|-------------|
| 507-198            | <b>E</b> - Chem Film                | <b>09</b>      | <b>51</b>   |
|                    | <b>J</b> - Cadmium, Yellow Chromate | <b>15</b>      | <b>51-2</b> |
|                    | <b>M</b> - Electroless Nickel       | <b>21</b>      | <b>67</b>   |
|                    | <b>NF</b> - Cadmium, Olive Drab     | <b>25</b>      | <b>69</b>   |
|                    | <b>Z2</b> - Gold                    | <b>31</b>      | <b>100</b>  |
|                    |                                     |                | <b>37</b>   |
| Sample Part Number |                                     |                |             |
| 507-198            | - M                                 | 25             |             |

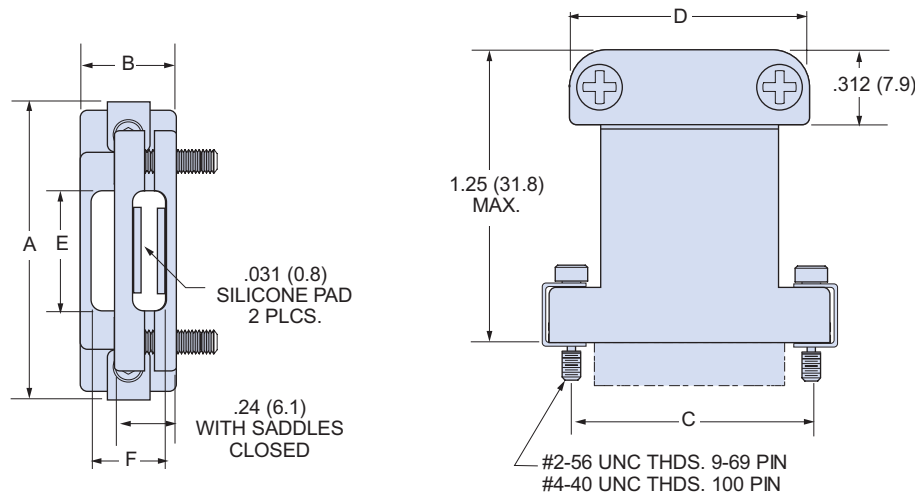

## DIMENSIONS

| Size | A Max. |       | B Max. |       | C     |       | D Max. |       | E    |       | F   |       |
|------|--------|-------|--------|-------|-------|-------|--------|-------|------|-------|-----|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.  | mm.   | In. | mm.   |
| 09   | .850   | 21.59 | .420   | 10.67 | .565  | 14.35 | .840   | 21.34 | .31  | 7.87  | .31 | 7.87  |
| 15   | 1.000  | 25.40 | .420   | 10.67 | .715  | 18.16 | .910   | 23.11 | .38  | 9.65  | .31 | 7.87  |
| 21   | 1.150  | 29.21 | .420   | 10.67 | .865  | 21.97 | .970   | 24.64 | .44  | 11.18 | .31 | 7.87  |
| 25   | 1.250  | 31.75 | .420   | 10.67 | .965  | 24.51 | 1.030  | 26.16 | .50  | 12.70 | .31 | 7.87  |
| 31   | 1.400  | 35.56 | .420   | 10.67 | 1.115 | 28.32 | 1.080  | 27.43 | .55  | 13.97 | .31 | 7.87  |
| 37   | 1.550  | 39.37 | .420   | 10.67 | 1.265 | 32.13 | 1.130  | 28.70 | .60  | 15.24 | .31 | 7.87  |
| 51   | 1.500  | 38.10 | .470   | 11.94 | 1.215 | 30.86 | 1.080  | 27.43 | .55  | 13.97 | .36 | 9.14  |
| 51-2 | 1.910  | 48.51 | .420   | 10.67 | 1.615 | 41.02 | 1.480  | 37.59 | .95  | 24.13 | .31 | 7.87  |
| 67   | 2.310  | 58.67 | .420   | 10.67 | 2.015 | 51.18 | 1.880  | 47.75 | 1.35 | 34.29 | .31 | 7.87  |
| 69   | 1.810  | 45.97 | .470   | 11.94 | 1.515 | 38.48 | 1.380  | 35.05 | .85  | 21.59 | .36 | 9.14  |
| 100  | 2.235  | 56.77 | .510   | 12.95 | 1.800 | 45.72 | 1.650  | 41.91 | 1.00 | 25.40 | .40 | 10.04 |

# Ten Reasons to Keep Glenair at the Top of Your List of Backshell Suppliers

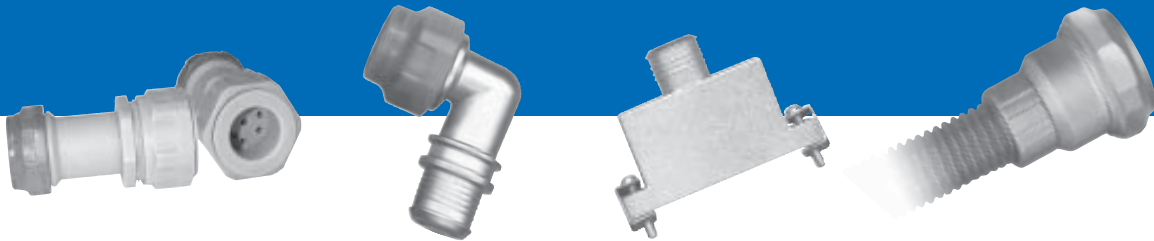

**1. We offer the lowest total cost of ownership in the interconnect industry:** From our cost-saving "no minimum order" policy to our free product samples and application engineering, Glenair provides the best value in connector accessories available today.

**2. Our full spectrum product lines make for one-stop-shopping:** We have the most complete selection of rectangular backshells and accessories in the world, including every Mil-Spec slash number and more composite designs than the rest of the industry combined.

**3. We have the largest capacity, broadest capability factory in the business** and the knowledge and expertise to handle any production requirement no matter how large or complex.

**4. We've provided complete convenience in ordering since 1956** (that's your convenience not ours): choose factory direct, your local Glenair office or your favorite distributor.

**5. We care as much about quality as you do:** We're BSENISO9001 registered in Europe and MIL-I-45208A and Boeing AQS D1-9000 Certified in North America.

**6. We have over 30,000 accessory part numbers ready for immediate shipment** including every Mil-C-85049 accessory and thousands of Glenair's most popular rectangular and circular backshell part numbers.

**7. Our turnaround on quotes and custom orders is the fastest in the industry:** We offer 24 hour turnaround on RFQ's and just 2 to 3 weeks delivery on custom orders, including Micro-Ds and other rectangular interconnects.

**8. We have the largest and most experienced support staff in the business,** including sales and engineering in every major aerospace market, on-site application engineering and dedicated product managers for every interconnect discipline.

**9. We understand interconnect systems from the ground up:** We're the only connector, backshell and accessory supplier to operate a full service harness facility. We even make our own line of assembly tools.

**10. We're committed:** Backshells and connector accessories are our life. We've served this market since 1956 and we're committed to meeting the evolving needs of our customers.

Glenair: A world of Interconnect Solutions

**PRODUCT SELECTION GUIDE**

**Micro-D Uni-Saver**

Always in stock, these feed-thru pin-socket adapters feature an innovative design using a single machined aluminum housing. Fully EMI protected, Uni-Savers protect expensive equipment from damage during testing and burn-in. Available in all sizes.



*Uni-Saver  
Page M-2*

**Micro-D Plastic Dust Caps**

Always in stock, these anti-static black LDPE dust caps protect Micro-D connectors from debris and damage. All Glenair Micro-D connectors are furnished with these dust caps; however, these caps may be purchased separately for replacements.



*Dust Caps  
Page M-4*

**Micro-D Metal Protective Covers**

These aluminum covers provide complete mechanical and environmental protection. A silicone gasket assures water-tight sealing. A variety of attachment styles are available.



*Metal Covers  
Page M-5*

**Bean Rubber Covers**

For protection of Micro-D's used in tactical equipment, these synthetic rubber covers are friction-fit and attach with nylon cord and ring terminals.



*Rubber Covers  
Page M-7*

**Shorting Adapters**

Combining a switching backshell and a Micro-D connector, these assemblies have all contacts shorted to each other. These shorting plugs provide ESD protection to sensitive instrumentation.



*Shorting Adapters  
Page M-3*

**Jackscrew Kits**

These stainless steel kits are compatible with standard Micro-D connectors and meet the requirements of MIL-DTL-83513. Jackscrews are available with slot heads or hex heads. Choose low profile or extended length versions.



*Jackscrew Kits  
Page M-8*

**Jackpost Kits**

Jackposts are available in various lengths to fit front and rear panel mounted connectors. These stainless steel jackposts fit all standard Micro-D connectors.



*Jackpost Kits  
Page M-10*

**Interfacial Seals**

Replace damaged Micro-D socket connector interfacial seals with new ones. Sometimes these seals can tear or be contaminated. Held in place by an interference fit with the contacts, damaged seals can be removed with tweezers.



*Interfacial Seals  
Page M-4*





# Micro-D Sav-Con® Connector Savers Uni-Saver

**Compact Size** reduces stress on mating connectors.

**In Stock, No Waiting** – All standard Uni-Saver sizes are in stock (9, 15, 21, 25, 31, 37, 51 and 100 pin).

**EMI Protected** one piece shell.


## MATERIALS & FINISHES

|             |  |
|-------------|--|
| Shell       | Aluminum Alloy 6061 -T6<br>Electroless Nickel Plated |
| Contacts    | Gold-Plated Copper Alloy                             |
| Encapsulant | Epoxy  |
| Insulators  | Glass-Filled LCP                                     |
| Hardware    | 300 Series Stainless Steel, Passivated               |



## Protect Expensive Equipment With Glenair's Micro-D Uni-Saver

These connector savers feature a one-piece aluminum housing, TwistPin contacts and locking hardware. Typical applications include test equipment and space-grade instruments. The Uni-Saver prevents wear and tear on sensitive gear. Standard Uni-Savers are electroless nickel plated. Other plating finishes are available on request.

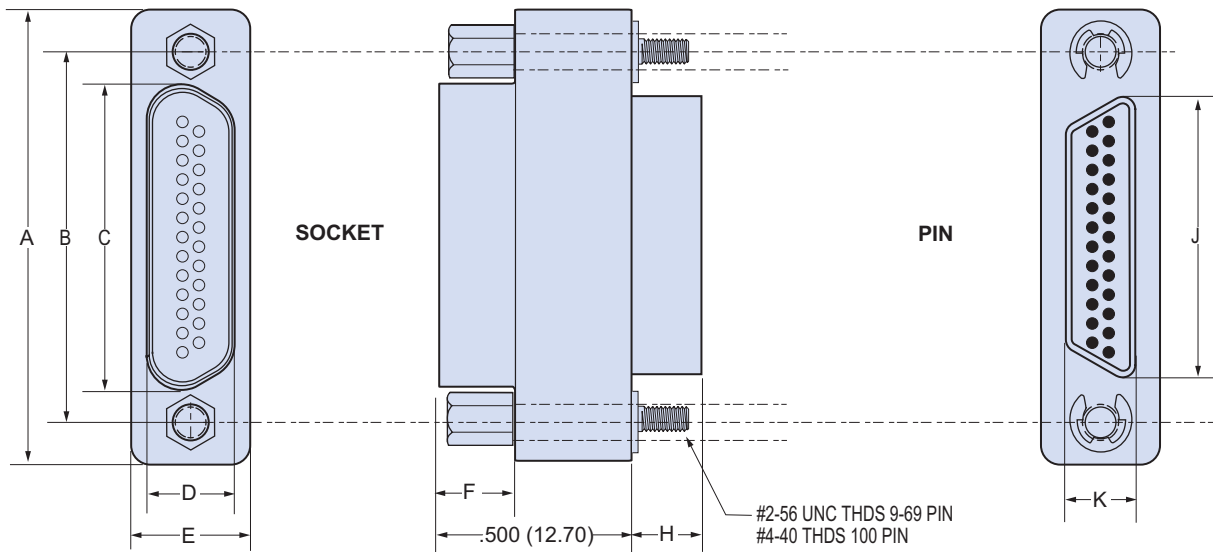

| Size | Part Number     | A Max. |       | B         |           | C Max. |       | D Max. |      | E Max. |       | F         |           | H Max. |      | J Max. |       |
|------|-----------------|--------|-------|-----------|-----------|--------|-------|--------|------|--------|-------|-----------|-----------|--------|------|--------|-------|
|      |                 | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.   | In.    | mm.  | In.    | mm.   | In. ±.003 | mm. ±0.08 | In.    | mm.  | In.    | mm.   |
| 9    | MWDM2L-9USP1    | .785   | 19.94 | .565      | 14.35     | .400   | 10.16 | .250   | 6.35 | .308   | 7.82  | .195      | 4.95      | .183   | 4.65 | .333   | 8.46  |
| 15   | MWDM2L-15USP1   | .935   | 23.75 | .715      | 18.16     | .551   | 14.00 | .250   | 6.35 | .308   | 7.82  | .195      | 4.95      | .183   | 4.65 | .483   | 12.27 |
| 21   | MWDM2L-21USP1   | 1.085  | 27.56 | .865      | 21.97     | .701   | 17.81 | .250   | 6.35 | .308   | 7.82  | .195      | 4.95      | .183   | 4.65 | .633   | 16.08 |
| 25   | MWDM2L-25USP1   | 1.185  | 30.01 | .965      | 24.51     | .801   | 20.35 | .250   | 6.35 | .308   | 7.82  | .195      | 4.95      | .183   | 4.65 | .733   | 18.62 |
| 31   | MWDM2L-31USP1   | 1.335  | 33.91 | 1.115     | 28.32     | .951   | 24.16 | .250   | 6.35 | .308   | 7.82  | .195      | 4.95      | .183   | 4.65 | .883   | 22.43 |
| 37   | MWDM2L-37USP1   | 1.485  | 37.72 | 1.265     | 32.13     | 1.101  | 27.96 | .250   | 6.35 | .308   | 7.82  | .195      | 4.95      | .183   | 4.65 | 1.033  | 26.24 |
| 51   | MWDM2L-51USP1   | 1.435  | 36.45 | 1.215     | 30.86     | 1.051  | 26.70 | .293   | 7.44 | .351   | 8.92  | .195      | 4.95      | .183   | 4.65 | .983   | 24.97 |
| 51-2 | MWDM2L-51-2USP1 | 1.835  | 46.61 | 1.615     | 41.02     | 1.450  | 36.83 | .250   | 6.35 | .308   | 7.82  | .195      | 4.95      | .183   | 4.65 | 1.384  | 35.15 |
| 67   | MWDM2L-67USP1   | 2.235  | 56.77 | 2.015     | 51.18     | 1.850  | 46.99 | .250   | 6.35 | .308   | 7.82  | .195      | 4.95      | .183   | 4.65 | 1.784  | 45.31 |
| 69   | MWDM2L-69USP1   | 1.735  | 44.07 | 1.515     | 38.48     | 1.350  | 34.29 | .293   | 7.44 | .351   | 8.92  | .195      | 4.95      | .183   | 4.65 | 1.284  | 32.61 |
| 100  | MWDM2L-100USP1  | 2.170  | 55.12 | 1.800     | 45.72     | 1.451  | 36.86 | .333   | 8.46 | .394   | 10.01 | .195      | 4.95      | .183   | 4.65 | 1.383  | 35.13 |

# Micro-D Accessories Shorting Plug Assembly 177-007



**Shorting Plug Assemblies** are Micro-D connectors with all contacts bussed/shorted together. Enclosed in a backshell and fitted with jackscrews, these shorting plugs provide ESD protection to sensitive instrumentation.


| MATERIALS & FINISHES |  |
|----------------------|--|
| Shells               | Aluminum Alloy 6061 -T6                |
| Contacts             | Gold-Plated Copper Alloy               |
| Encapsulant          | Epoxy                                  |
| Insulators           | Glass-Filled LCP                       |
| Hardware             | 300 Series Stainless Steel, Passivated |

## HOW TO ORDER 177-007 SHORTING PLUGS

| Series  | Connector Size | Contact Type          | Shell Finish   | Hardware Option   | Lanyard Option   | Lanyard Length   | Ring Terminal Ordering Code |
|---------|----------------|-----------------------|--|---|--|--|-----------------------------|
| 177-007 | 9              | P – Pin<br>S – Socket | 1 – Cadmium, Yellow Chromate<br>2 – Electroless Nickel<br>4 – Black Anodize<br>5 – Gold<br>6 – Chem Film | B – Fillister Head Jackscrew<br>H – Hex Head Jackscrew<br>E – Extended Jackscrew<br>F – Jackpost, Female<br>N – No Hardware | N – No Lanyard<br>G – Flexible Nylon Rope<br>F – Wire Rope, Nylon Jacket<br>H – Wire Rope, Teflon Jacket | Length in One Inch Increments<br>Example: "6" equals six inches. | 06 – .125 (3.2)             |
|         | 15             |                       |  |   |  |  | 01 – .140 (3.6)             |
|         | 21             |                       |  |   |  |  | 05 – .167 (4.2)             |
|         | 25             |                       |  |   |  |  | 04 – .197 (5.0)             |
|         | 31             |                       |  |   |  |  |                             |
|         | 37             |                       |  |   |  |  |                             |

### Sample Part Number

|         |      |   |   |   |   |   |      |
|---------|------|---|---|---|---|---|------|
| 177-007 | - 25 | S | 2 | H | F | 4 | - 06 |
|---------|------|---|---|---|---|---|------|

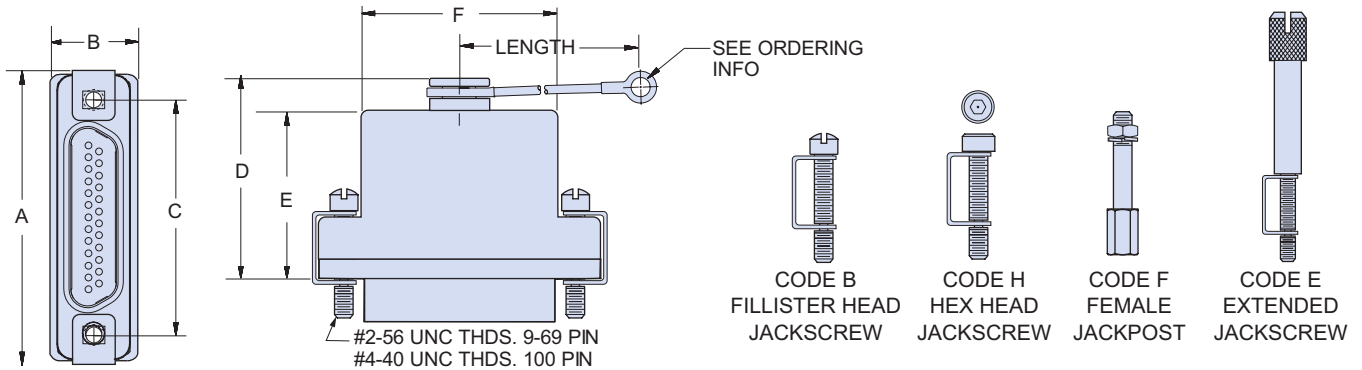

| Size | A Max. |       | B Max. |       | C     |       | D Max. |       | E Max. |       | F Max. |       |
|------|--------|-------|--------|-------|-------|-------|--------|-------|--------|-------|--------|-------|
|      | In.    | mm.   | In.    | mm.   | In.   | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   |
| 9    | .850   | 21.59 | .370   | 9.40  | .565  | 14.35 | .600   | 15.24 | .450   | 11.43 | .410   | 10.41 |
| 15   | 1.000  | 25.40 | .370   | 9.40  | .715  | 18.16 | .720   | 18.29 | .570   | 14.48 | .580   | 14.73 |
| 21   | 1.150  | 29.21 | .370   | 9.40  | .865  | 21.97 | .840   | 21.34 | .690   | 17.53 | .740   | 18.80 |
| 25   | 1.250  | 31.75 | .370   | 9.40  | .965  | 24.51 | .900   | 22.86 | .750   | 19.05 | .850   | 21.59 |
| 31   | 1.400  | 35.56 | .370   | 9.40  | 1.115 | 28.32 | .960   | 24.38 | .810   | 20.57 | .980   | 24.89 |
| 37   | 1.550  | 39.37 | .370   | 9.40  | 1.265 | 32.13 | 1.000  | 25.40 | .850   | 21.59 | 1.130  | 28.70 |
| 51   | 1.500  | 38.10 | .410   | 10.41 | 1.215 | 30.86 | 1.030  | 26.16 | .880   | 22.35 | 1.080  | 27.43 |
| 51-2 | 1.910  | 48.51 | .370   | 9.40  | 1.615 | 41.02 | 1.030  | 26.16 | .880   | 22.35 | 1.510  | 38.35 |
| 67   | 2.310  | 58.67 | .370   | 9.40  | 2.015 | 51.18 | 1.030  | 26.16 | .880   | 22.35 | 1.880  | 47.75 |
| 69   | 1.810  | 45.97 | .410   | 10.41 | 1.515 | 38.48 | 1.030  | 26.16 | .880   | 22.35 | 1.380  | 35.02 |
| 100  | 2.235  | 56.77 | .460   | 11.68 | 1.800 | 45.72 | 1.090  | 27.69 | .940   | 23.88 | 1.470  | 37.34 |


## ANTI-STATIC DUST CAPS




*Anti-Static Dust Caps* offer protection to Micro-D connectors for storage and handling. Molded in black thermoplastic LDPE, these caps meet the anti-static decay rate specified in MIL-PRF-81705D.

*UL 94-V0* rated, self-extinguishing

| Layout | MWD Metal Shell Connectors |        |       |        |       | MWD Plastic Shell Connectors |        |       |        |      |
|--------|----------------------------|--------|-------|--------|-------|------------------------------|--------|-------|--------|------|
|        | Part Number                | A Ref. |       | B Ref. |       | Part Number                  | A Ref. |       | B Ref. |      |
|        |                            | In.    | mm.   | In.    | mm.   |                              | In.    | mm.   | In.    | mm.  |
| 9P     | 000-01-09-162              | .390   | 9.91  | .250   | 6.35  | 000-01-09-164                | .350   | 8.89  | .200   | 5.08 |
| 9S     | 000-01-09-163              | .460   | 11.68 | .320   | 8.13  | 000-01-09-165                | .430   | 10.92 | .280   | 7.11 |
| 15P    | 000-01-15-162              | .540   | 13.72 | .250   | 6.35  | 000-01-15-164                | .500   | 12.70 | .200   | 5.08 |
| 15S    | 000-01-15-163              | .610   | 15.49 | .320   | 8.13  | 000-01-15-165                | .580   | 14.73 | .280   | 7.11 |
| 21P    | 000-01-21-162              | .670   | 17.02 | .250   | 6.35  | 000-01-21-164                | .650   | 16.51 | .200   | 5.08 |
| 21S    | 000-01-21-163              | .740   | 18.80 | .320   | 8.13  | 000-01-21-165                | .730   | 18.54 | .280   | 7.11 |
| 25P    | 000-01-25-162              | .770   | 19.56 | .250   | 6.35  | 000-01-25-164                | .750   | 19.05 | .200   | 5.08 |
| 25S    | 000-01-25-163              | .840   | 21.34 | .320   | 8.13  | 000-01-25-165                | .830   | 21.08 | .280   | 7.11 |
| 31P    | 000-01-31-162              | .920   | 23.37 | .250   | 6.35  | 000-01-31-164                | .900   | 22.86 | .200   | 5.08 |
| 31S    | 000-01-31-163              | 1.010  | 25.65 | .320   | 8.13  | 000-01-31-165                | .980   | 24.89 | .280   | 7.11 |
| 37P    | 000-01-37-162              | 1.090  | 27.69 | .250   | 6.35  | 000-01-37-164                | 1.050  | 26.67 | .200   | 5.08 |
| 37S    | 000-01-37-163              | 1.160  | 29.46 | .320   | 8.13  | 000-01-37-165                | 1.130  | 28.70 | .280   | 7.11 |
| 51P    | 000-01-51-162              | 1.040  | 26.42 | .300   | 7.62  | 000-01-51-164                | 1.000  | 25.40 | .250   | 6.35 |
| 51S    | 000-01-51-163              | 1.110  | 28.19 | .360   | 9.14  | 000-01-51-165                | 1.080  | 27.43 | .320   | 8.13 |
| 51-2P  | 000-01-51-172              | 1.440  | 36.58 | .250   | 6.35  | NOT AVAILABLE                |        |       |        |      |
| 51-2S  | 000-01-51-173              | 1.510  | 38.35 | .320   | 8.13  | NOT AVAILABLE                |        |       |        |      |
| 67P    | 000-01-67-162              | 1.840  | 46.74 | .250   | 6.35  | NOT AVAILABLE                |        |       |        |      |
| 67S    | 000-01-67-163              | 1.910  | 48.51 | .320   | 8.13  | NOT AVAILABLE                |        |       |        |      |
| 69P    | 000-01-69-162              | 1.340  | 34.04 | .300   | 7.62  | NOT AVAILABLE                |        |       |        |      |
| 69S    | 000-01-69-163              | 1.410  | 35.81 | .360   | 9.14  | NOT AVAILABLE                |        |       |        |      |
| 100P   | 000-01-00-162              | 1.440  | 36.58 | .340   | 8.64  | NOT AVAILABLE                |        |       |        |      |
| 100S   | 000-01-00-163              | 1.510  | 38.35 | .410   | 10.41 | NOT AVAILABLE                |        |       |        |      |

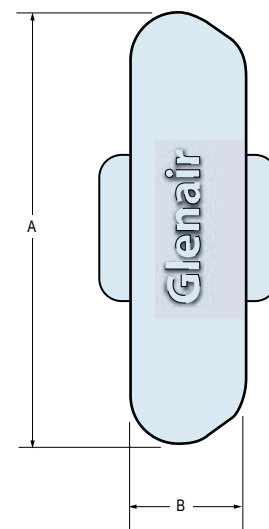

## INTERFACIAL SEALS FOR METAL SHELL MICRO-D SOCKET CONNECTORS



*Replacement Interfacial Seals* fit Micro-D metal shell socket connectors. These blue flourosilicone seals allow replacement of damaged seals.

| Layout | Part Number   | A Ref. |      | B Ref. |     |
|--------|---------------|--------|------|--------|-----|
|        |               | In.    | mm.  | In.    | mm. |
| 9S     | 000-01-09-132 | .330   | 8.4  | .180   | 4.6 |
| 15S    | 000-01-15-132 | .480   | 12.2 | .180   | 4.6 |
| 21S    | 000-01-21-132 | .630   | 16.0 | .180   | 4.6 |
| 25S    | 000-01-25-132 | .730   | 18.5 | .180   | 4.6 |
| 31S    | 000-01-31-132 | .880   | 22.4 | .180   | 4.6 |
| 37S    | 000-01-37-132 | 1.030  | 26.2 | .180   | 4.6 |
| 51S    | 000-01-51-132 | .976   | 24.8 | .223   | 5.7 |
| 100S   | 000-01-00-132 | 1.386  | 35.2 | .270   | 6.9 |

# Micro-D Accessories Metal Protective Covers 500-017 & 500-037



Choose **Metal Protective Covers** for full environmental protection.


**Silicone Rubber gasket** provides a watertight seal.

Use with **M83513 Type Metal Shell Micro-D Connectors**

| MATERIALS & FINISHES |  |
|----------------------|--|
| Shell                | Aluminum Alloy 6061 -T6                |
| Gasket               | Silicone Rubber                        |
| Hardware             | 300 Series Stainless Steel, Passivated |


## SELECT A PROTECTIVE COVER STYLE

Style 1




Use With Micro-D Connectors With Jackposts  
Not for rear panel mounted connectors.

Style 2

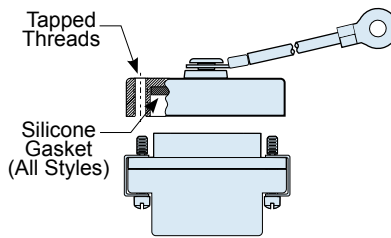



Use With Micro-D Connectors With Jackscrews

Style 3

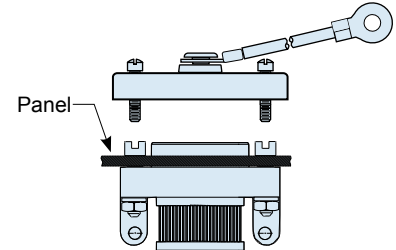

Use With Rear-Panel Mounted Micro-D Connectors

## HOW TO ORDER STYLE 1 AND STYLE 2 PROTECTIVE COVERS

| Series                    | Shell Finish                        | Connector Size | Hardware Option   | Lanyard Option   | Lanyard Length   | Ring Terminal Ordering Code |      |
|---------------------------|-------------------------------------|----------------|---|--|--|-----------------------------|------|
| 500-017                   | <b>C</b> – Black Anodize            | <b>09</b>      | <p><b>STYLE 1</b></p>  <p>Fits Micro-D's With Jackposts<br/>Cover has Jackscrews</p> <p><b>MB</b> – Fillister Head Jackscrew<br/><b>MH</b> – Hex Head Jackscrew</p> <p><b>STYLE 2</b></p>  <p>Fits Micro-D's With Jackscrews<br/>Cover has Tapped Female Threads</p> <p><b>F</b> – Female Threads</p> <p>(STYLE 3: see next page)</p> | <p><b>N</b> – No Lanyard<br/><b>G</b> – Flexible Nylon Rope<br/><b>F</b> – Wire Rope, Nylon Jacket<br/><b>H</b> – Wire Rope, Hi-Temp Teflon Jacket</p> | <p><b>Length in One Inch Increments</b></p> <p>Example: "6" equals six inches.</p> | <b>06</b> – .125 (3.2)      |      |
|                           |                                     | <b>15</b>      |   |  |  | <b>01</b> – .140 (3.6)      |      |
|                           | <b>E</b> – Chem Film                | <b>21</b>      |   |  |  | <b>05</b> – .167 (4.2)      |      |
|                           |                                     | <b>25</b>      |   |  |  | <b>04</b> – .197 (5.0)      |      |
|                           | <b>J</b> – Cadmium, Yellow Chromate | <b>31</b>      |   |  |  | I.D. of Ring Terminal       |      |
|                           |                                     | <b>37</b>      |   |  |  |                             |      |
|                           | <b>M</b> – Electroless Nickel       | <b>51</b>      |   |  |  |                             |      |
|                           |                                     | <b>51-2</b>    |   |  |  |                             |      |
|                           | <b>NF</b> – Cadmium, Olive Drab     | <b>67</b>      |   |  |  |                             |      |
|                           |                                     | <b>69</b>      |   |  |  |                             |      |
| <b>Z2</b> – Gold          | <b>100</b>                          |                |   |  |  |                             |      |
| <b>Sample Part Number</b> |                                     |                |   |  |  |                             |      |
| 500-017                   | M                                   | 25             | MB  | F  | 4  |                             | - 06 |



### HOW TO ORDER STYLE 3 PROTECTIVE COVERS FOR REAR MOUNT CONNECTORS


| Series    | Shell Finish                 | Connector Size | Panel Thickness Option | Hardware Option   | Lanyard Option   | Ring Terminal Ordering Code |
|-----------|------------------------------|----------------|------------------------|---|--|-----------------------------|
| 500-037   | C - Black Anodize            | 09             | R1 - .031 (0.79) Panel | <b>STYLE 3</b><br><br>Fits Micro-D's With Jackposts<br>B - Fillister Head Jackscrew<br>H - Hex Head Jackscrew | N - No Lanyard<br>G - Flexible Nylon Rope<br>F - Wire Rope, Nylon Jacket<br>H - Wire Rope, Hi-Temp Teflon Jacket | 06 - .125 (3.2)             |
|           |                              | 15             | R2 - .047 (1.19) Panel |   |  | 01 - .140 (3.6)             |
|           | E - Chem Film                | 21             | R3 - .062 (1.57) Panel |   |  | 05 - .167 (4.2)             |
|           |                              | 25             | R4 - .093 (2.36) Panel |   |  | 04 - .197 (5.0)             |
|           | J - Cadmium, Yellow Chromate | 31             |                        |   |  |                             |
|           |                              | 37             |                        |   |  |                             |
|           | M - Electroless Nickel       | 51             |                        |   |  |                             |
|           |                              | 51-2           |                        |   |  |                             |
|           | NF - Cadmium, Olive Drab     | 67             |                        |   |  |                             |
|           |                              | 69             |                        |   |  |                             |
| Z2 - Gold | 100                          |                |                        |   |  |                             |

#### Sample Part Number

|         |   |    |    |   |   |      |
|---------|---|----|----|---|---|------|
| 500-037 | J | 31 | R4 | B | G | - 06 |
|---------|---|----|----|---|---|------|

### PROTECTIVE COVER DIMENSIONS


Style 1

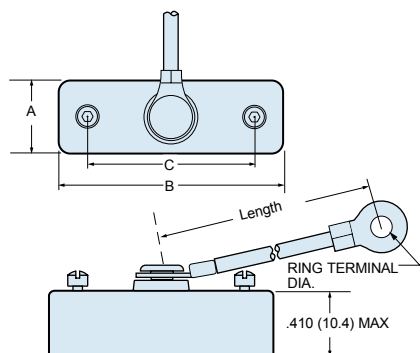

#2-56 UNC THREADS SIZES 9-69  
#4-40 UNC THREADS SIZE 100

For Micro-D Connectors With Jackposts


Style 2

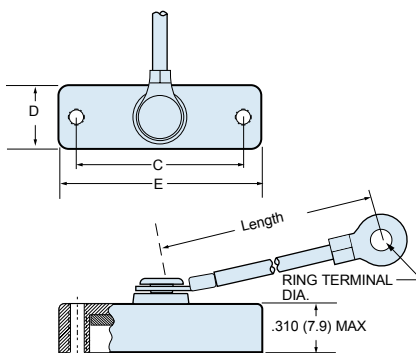

#2-56 UNC THREADS SIZES 9-69  
#4-40 UNC THREADS SIZE 100

For Micro-D Connectors With Jackscrews

Style 3

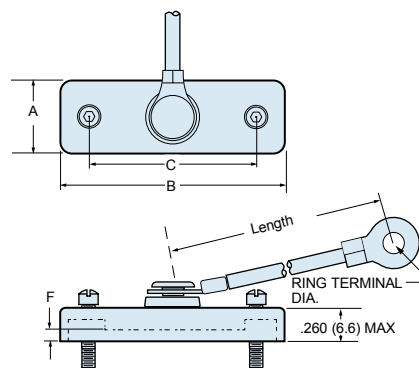

#2-56 UNC THREADS SIZES 9-69  
#4-40 UNC THREADS SIZE 100

For Rear-Panel Mounted Micro-D

| Size | A Max. |      | B Max. |      | C     |       | D Max. |       | E Max. |       | F               |      |     |
|------|--------|------|--------|------|-------|-------|--------|-------|--------|-------|-----------------|------|-----|
|      | In.    | mm.  | In.    | mm.  | In.   | mm.   | In.    | mm.   | In.    | mm.   | Panel Thickness | In.  | mm. |
| 9    | .453   | 11.5 | .930   | 23.6 | .565  | 14.35 | .380   | 9.65  | .795   | 20.19 | R1              | .126 | 3.2 |
| 15   | .453   | 11.5 | 1.080  | 27.4 | .715  | 18.16 | .380   | 9.65  | .945   | 24.00 | R2              | .110 | 2.8 |
| 21   | .453   | 11.5 | 1.230  | 31.2 | .865  | 21.97 | .380   | 9.65  | 1.095  | 27.81 | R3              | .095 | 2.4 |
| 25   | .453   | 11.5 | 1.330  | 33.8 | .965  | 24.51 | .380   | 9.65  | 1.195  | 30.35 | R4              | .064 | 1.6 |
| 31   | .453   | 11.5 | 1.480  | 37.6 | 1.115 | 28.32 | .380   | 9.65  | 1.345  | 34.16 |                 |      |     |
| 37   | .453   | 11.5 | 1.630  | 41.4 | 1.265 | 32.13 | .380   | 9.65  | 1.495  | 37.97 |                 |      |     |
| 51   | .496   | 12.6 | 1.580  | 40.1 | 1.215 | 30.86 | .420   | 10.67 | 1.445  | 36.70 |                 |      |     |
| 51-2 | .453   | 11.5 | 1.980  | 50.3 | 1.615 | 41.02 | .380   | 9.65  | 1.845  | 46.86 |                 |      |     |
| 67   | .453   | 11.5 | 2.380  | 60.5 | 2.015 | 51.18 | .380   | 9.65  | 2.245  | 57.02 |                 |      |     |
| 69   | .496   | 12.6 | 1.880  | 47.8 | 1.515 | 38.48 | .420   | 10.67 | 1.745  | 44.32 |                 |      |     |
| 100  | .539   | 13.7 | 2.315  | 58.8 | 1.800 | 45.72 | .470   | 11.94 | 2.180  | 55.37 |                 |      |     |

# Micro-D Accessories "Marshal Bean" Protective Rubber Covers 780-555



Fits Metal Shell  
M83513 Type  
Connectors

**Rubber Covers for Tactical Equipment and Field Instruments** – These friction-fit covers provide dust and splash protection.



**Two Tether Styles** – Choose ring terminals for attachment to a panel, or choose slip knots for cable attachment.

**-55° to +125° Temperature Range**

| MATERIALS & FINISHES |                                  |
|----------------------|----------------------------------|
| Cover                | SBR Rubber Per ASTM D2000 Type C |
| Cord                 | Nylon Per MIL-C-43307            |
| Ring Terminal        | Stainless Steel                  |
| Slip Collar          | Kynar                            |
| Crimp Ring           | Copper, Black Oxide Finish       |

## HOW TO ORDER 780-555 RUBBER PROTECTIVE COVERS

| Series                    | Connector Layout | Nylon Cord Option                           | Nylon Cord Length  | Attachment Option   | Rubber Type   |
|---------------------------|------------------|---|--|---|---|
| 780-555                   | 9P 9S            | Omit – (leave blank)<br>Cover only, no cord | Length in One<br>Inch Increments<br><br>Example: "6" equals<br>six inches.<br><br>± .250 Inches<br>± 6.35 mm | <b>Ring Terminal</b><br><b>06</b> – .125 (3.2) I.D.<br><b>01</b> – .140 (3.6) I.D.<br><b>05</b> – .167 (4.2) I.D.<br><b>04</b> – .197 (5.0) I.D.<br><br><b>SK</b> – Slip Knot | <b>Omit</b><br>Standard Rubber<br><br><b>C</b><br>Conductive Rubber |
|                           | 15P 15S          |   |  |   |   |
|                           | 21P 21S          |   |  |   |   |
|                           | 25P 25S          | G – Nylon Cord                              |  |   |   |
|                           | 31P 31S          |   |  |   |   |
|                           | 37P 37S          |   |  |   |   |
|                           | 51P 51S          |   |  |   |   |
|                           | 51-2P 51-2S      |   |  |   |   |
|                           | 67P 67S          |   |  |   |   |
|                           | 69P 69S          |   |  |   |   |
| 100P 100S                 |                  |   |  |   |   |
| <b>Sample Part Number</b> |                  |   |  |   |   |
| 780-555                   | 37               | G   | 4  | - SK  |   |

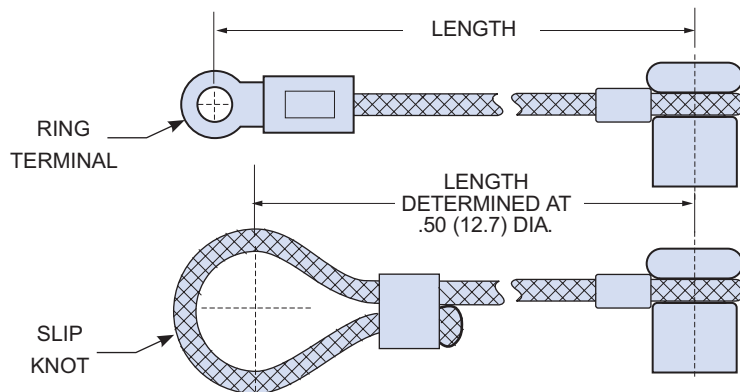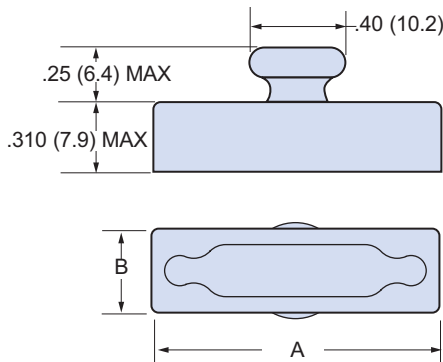

| Layout   | A Max. |       | B Max. |      |
|----------|--------|-------|--------|------|
|          | In.    | mm.   | In.    | mm.  |
| 9P, 9S   | .830   | 21.08 | .370   | 9.40 |
| 15P, 15S | .980   | 24.89 | .370   | 9.40 |
| 21P, 21S | 1.130  | 28.70 | .370   | 9.40 |
| 25P, 25S | 1.230  | 31.24 | .370   | 9.40 |
| 31P, 31S | 1.380  | 35.05 | .370   | 9.40 |
| 37P, 37S | 1.530  | 38.86 | .370   | 9.40 |













| Layout       | A Max. |       | B Max. |       |
|--------------|--------|-------|--------|-------|
|              | In.    | mm.   | In.    | mm.   |
| 51P, 51S     | 1.480  | 37.59 | .410   | 10.41 |
| 51-2P, 51-2S | 1.880  | 47.75 | .370   | 9.40  |
| 67P, 67S     | 2.770  | 70.36 | .370   | 9.40  |
| 69P, 69S     | 1.780  | 45.21 | .410   | 10.41 |
| 100P, 100S   | 2.215  | 56.26 | .460   | 11.68 |



**Mil Spec Jackscrew Kits** feature 300 series stainless steel and easily attach to Micro-D connectors with an e-ring.

**Order One Kit Per Connector.** Each kit contains two jackscrews and e-rings. Packaged one kit (two screws) per bag.

## MIL SPEC JACKSCREW KITS
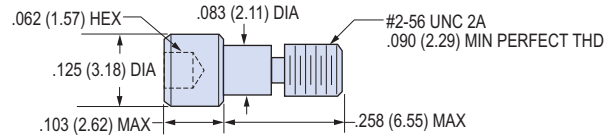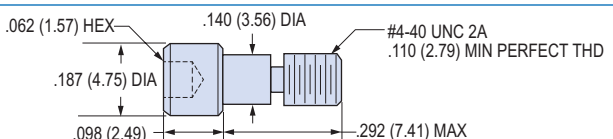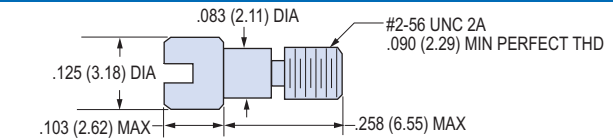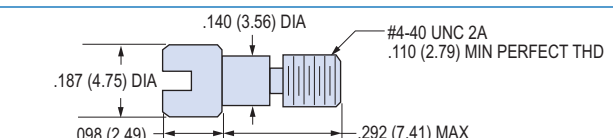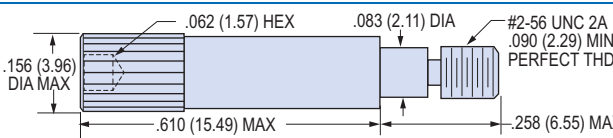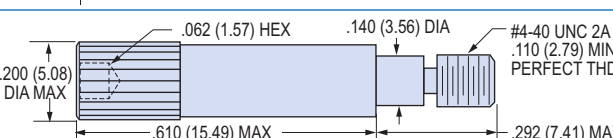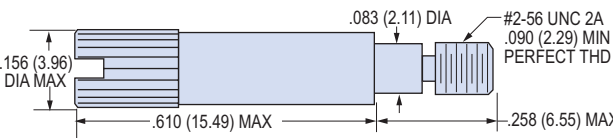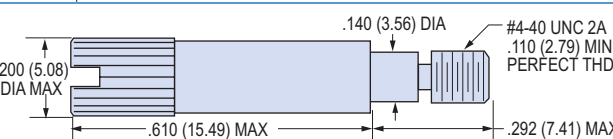
| Configuration  | Connector Size, Thread Size                               | Part Number          |                     | Dimensions  |
|--|---|----------------------|---------------------|---|
|  |   | Mil Spec Part Number | Glenair Part Number |   |
| <br><b>Hex Head Low Profile</b>    | Sizes 9 to 69 Contacts. Mil Spec Size A to G #2-56 UNC-2A | M83513/05-02         | 080-00-00-502       |  <p>.062 (1.57) HEX<br/>.125 (3.18) DIA<br/>.103 (2.62) MAX<br/>.083 (2.11) DIA<br/>#2-56 UNC 2A<br/>.090 (2.29) MIN PERFECT THD<br/>.258 (6.55) MAX</p>        |
|  | Size 100 Only Mil Spec Size H #4-40 UNC-2A                | M83513/05-12         | 080-00-00-512       |  <p>.062 (1.57) HEX<br/>.187 (4.75) DIA<br/>.098 (2.49)<br/>.140 (3.56) DIA<br/>#4-40 UNC 2A<br/>.110 (2.79) MIN PERFECT THD<br/>.292 (7.41) MAX</p>           |
| <br><b>Slot Head Low Profile</b> | Sizes 9 to 69 Contacts. Mil Spec Size A to G #2-56 UNC-2A | M83513/05-05         | 080-00-00-505       |  <p>.083 (2.11) DIA<br/>.125 (3.18) DIA<br/>.103 (2.62) MAX<br/>#2-56 UNC 2A<br/>.090 (2.29) MIN PERFECT THD<br/>.258 (6.55) MAX</p>                          |
|  | Size 100 Only Mil Spec Size H #4-40 UNC-2A                | M83513/05-15         | 080-00-00-515       |  <p>.140 (3.56) DIA<br/>.187 (4.75) DIA<br/>.098 (2.49)<br/>#4-40 UNC 2A<br/>.110 (2.79) MIN PERFECT THD<br/>.292 (7.41) MAX</p>                              |
| <br><b>Hex Head Extended</b>     | Sizes 9 to 69 Contacts. Mil Spec Size A to G #2-56 UNC-2A | M83513/05-03         | 080-00-00-503       |  <p>.062 (1.57) HEX<br/>.156 (3.96) DIA MAX<br/>.610 (15.49) MAX<br/>.083 (2.11) DIA<br/>#2-56 UNC 2A<br/>.090 (2.29) MIN PERFECT THD<br/>.258 (6.55) MAX</p> |
|  | Size 100 Only Mil Spec Size H #4-40 UNC-2A                | M83513/05-13         | 080-00-00-513       |  <p>.062 (1.57) HEX<br/>.200 (5.08) DIA MAX<br/>.610 (15.49) MAX<br/>.140 (3.56) DIA<br/>#4-40 UNC 2A<br/>.110 (2.79) MIN PERFECT THD<br/>.292 (7.41) MAX</p> |
| <br><b>Slot Head Extended</b>    | Sizes 9 to 69 Contacts. Mil Spec Size A to G #2-56 UNC-2A | M83513/05-06         | 080-00-00-506       |  <p>.156 (3.96) DIA MAX<br/>.610 (15.49) MAX<br/>.083 (2.11) DIA<br/>#2-56 UNC 2A<br/>.090 (2.29) MIN PERFECT THD<br/>.258 (6.55) MAX</p>                     |
|  | Size 100 Only Mil Spec Size H #4-40 UNC-2A                | M83513/05-16         | 080-00-00-516       |  <p>.200 (5.08) DIA MAX<br/>.610 (15.49) MAX<br/>.140 (3.56) DIA<br/>#4-40 UNC 2A<br/>.110 (2.79) MIN PERFECT THD<br/>.292 (7.41) MAX</p>                     |

## C CLIP JACKSCREW KITS




**C Clip Jackscrew Kits** offer an alternative to e-ring jackscrew kits. The c clip fits over the flange and, unlike e-rings, cannot be dislodged in handling or use.

**Corrosion-Resistant Steel** – The clip is made from 17-7PH spring temper stainless steel. The jackscrew is made from 125 KPSI tensile strength stainless steel, passivated.


**Order Two Kits Per Connector.** Each kit consists of one jackscrew and one c clip.

**Application Note:** The magnetic permeability of the c clip exceeds the 2.0 μ maximum of MIL-DTL-83513.

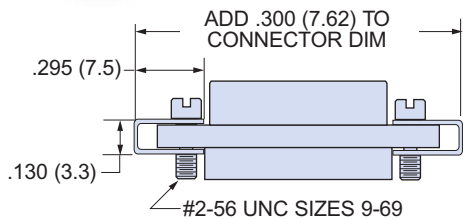

**Figure 1**

C Clip for Size 9 to Size 69 Pin Micro-D

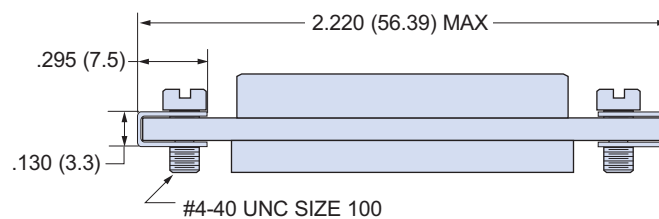

**Figure 2**

C Clip for Size 100 Micro-D


| Part Number | Jackscrew Type | Thread Size | Configuration | Recommended Max. Torque | Max. Weight In Grams (2 Kits) |
|-------------|----------------|-------------|---------------|-------------------------|-------------------------------|
| 179-013-1S  | Slot Head      | #2-56 UNC   | Figure 1      | 2.5 inch-pounds         | 1.0                           |
| 179-013-1H  | Hex head       | #2-56 UNC   | Figure 1      | 2.5 inch-pounds         | 1.0                           |
| 179-013-2S  | Slot Head      | #4-40 UNC   | Figure 2      | 4.0 inch-pounds         | 1.5                           |
| 179-013-2H  | Hex head       | #4-40 UNC   | Figure 2      | 4.0 inch-pounds         | 1.5                           |

## REPLACEMENT HARDWARE KITS FOR C CLIP MICRO-D BACKSHELLS


**Replacement Hardware Kits for Standard Series 50 Micro-D Backshells.**

**Order Two Kits Per Connector.** Each Jackscrew kit consists of one jackscrew and one c clip.

**Corrosion-Resistant Steel** – The clip is made from 17-7PH spring temper stainless steel. The jackscrew is made from 300 series stainless steel, passivated.



**Fillister Head Jackscrew**



**Hex Head Jackscrew**



**Extended Jackscrew**




**Jackpost**

| Part Number | Thread Size      | Part Number | Thread Size      | Part Number (dash # = size) | Overall Length | Part Number | Thread Size      |
|-------------|------------------|-------------|------------------|-----------------------------|----------------|-------------|------------------|
| 687-152-01B | #2-56 (9-69 pin) | 687-152-01  | #2-56 (9-69 pin) | 687-439-09                  | 1.27 (32.3)    | 687-194     | #2-56 (9-69 pin) |
| 687-152-02B | #4-40 (100 pin)  | 687-152-02  | #4-40 (100 pin)  | 687-439-15                  | 1.40 (35.6)    | 687-194-1   | #4-40 (100 pin)  |
|             |                  |             |                  | 687-439-21                  | 1.52 (38.6)    |             |                  |
|             |                  |             |                  | 687-439-25                  | 1.58 (40.1)    |             |                  |
|             |                  |             |                  | 687-439-31                  | 1.64 (41.7)    |             |                  |
|             |                  |             |                  | 687-439-37                  | 1.68 (42.7)    |             |                  |
|             |                  |             |                  | 687-439-51                  | 1.71 (43.3)    |             |                  |
|             |                  |             |                  | 687-439-100                 | 1.81 (46.0)    |             |                  |



Rear Panel Mount  
Micro-D Jackpost



**Micro-D Jackpost Kits** feature 300 series stainless steel. Select a style: standard hex posts, rear panel, or rear panel printed circuit board.


**Order One Kit Per Connector.** Each kit contains two jackposts.

## JACKPOST GENERAL INFORMATION

1. Material and Finish: Corrosion resistant steel in accordance with ASTM A484 and ASTM A582, passivated in accordance with ASTM A967.
2. Torque: #2-56 threads= 2.5 inch-pounds, #4-40 threads = 4.0 inch-pounds. Maximum recommended torque for installation and operation.
3. Standard Package: One kit consists of two jackposts, 2 washers and 2 nuts for styles 1 and 2. Style 3 kits contain two jackposts. One kit per bag.
4. Application: Style 1 and 2 jackposts are compatible with any standard Micro-D connector. Style 3 jackposts for rear panel mounting Glenair printed circuit board connectors types BS, BR, and CBR only.


## SELECT A JACKPOST STYLE

Style 1




Use With Standard Solder Cup or Pigtail Micro-D Connectors

Style 2



Use With Rear Panel Mounted Solder Cup or Pigtail Micro-D Connectors

Style 3

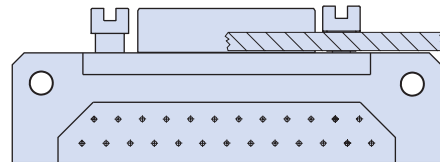

Use With Rear Panel Mounted Printed Circuit Board Micro-D Connectors

## STYLE 1 JACKPOST KITS

**Style 1 Jackpost Kits** are standard kits for installation on all standard Micro-D connectors. Each kit contains two jackposts, two hex nuts and two lockwashers.

| Connector Sizes (THDS)                        | Mil Spec Part Number | Glenair Part Number  | A Length   |           | Figure   |
|---|----------------------|----------------------|------------|-----------|----------|
|   |                      |                      | In. ± .015 | mm. ± 0.4 |          |
| 9 — 69<br>M83513<br>sizes A thru G<br>(#2-56) | M83513/05-07         | <b>080-00-00-100</b> | .475       | 12.1      | Figure 1 |
|   |                      | <b>500-069-2-1</b>   | .688       | 17.5      |          |
|   |                      | <b>500-069-2-2</b>   | .813       | 20.7      |          |
|   |                      | <b>500-069-2-3</b>   | .938       | 23.8      |          |
|   |                      | <b>500-069-2-4</b>   | 1.063      | 27.0      |          |
| 100<br>M83513<br>size H<br>(#4-40)            | M83513/05-17         | <b>080-00-00-101</b> | .475       | 12.1      | Figure 2 |
|   |                      | <b>500-069-4-1</b>   | .680       | 17.3      |          |
|   |                      | <b>500-069-4-2</b>   | .805       | 20.4      |          |
|   |                      | <b>500-069-4-3</b>   | .930       | 23.6      |          |
|   |                      | <b>500-069-4-4</b>   | 1.055      | 26.8      |          |
|   |                      | <b>500-069-4-5</b>   | 1.180      | 30.3      |          |

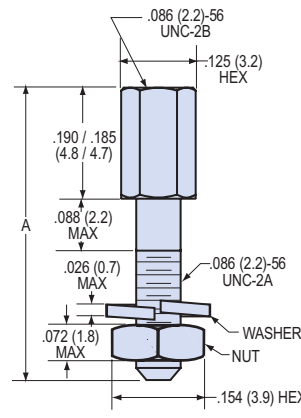


Figure 1  
#2-56 Jackpost


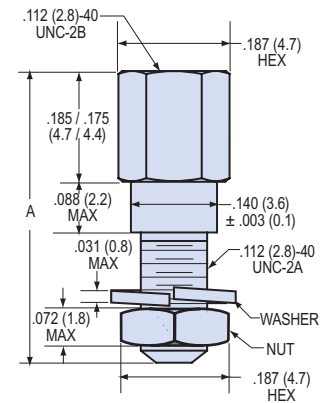


Figure 2  
#4-40 Jackpost

## STYLE 2 JACKPOST KITS FOR REAR MOUNTED CONNECTORS

**Style 2 Jackpost Kits** are for rear panel mounted connectors. These round, slotted posts accommodate panel thickness from .031 inches (0.8 mm.) to .125 inches (3.2 mm.).


| Connector Size (THDS)                         | Panel Thickness |     | Part Number | A          |            | Figure   |
|---|-----------------|-----|-------------|------------|------------|----------|
|   | In.             | mm. |             | In. ± .003 | mm. ± 0.08 |          |
| 9 — 69<br>M83513 sizes<br>A thru G<br>(#2-56) | .031            | 0.8 | 177-504-2-2 | .024       | 0.61       | Figure 1 |
|   | .047            | 1.2 | 177-504-2-3 | .041       | 1.04       |          |
|   | .062            | 1.6 | 177-504-2-4 | .055       | 1.40       |          |
|   | .094            | 2.4 | 177-504-2-5 | .086       | 2.18       |          |
| 100<br>M83513 size<br>H<br>(#4-40)            | .031            | 0.8 | 177-504-4-2 | .024       | 0.61       | Figure 2 |
|   | .047            | 1.2 | 177-504-4-3 | .041       | 1.04       |          |
|   | .062            | 1.6 | 177-504-4-4 | .055       | 1.40       |          |
|   | .094            | 2.4 | 177-504-4-5 | .086       | 2.18       |          |
|   | .125            | 3.2 | 177-504-4-6 | .118       | 3.00       |          |

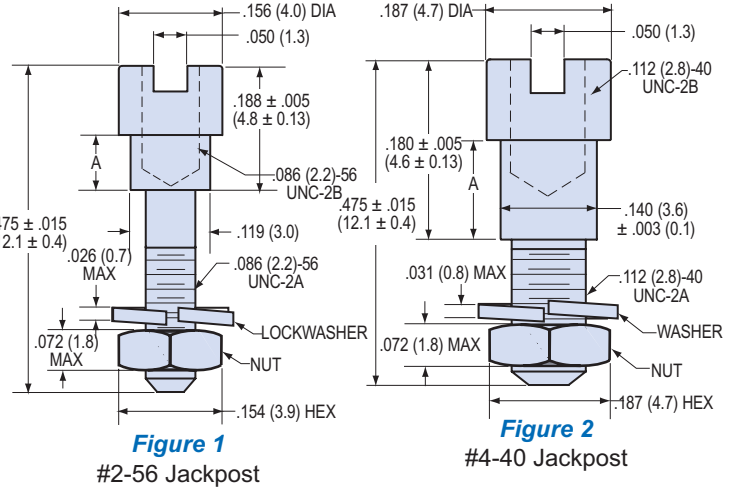


## STYLE 3 JACKPOST KITS FOR PRINTED CIRCUIT BOARD CONNECTORS

**Style 3 Jackpost Kits** are for rear panel mounted PCB connectors. Select the right post by choosing the connector style (BS, BR and CBR are the three standard PCB connector configurations).

| Connector Size (THDS)                            | Connector Style, Overall Length    | Panel Thickness |               | Part Number   | A             |            | Figure   |
|--|------------------------------------|-----------------|---------------|---------------|---------------|------------|----------|
|  |                                    | In.             | mm.           |               | In. ± .003    | mm. ± 0.08 |          |
| 9 — 69<br>M83513<br>sizes A thru<br>G<br>(#2-56) | OAL                                | .031            | 0.8           | 177-505-A-2-2 | .024          | 0.61       | Figure 1 |
|  |                                    | .047            | 1.2           | 177-505-A-2-3 | .041          | 1.04       |          |
|  |                                    | .062            | 1.6           | 177-505-A-2-4 | .055          | 1.40       |          |
|  |                                    | .094            | 2.4           | 177-505-A-2-5 | .086          | 2.18       |          |
|  | BR                                 | .031            | 0.8           | 177-505-B-2-2 | .024          | 0.61       |          |
|  |                                    | .047            | 1.2           | 177-505-B-2-3 | .041          | 1.04       |          |
| OAL  | .062                               | 1.6             | 177-505-B-2-4 | .055          | 1.40          |            |          |
|  | .094                               | 2.4             | 177-505-B-2-5 | .086          | 2.18          |            |          |
|  | .125                               | 3.2             | 177-505-B-2-6 | .118          | 3.00          |            |          |
|  | 100<br>M83513<br>size H<br>(#4-40) | BR, CBR         | .031          | 0.8           | 177-505-C-4-2 | .024       | 0.61     |
| .047   |                                    |                 | 1.2           | 177-505-C-4-3 | .041          | 1.04       |          |
| .062   |                                    |                 | 1.6           | 177-505-C-4-4 | .055          | 1.40       |          |
| OAL  |                                    | .094            | 2.4           | 177-505-C-4-5 | .086          | 2.18       |          |
|  |                                    | .125            | 3.2           | 177-505-C-4-6 | .118          | 3.00       |          |
|  |                                    | BS              | .031          | 0.8           | 177-505-D-4-2 | .024       | 0.61     |
| .047   | 1.2                                |                 | 177-505-D-4-3 | .041          | 1.04          |            |          |
| .062   | 1.6                                |                 | 177-505-D-4-4 | .055          | 1.40          |            |          |
| OAL  | .094                               | 2.4             | 177-505-D-4-5 | .086          | 2.18          |            |          |
|  | .125                               | 3.2             | 177-505-D-4-6 | .118          | 3.00          |            |          |

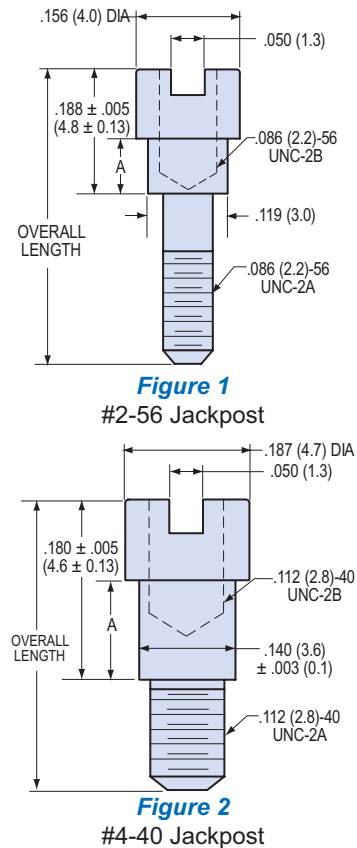

# Sometimes It Is the Little Things that Count...

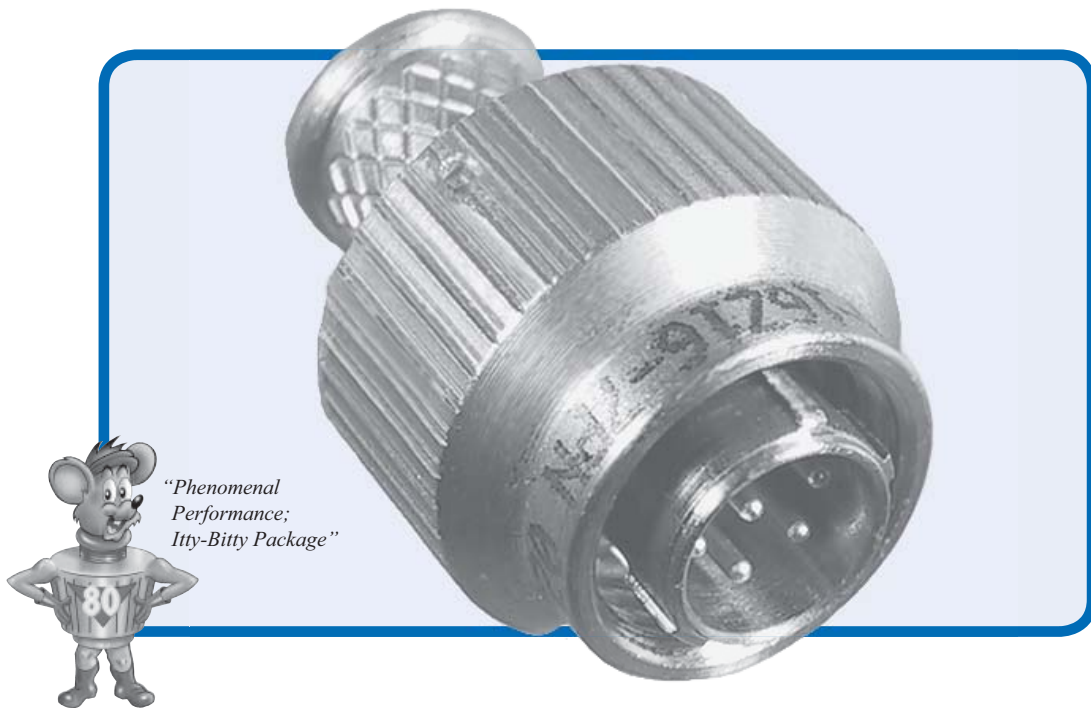

## ...Like an Integral Banding Platform

**G**lenair Series 80 “Mighty Mouse” connectors save size and weight in interconnect systems. That much we know. But the design of the connector also yields additional savings by eliminating the requirement for an accessory back-shell for EMI shield termination. That’s because every version of our ultra-miniature “Mighty Mouse” connector is

available with an integral banding porch for the termination of metal and fabric braided screening. The integration of a shield termination platform right on the connector may seem like a little thing; but it sure does reduce the size and weight of the complete interconnect package—No small matter in a world that’s now counting ounces instead of pounds.



1211 Air Way  
Glendale, California 91201-2497  
Telephone: 818-247-6000 · Facsimilie: 818-500-9912 · EMail: sales@glenair.com

United States · United Kingdom · Germany · Nordic · France · Italy · Spain


[www.glenair.com](http://www.glenair.com)

**PRODUCT SELECTION GUIDE**


**MWS Series MicroStrips**

MicroStrip connectors are one piece molded plastic insulators housing standard TwistPin contacts on .050 inch (1.27 mm.) spacing. These strips are used in tight spots where a Micro-D will not fit. Although these MicroStrips do not have mounting holes or locking hardware, these features can be incorporated into custom designs.

MicroStrips are available in two to 30 contacts. Optional guide pins provide polarization.




**MWS Series Pin Connector**



**MWS Series Socket Connector**

Page N-11

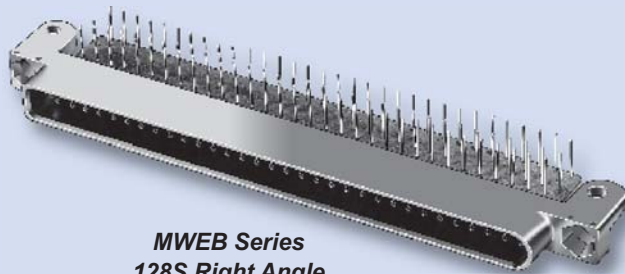

**MWEB Series  
 128S Right Angle  
 Daughtercard Connector**

**MWEB EdgeBoard Connectors**

These two row .050 inch (1.27 mm) pitch connectors are designed for motherboard-to-daughtercard applications. Available in four styles: surface mount cardedge for daughtercards, vertical thru-hole for motherboards, right angle thru-hole for daughtercards, and prewired cable connectors, these MWEB connectors feature rugged aluminum shells and TwistPin contacts. The single gang 128 pin and the two gang 184 pin (2 X 92 pin) are a ruggedized alternative to commercial board connectors.

**MWKQ Micro Circular Connectors**

The MWKQ connector provides quick-disconnect capability combined with a high-performance contact system and rugged construction. Intended for panel-to-cord I/O applications, these connectors are found in tactical military equipment, weapons systems and various instrumentation applications.

Available in two sizes with 7 or 19 contacts, the MWKQ is factory-terminated to the wire of your choice. Shielded, overmolded cordsets and other custom versions are available.



**MWKQ Series  
 19P Panel Mount  
 Receptacle**



**MWKQ Series  
 19S Cable Plug**

Page N-13

**D38999  
 19 Contacts**

**Glenair Series 80  
 19 Contacts**

**MWKQ Series  
 19 Contacts**

**Glenair Nano  
 19 Contacts**







# MWEB Series EdgeBoard Connectors





**Industry-Standard, Approved for Airborne Computers**  
MWEB EdgeBoard connectors meet the requirements of MIL-DTL-55302/120 thru /123. Available with 128 or 184 contacts.

**Rugged Aluminum Shell and TwistPin Contacts**  
MWEB connectors share the same design and construction as the Glenair Micro-D M83513 connector.

**Backplane, Daughtercard and Wired**  
Vertical mount thru-hole motherboard connectors and straddle mount daughtercard connectors are complemented by right angle thru-hole and pre-wired I/O versions.

## Rugged Mil Spec Performance in a High-Density Backplane Connector System: The MWEB EdgeBoard

Featuring a width of only ¼ inch (6.4 mm.), MWEB Series connectors provide high-density in a rugged metal shell connector. Contacts are rated at 3 amps, and the DWV voltage rating is 300 volts AC RMS at 70,000 feet altitude. The two row, .050 inch (1.54 mm.) spacing is made possible by using TwistPin reverse gender contacts. Insert-molded LCP insulators are resistant to heat and chemicals. Contacts are beryllium copper with fifty microinches of gold plating. Shells are machined aluminum alloy. Hexagonal polarizing keys allow up to 36 keying options.

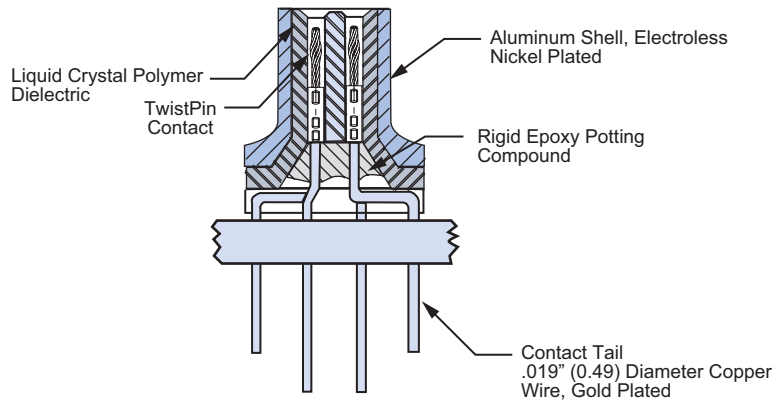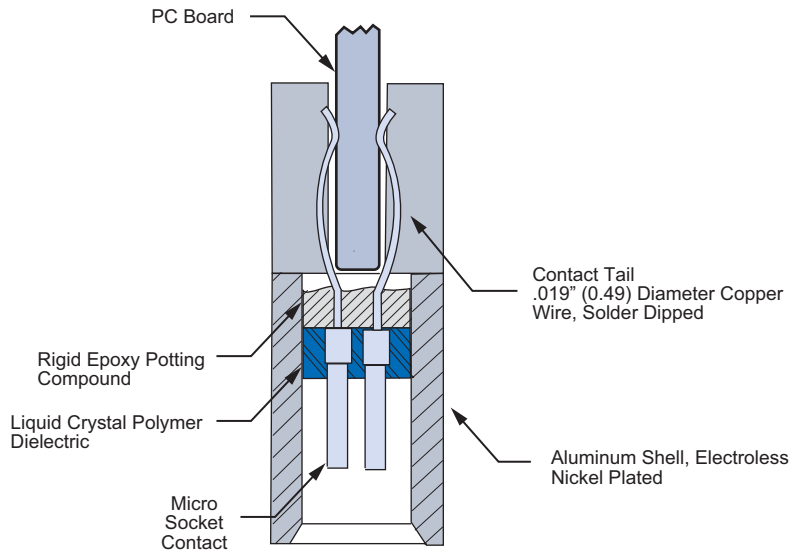


# MWEB Series EdgeBoard Connectors

## MWEB-128P Vertical Mount Backplane Connector



### MWEB-128P BACKPLANE THRU-HOLE CONNECTOR

Part Number *MWEB2L-128P5W4-.375*

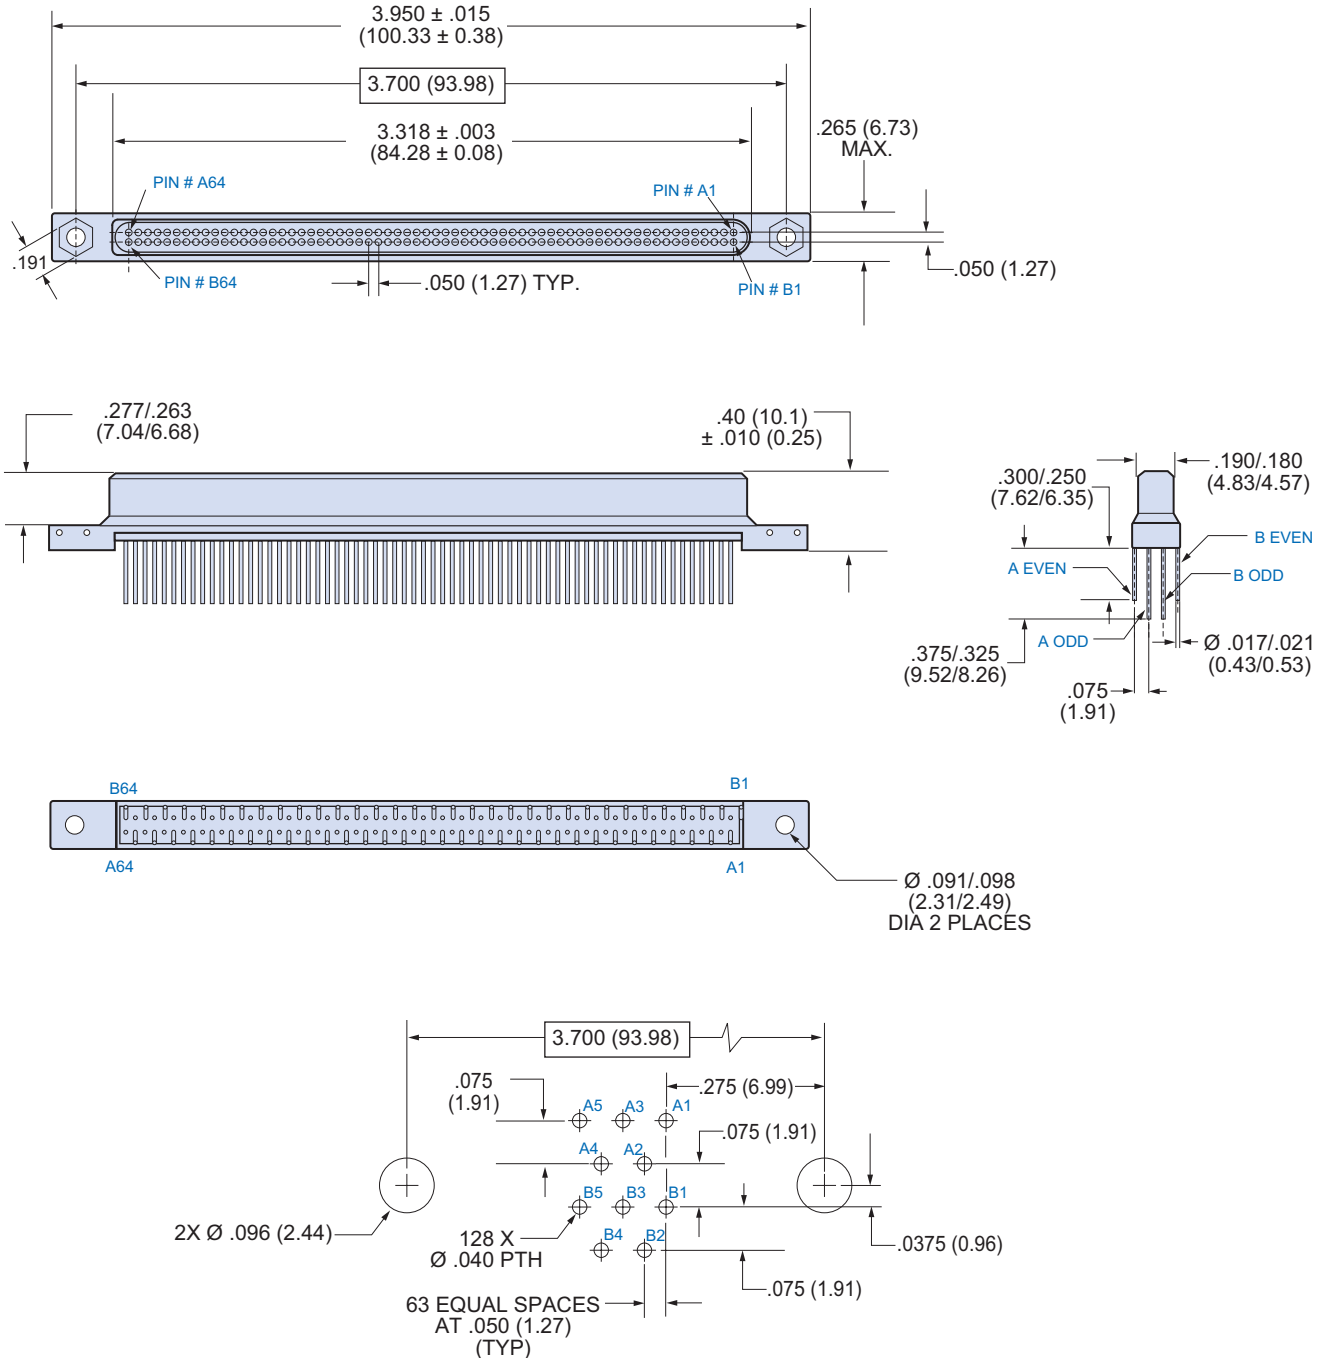


PATTERN SHOWN IS FOR CONNECTOR MOUNTING SIDE OF PC BOARD



### MWEB-128S STRADDLE MOUNT CARDEDGE CONNECTOR

*Part Number MWEB2L-128S4BS3*

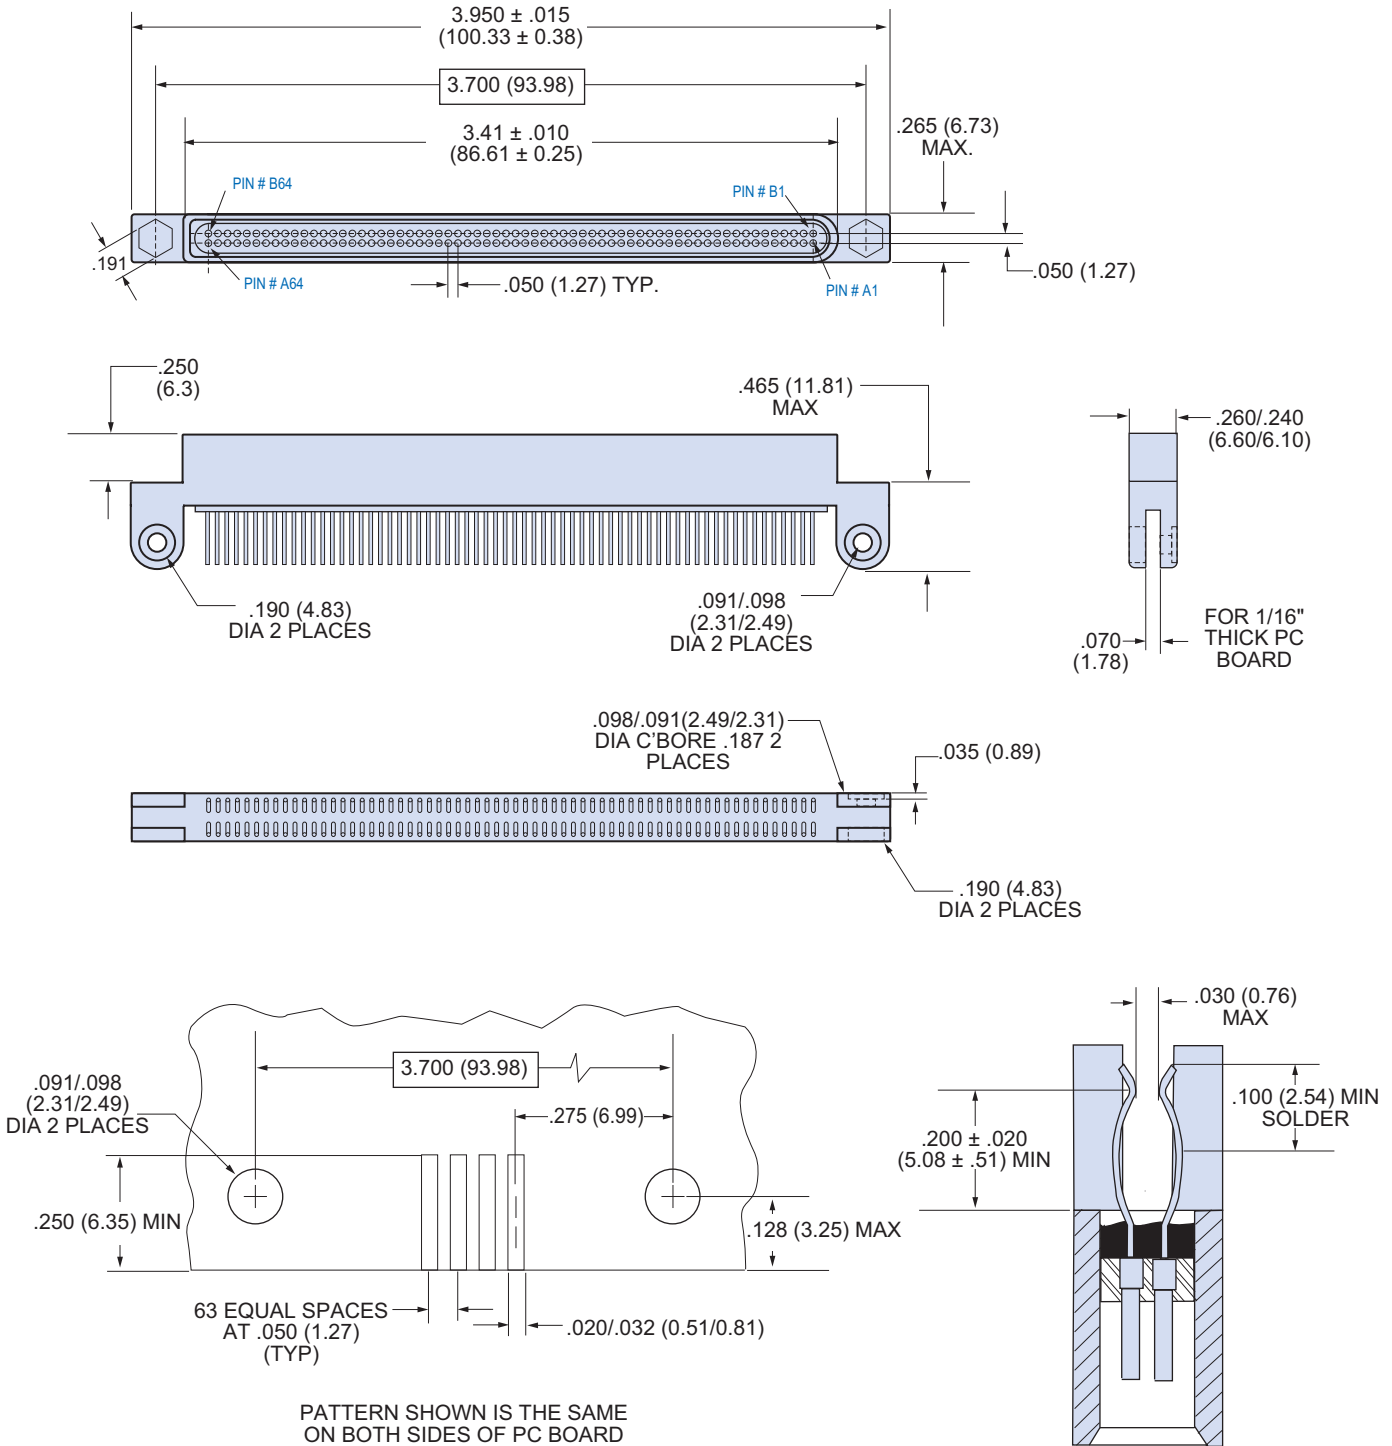

# MWEB Series EdgeBoard Connectors

## MWEB-128S Right Angle Board Connector



### MWEB-128S RIGHT ANGLE PCB CONNECTOR

**MWEB2L-128SBR- .125**

Base Part Number \_\_\_\_\_




PC Tail Length \_\_\_\_\_

.090

.125

.190

.250

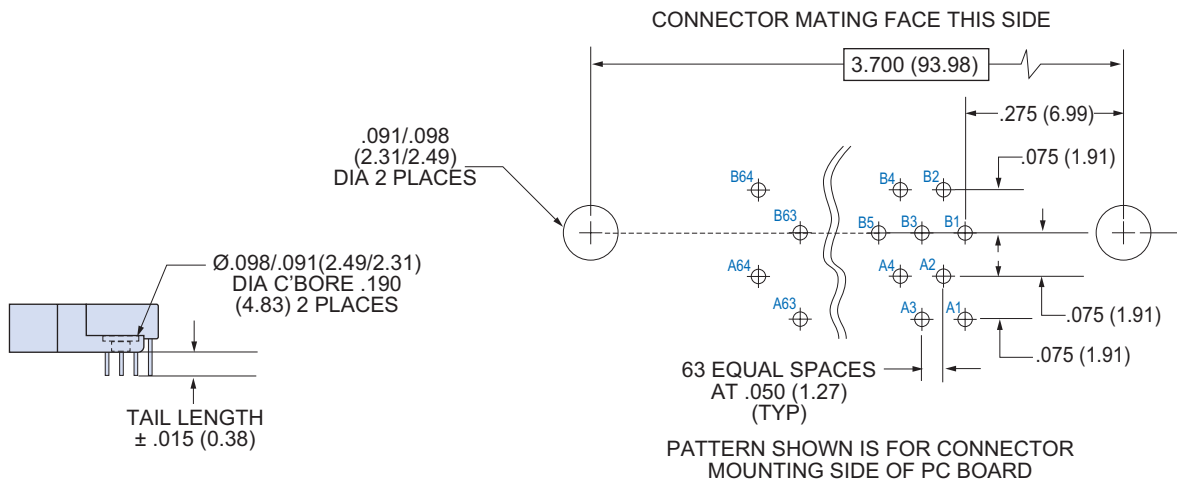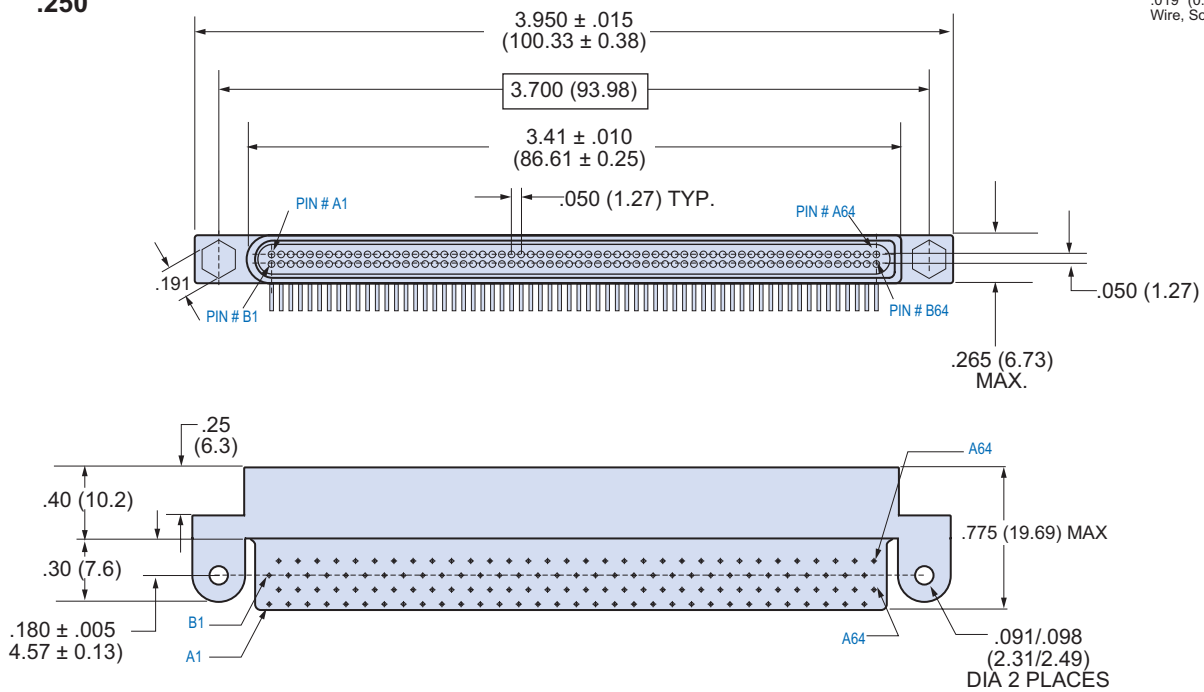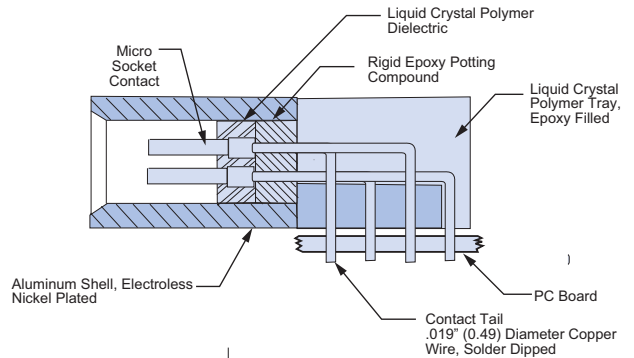




# MWEB Series EdgeBoard Connectors

## MWEB-184S Straddle Mount Cardedge Connector



### MWEB-184S STRADDLE MOUNT CARDEDGE CONNECTOR

Part Number MWEB2L-184NS4BS3

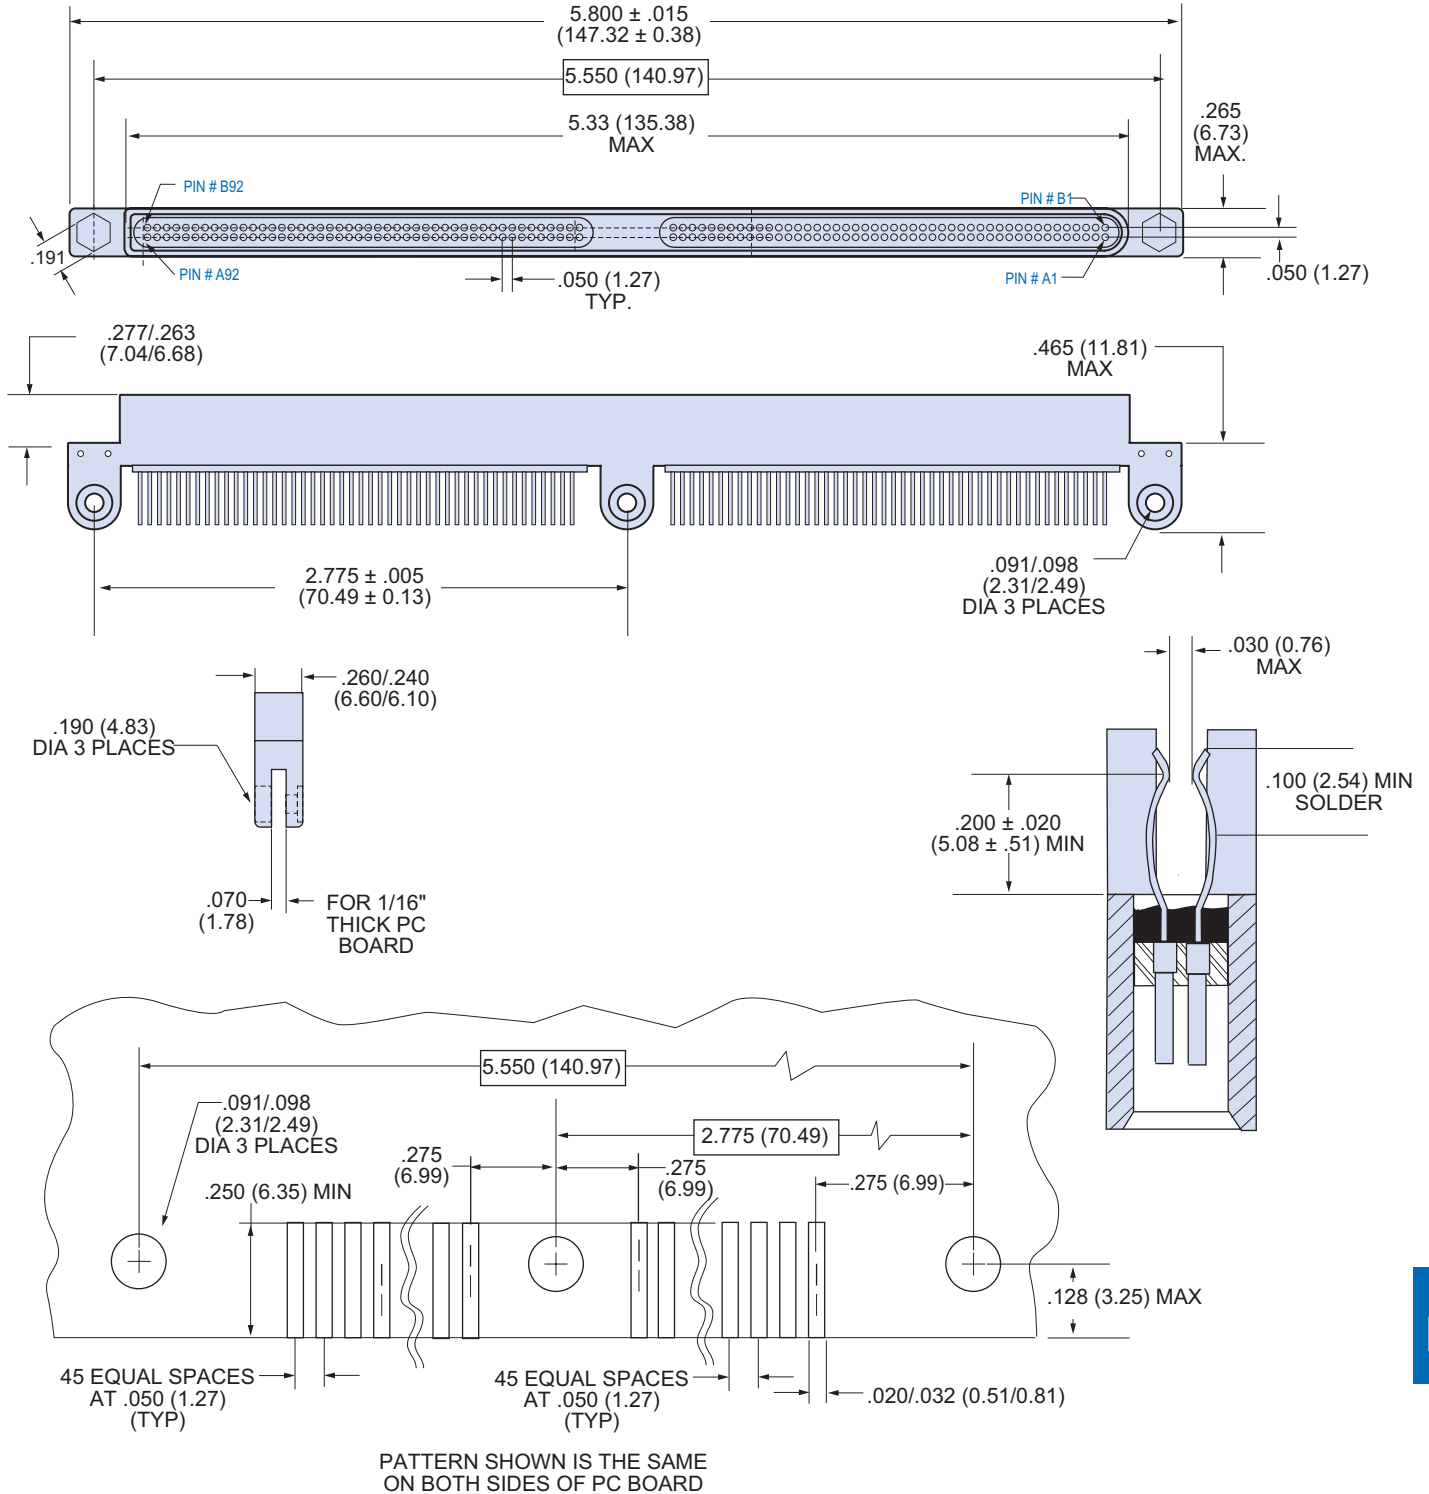

### MWEB-184S RIGHT ANGLE PCB CONNECTOR

**MWEB2L-184NSBR- .125**

Base Part Number






PC Tail Length

.090

.125


.190

.250

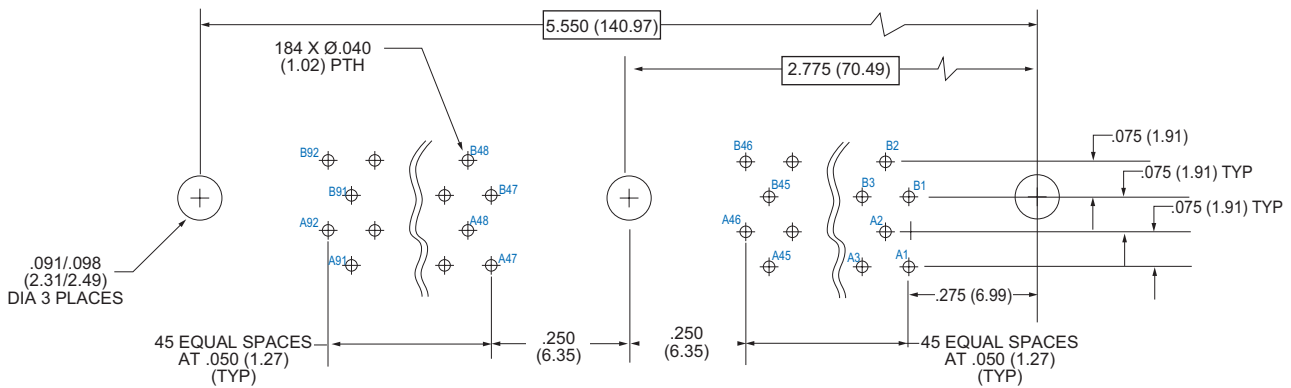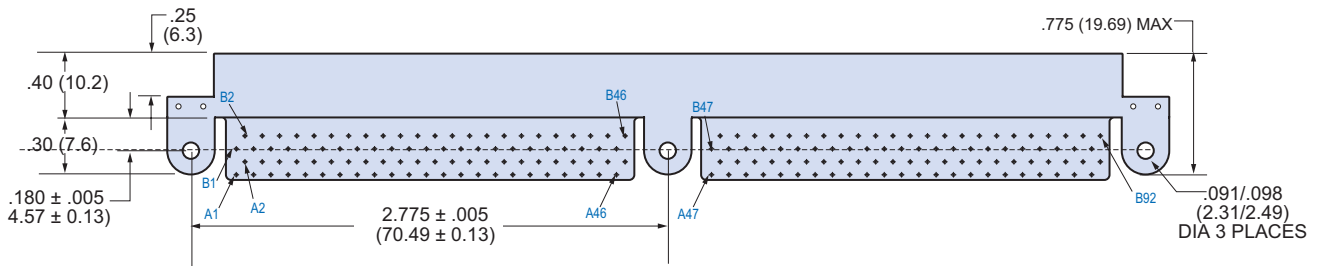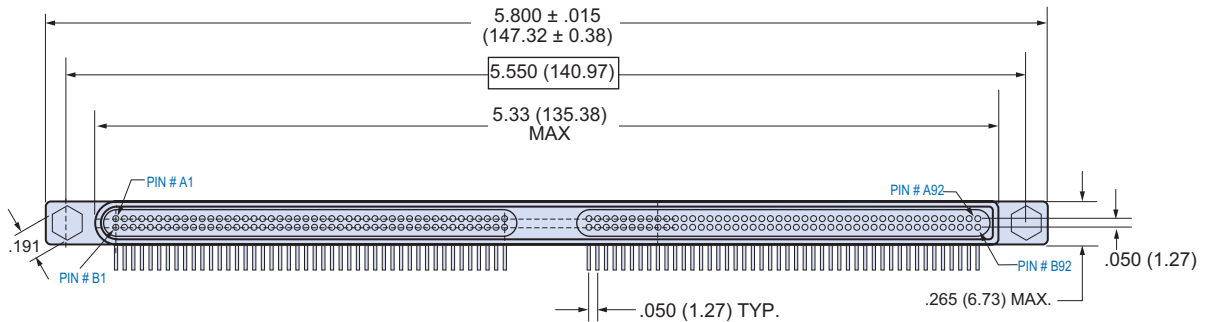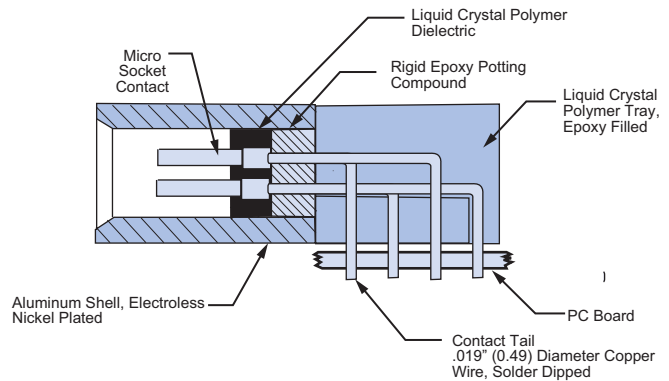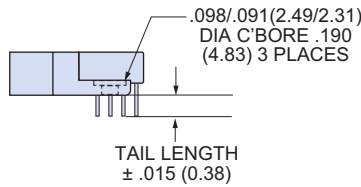

PATTERN SHOWN IS FOR CONNECTOR MOUNTING SIDE OF PC BOARD

# MWEB Series EdgeBoard Connectors MWEB Pre-Wired and Solder Cup Connectors

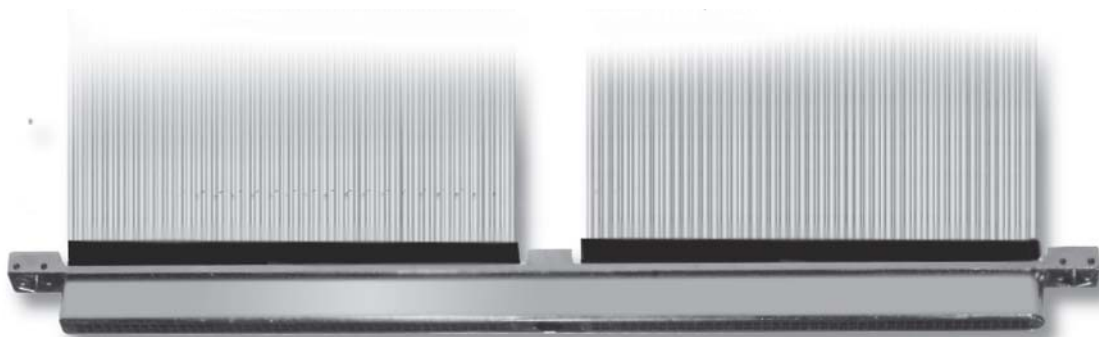

### MWEB EdgeBoard Connectors For Input/Output Wire-To-Board Applications –

With 128 or 184 contacts, these narrow profile factory-terminated MWEB connectors provide a space-saving I/O wire to board solution. Connector width of .25 inch (6.4 mm.) allows for high-density card slots.

### High Performance TwistPin Contacts

Suitable for airborne avionics processors and mission-critical computers, these pre-wired connectors feature interfacial seals and backpotting for improved environmental protection. Or, choose solder cup connectors for integration into wire harnesses.

| HOW TO ORDER MWEB PIGTAIL CONNECTORS |        |              |                               |   |  |   |  |
|--------------------------------------|--------|--------------|-------------------------------|---|--|---|--|
| Series                               | Layout | Contact Type | Wire Gage (AWG)               | Wire Type   | Wire Color   | Wire Length Inches                                      | Hardware Option                                    |
| MWEB2L                               | 128    | P – Pin      | 4 – #24                       | K – M22759/11<br>600 Vrms Teflon® (TFE)<br>J – M22759/33®<br>600 Vrms Modified Cross-Linked Tefzel (ETFE) | 1 – White<br>2 – Yellow<br>7 – Ten Color Repeating | 18<br>Total Length In Inches. "18" Specifies 18 Inches. | N – No hardware<br>J – Jackscrews<br>P – Jackposts |
|                                      | 184N   | S – Socket   | 6 – #26<br>8 – #28<br>0 – #30 |   |  |   |  |
| Sample Part Number                   |        |              |                               |   |  |   |  |
| MWEB2L                               | – 128  | P            | – 6                           | K   | 7  | – 24  | N  |

| HOW TO ORDER MWEB SOLDER CUP CONNECTORS |        |              |                  |  |
|---|--------|--------------|------------------|--|
| Series                                  | Layout | Contact Type | Termination Type | Hardware Option                                    |
| MWEB2L                                  | 128    | P – Pin      | S – Solder Cup   | N – No hardware<br>J – Jackscrews<br>P – Jackposts |
|   | 184N   | S – Socket   |                  |  |
| Sample Part Number                      |        |              |                  |  |
| MWEB2L                                  | – 128  | P            | S                | N  |



## MWEB HARDWARE KITS

### MWEB Jackscrew and Jackpost Kits


Stainless steel jackscrew kits are stainless steel and install with roll pins. Insert the stud through the flange from the mating side, then install the knurled head from the other side and attach to stud with a roll pin. Each kit contains two studs, two heads and two retainer pins.

Jackscrew Part Number (xx)

Jackpost Part Number (xx)



**Jackscrew Kit**

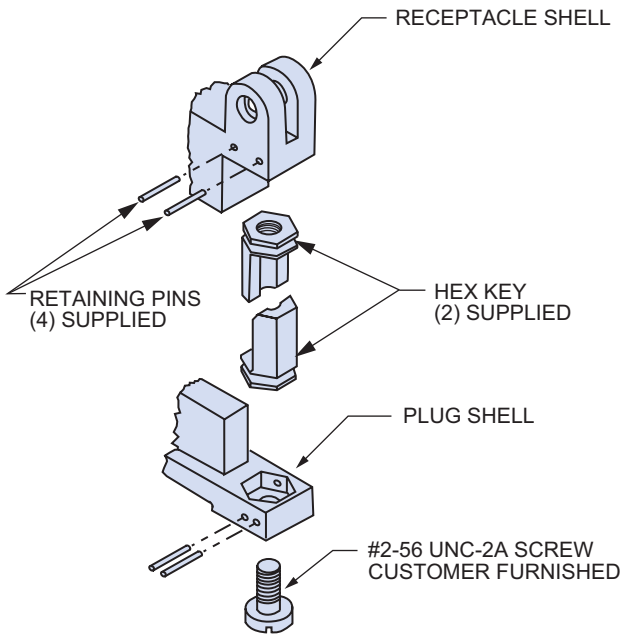

### MWEB Polarizing Keys

These stainless steel pol keys meet the requirements of MIL-C-55302/124-01. (6) keying positions per end equals (36) total positions. Install with roll pins, supplied. Half-hex keys are tapped for optional #2-56 screw installation. Kit consists of (2) keys and (4) retainer pins.

**Part Number 080-00-00-810**



**MWSL-10PS-P1**  
Pin Connector



**MWSL-10SS-P1**  
Socket Connector

**MWS MicroStrips** feature TwistPin contacts housed in single row molded plastic insulators. These MWS strips offer reduced size compared to conventional Micro-D connectors. Choose from (2) to (30) contacts.

**Three Styles** – Solder cup contacts for customer termination, or choose pre-wired versions. Wired versions are available with insulated wire or with gold-plated leads for termination to boards or flex circuits.

## HOW TO ORDER MWS SOLDER CUP CONNECTORS

| Series                    | No. of Cavities   | Contact Type                        | Termination Type      | Guide Pin Option  |
|---------------------------|---|-------------------------------------|-----------------------|---|
| <b>MWSL</b>               | <b>1 to 30</b><br>Total number of contact cavities including guide pins | <b>P</b> – Pin<br><b>S</b> – Socket | <b>S</b> – Solder Cup | <b>Omit</b> – No Guide Pin<br><b>P1</b> – Guide Pin Position 1<br><b>P2</b> – Guide Pin Both Ends<br><b>PX</b> – Guide Pin In Customer Specified Location |
| <b>Sample Part Number</b> |   |                                     |                       |   |
| <b>MWSL</b>               | <b>– 12</b>   | <b>P</b>                            | <b>S</b>              |   |

## HOW TO ORDER MWS CONNECTORS WITH INSULATED WIRE


| Series                    | No. of Cavities   | Contact Type                        | Wire Gage (AWG)  | Wire Type   | Wire Color   | Wire Length Inches                                       | Guide Pin Option  |
|---------------------------|---|-------------------------------------|--|---|--|--|---|
| <b>MWSL</b>               | <b>1 to 30</b><br>Total number of contact cavities including guide pins | <b>P</b> – Pin<br><b>S</b> – Socket | <b>4</b> – #24<br><b>6</b> – #26<br><b>8</b> – #28<br><b>0</b> – #30 | <b>K</b> – M22759/11<br>600 Vrms<br>Teflon® (TFE)<br><br><b>J</b> – M22759/33<br>600 Vrms<br>Modified Cross-Linked Tefzel® (ETFE) | <b>1</b> – White<br><b>2</b> – Yellow<br><b>5</b> – Color Coded Striped Wire Per MIL-STD-681<br><br><b>7</b> – Ten Color Repeating | <b>18</b><br>Length In Inches. "18" Specifies 18 Inches. | <b>Omit</b> – No Guide Pin<br><b>P1</b> – Guide Pin Position 1<br><b>P2</b> – Guide Pin Both Ends<br><b>PX</b> – Guide Pin In Customer Specified Location |
| <b>Sample Part Number</b> |   |                                     |  |   |  |  |   |
| <b>MWSL</b>               | <b>– 6</b>  | <b>P</b>                            | <b>– 6</b>   | <b>K</b>  | <b>7</b>   | <b>– 24</b>  |   |

## HOW TO ORDER MWS CONNECTORS WITH SOLID (SINGLE-STRAND) UNINSULATED WIRE

| Series   | No. of Cavities  | Contact Type | Wire Gage (AWG)    | Wire Type                     | Wire Finish                    | Wire Length Inches                             | Guide Pin Option  |
|--|--|--------------|--------------------|-------------------------------|--------------------------------|--|---|
| MWSL   | 1 to 30<br>Total number of contact cavities including guide pins | P – Pin      | 4 – #24            | C – Single Strand Copper Wire | 3 – Solder-Dipped (63/37 SnPb) | .125   | <b>Omit</b> – No Guide Pin<br><b>P1</b> – Guide Pin Position 1<br><b>P2</b> – Guide Pin Both Ends<br><b>PX</b> – Guide Pin In Customer Specified Location |
|  |  | S – Socket   | 5 – #25<br>6 – #26 |                               | 4 – Gold Plated                | .250<br>.375<br>.500<br>.750<br>1.000<br>2.000 |   |
| Wire Length In Inches. “.500” Specifies Half Inch. |  |              |                    |                               |                                |  |   |
| Sample Part Number                                 |  |              |                    |                               |                                |  |   |
| MWSL   | – 8  | P            | – 5                | C                             | 4                              | – .250   | – P1  |

## STRIP DIMENSIONS

LENGTH OF STRIP IS CALCULATED BY MULTIPLYING THE NUMBER OF CAVITIES BY .050 INCHES AND ADDING .075 INCHES.

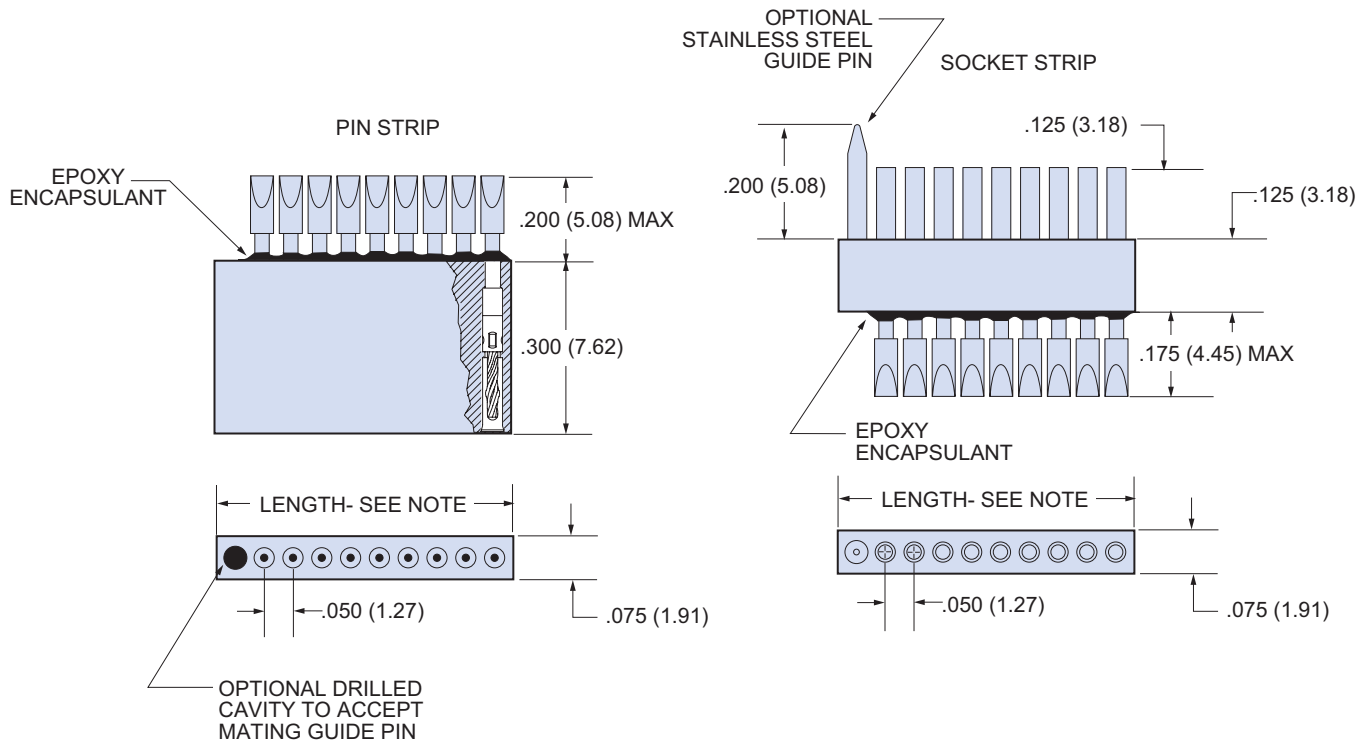

# MWKQ Micro Circular Quick Disconnect



**Plug With Socket Contacts**



**Receptacle With Pin Contacts**

**MWKQ Micro Circular Connectors** feature quick coupling and quick release. The plug has a knurled release sleeve. To unmate, just pull back on the sleeve, compressing the locking ring and free it from the receptacle.

**Choose (7) or (19) Contacts** – Connectors are supplied with hookup wires installed and potted.

## HOW TO ORDER PLUG (SOCKET) CONNECTORS

| Series  | No. of Contacts | Contact Type | Wire Gage (AWG)                          | Wire Type   | Wire Color   | Wire Length Inches                                       |
|---------|-----------------|--------------|--|---|--|--|
| MWKQ2L6 | 7<br>19         | S – Socket   | 4 – #24<br>6 – #26<br>8 – #28<br>0 – #30 | <b>K</b> – M22759/11<br>600 Vrms Teflon® (TFE)<br><b>J</b> – M22759/33<br>600 Vrms Modified Cross-Linked Tefzel® (ETFE) | 1 – White<br>2 – Yellow<br>5 – Color Coded Striped Wire Per MIL-STD-681<br>7 – Ten Color Repeating | <b>18</b><br>Length In Inches. "18" Specifies 18 Inches. |

### Sample Part Number

|         |      |   |     |   |   |      |
|---------|------|---|-----|---|---|------|
| MWKQ2L6 | – 19 | S | – 6 | K | 7 | – 24 |
|---------|------|---|-----|---|---|------|


## HOW TO ORDER RECEPTACLE (PIN) CONNECTORS

| Series  | No. of Contacts | Contact Type | Wire Gage (AWG)                          | Wire Type   | Wire Color   | Wire Length Inches                                       |
|---------|-----------------|--------------|--|---|--|--|
| MWKQ2L7 | 7<br>19         | P – Pin      | 4 – #24<br>6 – #26<br>8 – #28<br>0 – #30 | <b>K</b> – M22759/11<br>600 Vrms Teflon (TFE)<br><b>J</b> – M22759/33<br>600 Vrms Modified Cross-Linked Tefzel (ETFE) | 1 – White<br>2 – Yellow<br>7 – Ten Color Repeating | <b>18</b><br>Length In Inches. "18" Specifies 18 Inches. |


### Sample Part Number

|         |     |   |     |   |   |      |
|---------|-----|---|-----|---|---|------|
| MWKQ2L7 | – 7 | P | – 6 | K | 7 | – 24 |
|---------|-----|---|-----|---|---|------|


## CONTACT ARRANGEMENTS




7 Contacts  
Face View Pin Connector  
(Receptacle)



7 Contacts  
Face View Socket Connector  
(Plug)



19 Contacts  
Face View Pin Connector  
(Receptacle)



19 Contacts  
Face View Socket Connector  
(Plug)





## PERFORMANCE SPECIFICATIONS

|                                 |  |
|---------------------------------|--|
| Current Rating                  | 3 AMP                                    |
| Dielectric Withstanding Voltage | 600 VAC Sea Level<br>150 VAC 70,000 Feet |
| Insulation Resistance           | 5000 Megohms Minimum                     |
| Contact Resistance              | 8 Milliohms Maximum                      |
| Low Level CR                    | 32 Milliohms Maximum                     |
| Operating Temperature           | -55° C. to +150° C.                      |
| Shock                           | 50 g.                                    |
| Vibration                       | 20 g.                                    |
| Mating Force                    | (10 Ounces) X (# of Contacts)            |

## MATERIALS AND FINISHES

|                                |   |
|--------------------------------|---|
| Connector                      |   |
| Shell, Release Sleeve, Jam Nut | Aluminum Alloy 6061 with Electroless Nickel Plating           |
| Insulator                      | Liquid Crystal Polymer (LCP)                                  |
| Lock Ring                      | Stainless Steel   |
| Pin Contact                    | Beryllium Copper With 50 Microinches Gold over Nickel Plating |
| Socket Contact                 | Copper Alloy With 50 Microinches Gold Over Nickel Plating     |
| Encapsulant                    | Epoxy Resin Hysol EE4215                                      |

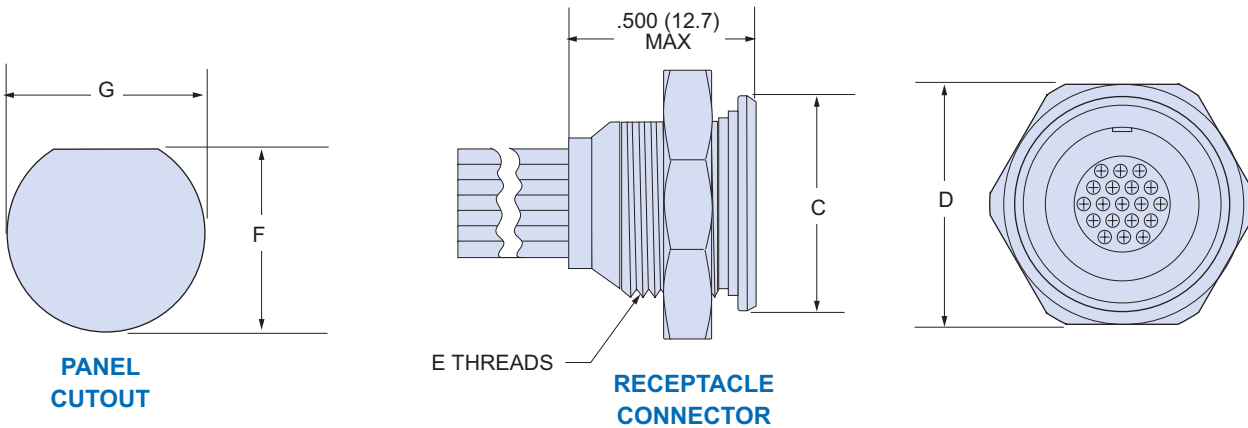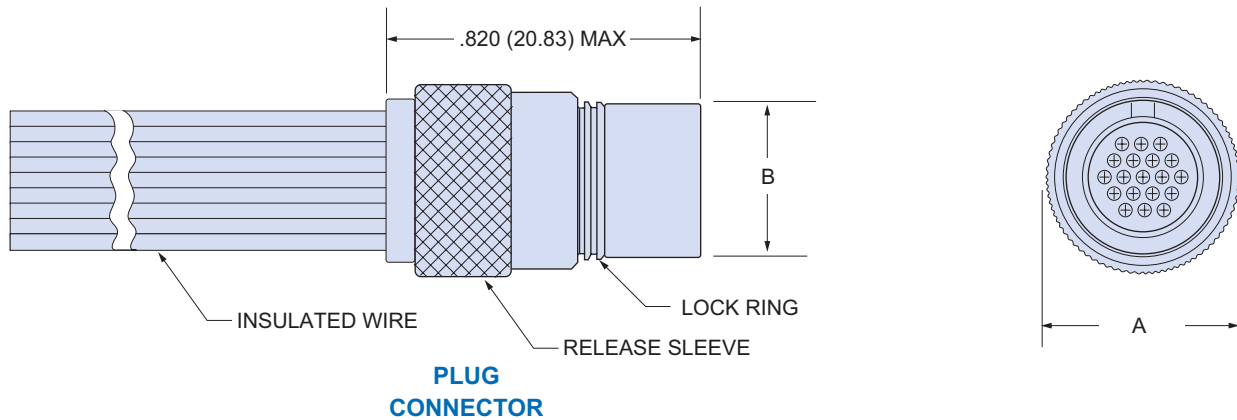


## DIMENSIONS

| Layout    | A Max. |       | B Max. |       | C Max. |       | D Hex. |       | E Thds.          |      | F     |      | G Dia. |     |
|-----------|--------|-------|--------|-------|--------|-------|--------|-------|------------------|------|-------|------|--------|-----|
|           | In.    | mm.   | In.    | mm.   | In.    | mm.   | In.    | mm.   | In.              | mm.  | In.   | mm.  | In.    | mm. |
| <b>7</b>  | .385   | 9.78  | .305   | 7.75  | .500   | 12.7  | .500   | 12.70 | .3125-32 UNEF-2A | .364 | 9.25  | .390 | 9.91   |     |
| <b>19</b> | .515   | 13.08 | .405   | 10.28 | .570   | 14.48 | .625   | 15.88 | .500-28 UNEF-2A  | .475 | 12.07 | .515 | 13.08  |     |

## CUSTOM CIRCULAR TWISTPIN CONNECTORS

### 55 Pin Circular Connector

This connector, developed for a CCD imaging system, provides 55 contacts in a shell size 9 circular connector. Compatible with standard Glenair Series 80 "Mighty Mouse" connector options, this layout offers high density packaging and environmental protection in a circular twistpin connector.

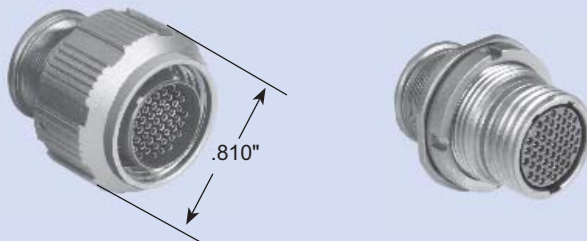

### Ultra-Small 7 Pin Micro Circular

This "minimalist" connector grew out of the need for an extremely small connector for use in laboratory monitoring equipment. The diameter over the coupling nut is .375 inches (9.53 mm.). Designed for wire-to-wire applications, the coupling nut is captivated by soldering a ferrule to the back of the plug.

# Four Reasons to Add Glenair to Your Short List of Suppliers:

## First and foremost you need availability.

Are the products and components you need either in stock or able to be manufactured in a short period of time? Glenair has built its reputation on fast turnaround. We maintain the world's largest inventory of connector accessories and deliver faster turnaround on quotes and orders than anyone else in our business. Today, Glenair is changing the way the interconnect industry operates: from a long lead-time, custom order problem; to a fast response, in-stock solution. From connector accessories to fiber optic termini, Glenair is the "same-day" leader.

## Second, you need capacity.

Can the supplier respond to your evolving requirements with the factory capacity and labor necessary to meet every demand—from one piece to one hundred thousand? Glenair has built the largest capacity, broadest capability factory in the interconnect accessory industry. We have the knowledge, experience and equipment necessary to handle any production requirement, no matter how large or complex, and the manpower to tackle even the most aggressive production schedules.

## Third, you need convenience in ordering.

Do your current suppliers insist on quantity or dollar minimums whenever you place an order? Are their products available only from distributors with limited product knowledge and equally limited shelf stock? Is it hard to get samples when and where you need them? Do you get charged expediting fees for accelerated production? If your answer to any of these questions is yes, we encourage you to consider Glenair, where complete convenience in ordering has been a guiding principle since 1956.


## Finally, you need top quality products backed by outstanding technical support.

At Glenair, we've made product quality and worldwide technical support a major part of our approach to earning your trust and loyalty. We've established an unsurpassed sales, support and engineering presence in every major market in the world. And we've designed quality into every product we ship, by applying the experience and expertise gained from over 40 years in the business.

*In every respect, our formula for serving the fiber optic interconnect customer is identical to the "best-value" service model we've relied on to maintain our leadership position in our core, connector accessory business:*

- **Same-Day Delivery on Our Most Popular Part Numbers**
- **Lightning-Fast Turnaround on Quotes for Price and Delivery**
- **No Price or Quantity Minimums**
- **Outstanding Application Engineering and Worldwide Technical Support**


# Section P Series 89 Nanominiature Connectors

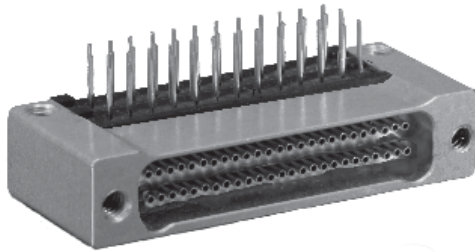

*Glenair's Nano Connectors* offer ultra high density for maximum weight and space savings. Contact spacing is .025 inches. These connectors meet the performance and intermateability requirements of MIL-DTL-32139. 1 AMP current rating, 70 VAC RMS operating voltage. #30 and #32 wire sizes, thru-hole and SMT board mount versions.


## PRODUCT SELECTION GUIDE

### Single Row Pigtail




890-001 and -002 Page P-6

### Single Row Solid Leads




890-003 and -004 Page P-8

### Single Row Back-to-Back




890-005 Page P-10

### Single Row Vertical PCB




890-006 and -007 Page P-12

### Single Row 90° PCB




890-008 and -009 Page P-16

### Single Row Vertical SMT




890-010 and -011 Page P-20

### Single Row 90° SMT




890-012 and -013 Page P-24

### Two Row Pigtail




891-001 and -002 Page P-29

### Two Row Back-To-Back




891-005 Page P-33

### Two Row Solid Leads




891-003 and -004 Page P-31

### Two Row Vertical PCB




891-006 and -007 Page P-35

### Two Row 90° PCB




891-008 and -009 Page P-39

### Two Row Vertical SMT




891-010 and -011 Page P-43

### Two Row 90° SMT



891-012 and -013 Page P-47

### Two Row Straddle Mount



891-014 and -015 Page P-51



## ABOUT NANOMINIATURE CONNECTORS


### Nanominiature Connectors At A Glance

Nanominiature connectors are high reliability ultraminiature interconnects intended for critical applications where size and weight restrictions will not allow the use of Micro-D connectors. Typical applications include miniaturized electronics boxes used in UAV's, satellites, missile systems, and geophysical instruments. Contact spacing of 0.025 inches combined with a rugged contact system allow these nano connectors to be used in demanding environments where size restrictions will not allow the use of any other connector.



### The NanoPin Contact System

The Glenair Nano contact system consists of a twistpin and a tubular socket. The pin contact is a miniaturized version of the Glenair Micro-D twistpin. Spring temper gold alloy wires are welded at the tip to create a hemispherical radius. The pin bundle is bulged to create a spring. The bundle is crimped to a tubular sleeve, allowing wire to be crimped to the contact. The socket contact is fabricated from drawn gold alloy tubing. The material is spring temper alloy, assuring excellent crimp strength. This contact system accommodates either #30 or #32 AWG wire. The current rating is 1 ampere.

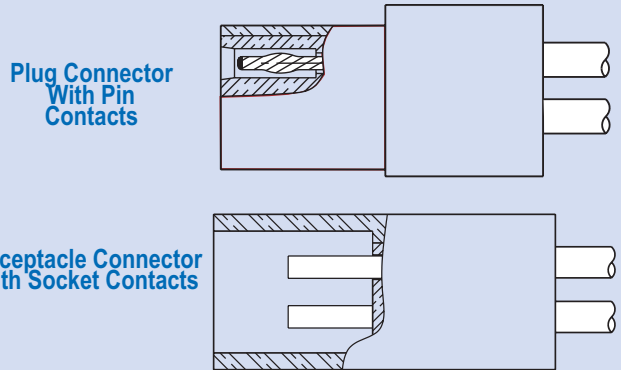

### Superior Performance


The NanoPin contact system offers excellent durability and superior resistance to shock and vibration. The pin bundle consists of seven strands of gold alloy wire, providing multiple contact points with the socket. The contacts are unplated. This is possible because the contact material is 70% gold, alloyed with other metals to yield spring temper material.



NanoPin

### A New Industry Standard

Glenair Series 89 Nanominiature connectors meet the requirements of MIL-DTL-32139. This Defense Supply Center, Columbus (DSCC) specification simplifies the task of specifying nano connectors. This mil spec guarantees interchangeability and intermateability.

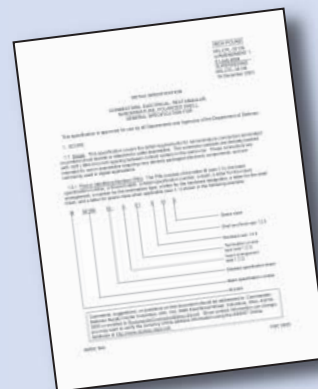

# Series 89 Nanominiature Connectors Performance Specifications, Materials and Finishes



## SERIES 89 NANOMINIATURE CONNECTOR PERFORMANCE SUMMARY

|                                   |  |
|-----------------------------------|--|
| Contact Spacing                   | .025" (0.64) Contact Centers   |
| Wire Accommodation                | #30-#32 AWG  |
| Current Rating                    | 1 AMP Maximum  |
| Voltage Rating (DWV)              | 300 VAC RMS Sea Level, 100 VAC RMS 70,000 Feet                                 |
| Insulation Resistance             | 5000 Megohms Minimum   |
| Operating Temperature             | -55° C. to +125° C.  |
| Contact Resistance                | 71 Millivolt Drop Maximum, When Tested With 1 AMP Current, #30 AWG Wire        |
| Vibration                         | 20 g's, in Accordance with EIA-364-28, Condition IV                            |
| Shock                             | 50 g's, in Accordance with EIA-364-27  |
| Durability                        | 200 Mating Cycles  |
| Corrosion Resistance              | 48 Hours Salt Spray In Accordance With EIA-364-26, Condition B                 |
| Humidity                          | 96 Hours, In Accordance with EIA-364-31 Condition A                            |
| Contact Engaging/Separation Force | 2 Ounce (0.56 Newtons) Maximum, 0.5 Ounce (0.14) Minimum                       |
| Thermal Vacuum Outgassing         | Total Mass Loss (TML) 1.0% Max., Volatile Condensable Material (VCM) 0.1% Max. |

## MATERIALS AND FINISHES

|                 |  |
|-----------------|--|
| Connector Shell | Aluminum Alloy, Cadmium Plated per SAE-AMS-QQ-P-416 Type II Class 1.<br>Aluminum Alloy, Electroless Nickel Plated Per SAE-AMS-C-26074, Class 3 or 4, Grade B<br>Titanium Alloy per MIL-T-81556, Unplated<br>300 Series Stainless Steel per ASTM A582 |
| Insulator       | Liquid Crystal Polymer (LCP), per MIL-M-24519 GLP-30F, 30% Glass-Filled  |
| Pin Contact     | Spring Temper Gold Alloy, Unplated, Per ASTM B477 and ASTM B541.   |
| Socket Contact  | Gold Alloy, Unplated, Per ASTM B477 and ASTM B541.   |
| Hardware        | 300 Series Stainless Steel   |
| PCB Trays       | Liquid Crystal Polymer (LCP), per MIL-M-24519 GLP-30F, 30% Glass-Filled  |
| Encapsulant     | Epoxy  |



SERIES 890 SINGLE ROW CONTACT ARRANGEMENTS



9 Pin Plug



9 Socket Receptacle



15 Pin Plug



15 Socket Receptacle



21 Pin Plug



21 Socket Receptacle



25 Pin Plug



25 Socket Receptacle



31 Pin Plug



31 Socket Receptacle



37 Pin Plug



37 Socket Receptacle



51 Pin Plug



51 Socket Receptacle















# Series 89 Nanominiature Connectors Series 891 Double Row Contact Arrangements



## SERIES 891 DOUBLE ROW CONTACT ARRANGEMENTS


### Mating Face of Pin Connector

### Mating Face of Socket Connector

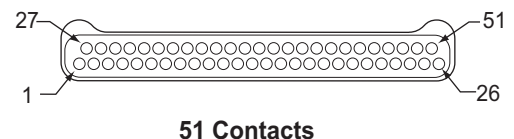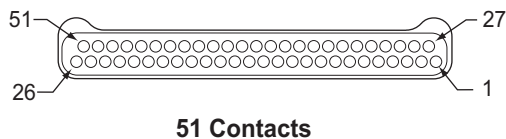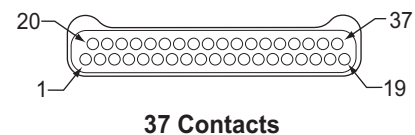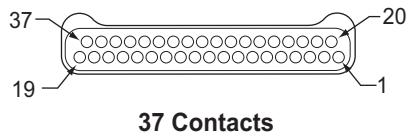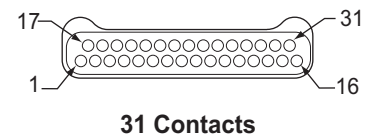



# Series 89 Nanominiature Connectors Single Row Pigtail Assemblies, Insulated Wire 890-001 and -002

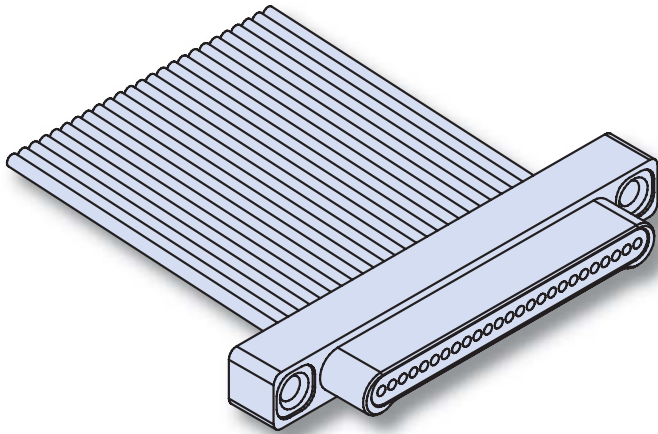

**Glenair's Pigtail Nano Connectors** feature gold alloy NanoPin contacts. Contacts are precision-crimped to insulated, stranded wire. These nanominiature connectors offer premium performance and reliability for demanding applications. Contact spacing is .025 inches. 1 amp current rating, DWV rating 300 volts AC. Wire gages #30 and #32 AWG.

**NanoPin Contact System** assures premium performance in demanding environments. The gold/platinum alloy contacts will stand up to years of exposure without corrosion.

**Typical Applications** include UAV's, satellites, missile systems and geophysical instruments.


## HOW TO ORDER NANOMINIATURE CONNECTORS WITH INSULATED WIRE

| Series   | Insert Arrangement/<br>Contact Type | Shell Material and Finish                               | Wire Gage   | Wire Type   | Wire Color Code   | Wire Length Inches  | Hardware   |
|--|-------------------------------------|---|---|---|---|---|--|
| <b>890-001</b><br>Plug, Pin Contacts, Single Row, Nanominiature          | Plugs (890-001)                     | <b>A1</b><br>Aluminum Shell, Cadmium Plating            | <b>0</b><br>#30 AWG   | <b>A</b><br>Ultralightweight XLETFE Insulation, Silver-Coated Ultrahigh-Strength Copper (Not available for #32 AWG) | <b>1</b> –White<br><b>2</b> –Yellow<br><b>7</b> –Ten Color Repeat | <b>18</b><br>Wire Length In Inches. "18" Specifies 18 Inches. | <b>J</b><br>Jackscrew, #0-80<br><br><b>T</b><br>Threaded Inserts, #0-80 Female |
|  | <b>9P</b>                           |   |   |   |   |   |  |
|  | <b>15P</b>                          |   |   |   |   |   |  |
|  | <b>21P</b>                          |   |   |   |   |   |  |
|  | <b>25P</b>                          |   |   |   |   |   |  |
| <b>890-002</b><br>Receptacle, Socket Contacts, Single Row, Nanominiature | Receptacles (890-002)               | <b>A2</b><br>Aluminum Shell, Electroless Nickel Plating | <b>2</b><br>#32 AWG   | <b>B</b><br>Extruded PTFE Insulation, NEMA HP3-ETX (MIL-W-16878/6)  |   |   |  |
|  | <b>31P</b>                          |   |   |   |   |   |  |
|  | <b>37P</b>                          |   |   |   |   |   |  |
|  | <b>51P</b>                          |   |   |   |   |   |  |
|  | <b>9S</b>                           | <b>T</b><br>Titanium Shell, Unplated                    | <b>C</b><br>Cross-Linked Modified ETFE Insulation, MIL-W-22759/33 (Not available for #32 AWG) |   |   |   |  |
|  | <b>15S</b>                          |   |   |   |   |   |  |
|  | <b>21S</b>                          | <b>S</b><br>Stainless Steel Shell, Passivated           |   |   |   |   |  |
|  | <b>25S</b>                          |   |   |   |   |   |  |
| <b>31S</b>   |                                     |   |   |   |   |   |  |
| <b>37S</b>   |                                     |   |   |   |   |   |  |
| <b>51S</b>   |                                     |   |   |   |   |   |  |


### Sample Part Number

|                |             |           |            |          |          |             |          |
|----------------|-------------|-----------|------------|----------|----------|-------------|----------|
| <b>890-002</b> | <b>- 9S</b> | <b>A1</b> | <b>- 0</b> | <b>A</b> | <b>1</b> | <b>- 12</b> | <b>J</b> |
|----------------|-------------|-----------|------------|----------|----------|-------------|----------|

### PLUG (PIN) CONNECTOR




"J" Jackscrew Option




"T" Threaded Insert Option

### RECEPTACLE (SOCKET) CONNECTOR



"T" Threaded Insert Option





"J" Jackscrew Option

# Series 89 Nanominiature Connectors Single Row Pigtail Assemblies, Insulated Wire 890-001 and -002




## SINGLE ROW NANO PIGTAIL DIMENSIONS



### Plug (Pin) Connectors

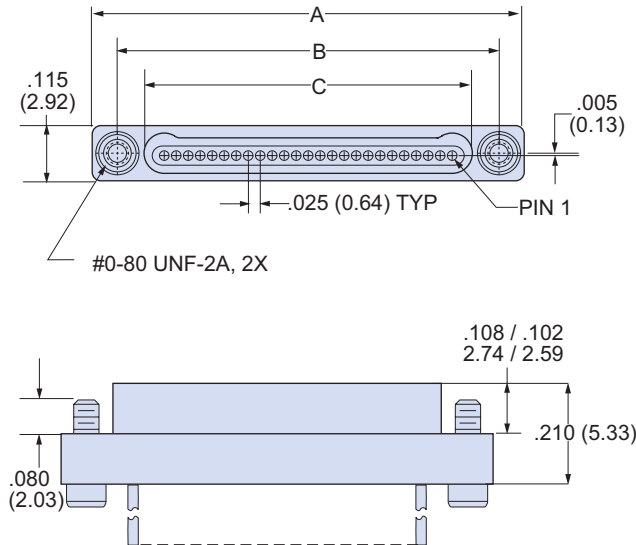


OPTIONAL  
2X #0-80 UNF-2B  
.090 MIN. THREAD  
(TYPE T)



### Receptacle (Socket) Connectors

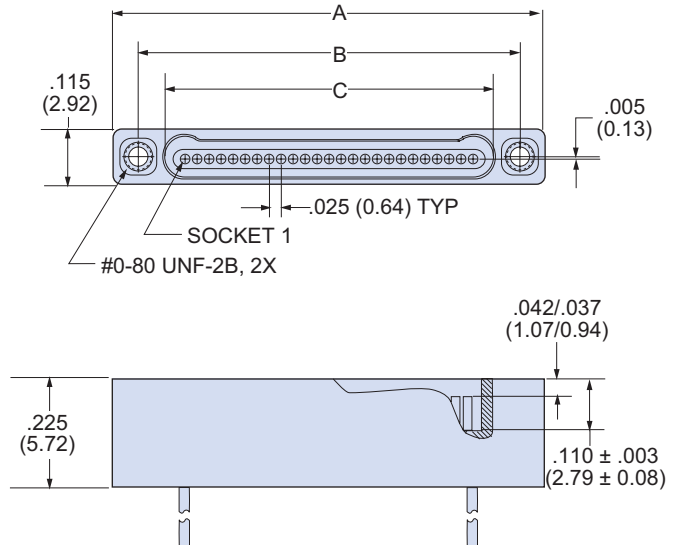


2X #0-80 UNF-2A  
.050 HEX DRIVE  
JACKSCREW  
(TYPE J)



| Layout | A Dimension |       | B Basic Dimension |       | C Basic Dimension |       |
|--------|-------------|-------|-------------------|-------|-------------------|-------|
|        | In.         | mm.   | In.               | mm.   | In.               | mm.   |
| 9P     | .500        | 12.70 | .395              | 10.03 | .284              | 7.21  |
| 9S     | .500        | 12.70 | .395              | 10.03 | .285              | 7.24  |
| 15P    | .650        | 16.51 | .545              | 13.84 | .434              | 11.02 |
| 15S    | .650        | 16.51 | .545              | 13.84 | .435              | 11.05 |
| 21P    | .800        | 20.32 | .695              | 17.65 | .584              | 14.83 |
| 21S    | .800        | 20.32 | .695              | 17.65 | .585              | 14.86 |
| 25P    | .900        | 22.86 | .795              | 20.19 | .684              | 17.37 |
| 25S    | .900        | 22.86 | .795              | 20.19 | .685              | 17.40 |
| 31P    | 1.050       | 26.67 | .945              | 24.00 | .834              | 21.18 |
| 31S    | 1.050       | 26.67 | .945              | 24.00 | .835              | 21.21 |
| 37P    | 1.200       | 30.48 | 1.095             | 27.81 | .984              | 24.99 |
| 37S    | 1.200       | 30.48 | 1.095             | 27.81 | .985              | 24.02 |
| 51P    | 1.550       | 39.37 | 1.445             | 36.70 | 1.334             | 33.88 |
| 51S    | 1.550       | 39.37 | 1.445             | 36.70 | 1.335             | 33.91 |



# Series 89 Nanominiature Connectors Single Row Pigtail Assemblies, Uninsulated Wire 890-003 and -004

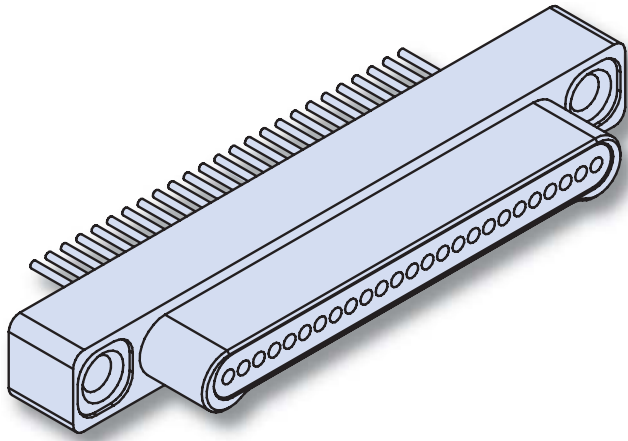

**Glenair's Pigtail Nano Connectors** feature gold alloy NanoPin contacts. Contacts are precision-crimped to insulated, stranded wire. These nanominiature connectors offer premium performance and reliability for demanding applications. Contact spacing is .025 inches. 1 amp current rating, DWV rating 300 volts AC. Wire gages #30 and #32 AWG.

**NanoPin Contact System** assures premium performance in demanding environments. The gold/platinum alloy contacts will stand up to years of exposure without corrosion.

**Typical Applications** include UAV's, satellites, missile systems and geophysical instruments.


## HOW TO ORDER NANOMINIATURE CONNECTORS WITH UNINSULATED WIRE

| Series   | Insert Arrangement/<br>Contact Type | Shell Material and Finish   | Wire Gage           | Wire Type   | Wire Length   | Hardware   |
|--|-------------------------------------|---|---------------------|---|---|--|
| <b>890-003</b><br>Plug, Pin Contacts, Single Row, Nanominiature          | Plugs (890-003)                     | <b>A1</b><br>Aluminum Shell, Cadmium Plating<br><br><b>A2</b><br>Aluminum Shell, Electroless Nickel Plating | <b>0</b><br>#30 AWG | Single Strand Copper Wire, Uninsulated, with Gold Plating | .125<br>.250<br>.375<br>.500<br>Wire Length in Inches | <b>J</b><br>Jackscrew, #0-80<br><br><b>T</b><br>Threaded Inserts, #0-80 Female |
|  | <b>9P</b>                           |   |                     |   |   |  |
|  | <b>15P</b>                          |   |                     |   |   |  |
|  | <b>21P</b>                          |   |                     |   |   |  |
|  | <b>25P</b>                          |   |                     |   |   |  |
| <b>890-004</b><br>Receptacle, Socket Contacts, Single Row, Nanominiature | Receptacles (890-004)               | <b>T</b><br>Titanium Shell, Unplated<br><br><b>S</b><br>Stainless Steel Shell, Passivated                   | <b>2</b><br>#32 AWG |   |   |  |
|  | <b>31P</b>                          |   |                     |   |   |  |
|  | <b>37P</b>                          |   |                     |   |   |  |
|  | <b>51P</b>                          |   |                     |   |   |  |
|  | <b>9S</b>                           |   |                     |   |   |  |
|  | <b>15S</b>                          |   |                     |   |   |  |
|  | <b>21S</b>                          |   |                     |   |   |  |
|  | <b>25S</b>                          |   |                     |   |   |  |
| <b>31S</b>   |                                     |   |                     |   |   |  |
| <b>37S</b>   |                                     |   |                     |   |   |  |
| <b>51S</b>   |                                     |   |                     |   |   |  |


### Sample Part Number

|                |              |           |            |           |               |          |
|----------------|--------------|-----------|------------|-----------|---------------|----------|
| <b>890-003</b> | <b>- 31P</b> | <b>A2</b> | <b>- 0</b> | <b>D3</b> | <b>- .250</b> | <b>J</b> |
|----------------|--------------|-----------|------------|-----------|---------------|----------|

### PLUG (PIN) CONNECTOR




"J" Jackscrew Option




"T" Threaded Insert Option

### RECEPTACLE (SOCKET) CONNECTOR



"T" Threaded Insert Option





"J" Jackscrew Option

# Series 89 Nanominiature Connectors Single Row Pigtail Assemblies, Uninsulated Wire 890-003 and -004





## SINGLE ROW NANO PIGTAIL DIMENSIONS

### Plug (Pin) Connectors

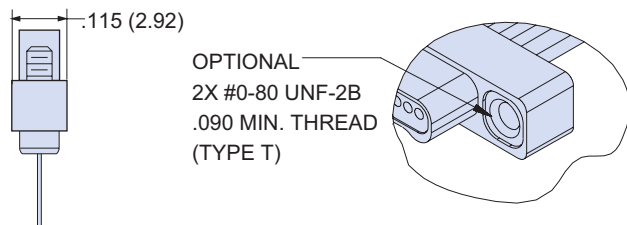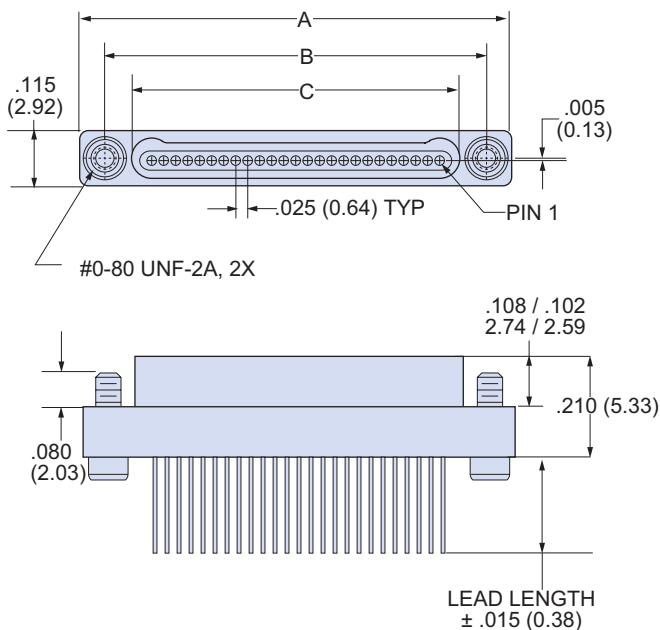

### Receptacle (Socket) Connectors

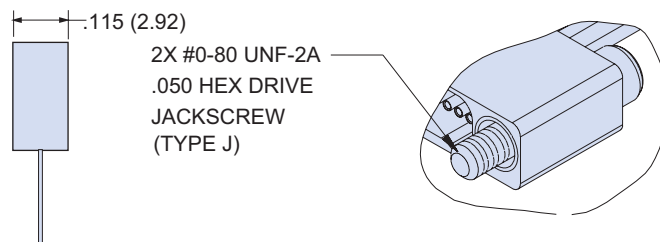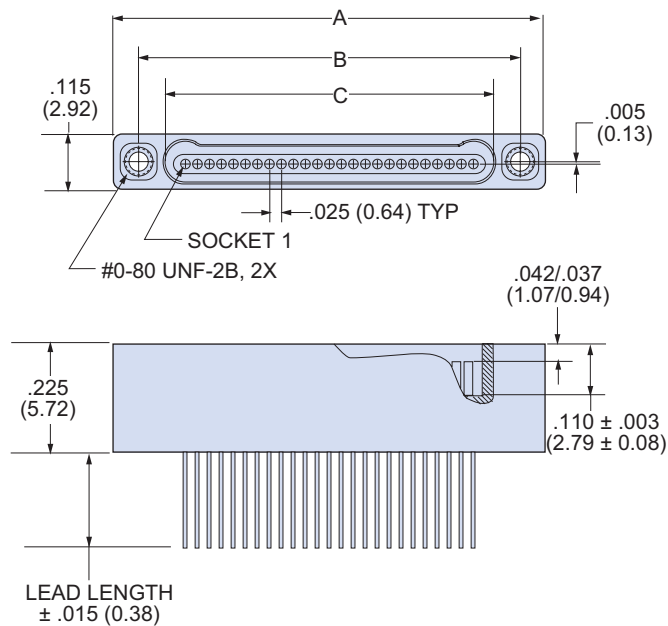


| Layout | A Dimension |       | B Basic Dimension |       | C Basic Dimension |       |
|--------|-------------|-------|-------------------|-------|-------------------|-------|
|        | In.         | mm.   | In.               | mm.   | In.               | mm.   |
| 9P     | .500        | 12.70 | .395              | 10.03 | .284              | 7.21  |
| 9S     | .500        | 12.70 | .395              | 10.03 | .285              | 7.24  |
| 15P    | .650        | 16.51 | .545              | 13.84 | .434              | 11.02 |
| 15S    | .650        | 16.51 | .545              | 13.84 | .435              | 11.05 |
| 21P    | .800        | 20.32 | .695              | 17.65 | .584              | 14.83 |
| 21S    | .800        | 20.32 | .695              | 17.65 | .585              | 14.86 |
| 25P    | .900        | 22.86 | .795              | 20.19 | .684              | 17.37 |
| 25S    | .900        | 22.86 | .795              | 20.19 | .685              | 17.40 |
| 31P    | 1.050       | 26.67 | .945              | 24.00 | .834              | 21.18 |
| 31S    | 1.050       | 26.67 | .945              | 24.00 | .835              | 21.21 |
| 37P    | 1.200       | 30.48 | 1.095             | 27.81 | .984              | 24.99 |
| 37S    | 1.200       | 30.48 | 1.095             | 27.81 | .985              | 24.02 |
| 51P    | 1.550       | 39.37 | 1.445             | 36.70 | 1.334             | 33.88 |
| 51S    | 1.550       | 39.37 | 1.445             | 36.70 | 1.335             | 33.91 |





# Series 89 Nanominiature Connectors Single Row Back-To-Back Cables 890-005

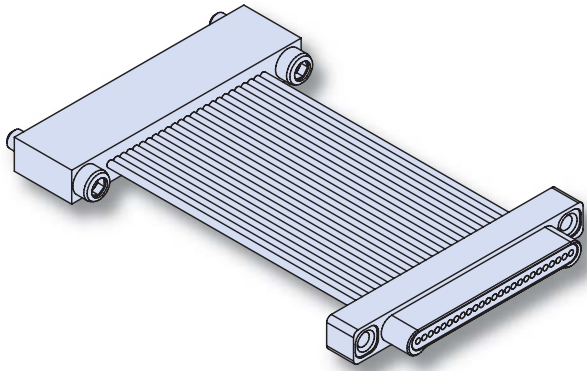

**Glenair's Back-To-Back Nano Connectors** feature gold alloy NanoPin contacts. Contacts are precision-crimped to insulated, stranded wire. These nanominiature connectors offer premium performance and reliability for demanding applications. Contact spacing is .025 inches. 1 amp current rating, DWV rating 300 volts AC. Wire gages #30 and #32 AWG.

**NanoPin Contact System** assures premium performance in demanding environments. The gold/platinum alloy contacts will stand up to years of exposure without corrosion.

**Typical Applications** include UAV's, satellites, missile systems and geophysical instruments.


## HOW TO ORDER SINGLE ROW BACK-TO-BACK JUMPERS

| Series  | Number of Contacts   | Connector Type   | Shell Material and Finish  | Wire Gage  | Wire Type  | Wire Color Code  | Length Inches         | Hardware   |  |   |   |
|---|--|--|--|--|--|--|-----------------------|--|--|---|---|
| 890-005<br>Back-To-Back Cables,<br>Single Row,<br>Nanominiature | 9  | <b>GP</b><br>Plug (Pin)<br>Connector on<br>Both Ends             | <b>A1</b><br>Aluminum Shell,<br>Cadmium Plating  | <b>0</b><br>#30<br>AWG                                       | <b>A</b><br>Ultra lightweight XLETFE<br>Insulation, Silver-Coated<br>Ultrahigh-Strength Copper<br>(Not available for #32 gage) | <b>1</b> –White<br><b>2</b> –Yellow<br><b>7</b> –Ten<br>Color<br>Repeat          | <b>Overall Length</b> | <b>JJ</b> = Jackscrews on<br>both ends (GP, GS, CS)  |  |   |   |
|   | 15   |  |  |  |  |  |                       |  |  |   |   |
|   | 21   | <b>GS</b><br>Receptacle<br>(Socket)<br>Connector on<br>Both Ends | <b>A2</b><br>Aluminum Shell,<br>Electroless<br>Nickel Plating  | <b>2</b><br>#32<br>AWG                                       |  |  |                       |  | <b>B</b><br>Extruded PTFE Insulation,<br>NEMA HP3-ETX<br>(MIL-W-16878/6) | <b>In Inches<br/>Including<br/>Connectors</b> | <b>JT</b> = Jackscrews on<br>plug, threaded holes on<br>receptacle (CS) |
|   | 25   |  |  |  |  |  |                       |  |  |   |   |
| 31  | <b>CS</b><br>Plug (Pin)<br>On One End,<br>Receptacle On<br>The Other End | <b>T</b><br>Titanium Shell,<br>Unplated                          | <b>C</b><br>Cross-Linked Modified<br>ETFE Insulation,<br>MIL-W-22759/33<br>(Not available for #32 AWG) | <b>Example:<br/>"12"<br/>specifies<br/>12 inches<br/>OAL</b> | <b>JP</b> = Jackscrews on<br>plug, threaded holes on<br>plug (GP)  |  |                       |  |  |   |   |
| 37  |  |  |  |  |  |  |                       |  |  |   |   |
| 51  |  | <b>S</b><br>Stainless Steel<br>Shell, Passivated                 |  |  |  | <b>TJ</b> = Jackscrews on<br>receptacle, threaded<br>holes on plug (CS)          |                       |  |  |   |   |
|   |  |  |  |  |  | <b>JR</b> = Jackscrews on<br>receptacle, threaded<br>holes on receptacle<br>(GS) |                       |  |  |   |   |
|   |  |  |  |  |  |  |                       | <b>TT</b> = Threaded holes<br>both ends (GP, GS, CS) |  |   |   |


### Sample Part Number

890-005    – 9    GP    A1    – 0    A    1    – 12    JP

### PLUG (PIN) CONNECTOR




"J" Jackscrew Option




"T" Threaded Insert Option

### RECEPTACLE (SOCKET) CONNECTOR



"T" Threaded Insert Option




"J" Jackscrew Option

# Series 89 Nanominiature Connectors Single Row Back-To-Back Cables 890-005





## SINGLE ROW NANO BACK-TO-BACK DIMENSIONS

### Plug (Pin) Connectors

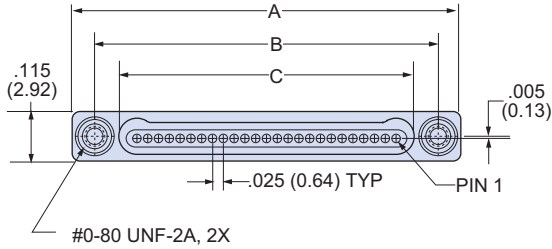


### Receptacle (Socket) Connectors

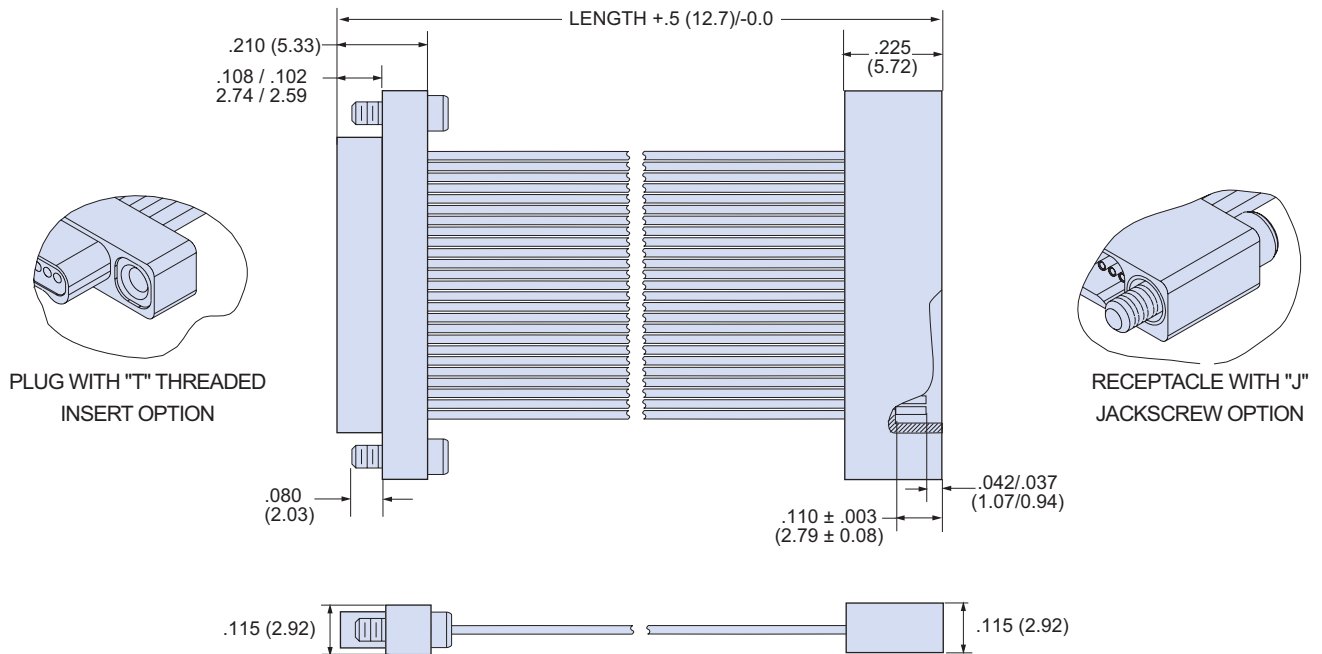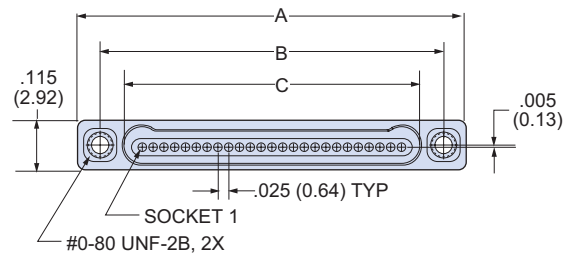

| Layout | A Dimension |       | B Basic Dimension |       | C Basic Dimension |       |
|--------|-------------|-------|-------------------|-------|-------------------|-------|
|        | In.         | mm.   | In.               | mm.   | In.               | mm.   |
| 9P     | .500        | 12.70 | .395              | 10.03 | .284              | 7.21  |
| 9S     | .500        | 12.70 | .395              | 10.03 | .285              | 7.24  |
| 15P    | .650        | 16.51 | .545              | 13.84 | .434              | 11.02 |
| 15S    | .650        | 16.51 | .545              | 13.84 | .435              | 11.05 |
| 21P    | .800        | 20.32 | .695              | 17.65 | .584              | 14.83 |
| 21S    | .800        | 20.32 | .695              | 17.65 | .585              | 14.86 |
| 25P    | .900        | 22.86 | .795              | 20.19 | .684              | 17.37 |
| 25S    | .900        | 22.86 | .795              | 20.19 | .685              | 17.40 |
| 31P    | 1.050       | 26.67 | .945              | 24.00 | .834              | 21.18 |
| 31S    | 1.050       | 26.67 | .945              | 24.00 | .835              | 21.21 |
| 37P    | 1.200       | 30.48 | 1.095             | 27.81 | .984              | 24.99 |
| 37S    | 1.200       | 30.48 | 1.095             | 27.81 | .985              | 24.02 |
| 51P    | 1.550       | 39.37 | 1.445             | 36.70 | 1.334             | 33.88 |
| 51S    | 1.550       | 39.37 | 1.445             | 36.70 | 1.335             | 33.91 |



## Series 89 Nanominiature Connectors Single Row Vertical Mount Printed Circuit Board 890-006 and -007

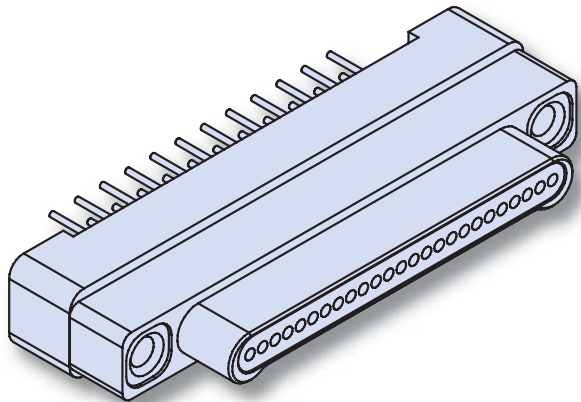

**Vertical Mount PCB Nano Connectors** feature gold alloy NanoPin contacts. These nanominiature connectors offer premium performance and reliability for demanding applications. Available with #0-80 threaded inserts, or with jackscrews for use with flexible circuits.

**Pre-Tinned PC Tails** are coated with Sn63Pb37 tin-lead for excellent solderability.

**Choose Aluminum, Titanium or Stainless Steel Shells** in seven layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139. These connectors are intermateable with any corresponding Glenair Series 890 single row metal shell nanominiature connector.

### HOW TO ORDER VERTICAL MOUNT PCB CONNECTORS

| Series   | Insert Arrangement/<br>Contact Type  | Shell Material and Finish                       | Termination Type   | PC Tail Length                                   | Hardware   |   |  |
|--|--|---|--|--|--|---|--|
| <b>890-006</b><br>Plug, Pin Contacts,<br>Single Row, Vertical<br>PCB Nanominiature | Plugs (890-006)<br><b>9P</b><br><b>15P</b><br><b>21P</b><br><b>25P</b><br><b>31P</b><br><b>37P</b><br><b>51P</b> | <b>A1</b><br>Aluminum Shell,<br>Cadmium Plating | <b>BST</b><br>"Board <u>S</u> traight <u>T</u> hru-<br>Hole" | <b>1</b><br>.110 Inch (2.79 mm)                  | <b>J</b><br>Jackscrew, #0-80<br><br><b>T</b><br>Threaded Inserts, #0-<br>80 Female |   |  |
|  |  |   |  |  |  | <b>A2</b><br>Aluminum Shell,<br>Electroless Nickel<br>Plating                               | <b>2</b><br>.172 Inch (43.69 mm)   |
|  |  | <b>T</b><br>Titanium Shell,<br>Unplated         |  |  |  |   |  |
|  |  |   |  | <b>S</b><br>Stainless Steel Shell,<br>Passivated |  |   |  |
|  |  |   |  |  |  | <b>890-007</b><br>Receptacle, Socket<br>Contacts, Two<br>Row, Vertical PCB<br>Nanominiature | Receptacles (890-007)<br><b>9S</b><br><b>15S</b><br><b>21S</b><br><b>25S</b><br><b>31S</b><br><b>37S</b><br><b>51S</b> |
| <b>Sample Part Number</b>  |  |   |  |  |  |   |  |
| <b>890-007</b>   | <b>- 31S</b>   | <b>T</b>  | <b>- BST</b>   |  | <b>1</b>   |   |  |

#### MATERIALS AND FINISHES


|                 |  |
|-----------------|--|
| Connector Shell | See Ordering Information                       |
| Insulator       | Liquid Crystal Polymer (LCP), 30% Glass-Filled |
| Contacts        | Gold Alloy, Unplated                           |
| Hardware        | 300 Series Stainless Steel                     |
| PC Tails        | #30 (.010 Dia.) Copper Wire, Solder Dipped     |
| PCB Trays       | Liquid Crystal Polymer (LCP) or Epoxy          |
| Encapsulant     | Epoxy  |

#### SPECIFICATIONS


|                           |                            |
|---------------------------|----------------------------|
| Durability                | 200 Cycles Minimum         |
| Current Rating            | 1 AMP Maximum              |
| Voltage Rating (DWV)      | 300 VAC RMS Sea Level      |
| Insulation Resistance     | 5000 Megohms Minimum       |
| Operating Temperature     | -55° C. to +125° C.        |
| Contact Resistance        | 71 mV. @1 AMP #30 AWG Wire |
| Thermal Vacuum Outgassing | 1.0% Max TML, 0.1% Max.    |

**SINGLE ROW NANO VERTICAL PCB DIMENSIONS**

**Plug (Pin) Connectors**

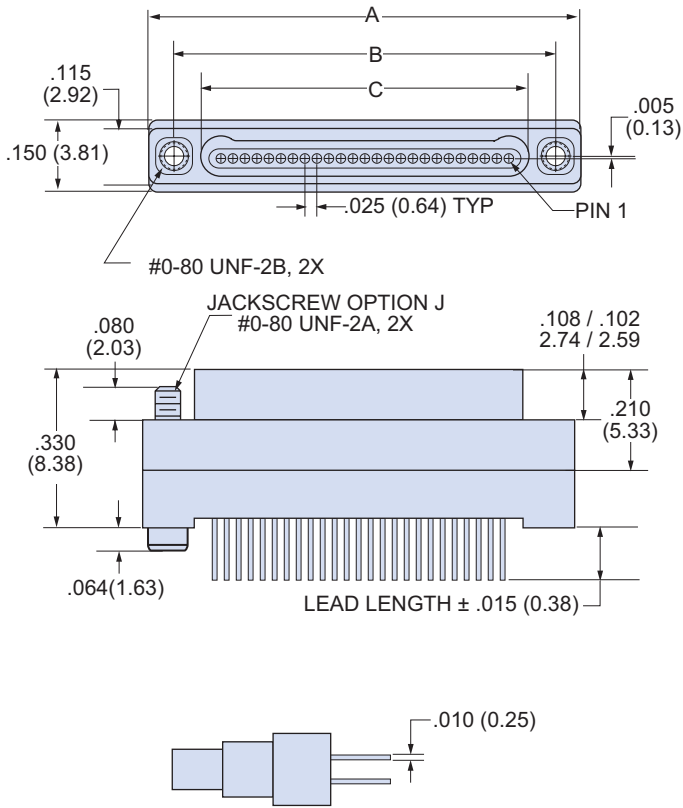

**Receptacle (Socket) Connectors**

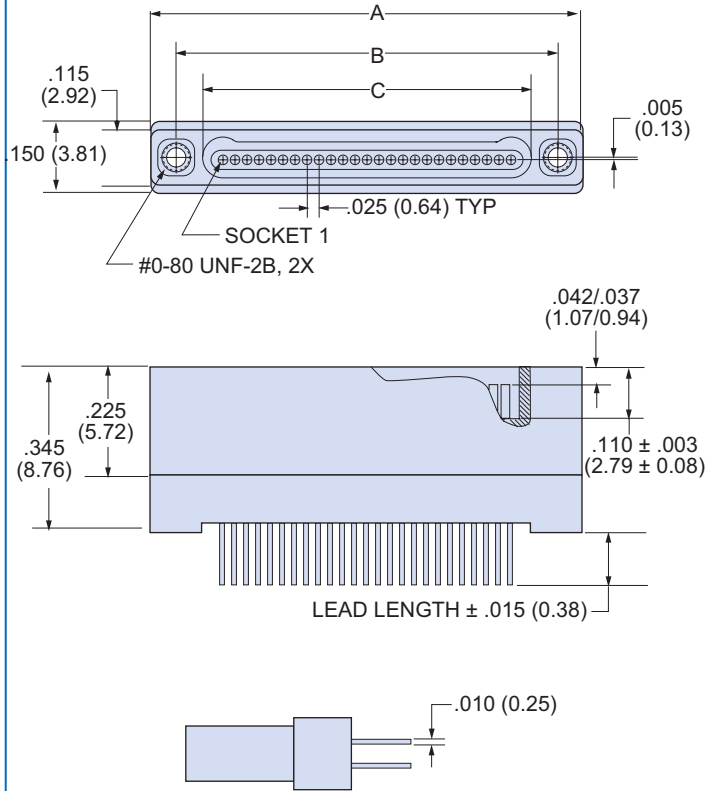

| Layout     | A Dimension |       | B Basic Dimension |       | C Basic Dimension |       |
|------------|-------------|-------|-------------------|-------|-------------------|-------|
|            | In.         | mm.   | In.               | mm.   | In.               | mm.   |
| <b>9P</b>  | .500        | 12.70 | .395              | 10.03 | .284              | 7.21  |
| <b>9S</b>  | .500        | 12.70 | .395              | 10.03 | .285              | 7.24  |
| <b>15P</b> | .650        | 16.51 | .545              | 13.84 | .434              | 11.02 |
| <b>15S</b> | .650        | 16.51 | .545              | 13.84 | .435              | 11.05 |
| <b>21P</b> | .800        | 20.32 | .695              | 17.65 | .584              | 14.83 |
| <b>21S</b> | .800        | 20.32 | .695              | 17.65 | .585              | 14.86 |
| <b>25P</b> | .900        | 22.86 | .795              | 20.19 | .684              | 17.37 |
| <b>25S</b> | .900        | 22.86 | .795              | 20.19 | .685              | 17.40 |
| <b>31P</b> | 1.050       | 26.67 | .945              | 24.00 | .834              | 21.18 |
| <b>31S</b> | 1.050       | 26.67 | .945              | 24.00 | .835              | 21.21 |
| <b>37P</b> | 1.200       | 30.48 | 1.095             | 27.81 | .984              | 24.99 |
| <b>37S</b> | 1.200       | 30.48 | 1.095             | 27.81 | .985              | 24.02 |
| <b>51P</b> | 1.550       | 39.37 | 1.445             | 36.70 | 1.334             | 33.88 |
| <b>51S</b> | 1.550       | 39.37 | 1.445             | 36.70 | 1.335             | 33.91 |



# Series 89 Nanominiature Connectors



## Single Row Vertical Mount Printed Circuit Board

### 890-006 and -007

Patterns shown are for connector mounting side of PC Board.


### VERTICAL PCB PLUG (PIN) CONNECTOR LAYOUT 890-006

#### 9 Contacts

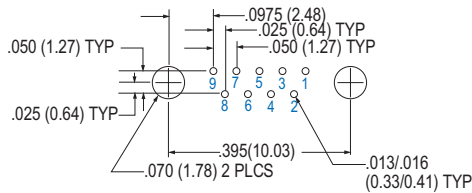


Connector Mating Face


#### 15 Contacts

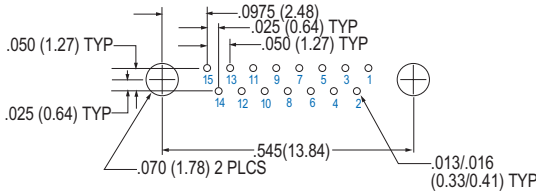


#### 21 Contacts

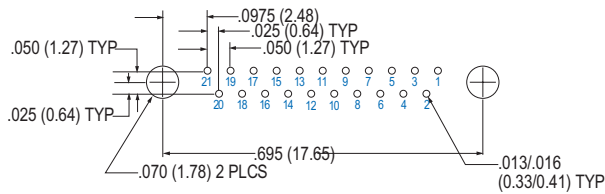


#### 25 Contacts

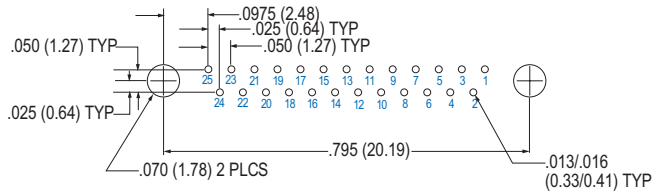


#### 31 Contacts

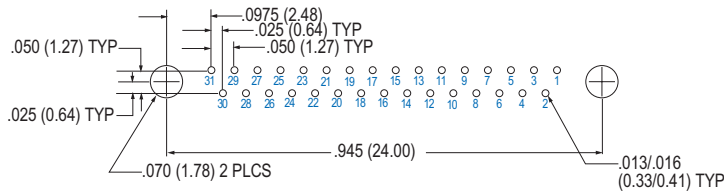

#### 37 Contacts

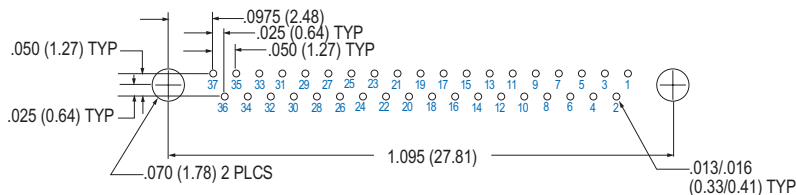

#### 51 Contacts

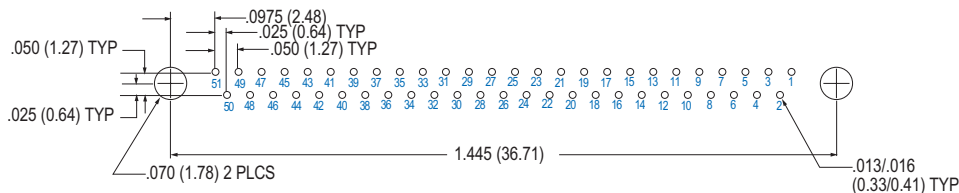


# Series 89 Nanominiature Connectors Single Row Vertical Mount Printed Circuit Board 890-006 and -007




Patterns shown are for connector mounting side of PC Board.

## VERTICAL PCB RECEPTACLE (SOCKET) CONNECTOR LAYOUT 890-007

### 9 Contacts

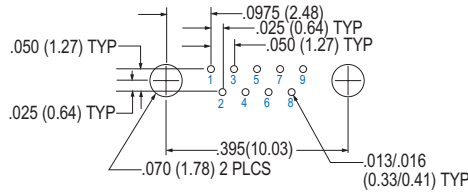


Socket #1




Connector Mating Face


### 15 Contacts

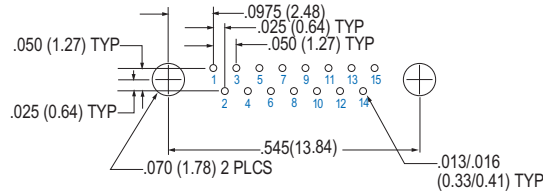


### 21 Contacts

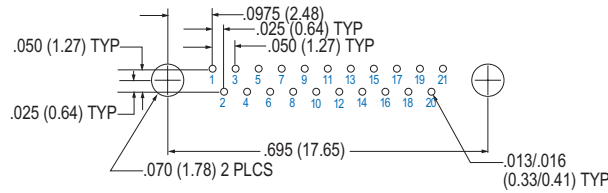


### 25 Contacts

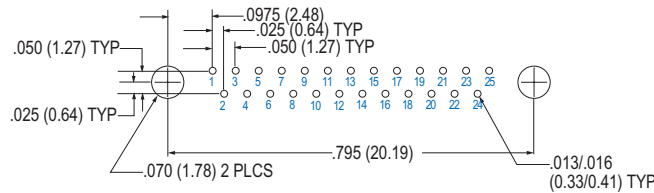


### 31 Contacts

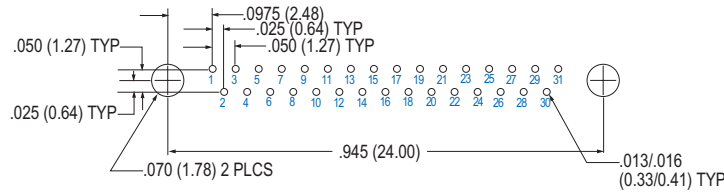

### 37 Contacts

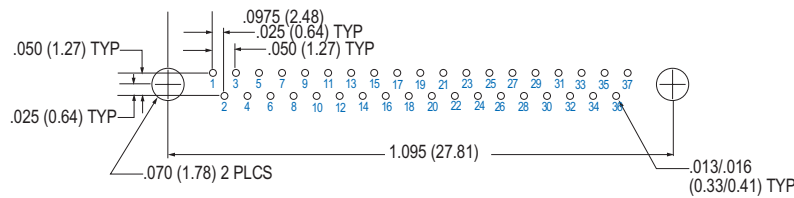


### 51 Contacts

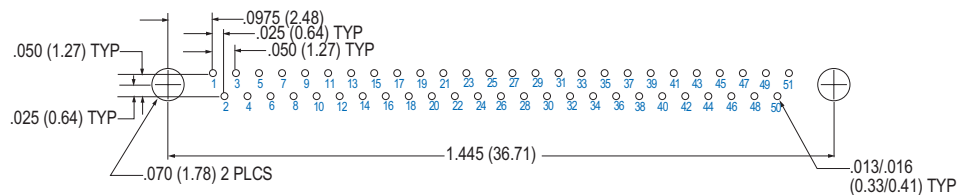



## Series 89 Nanominiature Connectors Single Row Right Angle Printed Circuit Board 890-008 and -009

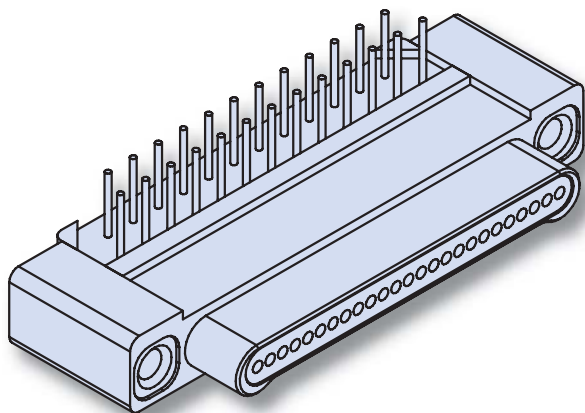

**Right Angle Thru Hole PCB Nano Connectors** feature gold alloy NanoPin contacts. These nanominiature connectors offer premium performance and reliability for demanding applications. Available with #0-80 threaded inserts, or with jackscrews for use with flexible circuits.

**Pre-Tinned PC Tails** are coated with Sn63Pb37 tin-lead for excellent solderability.

**Choose Aluminum, Titanium or Stainless Steel Shells** in seven layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139. These connectors are intermateable with any corresponding Glenair Series 890 single row metal shell nanominiature connector.

### HOW TO ORDER RIGHT ANGLE PCB CONNECTORS

| Series  | Insert Arrangement/<br>Contact Type | Shell Material and Finish  | Termination Type                               | PC Tail Length                   | Hardware                                       |
|---|-------------------------------------|--|--|----------------------------------|--|
| <b>890-008</b><br>Plug, Pin Contacts,<br>Single Row, Right<br>Angle Thru-Hole PCB<br>Nanominiature          | Plugs (890-008)                     | <b>A1</b><br>Aluminum Shell,<br>Cadmium Plating<br><br><b>A2</b><br>Aluminum Shell,<br>Electroless Nickel<br>Plating | <b>BRT</b><br>"Board Right Angle<br>Thru-Hole" | <b>1</b><br>.110 Inch (2.79 mm)  | <b>J</b><br>Jackscrew, #0-80                   |
|   | <b>9P</b>                           |  |  |                                  |  |
|   | <b>15P</b>                          |  |  |                                  |  |
|   | <b>21P</b>                          |  |  |                                  |  |
|   | <b>25P</b>                          |  |  |                                  |  |
| <b>890-009</b><br>Receptacle, Socket<br>Contacts, Single Row,<br>Right Angle Thru-Hole<br>PCB Nanominiature | Receptacles (890-009)               | <b>T</b><br>Titanium Shell,<br>Unplated<br><br><b>S</b><br>Stainless Steel Shell,<br>Passivated                      |  | <b>2</b><br>.172 Inch (43.69 mm) | <b>T</b><br>Threaded Inserts, #0-<br>80 Female |
|   | <b>31P</b>                          |  |  |                                  |  |
|   | <b>37P</b>                          |  |  |                                  |  |
|   | <b>51P</b>                          |  |  |                                  |  |
|   | <b>9S</b>                           |  |  |                                  |  |
|   | <b>15S</b>                          |  |  |                                  |  |
|   | <b>21S</b>                          |  |  |                                  |  |
| <b>25S</b>  |                                     |  |  |                                  |  |
| <b>31S</b>  |                                     |  |  |                                  |  |
| <b>37S</b>  |                                     |  |  |                                  |  |
| <b>51S</b>  |                                     |  |  |                                  |  |
| <b>Sample Part Number</b>   |                                     |  |  |                                  |  |
| <b>890-008</b>  | <b>- 51P</b>                        | <b>A2</b>  | <b>- BRT</b>                                   | <b>1</b>                         | <b>T</b>                                       |

#### MATERIALS AND FINISHES


|                 |  |
|-----------------|--|
| Connector Shell | See Ordering Information                       |
| Insulator       | Liquid Crystal Polymer (LCP), 30% Glass-Filled |
| Contacts        | Gold Alloy, Unplated                           |
| Hardware        | 300 Series Stainless Steel                     |
| PC Tails        | #30 (.010 Dia.) Copper Wire, Solder Dipped     |
| PCB Trays       | Liquid Crystal Polymer (LCP) or Epoxy          |
| Encapsulant     | Epoxy  |

#### SPECIFICATIONS




|                           |                            |
|---------------------------|----------------------------|
| Durability                | 200 Cycles Minimum         |
| Current Rating            | 1 AMP Maximum              |
| Voltage Rating (DWV)      | 300 VAC RMS Sea Level      |
| Insulation Resistance     | 5000 Megohms Minimum       |
| Operating Temperature     | -55° C. to +125° C.        |
| Contact Resistance        | 71 mV. @1 AMP #30 AWG Wire |
| Thermal Vacuum Outgassing | 1.0% Max TML, 0.1% Max.    |

**SINGLE ROW NANO RIGHT ANGLE PCB DIMENSIONS**

**Plug (Pin) Connectors**

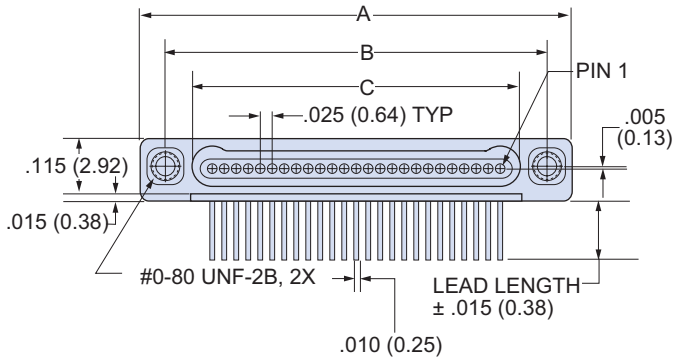

**Receptacle (Socket) Connectors**

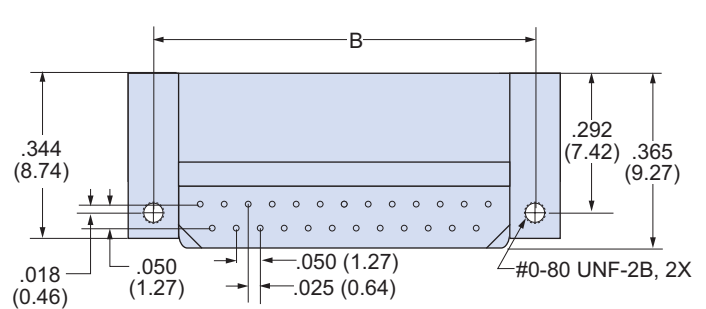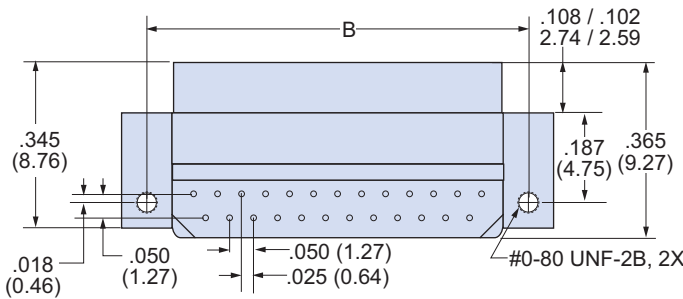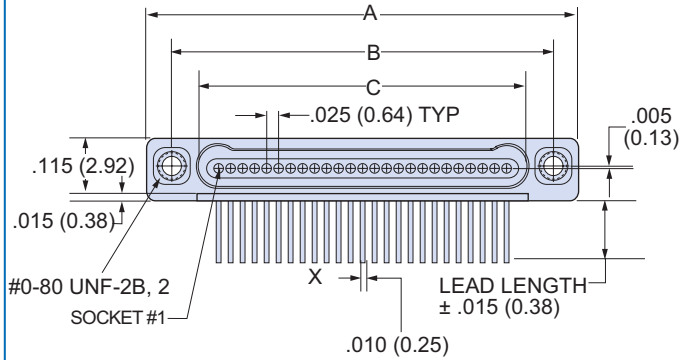


| Layout     | A Dimension |       | B Basic Dimension |       | C Basic Dimension |       |
|------------|-------------|-------|-------------------|-------|-------------------|-------|
|            | In.         | mm.   | In.               | mm.   | In.               | mm.   |
| <b>9P</b>  | .500        | 12.70 | .395              | 10.03 | .284              | 7.21  |
| <b>9S</b>  | .500        | 12.70 | .395              | 10.03 | .285              | 7.24  |
| <b>15P</b> | .650        | 16.51 | .545              | 13.84 | .434              | 11.02 |
| <b>15S</b> | .650        | 16.51 | .545              | 13.84 | .435              | 11.05 |
| <b>21P</b> | .800        | 20.32 | .695              | 17.65 | .584              | 14.83 |
| <b>21S</b> | .800        | 20.32 | .695              | 17.65 | .585              | 14.86 |
| <b>25P</b> | .900        | 22.86 | .795              | 20.19 | .684              | 17.37 |
| <b>25S</b> | .900        | 22.86 | .795              | 20.19 | .685              | 17.40 |
| <b>31P</b> | 1.050       | 26.67 | .945              | 24.00 | .834              | 21.18 |
| <b>31S</b> | 1.050       | 26.67 | .945              | 24.00 | .835              | 21.21 |
| <b>37P</b> | 1.200       | 30.48 | 1.095             | 27.81 | .984              | 24.99 |
| <b>37S</b> | 1.200       | 30.48 | 1.095             | 27.81 | .985              | 24.02 |
| <b>51P</b> | 1.550       | 39.37 | 1.445             | 36.70 | 1.334             | 33.88 |
| <b>51S</b> | 1.550       | 39.37 | 1.445             | 36.70 | 1.335             | 33.91 |




Patterns shown are for connector mounting side of PC Board.

## RIGHT ANGLE PCB PLUG (PIN) CONNECTOR LAYOUT 890-008


### 9 Contacts

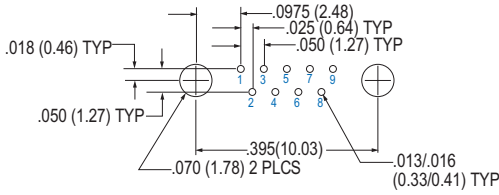


### 15 Contacts

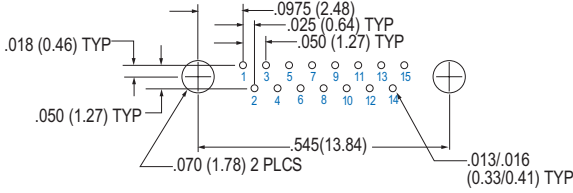


### 21 Contacts

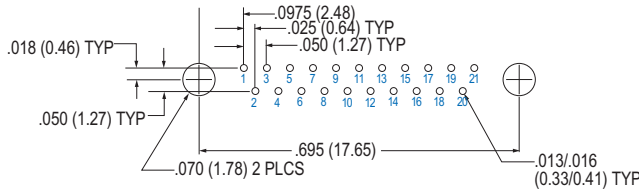


### 25 Contacts

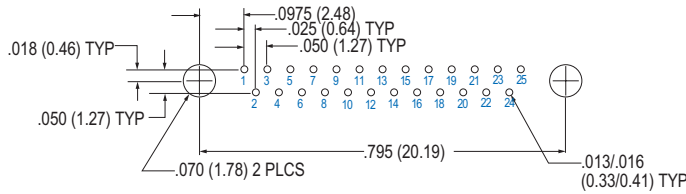



### 31 Contacts

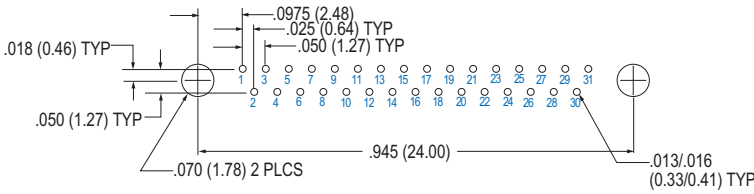

### 37 Contacts

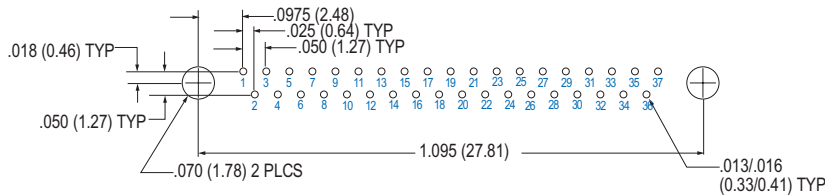

### 51 Contacts

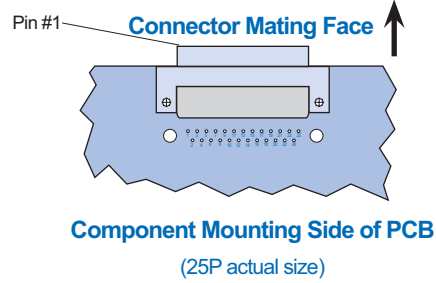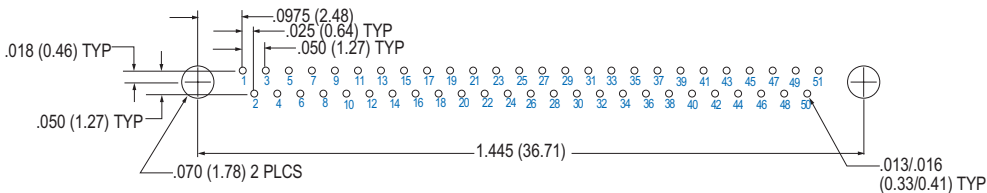



# Series 89 Nanominiature Connectors Single Row Right Angle Printed Circuit Board 890-008 and -009



Patterns shown are for connector mounting side of PC Board.


## RIGHT ANGLE PCB RECEPTACLE (SOCKET) CONNECTOR LAYOUT 890-009

**9 Contacts**

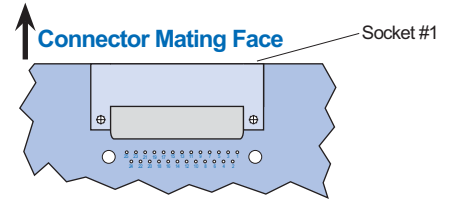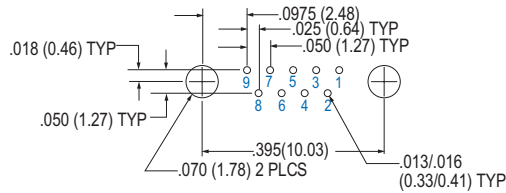


**Component Mounting Side of PCB**  
(25S actual size)


**15 Contacts**

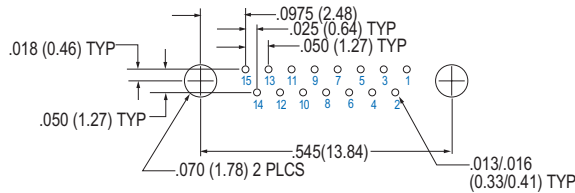


**21 Contacts**

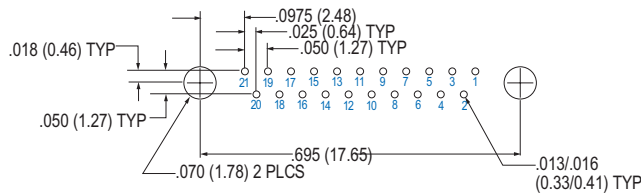


**25 Contacts**

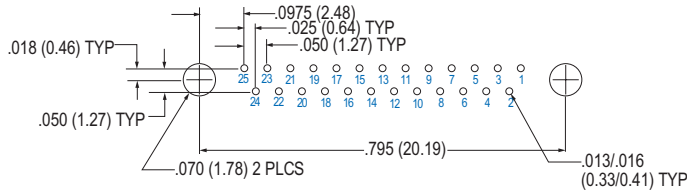


**31 Contacts**

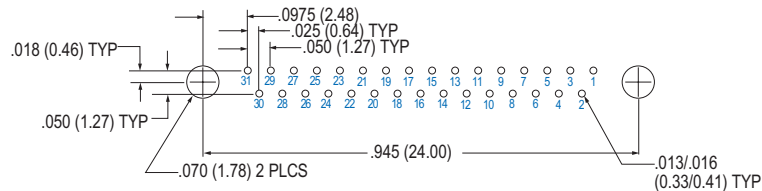

**37 Contacts**

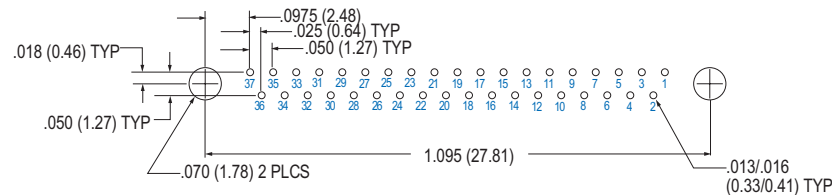


**51 Contacts**

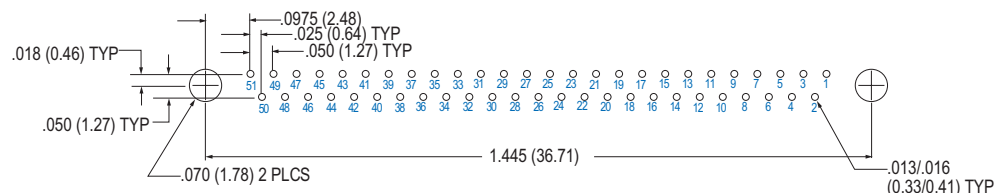



# Series 89 Nanominiature Connectors Single Row Vertical Surface Mount PCB 890-010 and -011

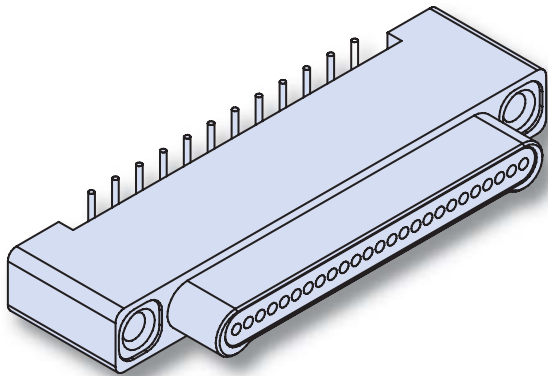

**Vertical SMT PCB Nano Connectors** feature gold alloy NanoPin contacts. These nanominiature connectors offer premium performance and reliability for demanding applications. Available with #0-80 threaded inserts, or with jackscrews for use with flexible circuits.

**Pre-Tinned PC Tails** are coated with Sn63Pb37 tin-lead for excellent solderability.

**Choose Aluminum, Titanium or Stainless Steel Shells** in seven layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139. These connectors are intermateable with any corresponding Glenair Series 890 single row metal shell nanominiature connector.

## HOW TO ORDER VERTICAL SMT PCB CONNECTORS

| Series   | Insert Arrangement/<br>Contact Type  | Shell Material and<br>Finish  | Termination Type                                | Hardware                                      |   |  |  |                           |              |           |             |          |
|--|--|---|---|---|---|--|--|---------------------------|--------------|-----------|-------------|----------|
| <b>890-010</b><br>Plug, Pin Contacts,<br>Single Row, Vertical SMT<br>Nanominiature | Plugs (890-010)<br><b>9P</b><br><b>15P</b><br><b>21P</b><br><b>25P</b><br><b>31P</b><br><b>37P</b><br><b>51P</b> | <b>A1</b><br>Aluminum Shell, Cadmium<br>Plating<br><br><b>A2</b><br>Aluminum Shell, Electroless<br>Nickel Plating | <b>BSS</b><br>"Board Straight Surface<br>Mount" | <b>T</b><br>Threaded Inserts, #0-80<br>Female |   |  |  |                           |              |           |             |          |
|  |  |   |   |   | <b>890-011</b><br>Receptacle, Socket<br>Contacts, Single Row,<br>Vertical SMT Nanominiature | Receptacles (890-011)<br><b>9S</b><br><b>15S</b><br><b>21S</b><br><b>25S</b><br><b>31S</b><br><b>37S</b><br><b>51S</b> | <b>T</b><br>Titanium Shell, Unplated<br><br><b>S</b><br>Stainless Steel Shell,<br>Passivated |                           |              |           |             |          |
|  |  |   |   |   |   |  |  | <b>Sample Part Number</b> |              |           |             |          |
|  |  |   |   |   |   |  |  | <b>890-010</b>            | <b>- 37P</b> | <b>A1</b> | <b>-BSS</b> | <b>T</b> |

### MATERIALS AND FINISHES

|                 |  |
|-----------------|--|
| Connector Shell | See Ordering Information                       |
| Insulator       | Liquid Crystal Polymer (LCP), 30% Glass-Filled |
| Contacts        | Gold Alloy, Unplated                           |
| Hardware        | 300 Series Stainless Steel                     |
| PC Tails        | #30 (.010 Dia.) Copper Wire, Solder Dipped     |
| PCB Trays       | Liquid Crystal Polymer (LCP) or Epoxy          |
| Encapsulant     | Epoxy  |

### SPECIFICATIONS


|                           |                            |
|---------------------------|----------------------------|
| Durability                | 200 Cycles Minimum         |
| Current Rating            | 1 AMP Maximum              |
| Voltage Rating (DWV)      | 300 VAC RMS Sea Level      |
| Insulation Resistance     | 5000 Megohms Minimum       |
| Operating Temperature     | -55° C. to +125° C.        |
| Contact Resistance        | 71 mV. @1 AMP #30 AWG Wire |
| Thermal Vacuum Outgassing | 1.0% Max TML, 0.1% Max.    |

# Series 89 Nanominiature Connectors Single Row Vertical Surface Mount PCB 890-010 and -011




## SINGLE ROW NANO VERTICAL SMT DIMENSIONS

### Plug (Pin) Connectors

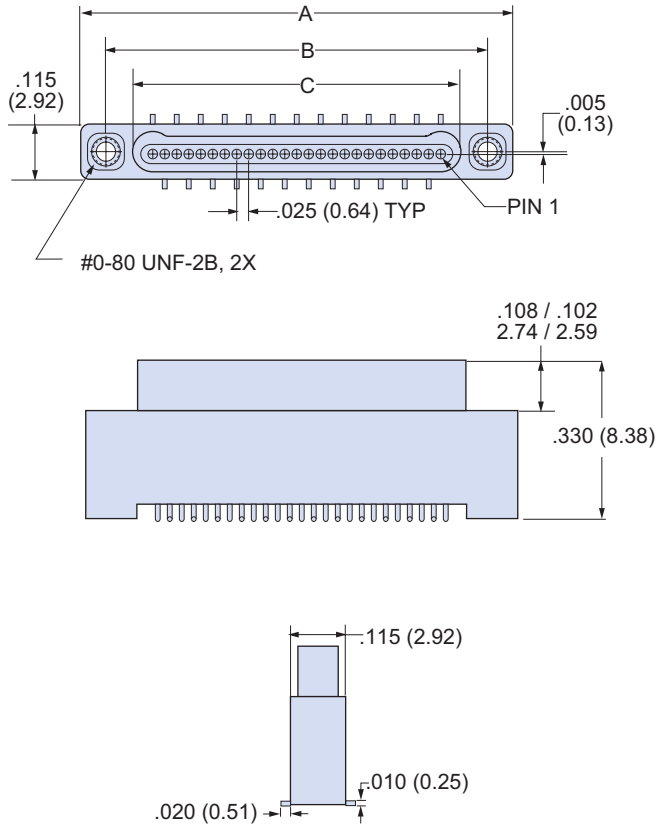

### Receptacle (Socket) Connectors


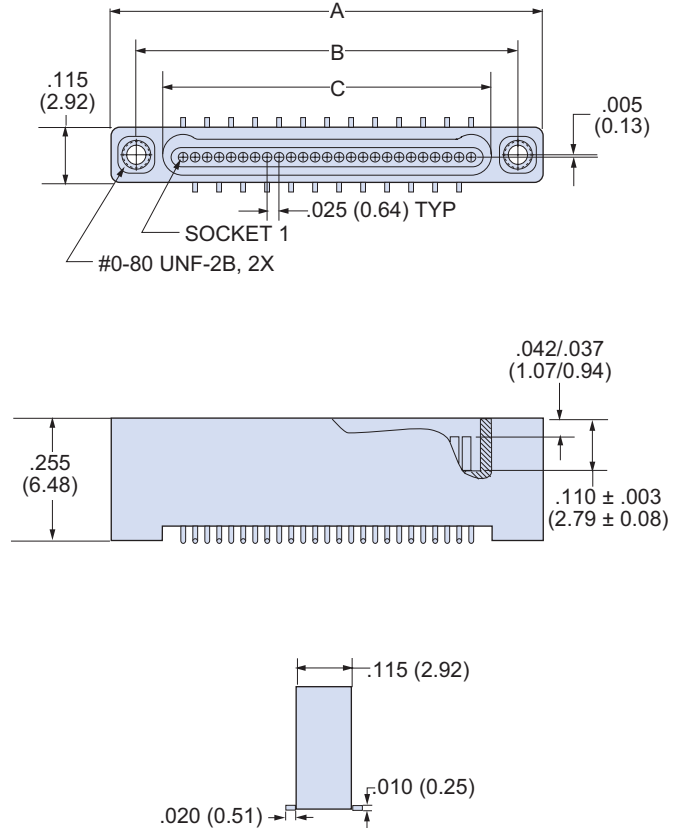


| Layout | A Dimension |       | B Basic Dimension |       | C Basic Dimension |       |
|--------|-------------|-------|-------------------|-------|-------------------|-------|
|        | In.         | mm.   | In.               | mm.   | In.               | mm.   |
| 9P     | .500        | 12.70 | .395              | 10.03 | .284              | 7.21  |
| 9S     | .500        | 12.70 | .395              | 10.03 | .285              | 7.24  |
| 15P    | .650        | 16.51 | .545              | 13.84 | .434              | 11.02 |
| 15S    | .650        | 16.51 | .545              | 13.84 | .435              | 11.05 |
| 21P    | .800        | 20.32 | .695              | 17.65 | .584              | 14.83 |
| 21S    | .800        | 20.32 | .695              | 17.65 | .585              | 14.86 |
| 25P    | .900        | 22.86 | .795              | 20.19 | .684              | 17.37 |
| 25S    | .900        | 22.86 | .795              | 20.19 | .685              | 17.40 |
| 31P    | 1.050       | 26.67 | .945              | 24.00 | .834              | 21.18 |
| 31S    | 1.050       | 26.67 | .945              | 24.00 | .835              | 21.21 |
| 37P    | 1.200       | 30.48 | 1.095             | 27.81 | .984              | 24.99 |
| 37S    | 1.200       | 30.48 | 1.095             | 27.81 | .985              | 24.02 |
| 51P    | 1.550       | 39.37 | 1.445             | 36.70 | 1.334             | 33.88 |
| 51S    | 1.550       | 39.37 | 1.445             | 36.70 | 1.335             | 33.91 |



## VERTICAL SMT PLUG (PIN) CONNECTOR LAYOUT 890-010

### Component Mounting Side of Printed Circuit Board

**9 Contacts**

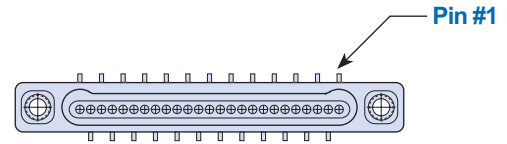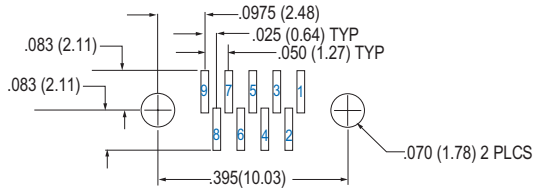


**15 Contacts**

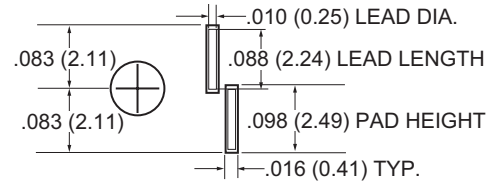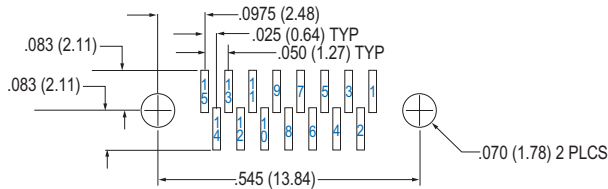


PAD/FOOTPRINT DETAIL


**21 Contacts**

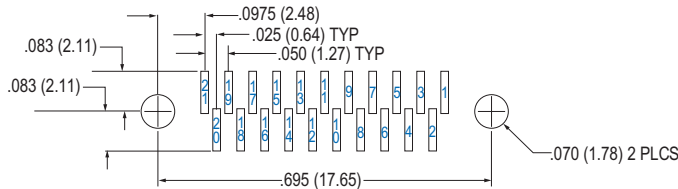


**25 Contacts**

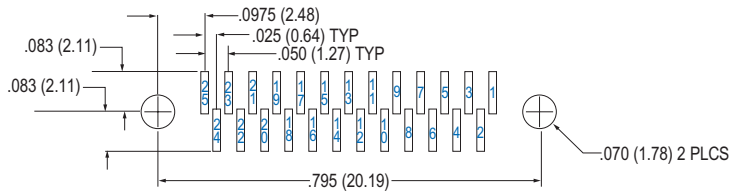


**31 Contacts**

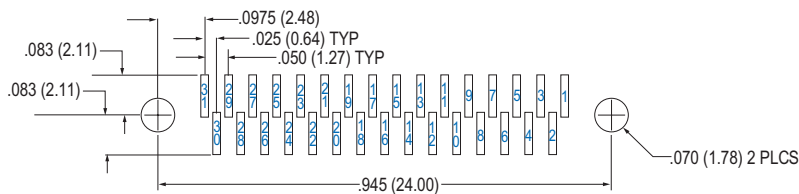

**37 Contacts**

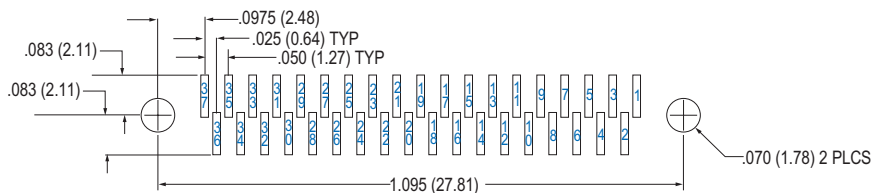

**51 Contacts**

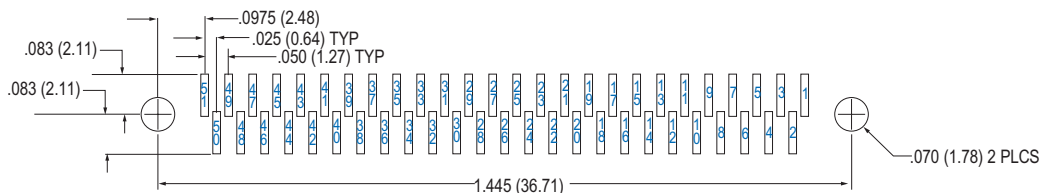



# Series 89 Nanominiature Connectors Single Row Vertical Mount SMT 890-010 and -011





## VERTICAL SMT RECEPTACLE (SOCKET) CONNECTOR LAYOUT 890-011

### Component Mounting Side of Printed Circuit Board

9 Contacts

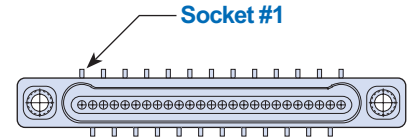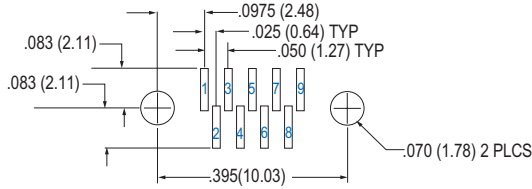


15 Contacts

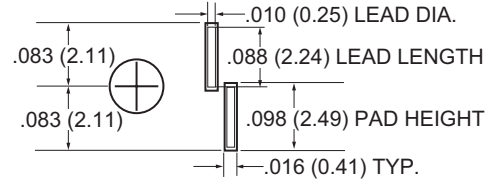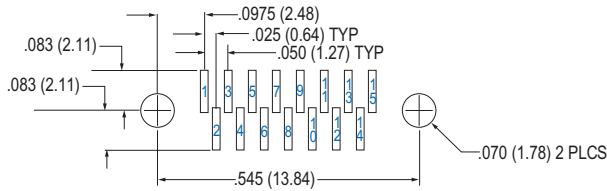


PAD/FOOTPRINT DETAIL


21 Contacts

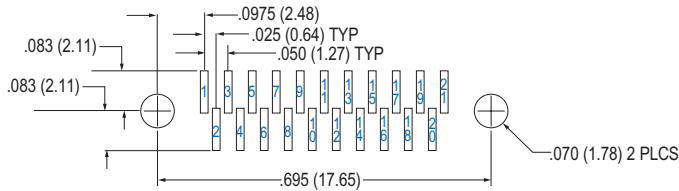


25 Contacts

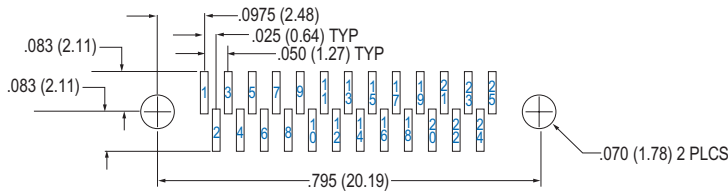


31 Contacts

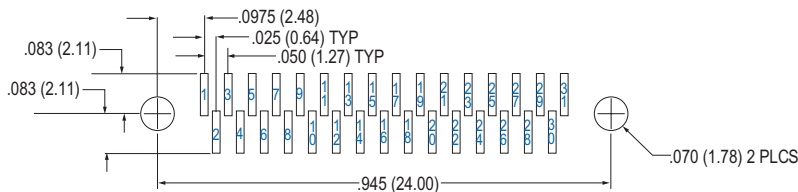

37 Contacts

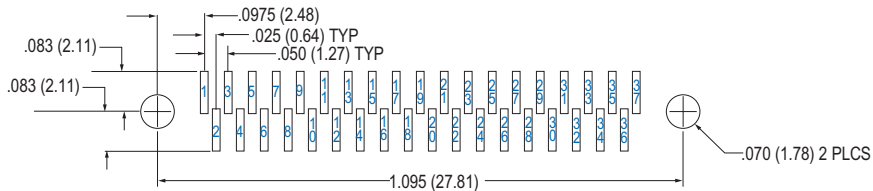


51 Contacts

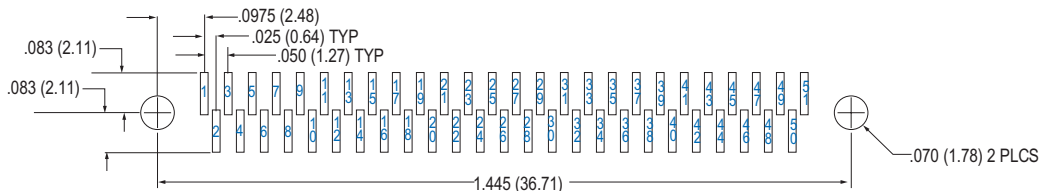



## Series 89 Nanominiature Connectors Single Row Right Angle Surface Mount PCB 890-012 and -013

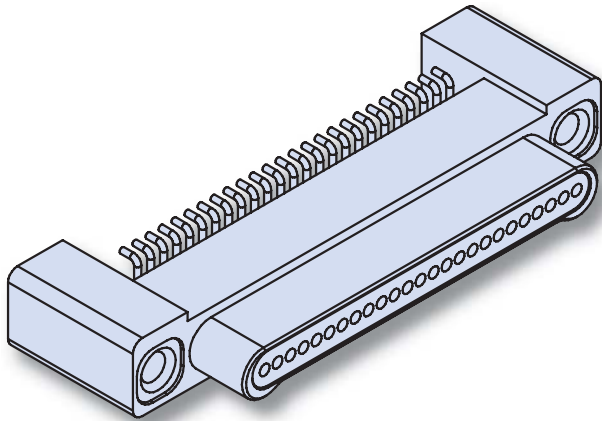

**Right Angle SMT PCB Nano Connectors** feature gold alloy NanoPin contacts. These nanominiature connectors offer premium performance and reliability for demanding applications. Available with #0-80 threaded inserts, or with jackscrews for use with flexible circuits.

**Pre-Tinned PC Tails** are coated with Sn63Pb37 tin-lead for excellent solderability.

**Choose Aluminum, Titanium or Stainless Steel Shells** in seven layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139. These connectors are intermateable with any corresponding Glenair Series 890 single row metal shell nanominiature connector.

### HOW TO ORDER RIGHT ANGLE SMT PCB CONNECTORS

| Series   | Insert Arrangement/<br>Contact Type  | Shell Material and<br>Finish  | Termination Type                                | Hardware                                   |
|--|--|---|---|--|
| <b>890-012</b><br>Plug, Pin Contacts, Single Row, Right Angle SMT Nanominiature          | Plugs (890-012)<br><b>9P</b><br><b>15P</b><br><b>21P</b><br><b>25P</b><br><b>31P</b><br><b>37P</b><br><b>51P</b>       | <b>A1</b><br>Aluminum Shell, Cadmium Plating<br><br><b>A2</b><br>Aluminum Shell, Electroless Nickel Plating | <b>BRS</b><br>"Board Right Angle Surface Mount" | <b>T</b><br>Threaded Inserts, #0-80 Female |
| <b>890-013</b><br>Receptacle, Socket Contacts, Single Row, Right Angle SMT Nanominiature | Receptacles (890-013)<br><b>9S</b><br><b>15S</b><br><b>21S</b><br><b>25S</b><br><b>31S</b><br><b>37S</b><br><b>51S</b> | <b>T</b><br>Titanium Shell, Unplated<br><br><b>S</b><br>Stainless Steel Shell, Passivated                   |   |  |
| <b>Sample Part Number</b>  |  |   |   |  |
| <b>890-012</b>   | <b>- 51P</b>   | <b>T</b>  | <b>- BRS</b>                                    | <b>T</b>                                   |

#### MATERIALS AND FINISHES

|                 |  |
|-----------------|--|
| Connector Shell | See Ordering Information                       |
| Insulator       | Liquid Crystal Polymer (LCP), 30% Glass-Filled |
| Contacts        | Gold Alloy, Unplated                           |
| Hardware        | 300 Series Stainless Steel                     |
| PC Tails        | #30 (.010 Dia.) Copper Wire, Solder Dipped     |
| PCB Trays       | Liquid Crystal Polymer (LCP) or Epoxy          |
| Encapsulant     | Epoxy  |

#### SPECIFICATIONS

|                           |                            |
|---------------------------|----------------------------|
| Durability                | 200 Cycles Minimum         |
| Current Rating            | 1 AMP Maximum              |
| Voltage Rating (DWV)      | 300 VAC RMS Sea Level      |
| Insulation Resistance     | 5000 Megohms Minimum       |
| Operating Temperature     | -55° C. to +125° C.        |
| Contact Resistance        | 71 mV. @1 AMP #30 AWG Wire |
| Thermal Vacuum Outgassing | 1.0% Max TML, 0.1% Max.    |

# Series 89 Nanominiature Connectors



## Single Row Right Angle Surface Mount PCB

### 890-012 and -013




### SINGLE ROW NANO RIGHT ANGLE SMT DIMENSIONS

#### Plug (Pin) Connectors

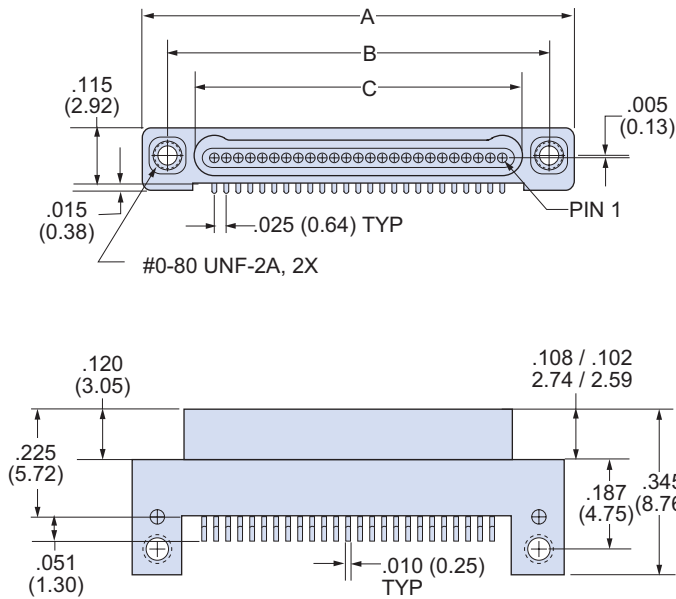

#### Receptacle (Socket) Connectors

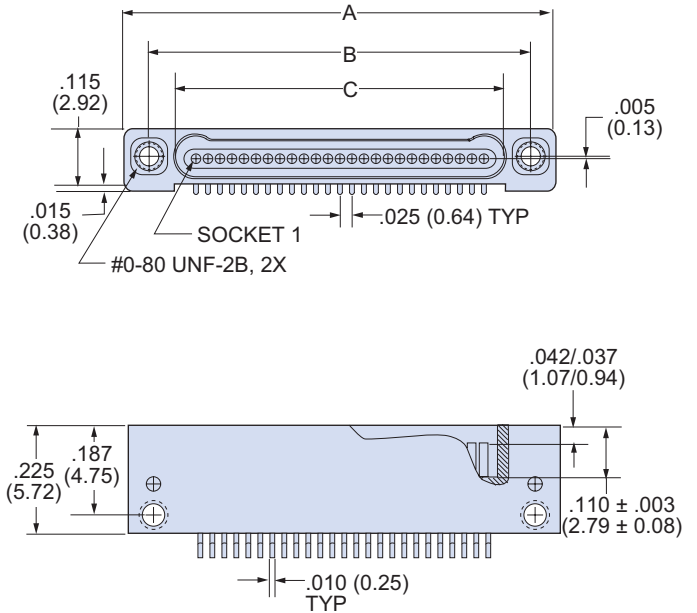


| Layout | A Dimension |       | B Basic Dimension |       | C Basic Dimension |       |
|--------|-------------|-------|-------------------|-------|-------------------|-------|
|        | In.         | mm.   | In.               | mm.   | In.               | mm.   |
| 9P     | .500        | 12.70 | .395              | 10.03 | .284              | 7.21  |
| 9S     | .500        | 12.70 | .395              | 10.03 | .285              | 7.24  |
| 15P    | .650        | 16.51 | .545              | 13.84 | .434              | 11.02 |
| 15S    | .650        | 16.51 | .545              | 13.84 | .435              | 11.05 |
| 21P    | .800        | 20.32 | .695              | 17.65 | .584              | 14.83 |
| 21S    | .800        | 20.32 | .695              | 17.65 | .585              | 14.86 |
| 25P    | .900        | 22.86 | .795              | 20.19 | .684              | 17.37 |
| 25S    | .900        | 22.86 | .795              | 20.19 | .685              | 17.40 |
| 31P    | 1.050       | 26.67 | .945              | 24.00 | .834              | 21.18 |
| 31S    | 1.050       | 26.67 | .945              | 24.00 | .835              | 21.21 |
| 37P    | 1.200       | 30.48 | 1.095             | 27.81 | .984              | 24.99 |
| 37S    | 1.200       | 30.48 | 1.095             | 27.81 | .985              | 24.02 |
| 51P    | 1.550       | 39.37 | 1.445             | 36.70 | 1.334             | 33.88 |
| 51S    | 1.550       | 39.37 | 1.445             | 36.70 | 1.335             | 33.91 |




## RIGHT ANGLE SMT PLUG (PIN) CONNECTOR LAYOUT 890-012

### Component Mounting Side of Printed Circuit Board


**9 Contacts**

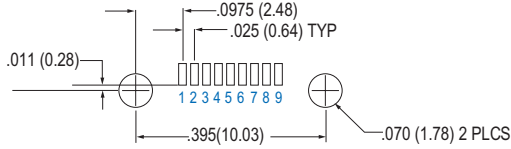


**15 Contacts**

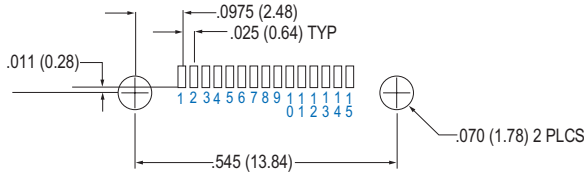


**21 Contacts**

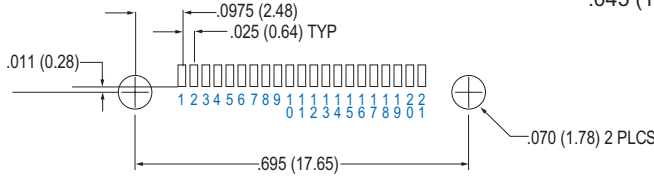


**25 Contacts**

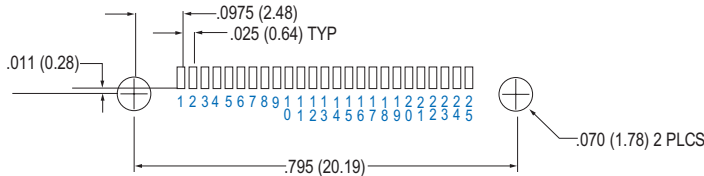




**31 Contacts**

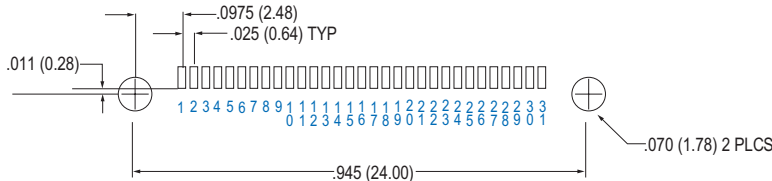

**37 Contacts**

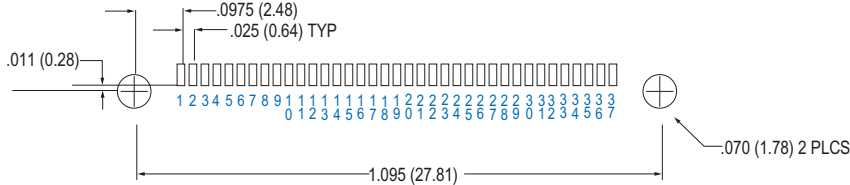

**51 Contacts**

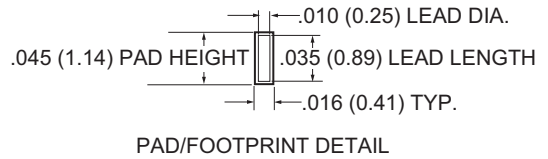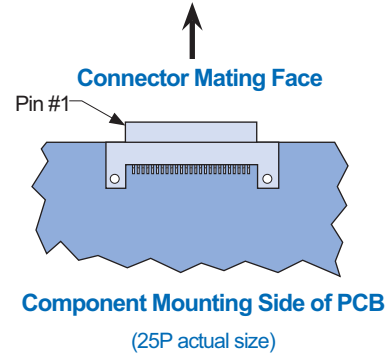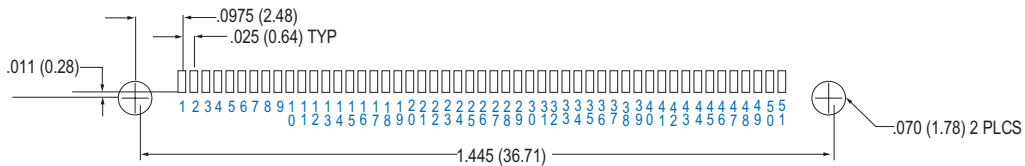


# Series 89 Nanominiature Connectors Single Row Right Angle Surface Mount PCB 890-012 and -013




## RIGHT ANGLE SMT RECEPTACLE (SOCKET) CONNECTOR LAYOUT 890-013

Component Mounting Side of Printed Circuit Board


### 9 Contacts

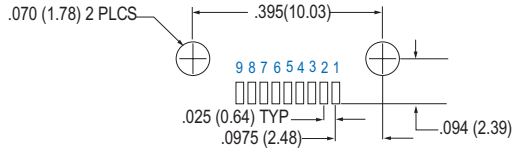


### 15 Contacts

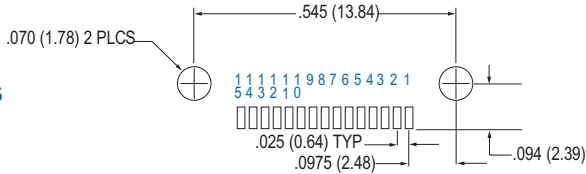


### 21 Contacts

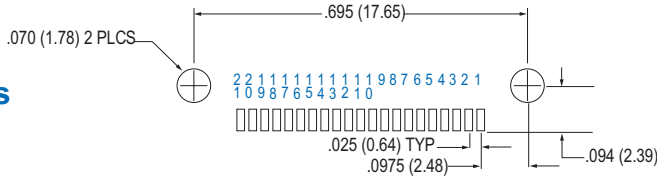


### 25 Contacts

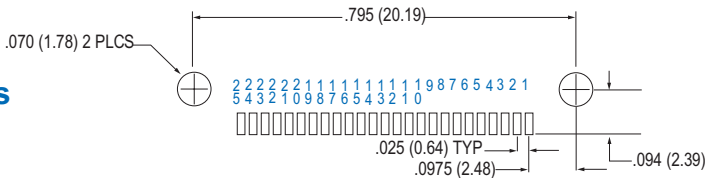



### 31 Contacts

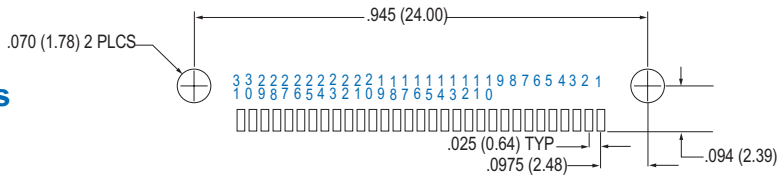

### 37 Contacts

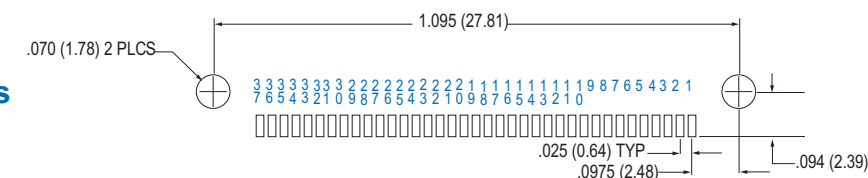


### 51 Contacts

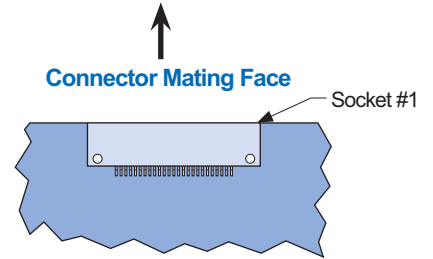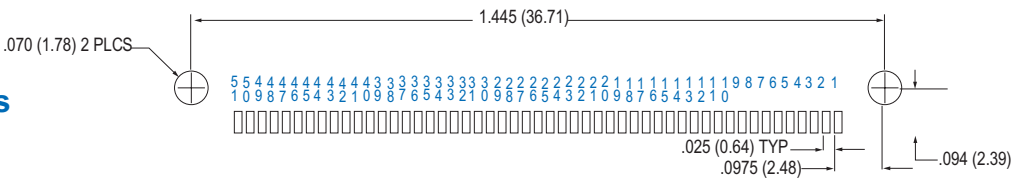

Component Mounting Side of PCB

(25S actual size)




PAD/FOOTPRINT DETAIL





## Series 89 Nanominiature Connectors Two Row Pigtail Assemblies, Insulated Wire 891-001 and -002

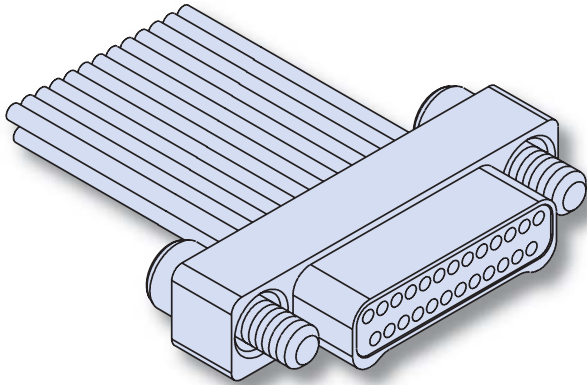

**Glenair's Pigtail Nano Connectors** feature gold alloy NanoPin contacts. Contacts are precision-crimped to insulated, stranded wire. These nanominiature connectors offer premium performance and reliability for demanding applications. Contact spacing is .025 inches. 1 amp current rating, DWV rating 300 volts AC. Wire gages #30 and #32 AWG.

**NanoPin Contact System** assures premium performance in demanding environments. The gold/platinum alloy contacts will stand up to years of exposure without corrosion.

**Typical Applications** include UAV's, satellites, missile systems and geophysical instruments.


### HOW TO ORDER NANOMINIATURE CONNECTORS WITH INSULATED WIRE

| Series  | Insert Arrangement/<br>Contact Type  | Shell Material and Finish                               | Wire Gage           | Wire Type   | Wire Color Code   | Wire Length Inches  | Hardware   |
|---|--------------------------------------|---|---------------------|---|---|---|--|
| <b>891-001</b><br>Plug, Pin Contacts, Two Row, Nanominiature          | Plugs (891-001)                      | <b>A1</b><br>Aluminum Shell, Cadmium Plating            | <b>0</b><br>#30 AWG | <b>A</b><br>Ultralightweight XLETFE Insulation, Silver-Coated Ultrahigh-Strength Copper (Not available for #32 AWG) | <b>1</b> –White<br><b>2</b> –Yellow<br><b>7</b> –Ten Color Repeat | <b>18</b><br>Wire Length In Inches. "18" Specifies 18 Inches. | <b>J</b><br>Jackscrew, #0-80<br><br><b>T</b><br>Threaded Inserts, #0-80 Female |
|   | <b>9P</b>                            |   |                     |   |   |   |  |
|   | <b>15P</b>                           |   |                     |   |   |   |  |
|   | <b>21P</b>                           |   |                     |   |   |   |  |
|   | <b>25P</b>                           |   |                     |   |   |   |  |
| <b>891-002</b><br>Receptacle, Socket Contacts, Two Row, Nanominiature | Receptacles (891-002)                | <b>A2</b><br>Aluminum Shell, Electroless Nickel Plating | <b>2</b><br>#32 AWG | <b>B</b><br>Extruded PTFE Insulation, NEMA HP3-ETX (MIL-W-16878/6)  |   |   |  |
|   | <b>31P</b>                           |   |                     |   |   |   |  |
|   | <b>37P</b>                           |   |                     |   |   |   |  |
|   | <b>51P</b>                           |   |                     |   |   |   |  |
|   | <b>9S</b>                            |   |                     |   |   |   |  |
|   | <b>T</b><br>Titanium Shell, Unplated | <b>15S</b>  |                     |   |   |   |  |
|   |                                      | <b>21S</b>  |                     |   |   |   |  |
|   |                                      | <b>25S</b>  |                     |   |   |   |  |
|   |                                      | <b>31S</b>  |                     |   |   |   |  |
|   |                                      | <b>37S</b>  |                     |   |   |   |  |
| <b>S</b><br>Stainless Steel Shell, Passivated                         | <b>51S</b>                           |   |                     |   |   |   |  |
|   |                                      |   |                     |   |   |   |  |
|   |                                      |   |                     |   |   |   |  |


#### Sample Part Number

|                |              |           |           |          |          |             |          |
|----------------|--------------|-----------|-----------|----------|----------|-------------|----------|
| <b>891-002</b> | <b>— 37S</b> | <b>A1</b> | <b>—0</b> | <b>A</b> | <b>1</b> | <b>— 12</b> | <b>J</b> |
|----------------|--------------|-----------|-----------|----------|----------|-------------|----------|

#### PLUG (PIN) CONNECTOR




"J" Jackscrew Option




"T" Threaded Insert Option

#### RECEPTACLE (SOCKET) CONNECTOR



"T" Threaded Insert Option




"J" Jackscrew Option

# Series 89 Nanominiature Connectors Two Row Pigtail Assemblies, Insulated Wire 891-001 and -002




## TWO ROW NANO PIGTAIL DIMENSIONS

### Plug (Pin) Connectors

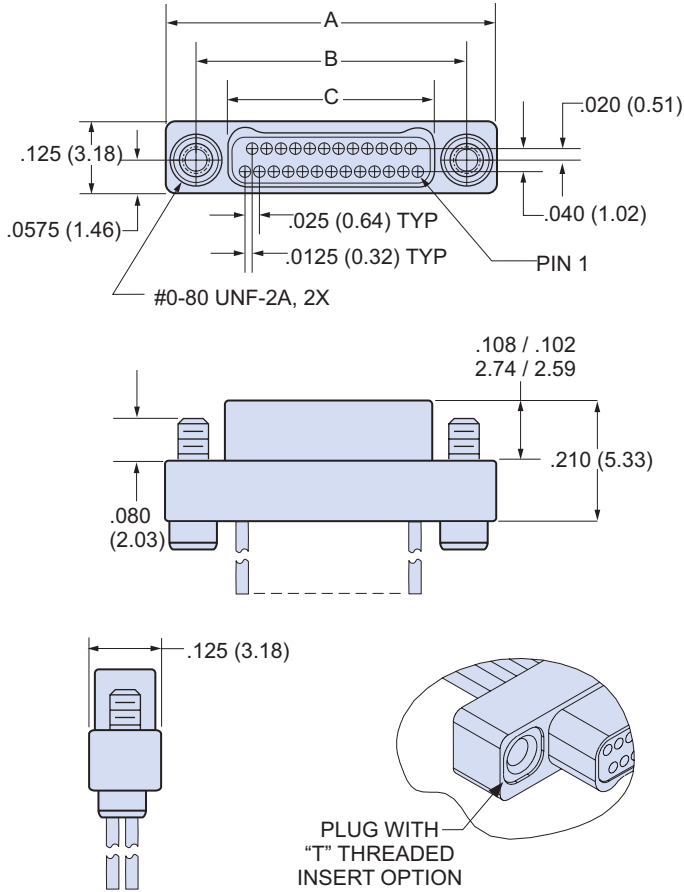


### Receptacle (Socket) Connectors

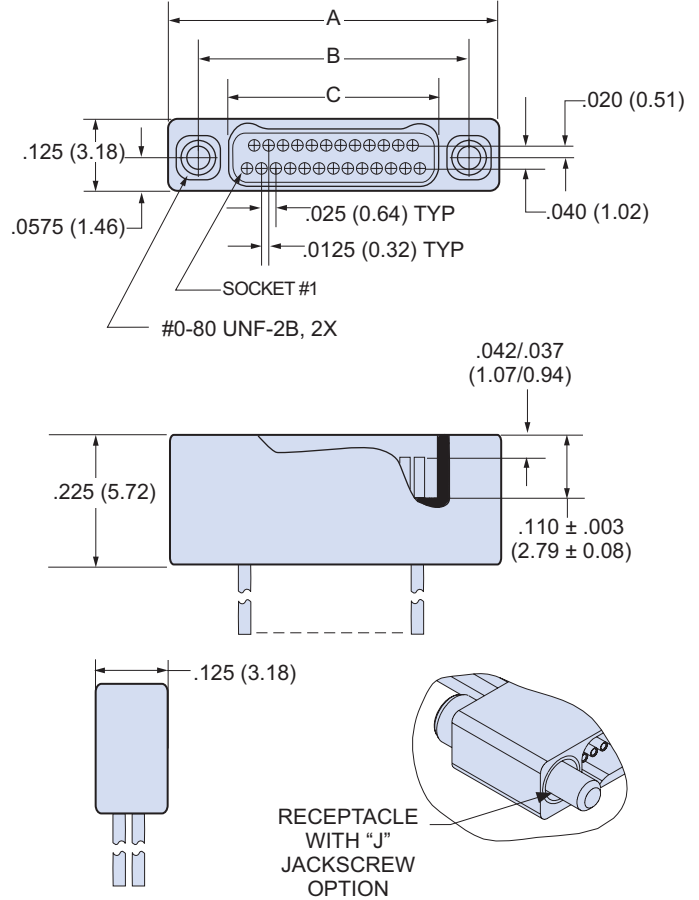

| Layout | A Dimension |       | B Basic Dimension |       | C Basic Dimension |       |
|--------|-------------|-------|-------------------|-------|-------------------|-------|
|        | In.         | mm.   | In.               | mm.   | In.               | mm.   |
| 9P     | .375        | 9.52  | .270              | 6.86  | .160              | 4.06  |
| 9S     | .375        | 9.52  | .270              | 6.86  | .163              | 4.14  |
| 15P    | .450        | 11.43 | .345              | 8.76  | .235              | 5.97  |
| 15S    | .450        | 11.43 | .345              | 8.76  | .238              | 6.04  |
| 21P    | .525        | 13.33 | .420              | 10.67 | .310              | 7.87  |
| 21S    | .525        | 13.33 | .420              | 10.67 | .313              | 7.95  |
| 25P    | .575        | 14.60 | .470              | 11.94 | .360              | 9.14  |
| 25S    | .575        | 14.60 | .470              | 11.94 | .363              | 9.22  |
| 31P    | .650        | 16.51 | .545              | 13.84 | .435              | 11.05 |
| 31S    | .650        | 16.51 | .545              | 13.84 | .438              | 11.12 |
| 37P    | .725        | 18.41 | .620              | 15.75 | .510              | 12.95 |
| 37S    | .725        | 18.41 | .620              | 15.75 | .513              | 13.03 |
| 51P    | .900        | 22.86 | .795              | 20.19 | .685              | 17.40 |
| 51S    | .900        | 22.86 | .795              | 20.19 | .688              | 17.47 |

## Series 89 Nanominiature Connectors Two Row Pigtail Assemblies, Uninsulated Wire 891-003 and -004

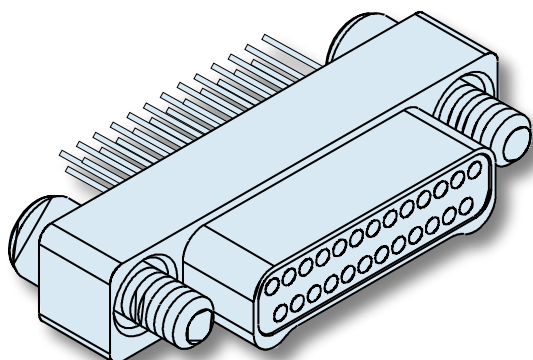

**Glenair's Pigtail Nano Connectors** feature gold alloy NanoPin contacts. Contacts are precision-cripped to insulated, stranded wire. These nanominiature connectors offer premium performance and reliability for demanding applications. Contact spacing is .025 inches. 1 amp current rating, DWV rating 300 volts AC. Wire gages #30 and #32 AWG.

**NanoPin Contact System** assures premium performance in demanding environments. The gold/platinum alloy contacts will stand up to years of exposure without corrosion.

**Typical Applications** include UAV's, satellites, missile systems and geophysical instruments.


### HOW TO ORDER NANOMINIATURE CONNECTORS WITH UNINSULATED WIRE

| Series  | Insert Arrangement/<br>Contact Type | Shell Material<br>and Finish                                  | Wire<br>Gage                            | Wire Type  | Wire Length   | Hardware   |            |            |
|---|-------------------------------------|---|---|--|---|--|------------|------------|
| <b>891-003</b><br>Plug, Pin<br>Contacts,<br>Two Row,<br>Nanominiature,<br>Uninsulated Wire          | Plugs (891-003)                     | <b>A1</b><br>Aluminum Shell,<br>Cadmium Plating               | <b>0</b><br>#30 AWG                     | <b>D3</b><br>Single Strand Copper<br>Wire, Uninsulated, with<br>Gold Plating | <b>.125</b><br><b>.250</b><br><b>.375</b><br><b>.500</b><br>Wire Length in Inches | <b>J</b><br>Jackscrew, #0-80<br><br><b>T</b><br>Threaded Inserts, #0-80<br>Female<br><br>Threaded inserts are available<br>on plug connectors only if the<br>shell material is titanium or<br>stainless steel. |            |            |
|   | <b>9P</b>                           |   |   |  |   |  |            |            |
|   | <b>15P</b>                          |   |   |  |   |  |            |            |
|   | <b>21P</b>                          |   |   |  |   |  |            |            |
|   | <b>25P</b>                          |   |   |  |   |  |            |            |
| <b>891-004</b><br>Receptacle,<br>Socket Contacts,<br>Two Row,<br>Nanominiature,<br>Uninsulated Wire | Receptacles (891-004)               | <b>A2</b><br>Aluminum Shell,<br>Electroless<br>Nickel Plating | <b>2</b><br>#32 AWG                     | <b>D3</b><br>Single Strand Copper<br>Wire, Uninsulated, with<br>Gold Plating | <b>.125</b><br><b>.250</b><br><b>.375</b><br><b>.500</b><br>Wire Length in Inches | <b>J</b><br>Jackscrew, #0-80<br><br><b>T</b><br>Threaded Inserts, #0-80<br>Female<br><br>Threaded inserts are available<br>on plug connectors only if the<br>shell material is titanium or<br>stainless steel. |            |            |
|   | <b>31P</b>                          |   |   |  |   |  |            |            |
|   | <b>37P</b>                          |   |   |  |   |  |            |            |
|   | <b>51P</b>                          |   |   |  |   |  |            |            |
|   | <b>9S</b>                           |   |   |  |   |  |            |            |
|   | <b>15S</b>                          | <b>21S</b>  | <b>T</b><br>Titanium Shell,<br>Unplated | <b>S</b><br>Stainless Steel<br>Shell, Passivated                             |   |  |            |            |
|   |                                     |   |   |  | <b>25S</b>  | <b>31S</b>   |            |            |
|   |                                     |   |   |  |   |  | <b>37S</b> | <b>51S</b> |


#### Sample Part Number

**891-003    — 9P    A1    —0    D3    — .125    J**

#### PLUG (PIN) CONNECTOR




"J" Jackscrew Option




"T" Threaded Insert Option  
Titanium or Stainless Steel  
Shells Only

#### RECEPTACLE (SOCKET) CONNECTOR



"T" Threaded Insert Option



"J" Jackscrew Option


# Series 89 Nanominiature Connectors Two Row Pigtail Assemblies, Uninsulated Wire 891-003 and -004




Nano

## TWO ROW NANO PIGTAIL DIMENSIONS

### Plug (Pin) Connectors

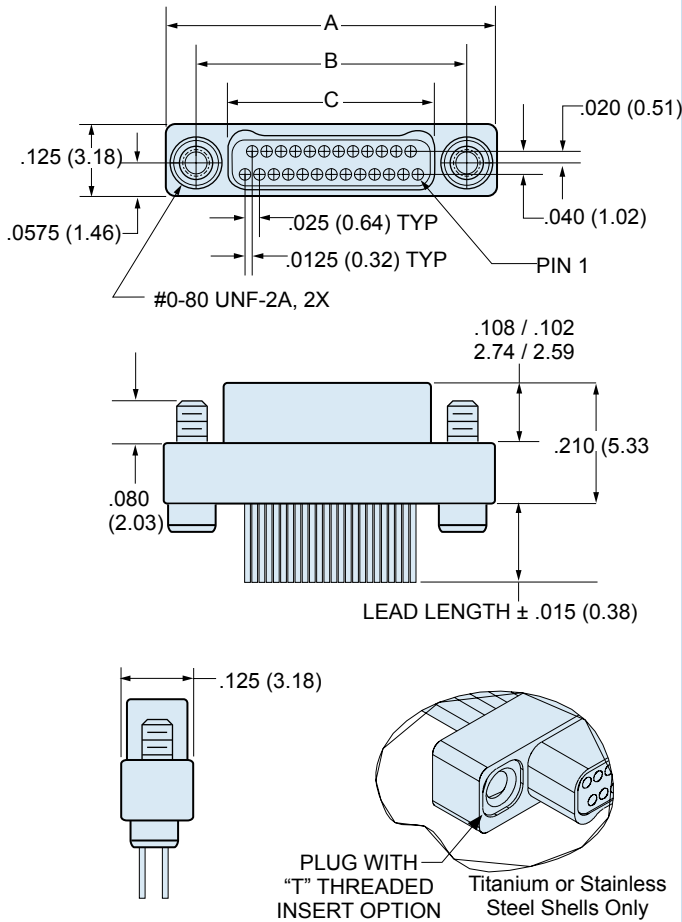


### Receptacle (Socket) Connectors

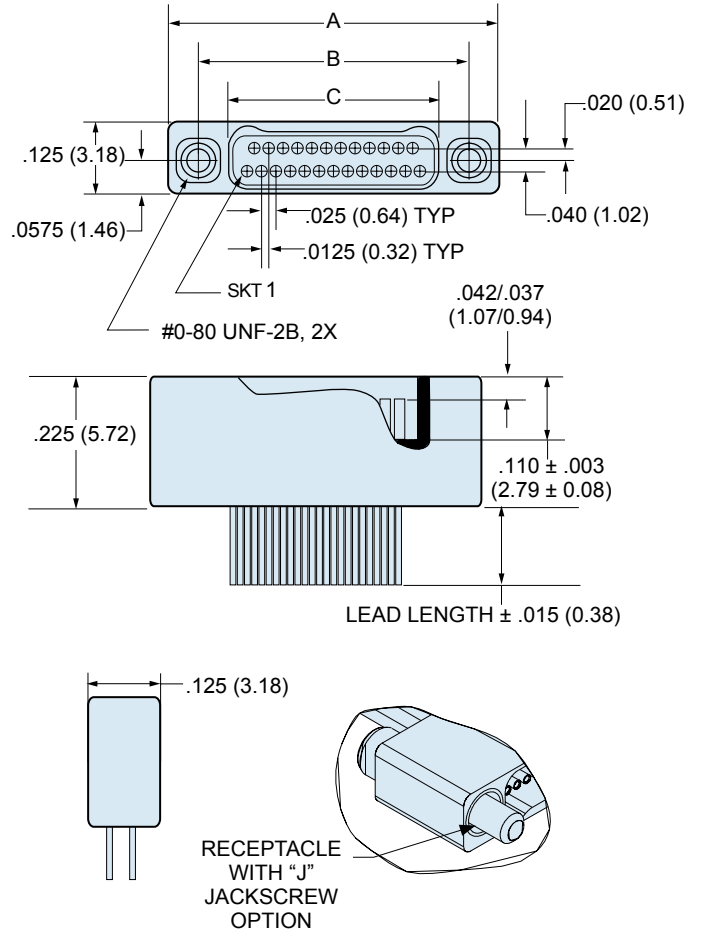

| Layout | A    |       | B BSC. |       | C BSC. |       |
|--------|------|-------|--------|-------|--------|-------|
|        | In.  | mm.   | In.    | mm.   | In.    | mm.   |
| 9P     | .375 | 9.52  | .270   | 6.86  | .160   | 4.06  |
| 9S     | .375 | 9.52  | .270   | 6.86  | .163   | 4.14  |
| 15P    | .450 | 11.43 | .345   | 8.76  | .235   | 5.97  |
| 15S    | .450 | 11.43 | .345   | 8.76  | .238   | 6.04  |
| 21P    | .525 | 13.33 | .420   | 10.67 | .310   | 7.87  |
| 21S    | .525 | 13.33 | .420   | 10.67 | .313   | 7.95  |
| 25P    | .575 | 14.60 | .470   | 11.94 | .360   | 9.14  |
| 25S    | .575 | 14.60 | .470   | 11.94 | .363   | 9.22  |
| 31P    | .650 | 16.51 | .545   | 13.84 | .435   | 11.05 |
| 31S    | .650 | 16.51 | .545   | 13.84 | .438   | 11.12 |
| 37P    | .725 | 18.41 | .620   | 15.75 | .510   | 12.95 |
| 37S    | .725 | 18.41 | .620   | 15.75 | .513   | 13.03 |
| 51P    | .900 | 22.86 | .795   | 20.19 | .685   | 17.40 |
| 51S    | .900 | 22.86 | .795   | 20.19 | .688   | 17.47 |



## Series 89 Nanominiature Connectors Two Row Back-To-Back 891-005

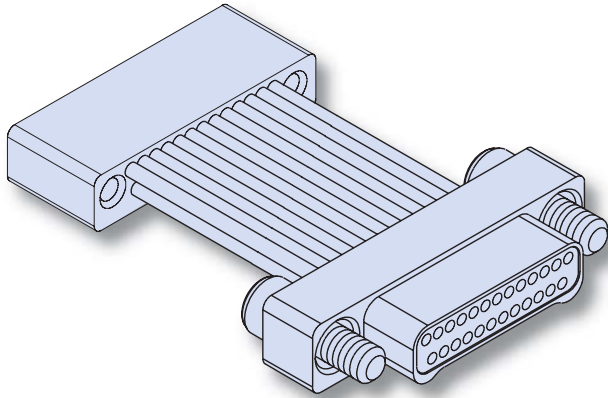

**Glenair's Back-To-Back Nano Connectors** feature gold alloy NanoPin contacts. Contacts are precision-crimped to insulated, stranded wire. These nanominiature connectors offer premium performance and reliability for demanding applications. Contact spacing is .025 inches. 1 amp current rating, DWV rating 300 volts AC. Wire gages #30 and #32 AWG.

**NanoPin Contact System** assures premium performance in demanding environments. The gold/platinum alloy contacts will stand up to years of exposure without corrosion.

**Typical Applications** include UAV's, satellites, missile systems and geophysical instruments.


### HOW TO ORDER TWO ROW BACK-TO-BACK JUMPERS

| Series   | Number of Contacts   | Connector Type  | Shell Material and Finish                        | Wire Gage  | Wire Type  | Wire Color Code   | Length Inches         | Hardware   |
|--|--|---|--|--|--|---|-----------------------|--|
| 891-005<br>Back-To-Back Cables,<br>Two Row,<br>Nanominiature | 9  | <b>GP</b><br>Plug (Pin)<br>Connector on<br>Both Ends          | <b>A1</b><br>Aluminum Shell,<br>Cadmium Plating  | <b>0</b><br>#30 AWG  | <b>A</b><br>Ultralightweight<br>XLETFE Insulation,<br>Silver-Coated<br>Ultrahigh-Strength<br>Copper (Not available<br>for #32 AWG) | <b>1</b> –White<br><b>2</b> –Yellow<br><b>7</b> –Ten<br>Color<br>Repeat | <b>Overall Length</b> | <b>JJ</b> = Jackscrews on<br>both ends (GP, GS, CS)<br><br><b>JT</b> = Jackscrews on<br>plug, threaded holes on<br>receptacle (CS)<br><br><b>JP</b> = Jackscrews on<br>plug, threaded holes on<br>plug (GP)<br><br><b>TJ</b> = Jackscrews on<br>receptacle, threaded<br>holes on plug (CS)<br><br><b>JR</b> = Jackscrews on<br>receptacle, threaded<br>holes on receptacle<br>(GS)<br><br><b>TT</b> = Threaded holes<br>both ends (GP, GS, CS) |
|  | 15   |   |  |  |  |   |                       |  |
|  | 21   |   |  |  |  |   |                       |  |
|  | 25   |   |  |  |  |   |                       |  |
|  | 31   |   |  |  |  |   |                       |  |
| 37   | <b>GS</b><br>Receptacle<br>(Socket)<br>Connector on<br>Both Ends         | <b>A2</b><br>Aluminum Shell,<br>Electroless<br>Nickel Plating | <b>2</b><br>#32 AWG                              | <b>B</b><br>Extruded PTFE<br>Insulation, NEMA HP3-<br>ETX (MIL-W-16878/6)                                  | <b>Example:<br/>"12" specifies<br/>12 inches<br/>OAL</b>   |   |                       |  |
| 37   |  |   |  |  |  |   |                       |  |
| 51   | <b>CS</b><br>Plug (Pin)<br>On One End,<br>Receptacle On<br>The Other End | <b>T</b><br>Titanium Shell,<br>Unplated                       | <b>S</b><br>Stainless Steel<br>Shell, Passivated | <b>C</b><br>Cross-Linked Modified<br>ETFE Insulation, MIL-<br>W-22759/33<br>(Not available for #32<br>AWG) |  |   |                       |  |
|  |  |   |  |  |  |   |                       |  |
|  |  |   |  |  |  |   |                       |  |


#### Sample Part Number

|         |     |    |    |    |   |   |      |   |
|---------|-----|----|----|----|---|---|------|---|
| 891-005 | — 9 | GP | A1 | —0 | A | 1 | — 12 | J |
|---------|-----|----|----|----|---|---|------|---|

#### PLUG (PIN) CONNECTOR




"J" Jackscrew Option




"T" Threaded Insert Option

#### RECEPTACLE (SOCKET) CONNECTOR



"T" Threaded Insert Option




"J" Jackscrew Option

# Series 89 Nanominiature Connectors Two Row Back-To-Back 891-005





## TWO ROW NANO BACK-TO-BACK PIGTAIL DIMENSIONS

### Plug (Pin) Connectors

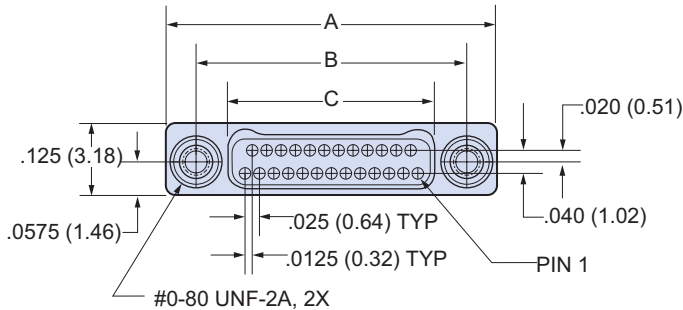

### Receptacle (Socket) Connectors

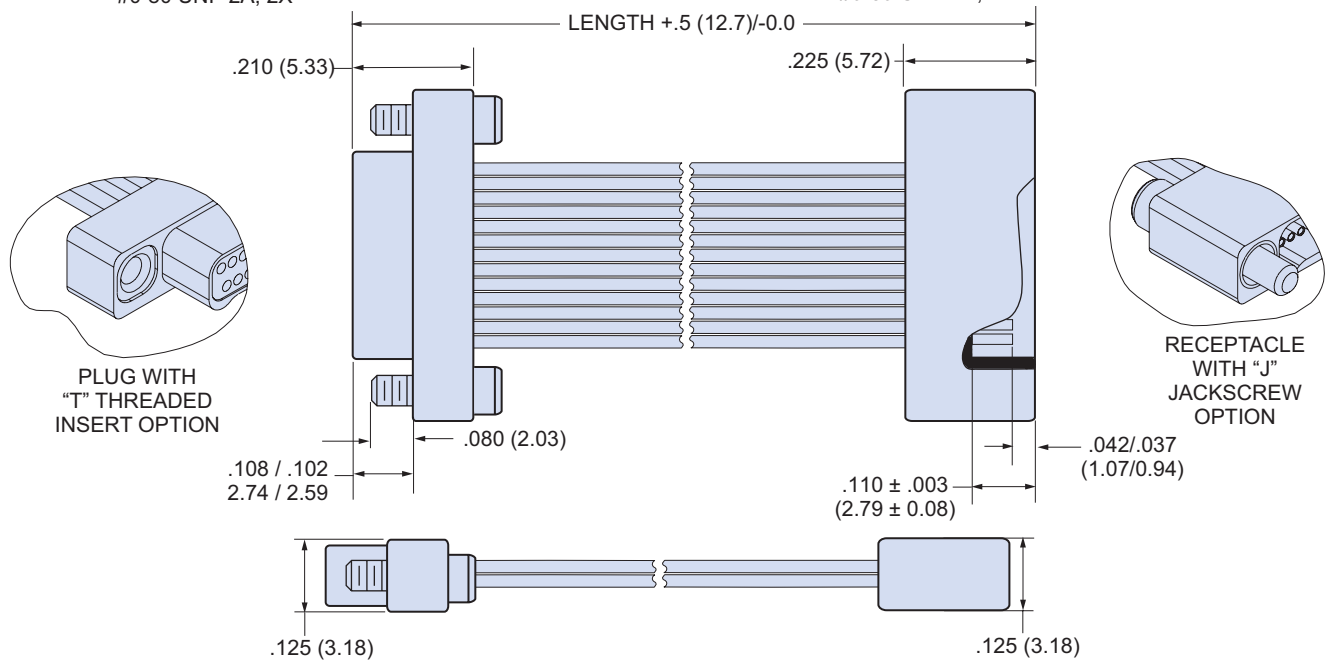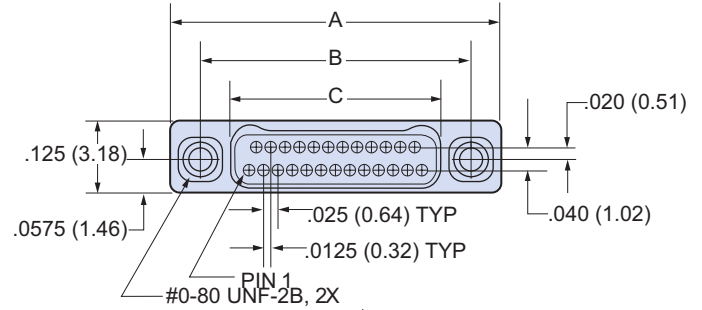


| Layout | A    |       | B BSC. |       | C BSC. |       |
|--------|------|-------|--------|-------|--------|-------|
|        | In.  | mm.   | In.    | mm.   | In.    | mm.   |
| 9P     | .375 | 9.52  | .270   | 6.86  | .160   | 4.06  |
| 9S     | .375 | 9.52  | .270   | 6.86  | .163   | 4.14  |
| 15P    | .450 | 11.43 | .345   | 8.76  | .235   | 5.97  |
| 15S    | .450 | 11.43 | .345   | 8.76  | .238   | 6.04  |
| 21P    | .525 | 13.33 | .420   | 10.67 | .310   | 7.87  |
| 21S    | .525 | 13.33 | .420   | 10.67 | .313   | 7.95  |
| 25P    | .575 | 14.60 | .470   | 11.94 | .360   | 9.14  |
| 25S    | .575 | 14.60 | .470   | 11.94 | .363   | 9.22  |
| 31P    | .650 | 16.51 | .545   | 13.84 | .435   | 11.05 |
| 31S    | .650 | 16.51 | .545   | 13.84 | .438   | 11.12 |
| 37P    | .725 | 18.41 | .620   | 15.75 | .510   | 12.95 |
| 37S    | .725 | 18.41 | .620   | 15.75 | .513   | 13.03 |
| 51P    | .900 | 22.86 | .795   | 20.19 | .685   | 17.40 |
| 51S    | .900 | 22.86 | .795   | 20.19 | .688   | 17.47 |





## Series 89 Nanominiature Connectors Two Row Thru Hole Vertical Mount Printed Circuit Board 891-006 and -007

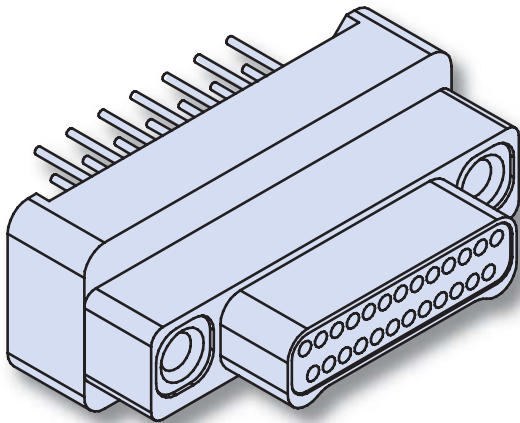

**Vertical Mount PCB Nano Connectors** feature gold alloy NanoPin contacts. These nanominiature connectors offer premium performance and reliability for demanding applications. Available with #0-80 threaded inserts, or with jackscrews for use with flexible circuits.

**Pre-Tinned PC Tails** are coated with Sn63Pb37 tin-lead for excellent solderability.

**Choose Aluminum, Titanium or Stainless Steel Shells** in seven layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139. These connectors are intermateable with any corresponding Glenair Series 891 two row metal shell nanominiature connector.

### HOW TO ORDER VERTICAL MOUNT PCB CONNECTORS

| Series  | Insert Arrangement/<br>Contact Type  | Shell Material and Finish                       | Termination Type                             | PC Tail Length   | Hardware                                |   |                                  |  |  |
|---|--|---|--|--|---|---|----------------------------------|--|--|
| <b>891-006</b><br>Plug, Pin Contacts,<br>Two Row, Vertical PCB<br>Nanominiature | Plugs (891-006)<br><b>9P</b><br><b>15P</b><br><b>21P</b><br><b>25P</b><br><b>31P</b><br><b>37P</b><br><b>51P</b> | <b>A1</b><br>Aluminum Shell,<br>Cadmium Plating | <b>BST</b><br>"Board Straight Thru-<br>Hole" | <b>1</b><br>.110 Inch (2.79 mm)  | <b>J</b><br>Jackscrew, #0-80            |   |                                  |  |  |
|   |  |   |  |  |   | <b>A2</b><br>Aluminum Shell,<br>Electroless Nickel<br>Plating | <b>2</b><br>.172 Inch (43.69 mm) | <b>T</b><br>Threaded Inserts, #0-<br>80 Female |  |
|   |  |   |  | Receptacles (891-007)<br><b>9S</b><br><b>15S</b><br><b>21S</b><br><b>25S</b><br><b>31S</b><br><b>37S</b><br><b>51S</b> | <b>T</b><br>Titanium Shell,<br>Unplated |   |                                  |  |  |
|   |  |   |  |  |   |   |                                  |  | <b>S</b><br>Stainless Steel Shell,<br>Passivated |
|   |  |   |  |  |   | <b>Sample Part Number</b>                                     |                                  |  |  |
|   | <b>891-007</b>   | <b>— 31S</b>                                    | <b>T</b>                                     |  |   | <b>—BST</b>   | <b>1</b>                         | <b>T</b>                                       |  |

#### MATERIALS AND FINISHES

|                 |  |
|-----------------|--|
| Connector Shell | See Ordering Information                       |
| Insulator       | Liquid Crystal Polymer (LCP), 30% Glass-Filled |
| Contacts        | Gold Alloy, Unplated                           |
| Hardware        | 300 Series Stainless Steel                     |
| PC Tails        | #30 (.010 Dia.) Copper Wire, Solder Dipped     |
| PCB Trays       | Liquid Crystal Polymer (LCP) or Epoxy          |
| Encapsulant     | Epoxy  |

#### SPECIFICATIONS


|                           |                            |
|---------------------------|----------------------------|
| Durability                | 200 Cycles Minimum         |
| Current Rating            | 1 AMP Maximum              |
| Voltage Rating (DWV)      | 300 VAC RMS Sea Level      |
| Insulation Resistance     | 5000 Megohms Minimum       |
| Operating Temperature     | -55° C. to +125° C.        |
| Contact Resistance        | 71 mV. @1 AMP #30 AWG Wire |
| Thermal Vacuum Outgassing | 1.0% Max TML, 0.1% Max.    |

# Series 89 Nanominiature Connectors Two Row Thru Hole Vertical Mount Printed Circuit Board 891-006 and -007




## TWO ROW VERTICAL PCB NANO DIMENSIONS

### Plug (Pin) Connectors

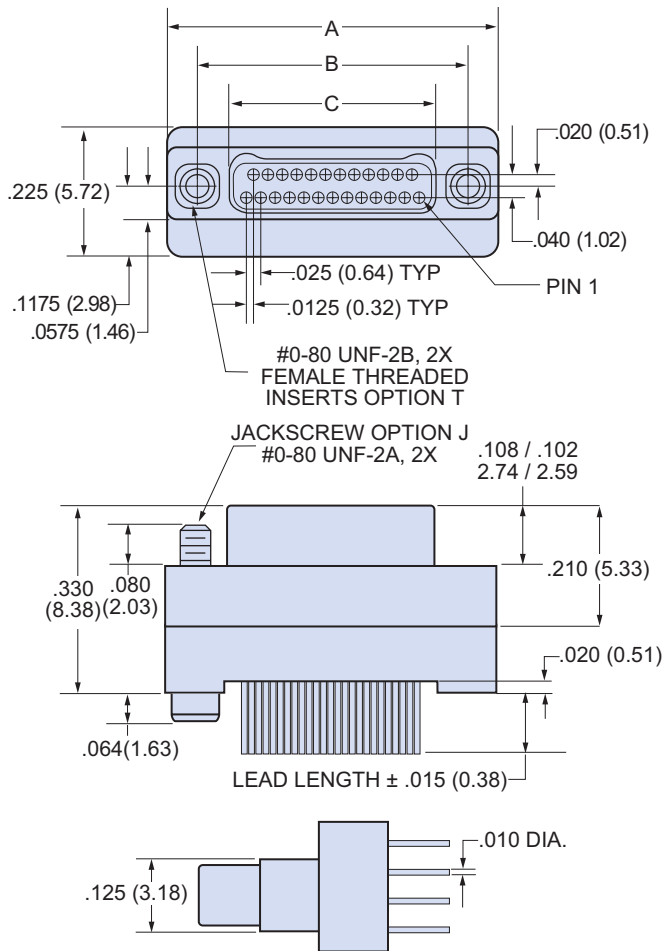

### Receptacle (Socket) Connectors

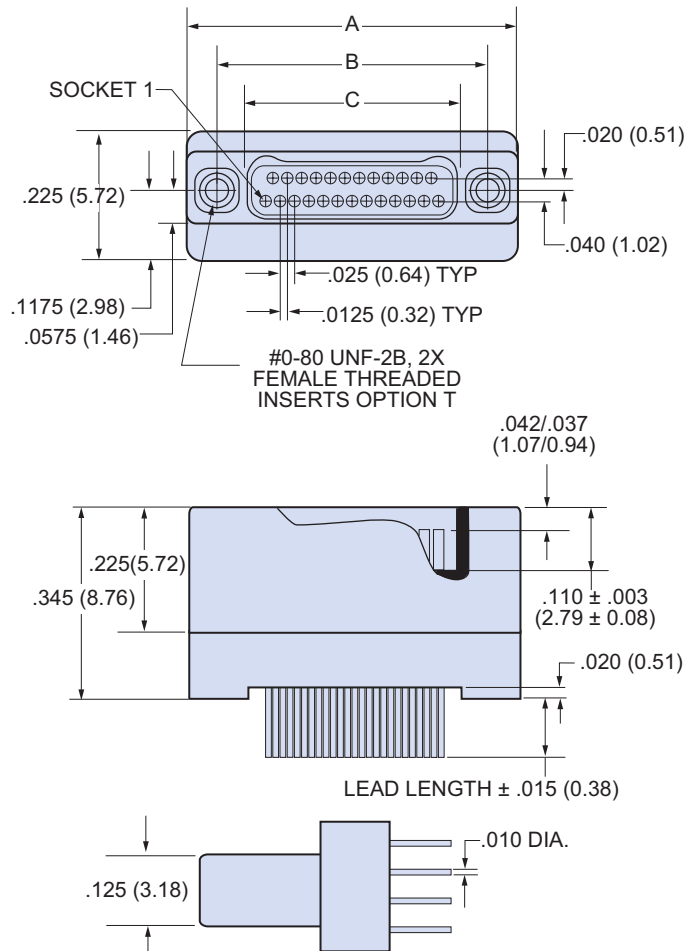

| Layout | A    |       | B BSC. |       | C BSC. |       |
|--------|------|-------|--------|-------|--------|-------|
|        | In.  | mm.   | In.    | mm.   | In.    | mm.   |
| 9P     | .375 | 9.52  | .270   | 6.86  | .160   | 4.06  |
| 9S     | .375 | 9.52  | .270   | 6.86  | .163   | 4.14  |
| 15P    | .450 | 11.43 | .345   | 8.76  | .235   | 5.97  |
| 15S    | .450 | 11.43 | .345   | 8.76  | .238   | 6.04  |
| 21P    | .525 | 13.33 | .420   | 10.67 | .310   | 7.87  |
| 21S    | .525 | 13.33 | .420   | 10.67 | .313   | 7.95  |
| 25P    | .575 | 14.60 | .470   | 11.94 | .360   | 9.14  |
| 25S    | .575 | 14.60 | .470   | 11.94 | .363   | 9.22  |
| 31P    | .650 | 16.51 | .545   | 13.84 | .435   | 11.05 |
| 31S    | .650 | 16.51 | .545   | 13.84 | .438   | 11.12 |
| 37P    | .725 | 18.41 | .620   | 15.75 | .510   | 12.95 |
| 37S    | .725 | 18.41 | .620   | 15.75 | .513   | 13.03 |
| 51P    | .900 | 22.86 | .795   | 20.19 | .685   | 17.40 |
| 51S    | .900 | 22.86 | .795   | 20.19 | .688   | 17.47 |





# Series 89 Nanominiature Connectors

## Two Row Thru Hole Vertical Mount Printed Circuit Board


### 891-006 and -007

Patterns shown are for connector mounting side of PC Board.


### VERTICAL PCB PLUG (PIN) CONNECTOR LAYOUT 891-006

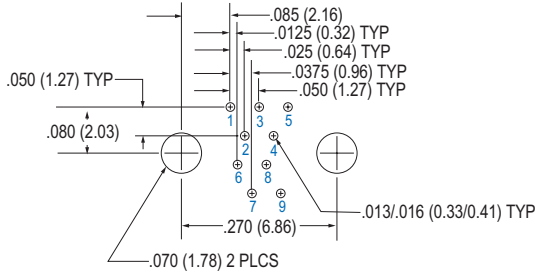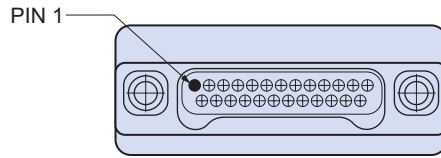


**9 Contacts**

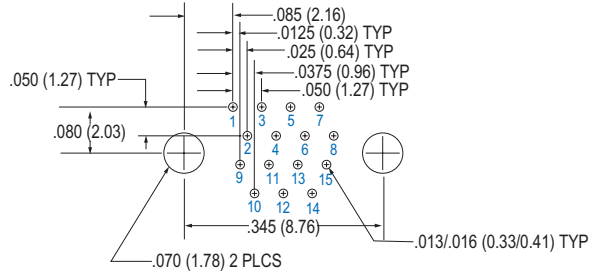


**15 Contacts**

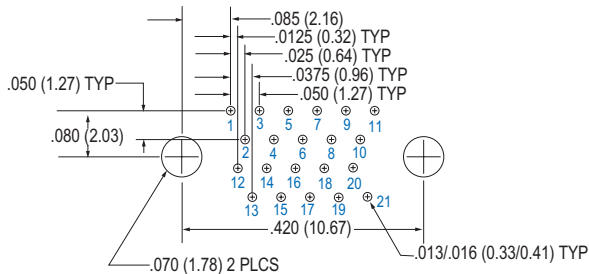


**21 Contacts**

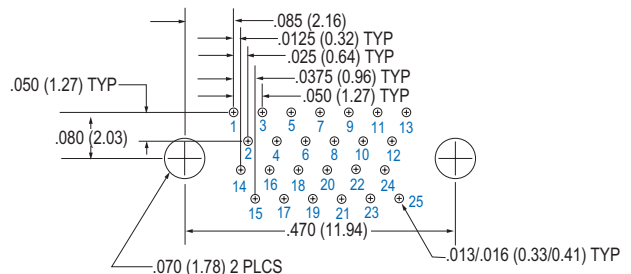


**25 Contacts**

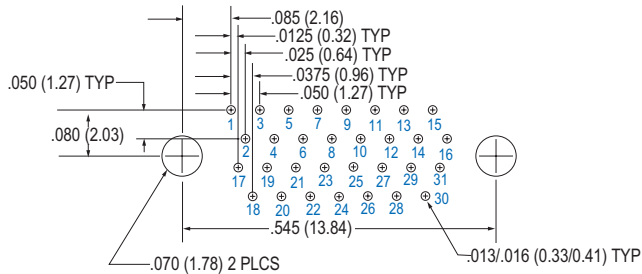

**31 Contacts**

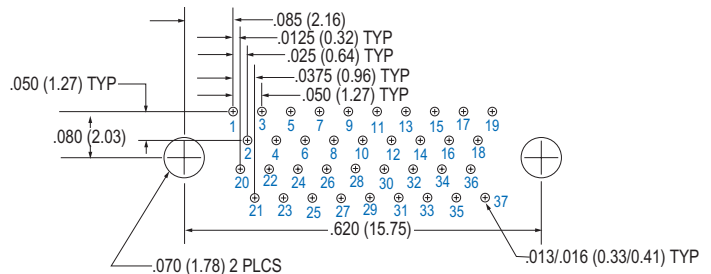

**37 Contacts**

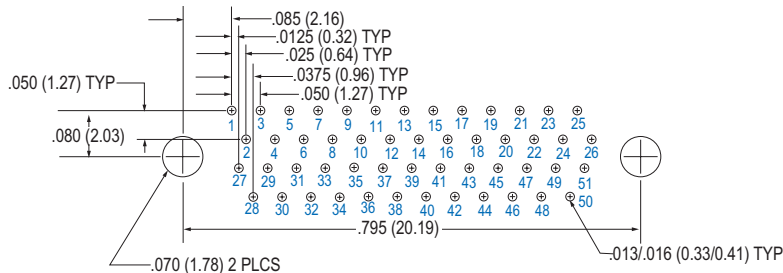

**51 Contacts**

# Series 89 Nanominiature Connectors



## Two Row Thru Hole Vertical Mount Printed Circuit Board

### 891-006 and -007




Patterns shown are for connector mounting side of PC Board.


## VERTICAL PCB RECEPTACLE (SOCKET) CONNECTOR LAYOUT 891-007

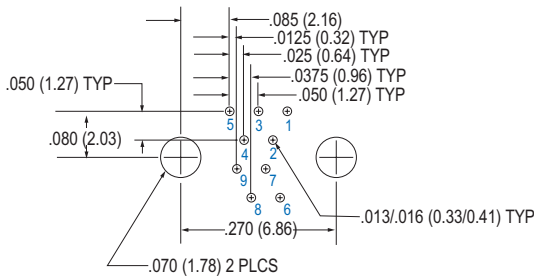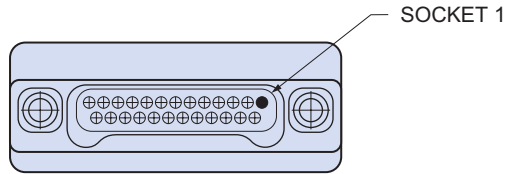


**9 Contacts**

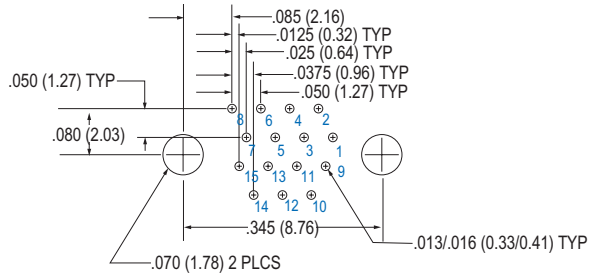


**15 Contacts**

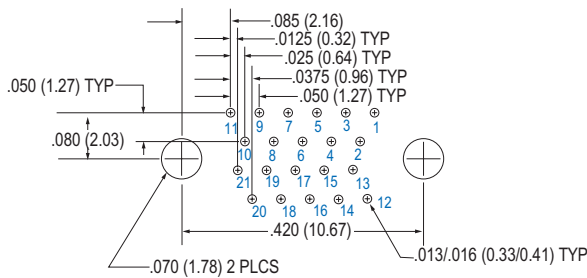


**21 Contacts**

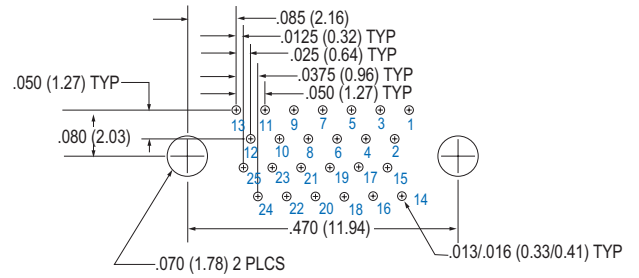


**25 Contacts**

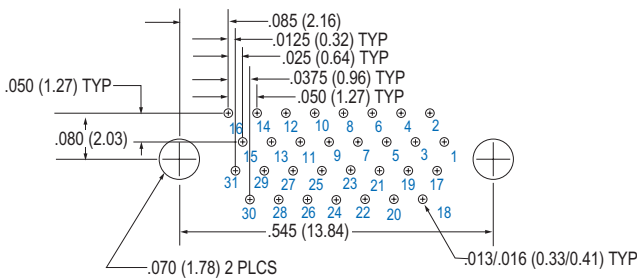

**31 Contacts**

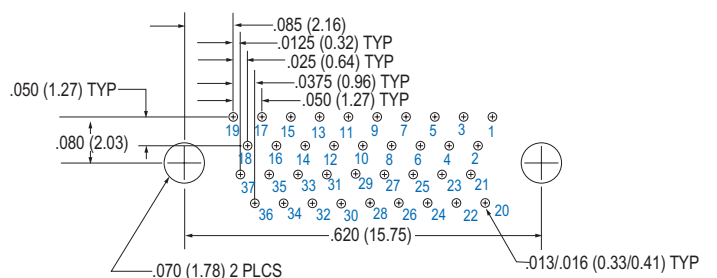

**37 Contacts**

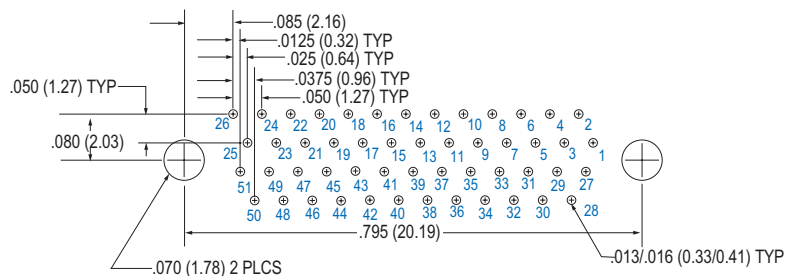

**51 Contacts**






# Series 89 Nanominiature Connectors

## Two Row Thru Hole Right Angle Printed Circuit Board

### 891-008 and -009

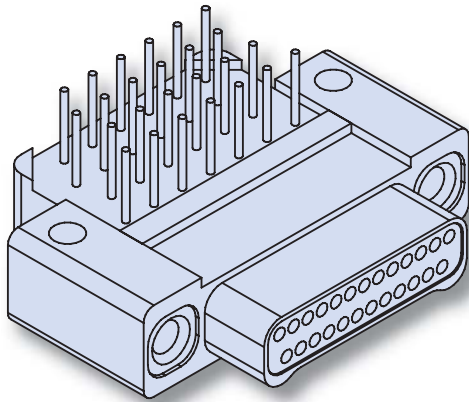

**Right Angle Mount PCB Nano Connectors** feature gold alloy NanoPin contacts. These nanominiature connectors offer premium performance and reliability for demanding applications. Available with #0-80 threaded inserts, or with jackscrews for use with flexible circuits.

**Pre-Tinned PC Tails** are coated with Sn63Pb37 tin-lead for excellent solderability.

**Choose Aluminum, Titanium or Stainless Steel Shells** in seven layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139. These connectors are intermateable with any corresponding Glenair Series 891 two row metal shell nanominiature connector.

### HOW TO ORDER RIGHT ANGLE MOUNT PCB CONNECTORS

| Series   | Insert Arrangement/<br>Contact Type  | Shell Material and Finish                               | Termination Type                            | PC Tail Length                   | Hardware                                   |
|--|--------------------------------------|---|---|----------------------------------|--|
| <b>891-008</b><br>Plug, Pin Contacts, Two Row, Right Angle PCB Nanominiature | Plugs (891-008)                      | <b>A1</b><br>Aluminum Shell, Cadmium Plating            | <b>BRT</b><br>"Board Right Angle Thru-Hole" | <b>1</b><br>.110 Inch (2.79 mm)  | <b>J</b><br>Jackscrew, #0-80               |
|  | <b>9P</b>                            |   |   |                                  |  |
|  | <b>15P</b>                           | <b>A2</b><br>Aluminum Shell, Electroless Nickel Plating |   | <b>2</b><br>.172 Inch (43.69 mm) | <b>T</b><br>Threaded Inserts, #0-80 Female |
|  | <b>21P</b>                           |   |   |                                  |  |
|  | <b>25P</b>                           |   |   |                                  |  |
|  | <b>31P</b>                           |   |   |                                  |  |
|  | <b>37P</b>                           |   |   |                                  |  |
| <b>51P</b>   | <b>T</b><br>Titanium Shell, Unplated | <b>S</b><br>Stainless Steel Shell, Passivated           |   |                                  |  |
| Receptacles (891-009)  |                                      |   |   |                                  |  |
| <b>9S</b>  |                                      |   |   |                                  |  |
| <b>15S</b>   |                                      |   |   |                                  |  |
| <b>21S</b>   |                                      |   |   |                                  |  |
| <b>25S</b>   |                                      |   |   |                                  |  |
| <b>31S</b>   |                                      |   |   |                                  |  |
| <b>37S</b>   |                                      |   |   |                                  |  |
| <b>51S</b>   |                                      |   |   |                                  |  |
| <b>Sample Part Number</b>  |                                      |   |   |                                  |  |
| <b>891-009</b>   | <b>— 31S</b>                         | <b>T</b>  | <b>—BRT</b>                                 | <b>1</b>                         | <b>T</b>                                   |

### MATERIALS AND FINISHES

|                 |  |
|-----------------|--|
| Connector Shell | See Ordering Information                       |
| Insulator       | Liquid Crystal Polymer (LCP), 30% Glass-Filled |
| Contacts        | Gold Alloy, Unplated                           |
| Hardware        | 300 Series Stainless Steel                     |
| PC Tails        | #30 (.010 Dia.) Copper Wire, Solder Dipped     |
| PCB Trays       | Liquid Crystal Polymer (LCP) or Epoxy          |
| Encapsulant     | Epoxy  |

### SPECIFICATIONS

|                           |                            |
|---------------------------|----------------------------|
| Durability                | 200 Cycles Minimum         |
| Current Rating            | 1 AMP Maximum              |
| Voltage Rating (DWV)      | 300 VAC RMS Sea Level      |
| Insulation Resistance     | 5000 Megohms Minimum       |
| Operating Temperature     | -55° C. to +125° C.        |
| Contact Resistance        | 71 mV. @1 AMP #30 AWG Wire |
| Thermal Vacuum Outgassing | 1.0% Max TML, 0.1% Max.    |

# Series 89 Nanominiature Connectors


## Two Row Thru Hole Right Angle Printed Circuit Board

### 891-008 and -009




### TWO ROW RIGHT ANGLE PCB NANO DIMENSIONS

#### Plug (Pin) Connectors

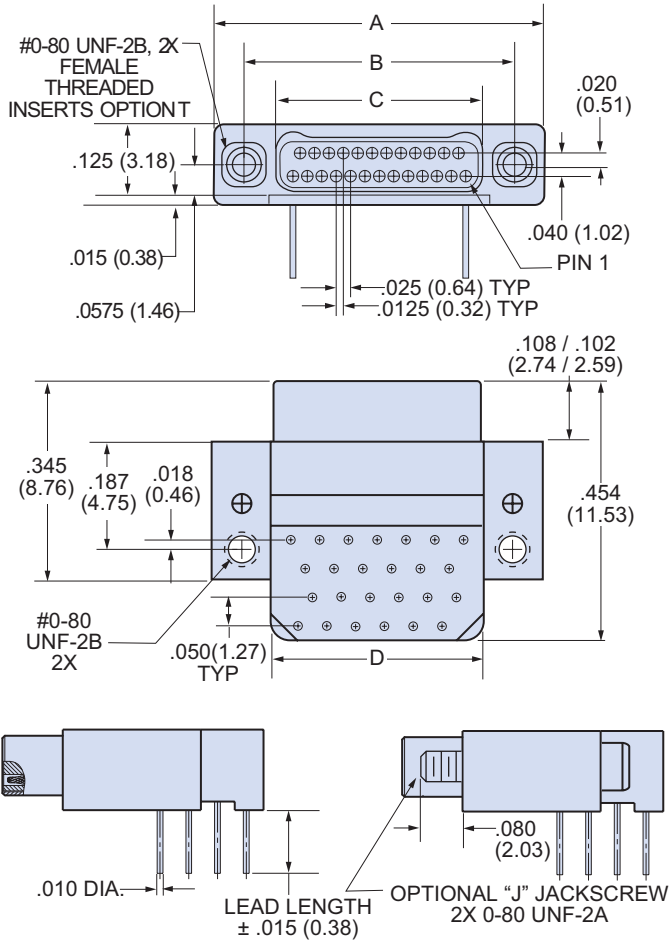

#### Receptacle (Socket) Connectors

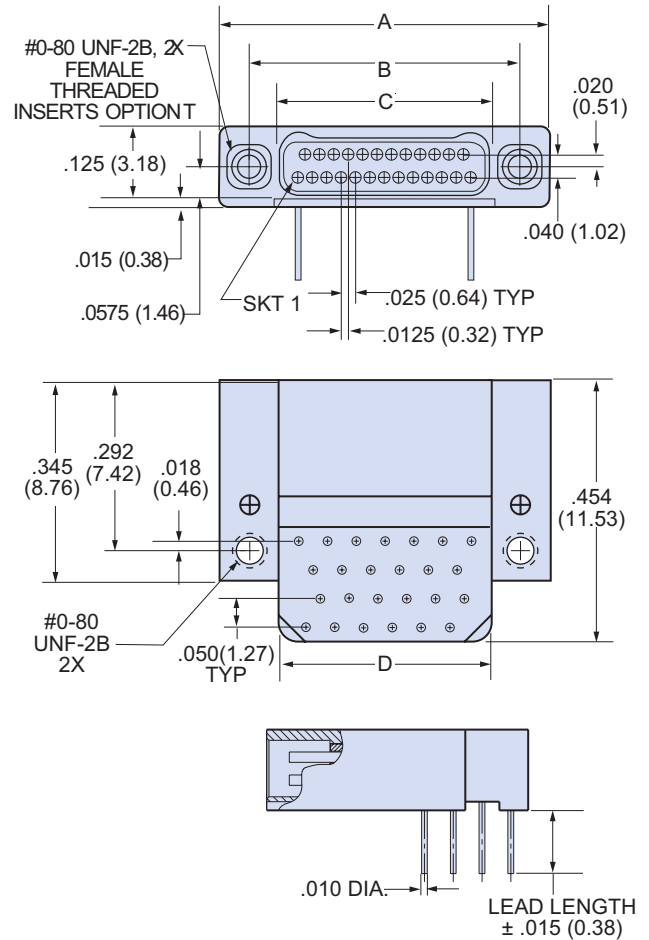

| Layout     | A    |       | B BSC. |       | C BSC. |       | D          |            |
|------------|------|-------|--------|-------|--------|-------|------------|------------|
|            | In.  | mm.   | In.    | mm.   | In.    | mm.   | In. ± .005 | mm. ± 0.13 |
| <b>9P</b>  | .375 | 9.52  | .270   | 6.86  | .160   | 4.06  | .170       | 4.32       |
| <b>9S</b>  | .375 | 9.52  | .270   | 6.86  | .163   | 4.14  | .170       | 4.32       |
| <b>15P</b> | .450 | 11.43 | .345   | 8.76  | .235   | 5.97  | .245       | 6.22       |
| <b>15S</b> | .450 | 11.43 | .345   | 8.76  | .238   | 6.04  | .245       | 6.22       |
| <b>21P</b> | .525 | 13.33 | .420   | 10.67 | .310   | 7.87  | .320       | 8.13       |
| <b>21S</b> | .525 | 13.33 | .420   | 10.67 | .313   | 7.95  | .320       | 8.13       |
| <b>25P</b> | .575 | 14.60 | .470   | 11.94 | .360   | 9.14  | .370       | 9.40       |
| <b>25S</b> | .575 | 14.60 | .470   | 11.94 | .363   | 9.22  | .370       | 9.40       |
| <b>31P</b> | .650 | 16.51 | .545   | 13.84 | .435   | 11.05 | .445       | 11.30      |
| <b>31S</b> | .650 | 16.51 | .545   | 13.84 | .438   | 11.12 | .445       | 11.30      |
| <b>37P</b> | .725 | 18.41 | .620   | 15.75 | .510   | 12.95 | .520       | 13.21      |
| <b>37S</b> | .725 | 18.41 | .620   | 15.75 | .513   | 13.03 | .520       | 13.21      |
| <b>51P</b> | .900 | 22.86 | .795   | 20.19 | .685   | 17.40 | .695       | 17.65      |
| <b>51S</b> | .900 | 22.86 | .795   | 20.19 | .688   | 17.47 | .695       | 17.65      |





# Series 89 Nanominiature Connectors

## Two Row Thru Hole Right Angle Printed Circuit Board


### 891-008 and -009

Patterns shown are for connector mounting side of PC Board.


### RIGHT ANGLE PCB PLUG (PIN) CONNECTOR LAYOUT 891-008

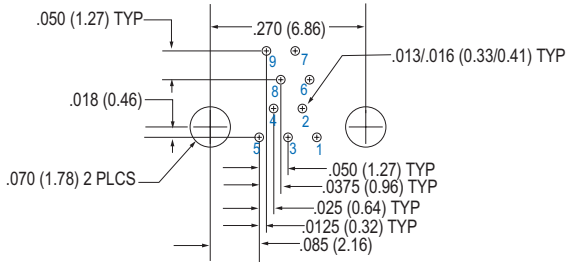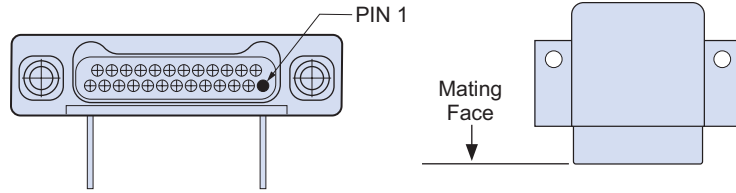


**9 Contacts**

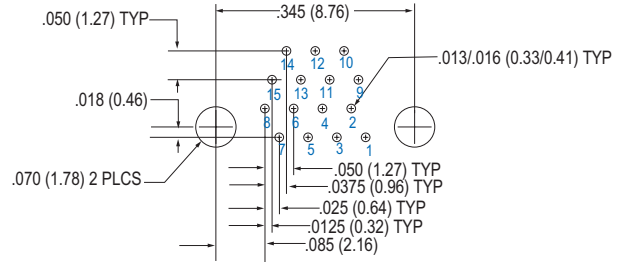


**15 Contacts**

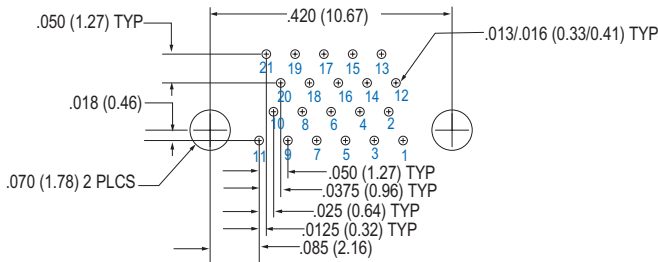


**21 Contacts**

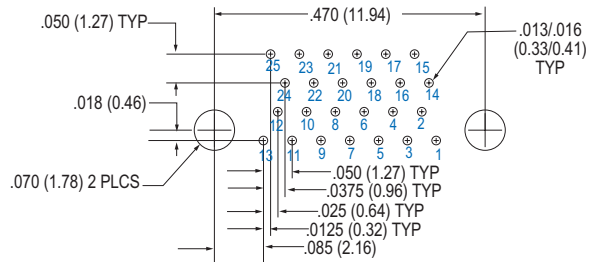


**25 Contacts**

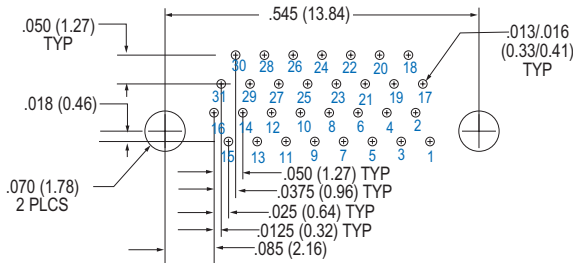

**31 Contacts**

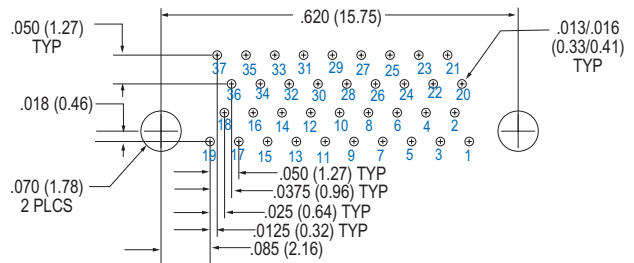

**37 Contacts**

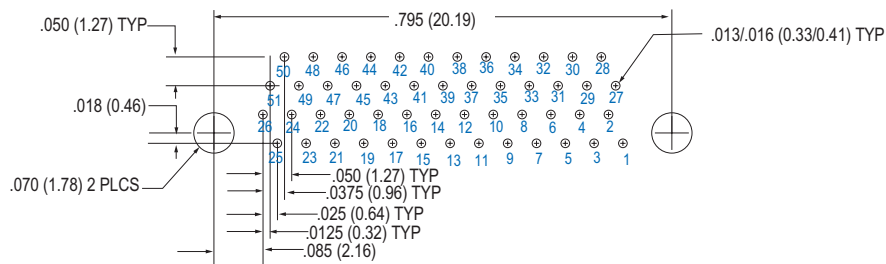




**51 Contacts**

# Series 89 Nanominiature Connectors Two Row Thru Hole Right Angle Printed Circuit Board 891-008 and -009




Patterns shown are for connector mounting side of PC Board.


## RIGHT ANGLE PCB RECEPTACLE (SOCKET) CONNECTOR LAYOUT 891-009

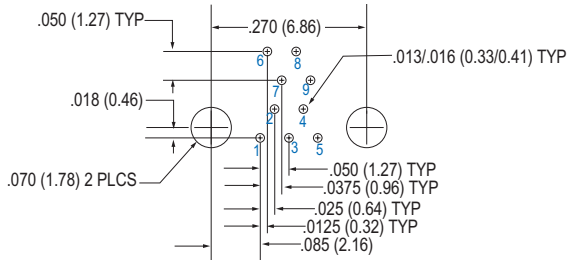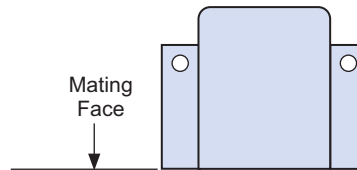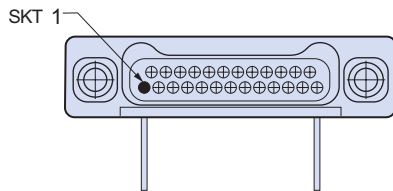


**9 Contacts**

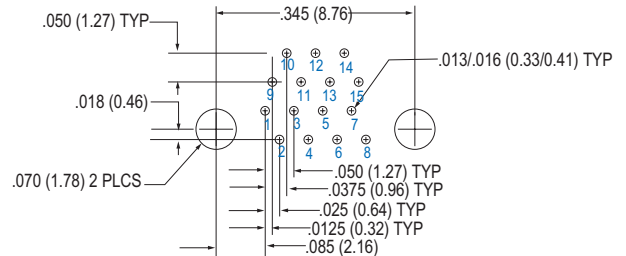


**15 Contacts**

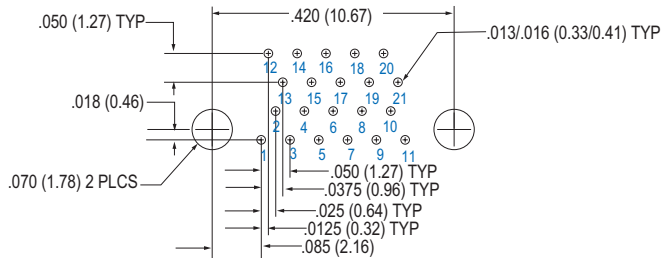


**21 Contacts**

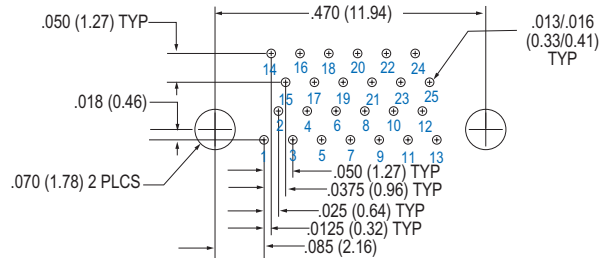


**25 Contacts**

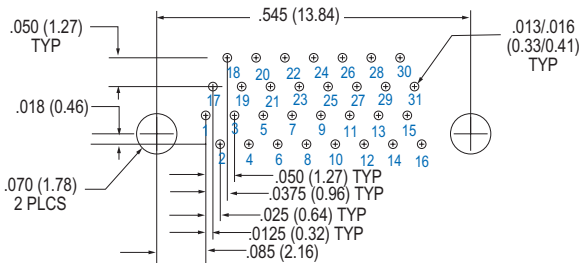

**31 Contacts**

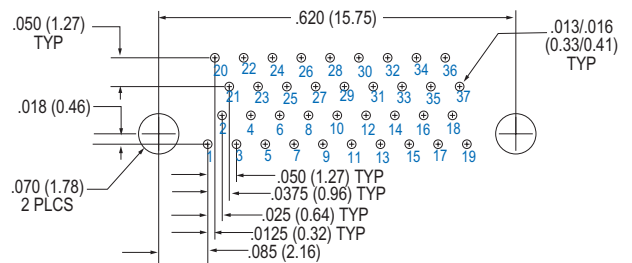

**37 Contacts**

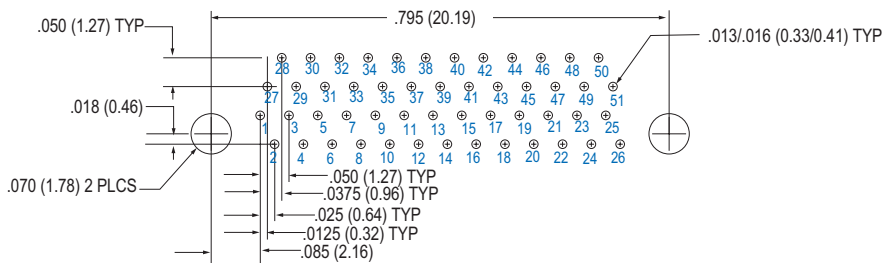


**51 Contacts**







## Series 89 Nanominiature Connectors Two Row Vertical Surface Mount 891-010 and -011

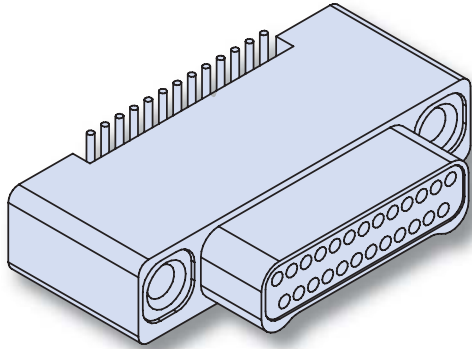

**Vertical Surface Mount PCB Nano Connectors** feature gold alloy NanoPin contacts. Contacts are precision-crimped #30 AWG gold-plated wire. These nanominiature connectors offer premium performance and reliability for demanding applications.

**Choose Aluminum, Titanium or Stainless Steel Shells** in eight layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139.

### HOW TO ORDER VERTICAL MOUNT SMT CONNECTORS

| Series   | Insert Arrangement/<br>Contact Type  | Shell Material and<br>Finish  | Termination Type                                | Hardware                                      |
|--|--|---|---|---|
| <b>891-010</b><br>Plug, Pin Contacts,<br>Two Row, Vertical SMT<br>Nanominiature          | Plugs (891-010)<br><b>9P</b><br><b>15P</b><br><b>21P</b><br><b>25P</b><br><b>31P</b><br><b>37P</b><br><b>51P</b>       | <b>A1</b><br>Aluminum Shell, Cadmium<br>Plating<br><br><b>A2</b><br>Aluminum Shell, Electroless<br>Nickel Plating | <b>BSS</b><br>"Board Surface Mount<br>Straight" | <b>T</b><br>Threaded Inserts, #0-80<br>Female |
| <b>891-011</b><br>Receptacle, Socket<br>Contacts, Two Row, Vertical<br>SMT Nanominiature | Receptacles (891-011)<br><b>9S</b><br><b>15S</b><br><b>21S</b><br><b>25S</b><br><b>31S</b><br><b>37S</b><br><b>51S</b> | <b>T</b><br>Titanium Shell, Unplated<br><br><b>S</b><br>Stainless Steel Shell,<br>Passivated                      |   |   |
| <b>Sample Part Number</b>  |  |   |   |   |
| <b>891-011</b>   | <b>— 51S</b>   | <b>A2</b>   | <b>—BSS</b>                                     | <b>T</b>                                      |

#### MATERIALS AND FINISHES

|                 |  |
|-----------------|--|
| Connector Shell | See Ordering Information                       |
| Insulator       | Liquid Crystal Polymer (LCP), 30% Glass-Filled |
| Contacts        | Gold Alloy, Unplated                           |
| Hardware        | 300 Series Stainless Steel                     |
| PC Tails        | #30 (.010 Dia.) Copper Wire, Solder Dipped     |
| PCB Trays       | Liquid Crystal Polymer (LCP) or Epoxy          |
| Encapsulant     | Epoxy  |

#### SPECIFICATIONS


|                           |                            |
|---------------------------|----------------------------|
| Durability                | 200 Cycles Minimum         |
| Current Rating            | 1 AMP Maximum              |
| Voltage Rating (DWV)      | 300 VAC RMS Sea Level      |
| Insulation Resistance     | 5000 Megohms Minimum       |
| Operating Temperature     | -55° C. to +125° C.        |
| Contact Resistance        | 71 mV. @1 AMP #30 AWG Wire |
| Thermal Vacuum Outgassing | 1.0% Max TML, 0.1% Max.    |

# Series 89 Nanominiature Connectors Two Row Vertical Surface Mount 891-010 and -011




## TWO ROW VERTICAL SURFACE MOUNT NANO DIMENSIONS

### Plug (Pin) Connectors

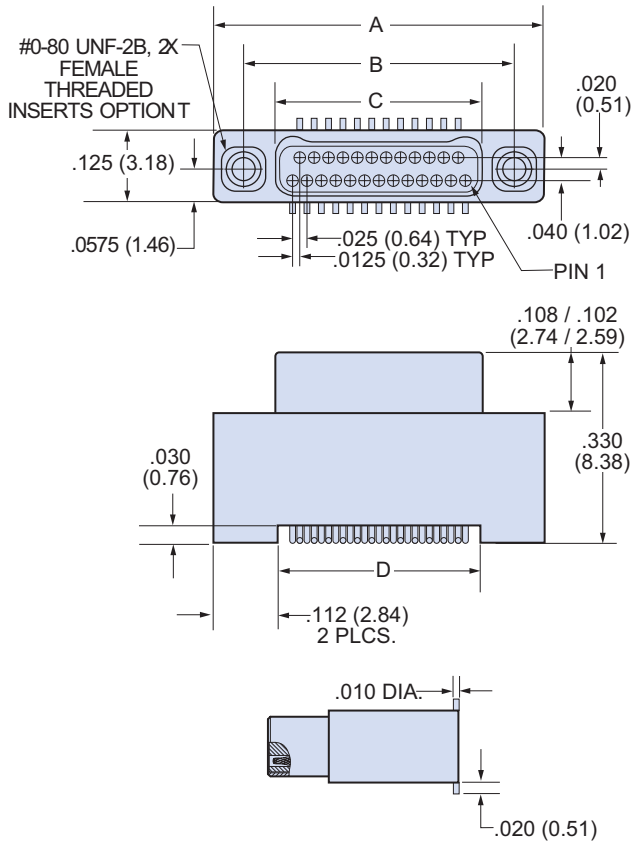

### Receptacle (Socket) Connectors

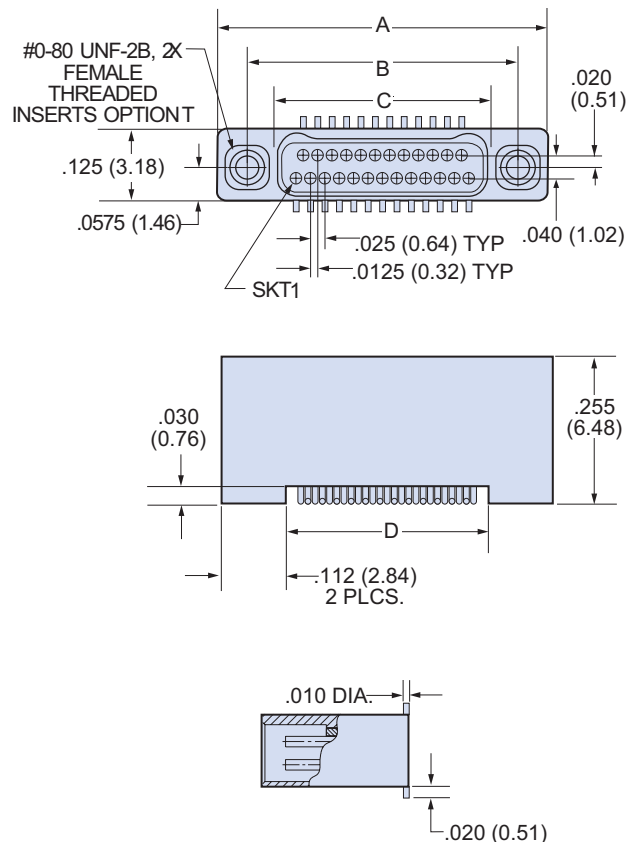



| Layout | A    |       | B BSC. |       | C BSC. |       | D          |            |
|--------|------|-------|--------|-------|--------|-------|------------|------------|
|        | In.  | mm.   | In.    | mm.   | In.    | mm.   | In. ± .005 | mm. ± 0.13 |
| 9P     | .375 | 9.52  | .270   | 6.86  | .160   | 4.06  | .152       | 3.86       |
| 9S     | .375 | 9.52  | .270   | 6.86  | .163   | 4.14  | .152       | 3.86       |
| 15P    | .450 | 11.43 | .345   | 8.76  | .235   | 5.97  | .227       | 5.77       |
| 15S    | .450 | 11.43 | .345   | 8.76  | .238   | 6.04  | .227       | 5.77       |
| 21P    | .525 | 13.33 | .420   | 10.67 | .310   | 7.87  | .302       | 7.67       |
| 21S    | .525 | 13.33 | .420   | 10.67 | .313   | 7.95  | .302       | 7.67       |
| 25P    | .575 | 14.60 | .470   | 11.94 | .360   | 9.14  | .352       | 8.94       |
| 25S    | .575 | 14.60 | .470   | 11.94 | .363   | 9.22  | .352       | 8.94       |
| 31P    | .650 | 16.51 | .545   | 13.84 | .435   | 11.05 | .427       | 10.85      |
| 31S    | .650 | 16.51 | .545   | 13.84 | .438   | 11.12 | .427       | 10.85      |
| 37P    | .725 | 18.41 | .620   | 15.75 | .510   | 12.95 | .502       | 12.75      |
| 37S    | .725 | 18.41 | .620   | 15.75 | .513   | 13.03 | .502       | 12.75      |
| 51P    | .900 | 22.86 | .795   | 20.19 | .685   | 17.40 | .677       | 17.20      |
| 51S    | .900 | 22.86 | .795   | 20.19 | .688   | 17.47 | .677       | 17.20      |




# Series 89 Nanominiature Connectors Two Row Vertical Surface Mount 891-010 and -011

Patterns shown are for connector mounting side of PC Board.


## TWO ROW VERTICAL SURFACE MOUNT BOARD LAYOUT—891-010 PLUGS (PIN CONTACTS)

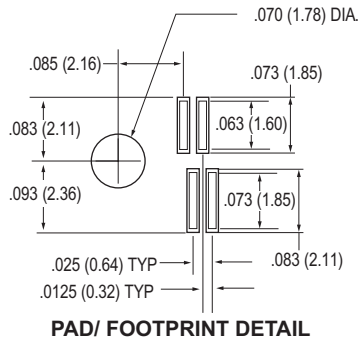


**9 Contacts**




**15 Contacts**

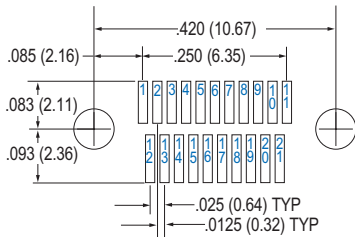


**21 Contacts**

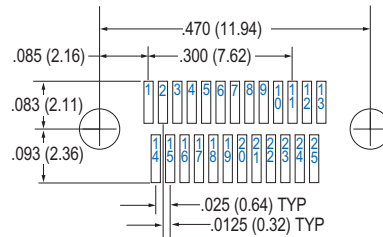


**25 Contacts**

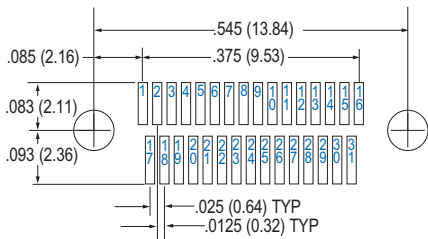

**31 Contacts**

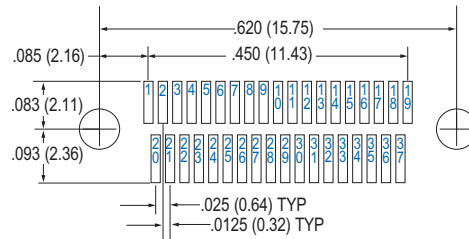

**37 Contacts**

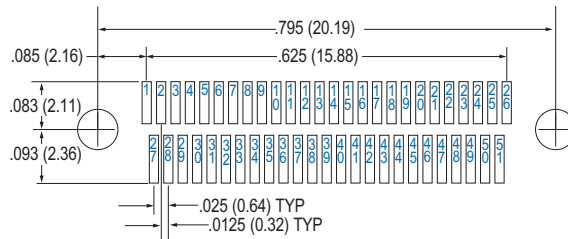



**51 Contacts**

# Series 89 Nanominiature Connectors Two Row Vertical Surface Mount 891-010 and -011




Patterns shown are for connector mounting side of PC Board.


## TWO ROW VERTICAL SURFACE MOUNT BOARD LAYOUT—891-011 RECEPTACLES

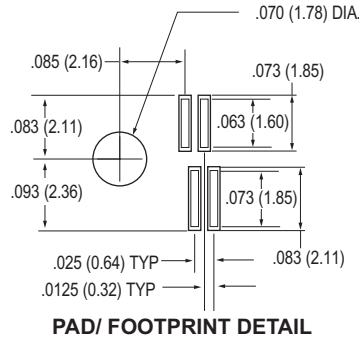


**9 Contacts**




**15 Contacts**

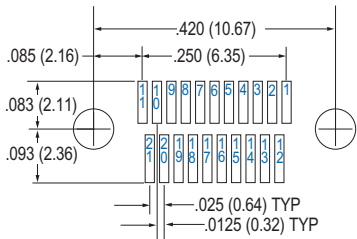


**21 Contacts**

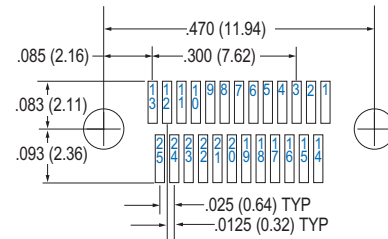


**25 Contacts**

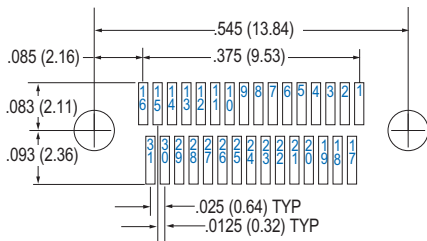

**31 Contacts**

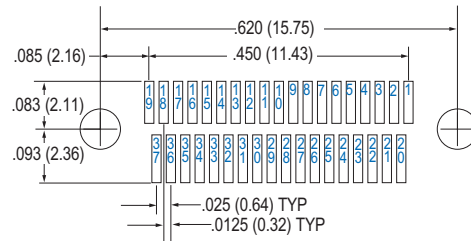


**37 Contacts**

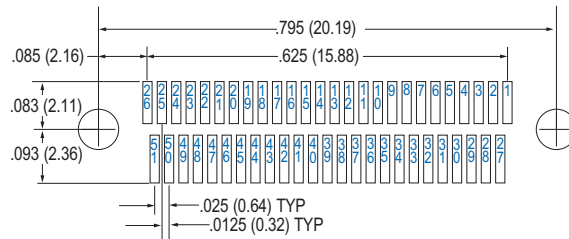

**51 Contacts**



# Series 89 Nanominiature Connectors Two Row Right Angle Surface Mount 891-012 and -013

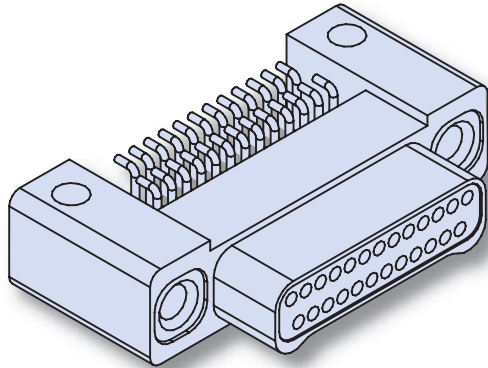

### Right Angle Surface Mount PCB Nano Connectors

feature gold alloy NanoPin contacts. These nanominiature connectors offer premium performance and reliability for demanding applications. Available with #0-80 threaded inserts, or with jackscrews for use with flexible circuits.

**Pre-Tinned PC Tails** are coated with Sn63Pb37 tin-lead for excellent solderability.

**Choose Aluminum, Titanium or Stainless Steel Shells** in seven layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139.

## HOW TO ORDER RIGHT ANGLE SURFACE MOUNT PCB CONNECTORS

| Series  | Insert Arrangement/<br>Contact Type  | Shell Material and<br>Finish  | Termination Type                                | Hardware                                   |
|---|--|---|---|--|
| <b>891-012</b><br>Plug, Pin Contacts, Two Row, Right Angle Surface Mount Nanominiature          | Plugs (891-012)<br><b>9P</b><br><b>15P</b><br><b>21P</b><br><b>25P</b><br><b>31P</b><br><b>37P</b><br><b>51P</b>       | <b>A1</b><br>Aluminum Shell, Cadmium Plating<br><br><b>A2</b><br>Aluminum Shell, Electroless Nickel Plating | <b>BRS</b><br>"Board Right Angle Surface Mount" | <b>T</b><br>Threaded Inserts, #0-80 Female |
| <b>891-013</b><br>Receptacle, Socket Contacts, Two Row, Right Angle Surface Mount Nanominiature | Receptacles (891-013)<br><b>9S</b><br><b>15S</b><br><b>21S</b><br><b>25S</b><br><b>31S</b><br><b>37S</b><br><b>51S</b> | <b>T</b><br>Titanium Shell, Unplated<br><br><b>S</b><br>Stainless Steel Shell, Passivated                   |   |  |
| <b>Sample Part Number</b>   |  |   |   |  |
| <b>891-012</b>  | <b>— 25P</b>   | <b>A1</b>   | <b>—BRS</b>                                     | <b>T</b>                                   |

### MATERIALS AND FINISHES

|                 |  |
|-----------------|--|
| Connector Shell | See Ordering Information                       |
| Insulator       | Liquid Crystal Polymer (LCP), 30% Glass-Filled |
| Contacts        | Gold Alloy, Unplated                           |
| Hardware        | 300 Series Stainless Steel                     |
| PC Tails        | #30 (.010 Dia.) Copper Wire, Solder Dipped     |
| PCB Trays       | Liquid Crystal Polymer (LCP) or Epoxy          |
| Encapsulant     | Epoxy  |

### SPECIFICATIONS


|                           |                            |
|---------------------------|----------------------------|
| Durability                | 200 Cycles Minimum         |
| Current Rating            | 1 AMP Maximum              |
| Voltage Rating (DWV)      | 300 VAC RMS Sea Level      |
| Insulation Resistance     | 5000 Megohms Minimum       |
| Operating Temperature     | -55° C. to +125° C.        |
| Contact Resistance        | 71 mV. @1 AMP #30 AWG Wire |
| Thermal Vacuum Outgassing | 1.0% Max TML, 0.1% Max.    |

# Series 89 Nanominiature Connectors Two Row Right Angle Surface Mount 891-012 and -013




## TWO ROW RIGHT ANGLE SURFACE MOUNT NANO DIMENSIONS

### Plug (Pin) Connectors

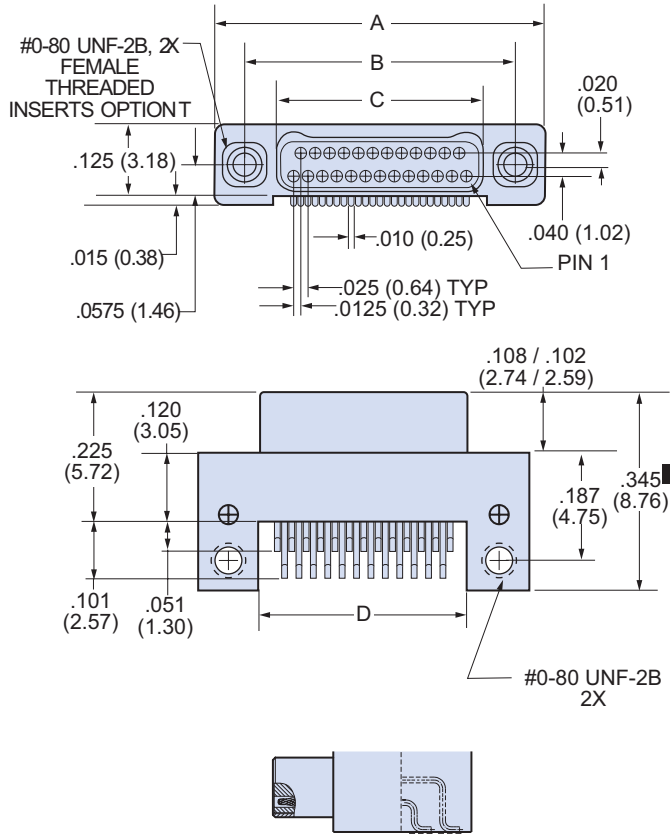

### Receptacle (Socket) Connectors

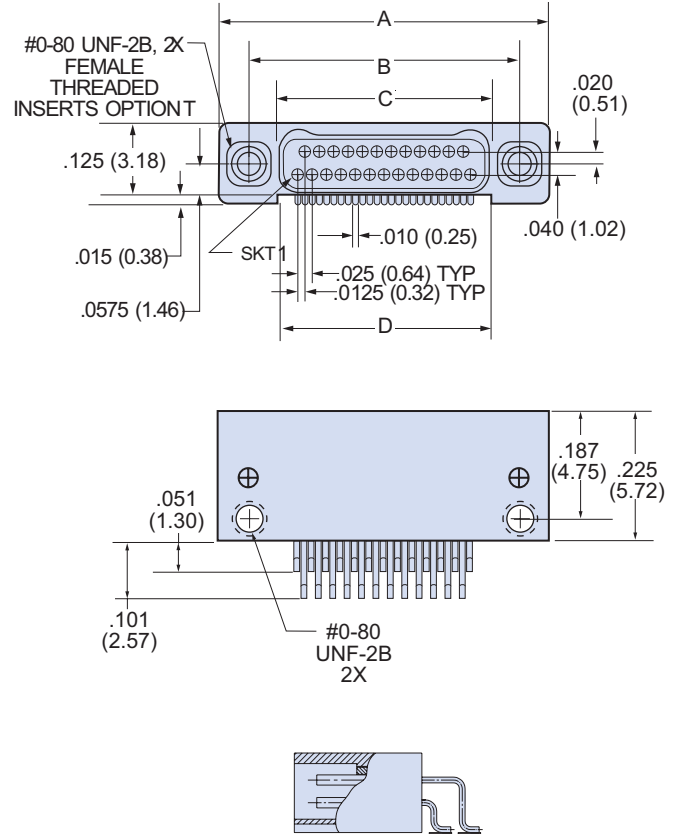


| Layout | A    |       | B BSC. |       | C BSC. |       | D          |            |
|--------|------|-------|--------|-------|--------|-------|------------|------------|
|        | In.  | mm.   | In.    | mm.   | In.    | mm.   | In. ± .005 | mm. ± 0.13 |
| 9P     | .375 | 9.52  | .270   | 6.86  | .160   | 4.06  | .170       | 4.32       |
| 9S     | .375 | 9.52  | .270   | 6.86  | .163   | 4.14  | .170       | 4.32       |
| 15P    | .450 | 11.43 | .345   | 8.76  | .235   | 5.97  | .245       | 6.22       |
| 15S    | .450 | 11.43 | .345   | 8.76  | .238   | 6.04  | .245       | 6.22       |
| 21P    | .525 | 13.33 | .420   | 10.67 | .310   | 7.87  | .320       | 8.13       |
| 21S    | .525 | 13.33 | .420   | 10.67 | .313   | 7.95  | .320       | 8.13       |
| 25P    | .575 | 14.60 | .470   | 11.94 | .360   | 9.14  | .370       | 9.40       |
| 25S    | .575 | 14.60 | .470   | 11.94 | .363   | 9.22  | .370       | 9.40       |
| 31P    | .650 | 16.51 | .545   | 13.84 | .435   | 11.05 | .445       | 11.30      |
| 31S    | .650 | 16.51 | .545   | 13.84 | .438   | 11.12 | .445       | 11.30      |
| 37P    | .725 | 18.41 | .620   | 15.75 | .510   | 12.95 | .520       | 13.21      |
| 37S    | .725 | 18.41 | .620   | 15.75 | .513   | 13.03 | .520       | 13.21      |
| 51P    | .900 | 22.86 | .795   | 20.19 | .685   | 17.40 | .695       | 17.65      |
| 51S    | .900 | 22.86 | .795   | 20.19 | .688   | 17.47 | .695       | 17.65      |




# Series 89 Nanominiature Connectors Two Row Right Angle Surface Mount 891-012 and -013

Patterns shown are for connector mounting side of PC Board.


## TWO ROW RIGHT ANGLE SURFACE MOUNT BOARD LAYOUT—891-012 PLUGS (PIN CONTACTS)




**PAD/ FOOTPRINT DETAIL**

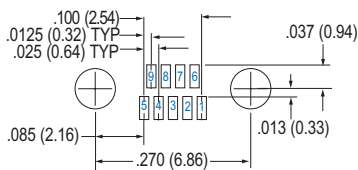


**9 Contacts**

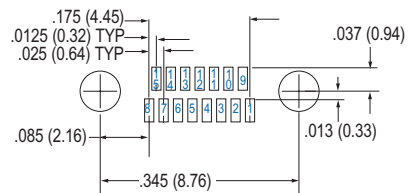


**15 Contacts**

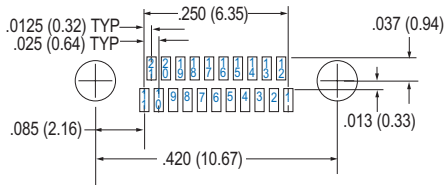


**21 Contacts**

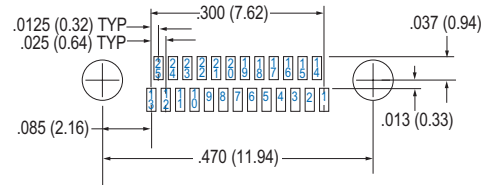


**25 Contacts**

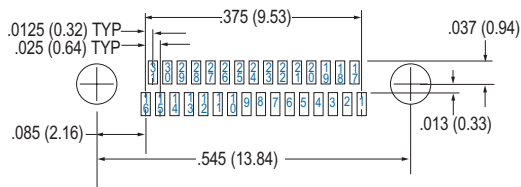

**31 Contacts**

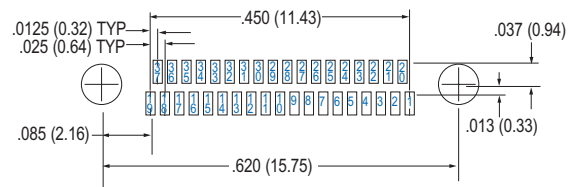

**37 Contacts**

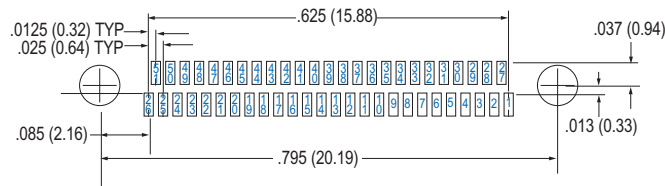


**51 Contacts**

# Series 89 Nanominiature Connectors Two Row Right Angle Surface Mount 891-012 and -013




Patterns shown are for connector mounting side of PC Board.


## TWO ROW RIGHT ANGLE SURFACE MOUNT BOARD LAYOUT—891-013 RECEPTACLES




**PAD/ FOOTPRINT DETAIL**




**9 Contacts**




**15 Contacts**

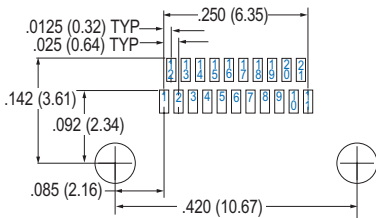


**21 Contacts**

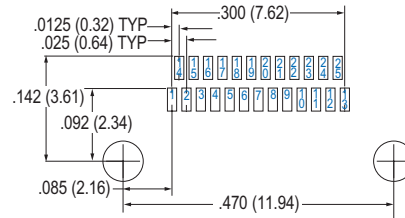


**25 Contacts**

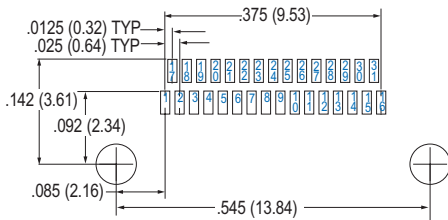

**31 Contacts**

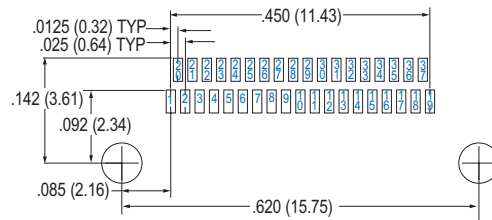

**37 Contacts**

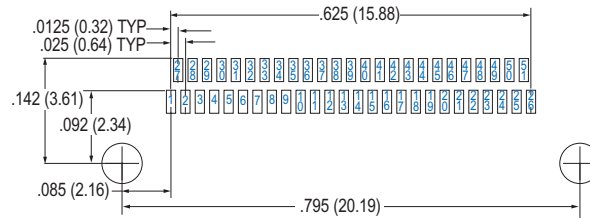


**51 Contacts**





## Series 89 Nanominiature Connectors Straddle Mount 891-014 and -015

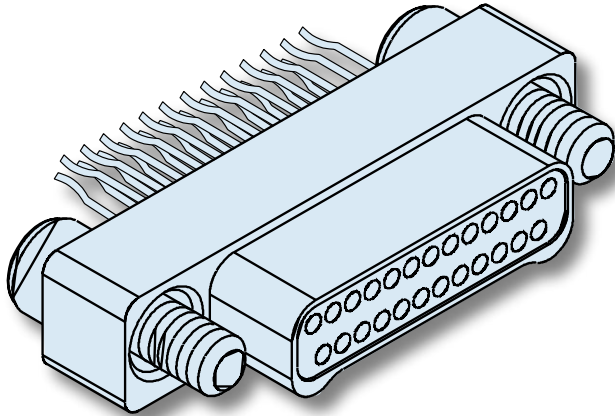

**Straddle Mount PCB Nano Connectors** feature gold alloy NanoPin contacts. These nanominiature connectors offer premium performance and reliability for demanding applications. Available with #0-80 threaded inserts, or with jackscrews for use with flexible circuits.

**Pre-Tinned PC Tails** are coated with Sn63Pb37 tin-lead for excellent solderability.

**Choose Aluminum, Titanium or Stainless Steel Shells** in seven layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139. These connectors are intermateable with any corresponding Glenair Series 891 two row metal shell nanominiature connector.

### HOW TO ORDER STRADDLE MOUNT PCB CONNECTORS

| Series  | Insert Arrangement/<br>Contact Type  | Shell Material and Finish   | Termination Type               | Hardware   |  |  |   |            |          |                           |              |           |             |          |
|---|--|---|--------------------------------|--|--|--|---|------------|----------|---------------------------|--------------|-----------|-------------|----------|
| <b>891-014</b><br>Plug, Pin Contacts, Two Row, Straddle Mount Nanominiature | Plugs (891-014)<br><b>9P</b><br><b>15P</b><br><b>21P</b><br><b>25P</b><br><b>31P</b><br><b>37P</b><br><b>51P</b> | <b>A1</b><br>Aluminum Shell, Cadmium Plating<br><br><b>A2</b><br>Aluminum Shell, Electroless Nickel Plating | <b>STM</b><br>"Straddle Mount" | <b>J</b><br>Jackscrew, #0-80<br><br><b>T</b><br>Threaded Inserts, #0-80 Female<br><br>Threaded inserts are available on plug connectors only if the shell material is titanium or stainless steel. |  |  |   |            |          |                           |              |           |             |          |
|   |  |   |                                |  | <b>891-015</b><br>Receptacle, Socket Contacts, Two Row, Straddle Mount Nanominiature | Receptacles (891-015)<br><b>9S</b><br><b>15S</b><br><b>21S</b><br><b>25S</b><br><b>31S</b><br><b>37S</b><br><b>51S</b> | <b>T</b><br>Titanium Shell, Unplated<br><br><b>S</b><br>Stainless Steel Shell, Passivated | <b>STM</b> | <b>T</b> |                           |              |           |             |          |
|   |  |   |                                |  |  |  |   |            |          | <b>Sample Part Number</b> |              |           |             |          |
|   |  |   |                                |  |  |  |   |            |          | <b>891-015</b>            | <b>— 37S</b> | <b>A1</b> | <b>—STM</b> | <b>T</b> |

#### MATERIALS AND FINISHES


|                 |  |
|-----------------|--|
| Connector Shell | See Ordering Information                       |
| Insulator       | Liquid Crystal Polymer (LCP), 30% Glass-Filled |
| Contacts        | Gold Alloy, Unplated                           |
| Hardware        | 300 Series Stainless Steel                     |
| PC Tails        | #30 (.010 Dia.) Copper Wire, Solder Dipped     |
| PCB Trays       | Liquid Crystal Polymer (LCP) or Epoxy          |
| Encapsulant     | Epoxy  |

#### SPECIFICATIONS


|                           |                            |
|---------------------------|----------------------------|
| Durability                | 200 Cycles Minimum         |
| Current Rating            | 1 AMP Maximum              |
| Voltage Rating (DWV)      | 300 VAC RMS Sea Level      |
| Insulation Resistance     | 5000 Megohms Minimum       |
| Operating Temperature     | -55° C. to +125° C.        |
| Contact Resistance        | 71 mV. @1 AMP #30 AWG Wire |
| Thermal Vacuum Outgassing | 1.0% Max TML, 0.1% Max.    |

STRADDLE MOUNT NANO DIMENSIONS

Plug (Pin) Connectors

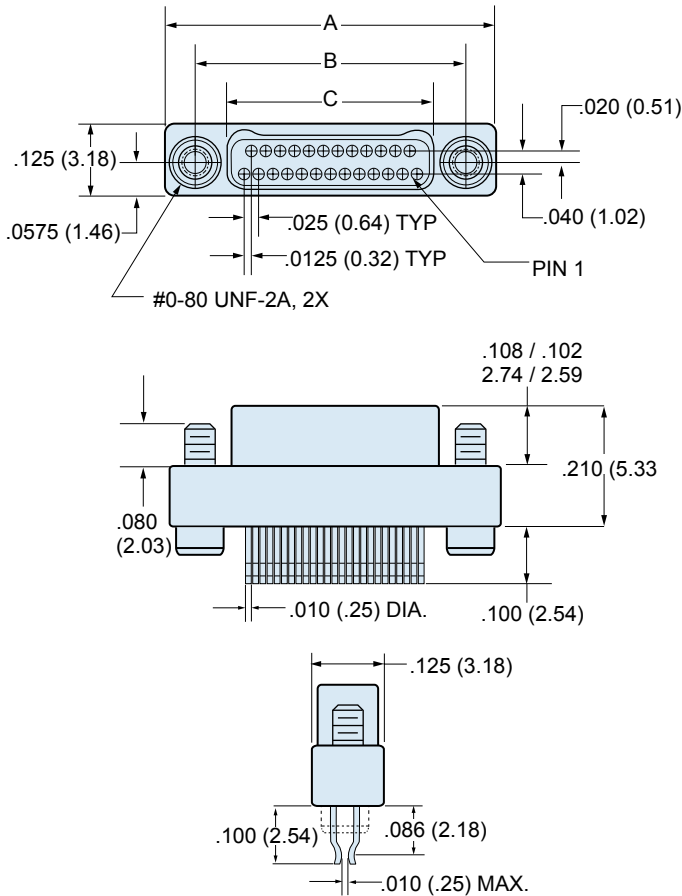

Receptacle (Socket) Connectors


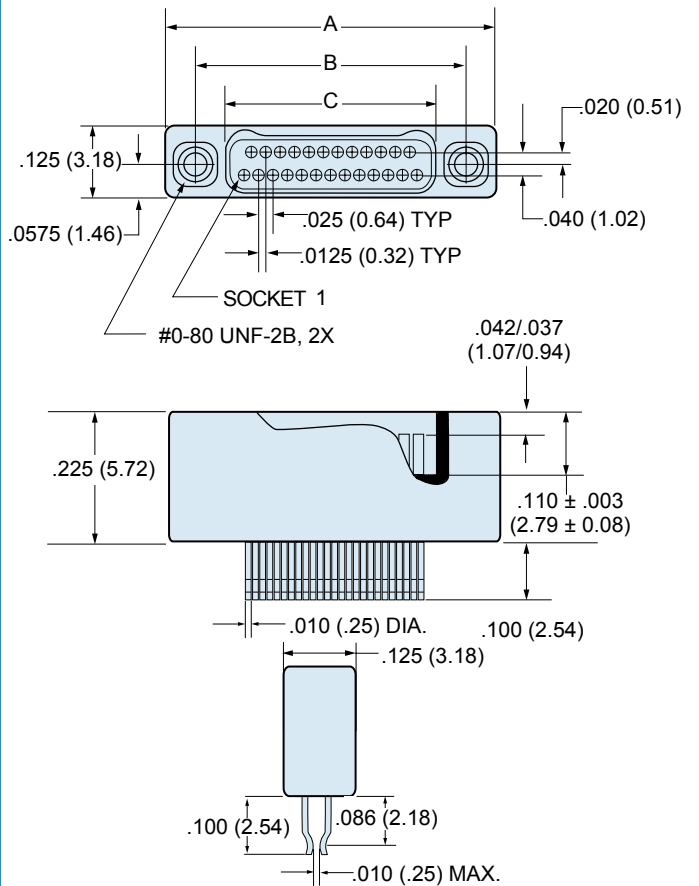


| Layout | A    |       | B BSC. |       | C BSC. |       |
|--------|------|-------|--------|-------|--------|-------|
|        | In.  | mm.   | In.    | mm.   | In.    | mm.   |
| 9P     | .375 | 9.52  | .270   | 6.86  | .160   | 4.06  |
| 9S     | .375 | 9.52  | .270   | 6.86  | .163   | 4.14  |
| 15P    | .450 | 11.43 | .345   | 8.76  | .235   | 5.97  |
| 15S    | .450 | 11.43 | .345   | 8.76  | .238   | 6.04  |
| 21P    | .525 | 13.33 | .420   | 10.67 | .310   | 7.87  |
| 21S    | .525 | 13.33 | .420   | 10.67 | .313   | 7.95  |
| 25P    | .575 | 14.60 | .470   | 11.94 | .360   | 9.14  |
| 25S    | .575 | 14.60 | .470   | 11.94 | .363   | 9.22  |
| 31P    | .650 | 16.51 | .545   | 13.84 | .435   | 11.05 |
| 31S    | .650 | 16.51 | .545   | 13.84 | .438   | 11.12 |
| 37P    | .725 | 18.41 | .620   | 15.75 | .510   | 12.95 |
| 37S    | .725 | 18.41 | .620   | 15.75 | .513   | 13.03 |
| 51P    | .900 | 22.86 | .795   | 20.19 | .685   | 17.40 |
| 51S    | .900 | 22.86 | .795   | 20.19 | .688   | 17.47 |




# Series 89 Nanominiature Connectors Straddle Mount 891-014 and -015


## STRADDLE MOUNT BOARD LAYOUT — 891-014 PLUGS (PIN CONTACTS)

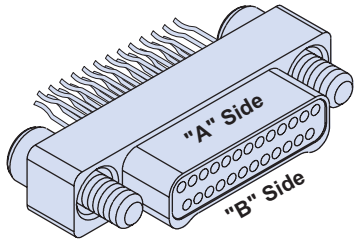


PAD/ FOOTPRINT DETAIL




9 Contacts

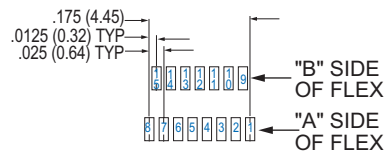


15 Contacts

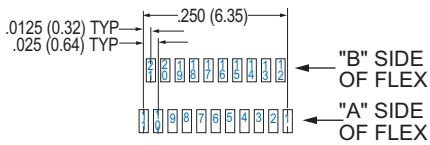


21 Contacts

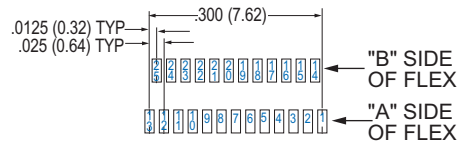


25 Contacts

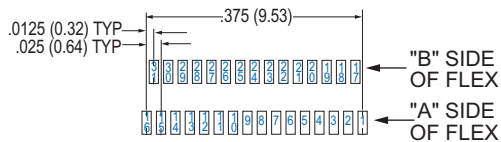

31 Contacts

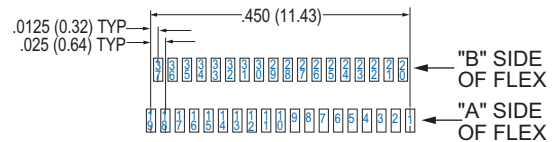

37 Contacts


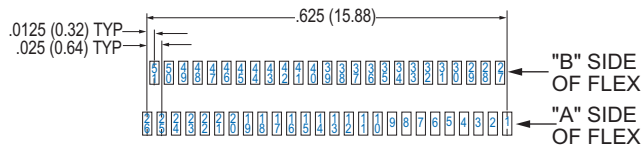


51 Contacts


Series 89 Nanominiature Connectors  
Straddle Mount  
891-014 and -015




STRADDLE MOUNT BOARD LAYOUT—891-015 RECEPTACLES




PAD/ FOOTPRINT DETAIL




9 Contacts

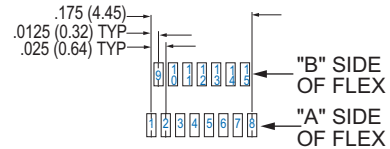


15 Contacts

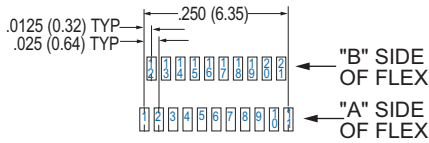


21 Contacts

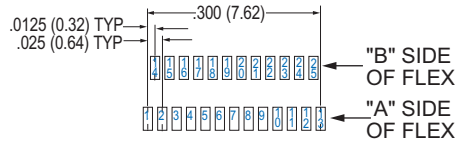


25 Contacts

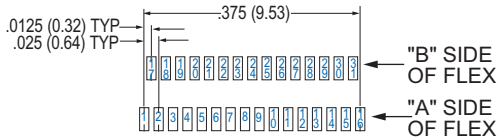

31 Contacts

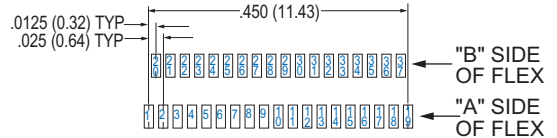


37 Contacts

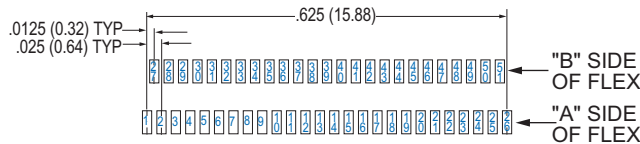

51 Contacts



# If "on time" is a promise you hope your vendors will keep...

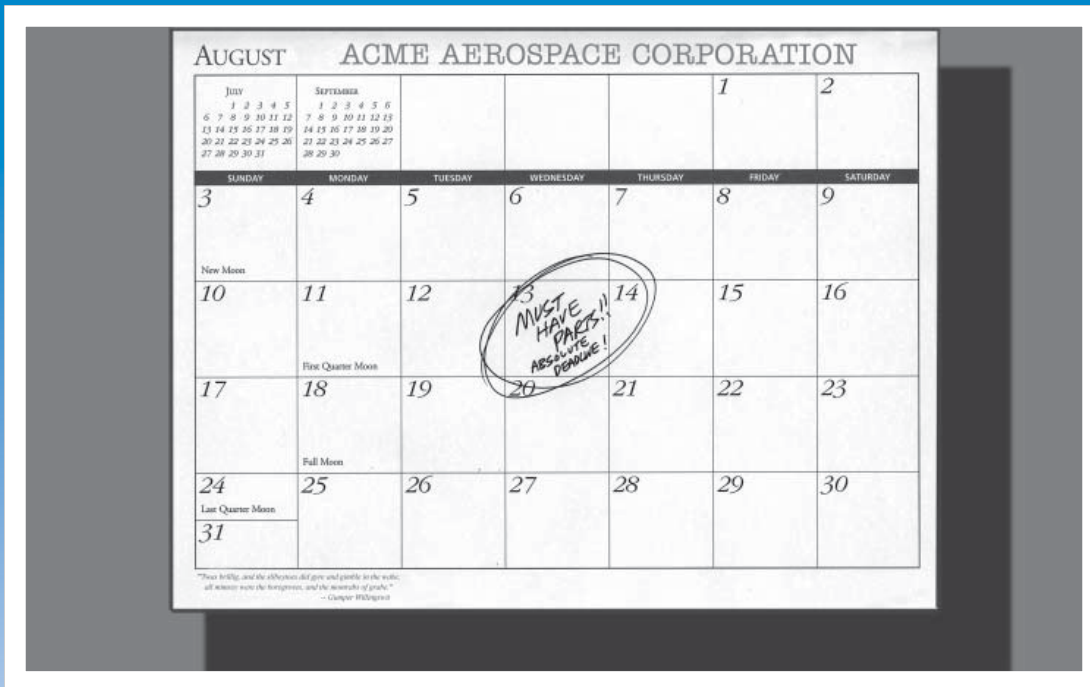

## ...your best hope is to place your orders with Glenair.

Most interconnect suppliers quote several months or more to make a connector. At Glenair, we not only quote the shortest lead times in our industry—generally 2-3 weeks—we also do the best job by far of getting the work out when we say we will. While it's true

we can't promise we'll always make our dates, we're confident we'll be way ahead of whoever's in second place when it comes to on-time delivery. And for those jobs which can't wait even 2-3 weeks, we offer over 50,000 part numbers in stock and ready for same-day shipment.



Commercial and Mil Spec connector accessories



Convolution tubing and metal-core conduit



Electrical and fiber optic cable assemblies



Composite thermoplastic components



Microminiature connectors and accessories



Backshell assembly and termination tools



1211 Air Way  
Glendale, California 91201-2497

Telephone: 818-247-6000 · Facsimilie: 818-500-9912 · EMail: sales@glenair.com

United States ■ United Kingdom ■ Germany ■ Nordic ■ France ■ Italy ■ Spain ■ Japan  
www.glenair.com

# PART NUMBER Index Same Day Stock List

(Stocked items are identified with "STK" before the page number)



|                 |              |                    |              |                   |              |                 |              |
|-----------------|--------------|--------------------|--------------|-------------------|--------------|-----------------|--------------|
| 000-01-09-132   | STK.....M-4  | 177-140H25SP       | STK.....G-5  | 500-047M25H       | STK....L-12  | 500S010M31H08   | STK.....L-6  |
| 000-01-09-162   | STK.....M-4  | 177-140H25SS       | STK.....G-5  | 500-047M25HB      | STK....L-12  | 500S010M31H09   | STK.....L-6  |
| 000-01-09-163   | STK.....M-4  | 177-140H31SP       | STK.....G-5  | 500-047M31H       | STK....L-12  | 500S010M31H10   | STK.....L-6  |
| 000-01-09-164   | STK.....M-4  | 177-140H37SP       | STK.....G-5  | 500-047M31HB      | STK....L-12  | 500S010M37B09   | STK.....L-6  |
| 000-01-09-165   | STK.....M-4  | 177-140H37SS       | STK.....G-5  | 500-047M37BB      | STK....L-12  | 500S010M37H07   | STK.....L-6  |
| 000-01-100-132  | STK.....M-4  | 177-140H9SP        | STK.....G-5  | 500-047M37H       | STK....L-12  | 500S010M37H09   | STK.....L-6  |
| 000-01-100-162  | STK.....M-4  | 177-140H9SS        | STK.....G-5  | 500-047M37HB      | STK....L-12  | 500S010M37H09B  | STK.....L-6  |
| 000-01-100-163  | STK.....M-4  | 177-504            | STK.....M-11 | 500-047M51B       | STK....L-12  | 500S010M37H09S  | STK.....L-6  |
| 000-01-100-164  | STK.....M-4  | 177-505            | STK.....M-11 | 500-047M51E       | STK....L-12  | 500S010M51H10   | STK.....L-6  |
| 000-01-100-165  | STK.....M-4  | 177-704            | STK.....G-5  | 500-047M51H       | STK....L-12  | 500S010NF09H05  | STK.....L-6  |
| 000-01-15-132   | STK.....M-4  | 177-705            | STK.....G-7  | 500-047M51HB      | STK....L-12  | 500S010NF09H06  | STK.....L-6  |
| 000-01-15-162   | STK.....M-4  | 177-706            | STK.....G-7  | 500-047MA09HB-401 | STK....L-12  | 500S010NF09H08  | STK.....L-6  |
| 000-01-15-163   | STK.....M-4  | 177-710            | STK.....B-8  | 500-047MA25HB-401 | STK....L-12  | 500S010NF25H08S | STK.....L-6  |
| 000-01-15-164   | STK.....M-4  | 177-740            | STK.....B-8  | 500-047MA51HB-401 | STK....L-12  | 500S010NF31H09B | STK.....L-6  |
| 000-01-15-165   | STK.....M-4  | 179-013            | STK.....M-9  | 500-047NF100B     | STK....L-12  | 500S010NF37H09  | STK.....L-6  |
| 000-01-21-132   | STK.....M-4  | 240-030            | STK.....F-5  | 500-047NF15H      | STK....L-12  | 500S011         | STK.....L-8  |
| 000-01-21-162   | STK.....M-4  | 240-031            | STK.....F-11 | 500-047NF25H      | STK....L-12  | 500S011M09B08-6 | STK.....L-8  |
| 000-01-21-163   | STK.....M-4  | 240-032            | STK.....F-7  | 500-069           | STK.....M-10 | 500S011M37B09-6 | STK.....L-8  |
| 000-01-21-164   | STK.....M-4  | 240-033            | STK.....F-9  | 500D010           | STK.....L-6  | 500S011M37B12-6 | STK.....L-8  |
| 000-01-21-165   | STK.....M-4  | 240-034            | STK.....F-15 | 500E010           | STK.....L-6  | 500S011M51B10-6 | STK.....L-8  |
| 000-01-25-132   | STK.....M-4  | 500-010            | STK.....L-6  | 500E010A09B04     | STK.....L-6  | 500S012         | STK.....L-10 |
| 000-01-25-162   | STK.....M-4  | 500-011            | STK.....L-8  | 500E010A51H10     | STK.....L-6  | 500S012J15H     | STK.....L-10 |
| 000-01-25-163   | STK.....M-4  | 500-012            | STK.....L-10 | 500E010B31H09S    | STK.....L-6  | 500S012M15B     | STK.....L-10 |
| 000-01-25-164   | STK.....M-4  | 500-016            | STK.....L-11 | 500E010M09B08     | STK.....L-6  | 500T010         | STK.....L-6  |
| 000-01-25-165   | STK.....M-4  | 500-016E25BN       | STK.....L-11 | 500E010M09H05     | STK.....L-6  | 500T010A09B04   | STK.....L-6  |
| 000-01-31-132   | STK.....M-4  | 500-016E25BT2-01   | STK.....L-11 | 500E010M09H08     | STK.....L-6  | 500T010A09B07   | STK.....L-6  |
| 000-01-31-162   | STK.....M-4  | 500-016M09FN       | STK.....L-11 | 500E010M15H05     | STK.....L-6  | 500T010A09H04   | STK.....L-6  |
| 000-01-31-163   | STK.....M-4  | 500-016M100HN      | STK.....L-11 | 500E010M15H08     | STK.....L-6  | 500T010A09H08   | STK.....L-6  |
| 000-01-31-164   | STK.....M-4  | 500-016M15BN       | STK.....L-11 | 500E010M21H08     | STK.....L-6  | 500T010A15B05   | STK.....L-6  |
| 000-01-31-165   | STK.....M-4  | 500-016M15HN       | STK.....L-11 | 500E010M25H08     | STK.....L-6  | 500T010A15B07   | STK.....L-6  |
| 000-01-37-132   | STK.....M-4  | 500-016M21BF6-02   | STK.....L-11 | 500E010M31H08     | STK.....L-6  | 500T010A25H08   | STK.....L-6  |
| 000-01-37-162   | STK.....M-4  | 500-016M31HN       | STK.....L-11 | 500E010M31H09     | STK.....L-6  | 500T010A37B06   | STK.....L-6  |
| 000-01-37-163   | STK.....M-4  | 500-016NF31BF9-00  | STK.....L-11 | 500E010M37H07     | STK.....L-6  | 500T010A37B09   | STK.....L-6  |
| 000-01-37-164   | STK.....M-4  | 500-017            | STK.....M-5  | 500E010M37H09     | STK.....L-6  | 500T010A37B09S  | STK.....L-6  |
| 000-01-37-165   | STK.....M-4  | 500-017B09F-R5-01  | STK.....M-5  | 500E010M51H10     | STK.....L-6  | 500T010A37H09   | STK.....L-6  |
| 000-01-51-132   | STK.....M-4  | 500-017M09FN       | STK.....M-5  | 500E010NF09H04    | STK.....L-6  | 500T010A51H10   | STK.....L-6  |
| 000-01-51-162   | STK.....M-4  | 500-017M09MBN      | STK.....M-5  | 500E010NF15F07    | STK.....L-6  | 500T010B09E07   | STK.....L-6  |
| 000-01-51-163   | STK.....M-4  | 500-017M09MHN      | STK.....M-5  | 500E010NF25B08    | STK.....L-6  | 500T010B31B09   | STK.....L-6  |
| 000-01-51-164   | STK.....M-4  | 500-017M100MHN     | STK.....M-5  | 500E010NF31H09    | STK.....L-6  | 500T010B31F09   | STK.....L-6  |
| 000-01-51-165   | STK.....M-4  | 500-017M15FN       | STK.....M-5  | 500E010NF37H09    | STK.....L-6  | 500T010B37H08   | STK.....L-6  |
| 000-01-51-2-162 | STK.....M-4  | 500-017M15MHN      | STK.....M-5  | 500E011           | STK.....L-8  | 500T010B51H10   | STK.....L-6  |
| 000-01-51-2-163 | STK.....M-4  | 500-017M21FN       | STK.....M-5  | 500E012           | STK.....L-10 | 500T010E15B07   | STK.....L-6  |
| 000-01-51-2-164 | STK.....M-4  | 500-017M21MHF2-01  | STK.....M-5  | 500E012M09H       | STK.....L-10 | 500T010J09H05S  | STK.....L-6  |
| 000-01-51-2-165 | STK.....M-4  | 500-017M21MHN      | STK.....M-5  | 500E012M100H      | STK.....L-10 | 500T010M09B04   | STK.....L-6  |
| 000-01-67-162   | STK.....M-4  | 500-017M25MBF2-06  | STK.....M-5  | 500E012M15H       | STK.....L-10 | 500T010M09B04S  | STK.....L-6  |
| 000-01-67-163   | STK.....M-4  | 500-017M25MHN      | STK.....M-5  | 500E012M21H       | STK.....L-10 | 500T010M09B05   | STK.....L-6  |
| 000-01-67-164   | STK.....M-4  | 500-017M37MBN      | STK.....M-5  | 500E012M31H       | STK.....L-10 | 500T010M09B05S  | STK.....L-6  |
| 000-01-67-165   | STK.....M-4  | 500-017M51MHN      | STK.....M-5  | 500E012M51H       | STK.....L-10 | 500T010M09B06   | STK.....L-6  |
| 000-01-69-162   | STK.....M-4  | 500-017NF37MBH5-06 | STK.....M-5  | 500S010           | STK.....L-6  | 500T010M09B07   | STK.....L-6  |
| 000-01-69-163   | STK.....M-4  | 500-017R15FN       | STK.....M-5  | 500S010A15H08     | STK.....L-6  | 500T010M09B08   | STK.....L-6  |
| 000-01-69-164   | STK.....M-4  | 500-047            | STK.....L-12 | 500S010A25H08     | STK.....L-6  | 500T010M09B08S  | STK.....L-6  |
| 000-01-69-165   | STK.....M-4  | 500-047J100B       | STK.....L-12 | 500S010A37B09S    | STK.....L-6  | 500T010M09B08SB | STK.....L-6  |
| 080-00-00-100   | STK.....M-10 | 500-047J15HB       | STK.....L-12 | 500S010J15H07     | STK.....L-6  | 500T010M09E08   | STK.....L-6  |
| 080-00-00-101   | STK.....M-10 | 500-047J31HB       | STK.....L-12 | 500S010J25H06     | STK.....L-6  | 500T010M09F06   | STK.....L-6  |
| 080-00-00-502   | STK.....M-8  | 500-047J51B        | STK.....L-12 | 500S010J25H08     | STK.....L-6  | 500T010M09F08   | STK.....L-6  |
| 080-00-00-503   | STK.....M-8  | 500-047J51E        | STK.....L-12 | 500S010M09E08     | STK.....L-6  | 500T010M09F08B  | STK.....L-6  |
| 080-00-00-505   | STK.....M-8  | 500-047M09E        | STK.....L-12 | 500S010M09H05     | STK.....L-6  | 500T010M09F08SB | STK.....L-6  |
| 080-00-00-506   | STK.....M-8  | 500-047M09F        | STK.....L-12 | 500S010M09H06     | STK.....L-6  | 500T010M09H04   | STK.....L-6  |
| 080-00-00-512   | STK.....M-8  | 500-047M09H        | STK.....L-12 | 500S010M09H07     | STK.....L-6  | 500T010M09H05   | STK.....L-6  |
| 080-00-00-513   | STK.....M-8  | 500-047M09HB       | STK.....L-12 | 500S010M09H08     | STK.....L-6  | 500T010M09H05B  | STK.....L-6  |
| 080-00-00-515   | STK.....M-8  | 500-047M100H       | STK.....L-12 | 500S010M15H06     | STK.....L-6  | 500T010M09H06   | STK.....L-6  |
| 080-00-00-516   | STK.....M-8  | 500-047M100HB      | STK.....L-12 | 500S010M15H07     | STK.....L-6  | 500T010M09H06S  | STK.....L-6  |
| 080-00-00-810   | STK.....N-10 | 500-047M15B        | STK.....L-12 | 500S010M15H08     | STK.....L-6  | 500T010M09H07   | STK.....L-6  |
| 177-007         | STK.....M-3  | 500-047M15H        | STK.....L-12 | 500S010M21H07     | STK.....L-6  | 500T010M09H08   | STK.....L-6  |
| 177-140         | STK.....G-5  | 500-047M15HB       | STK.....L-12 | 500S010M21H08     | STK.....L-6  | 500T010M09H08B  | STK.....L-6  |
| 177-140H15SP    | STK.....G-5  | 500-047M21H        | STK.....L-12 | 500S010M25B08     | STK.....L-6  | 500T010M100B12  | STK.....L-6  |
| 177-140H15SS    | STK.....G-5  | 500-047M21HB       | STK.....L-12 | 500S010M25H08     | STK.....L-6  | 500T010M100E12  | STK.....L-6  |
| 177-140H21SP    | STK.....G-5  | 500-047M25B        | STK.....L-12 | 500S010M31B08S    | STK.....L-6  | 500T010M15B05S  | STK.....L-6  |
| 177-140H21SS    | STK.....G-5  | 500-047M25EB       | STK.....L-12 | 500S010M31H05     | STK.....L-6  | 500T010M15B06   | STK.....L-6  |



# PART NUMBER Index Same Day Stock List

(Stocked items are identified with "STK" before the page number)

|                       |             |                       |              |                       |              |                     |             |
|-----------------------|-------------|-----------------------|--------------|-----------------------|--------------|---------------------|-------------|
| 500T010M15B06S.....   | STK.....L-6 | 500T010NF25H08.....   | STK.....L-6  | 507-035E51.....       | STK.....L-13 | 890-006.....        | P-12        |
| 500T010M15B07.....    | STK.....L-6 | 500T010NF31F09.....   | STK.....L-6  | 507-035M09.....       | STK.....L-13 | 890-007.....        | P-12        |
| 500T010M15B08.....    | STK.....L-6 | 500T010NF37H09.....   | STK.....L-6  | 507-035M09H.....      | STK.....L-13 | 890-008.....        | P-16        |
| 500T010M15B08B.....   | STK.....L-6 | 500T010NF51B10.....   | STK.....L-6  | 507-035M100.....      | STK.....L-13 | 890-009.....        | P-16        |
| 500T010M15B08S.....   | STK.....L-6 | 500T010NF51H10.....   | STK.....L-6  | 507-035M15.....       | STK.....L-13 | 890-010.....        | P-20        |
| 500T010M15E05.....    | STK.....L-6 | 500T010T25B08.....    | STK.....L-6  | 507-035M21.....       | STK.....L-13 | 890-011.....        | P-20        |
| 500T010M15F08B.....   | STK.....L-6 | 500T011.....          | STK.....L-8  | 507-035M25.....       | STK.....L-13 | 890-012.....        | P-24        |
| 500T010M15H04.....    | STK.....L-6 | 500T011B15B06-6.....  | STK.....L-8  | 507-035M31H.....      | STK.....L-13 | 890-013.....        | P-24        |
| 500T010M15H05.....    | STK.....L-6 | 500T011M09B04-22..... | STK.....L-8  | 507-035M37.....       | STK.....L-13 | 891-001.....        | P-29        |
| 500T010M15H06.....    | STK.....L-6 | 500T011M09B04-6.....  | STK.....L-8  | 507-035M51.....       | STK.....L-13 | 891-002.....        | P-29        |
| 500T010M15H06B.....   | STK.....L-6 | 500T011M09F04-6.....  | STK.....L-8  | 507-035NF09.....      | STK.....L-13 | 891-003.....        | P-31        |
| 500T010M15H07.....    | STK.....L-6 | 500T011M21B04-6.....  | STK.....L-8  | 507-035NF25.....      | STK.....L-13 | 891-004.....        | P-31        |
| 500T010M15H08.....    | STK.....L-6 | 500T011M21B06-6.....  | STK.....L-8  | 507-088.....          | L-14         | 891-005.....        | P-33        |
| 500T010M21B07.....    | STK.....L-6 | 500T011M25H08-10..... | STK.....L-8  | 507-145.....          | L-17         | 891-006.....        | P-35        |
| 500T010M21B08.....    | STK.....L-6 | 500T011M51B06-6.....  | STK.....L-8  | 507-146.....          | L-18         | 891-007.....        | P-35        |
| 500T010M21B08B.....   | STK.....L-6 | 500T011M51F06-6.....  | STK.....L-8  | 507-146C25E.....      | STK.....L-18 | 891-008.....        | P-39        |
| 500T010M21B08S.....   | STK.....L-6 | 500T012.....          | L-10         | 507-146C31E.....      | STK.....L-18 | 891-009.....        | P-39        |
| 500T010M21H08.....    | STK.....L-6 | 500T012C25B.....      | STK.....L-10 | 507-146E100H.....     | STK.....L-18 | 891-010.....        | P-43        |
| 500T010M21H08B.....   | STK.....L-6 | 500T012C51F.....      | STK.....L-10 | 507-146M09.....       | STK.....L-18 | 891-011.....        | P-43        |
| 500T010M25B04.....    | STK.....L-6 | 500T012E09B.....      | STK.....L-10 | 507-146M09E.....      | STK.....L-18 | 891-012.....        | P-47        |
| 500T010M25B07.....    | STK.....L-6 | 500T012E100B.....     | STK.....L-10 | 507-146M09F.....      | STK.....L-18 | 891-013.....        | P-47        |
| 500T010M25B08.....    | STK.....L-6 | 500T012E15B.....      | STK.....L-10 | 507-146M09H.....      | STK.....L-18 | 891-014.....        | P-51        |
| 500T010M25B08B.....   | STK.....L-6 | 500T012E21B.....      | STK.....L-10 | 507-146M100.....      | STK.....L-18 | 891-015.....        | P-51        |
| 500T010M25B08S.....   | STK.....L-6 | 500T012E31B.....      | STK.....L-10 | 507-146M100E.....     | STK.....L-18 | GMDE.....           | B-14        |
| 500T010M25E08.....    | STK.....L-6 | 500T012E51B.....      | STK.....L-10 | 507-146M15E.....      | STK.....L-18 | GMR7580.....        | C-20        |
| 500T010M25E08B.....   | STK.....L-6 | 500T012J09F.....      | STK.....L-10 | 507-146M15H.....      | STK.....L-18 | GMR7580C.....       | C-24        |
| 500T010M25F08.....    | STK.....L-6 | 500T012J09H.....      | STK.....L-10 | 507-146M21E.....      | STK.....L-18 | GMR7590.....        | C-28        |
| 500T010M25H08.....    | STK.....L-6 | 500T012J15F.....      | STK.....L-10 | 507-146M25E.....      | STK.....L-18 | GMR7590C.....       | C-32        |
| 500T010M25H08B.....   | STK.....L-6 | 500T012J21B.....      | STK.....L-10 | 507-146M25F.....      | STK.....L-18 | GMSM.....           | D-2         |
| 500T010M31B08.....    | STK.....L-6 | 500T012J21F.....      | STK.....L-10 | 507-146M31.....       | STK.....L-18 | M83513/01.....      | J-4         |
| 500T010M31B09.....    | STK.....L-6 | 500T012J21H.....      | STK.....L-10 | 507-146M31E.....      | STK.....L-18 | M83513/01-AC.....   | STK.....J-4 |
| 500T010M31B09B.....   | STK.....L-6 | 500T012J25H.....      | STK.....L-10 | 507-146M31H.....      | STK.....L-18 | M83513/01-AN.....   | STK.....J-4 |
| 500T010M31B09S.....   | STK.....L-6 | 500T012J31F.....      | STK.....L-10 | 507-146M37.....       | STK.....L-18 | M83513/01-BC.....   | STK.....J-4 |
| 500T010M31F09.....    | STK.....L-6 | 500T012J31H.....      | STK.....L-10 | 507-146M37E.....      | STK.....L-18 | M83513/01-BN.....   | STK.....J-4 |
| 500T010M31H09.....    | STK.....L-6 | 500T012J37F.....      | STK.....L-10 | 507-146M37H.....      | STK.....L-18 | M83513/01-CN.....   | STK.....J-4 |
| 500T010M31H09B.....   | STK.....L-6 | 500T012M09B.....      | STK.....L-10 | 507-146M51.....       | STK.....L-18 | M83513/01-CN.....   | STK.....J-4 |
| 500T010M31H09S.....   | STK.....L-6 | 500T012M09E.....      | STK.....L-10 | 507-146M51E.....      | STK.....L-18 | M83513/01-DC.....   | STK.....J-4 |
| 500T010M37B08.....    | STK.....L-6 | 500T012M09F.....      | STK.....L-10 | 507-146NF09E.....     | STK.....L-18 | M83513/01-DN.....   | STK.....J-4 |
| 500T010M37B08SB.....  | STK.....L-6 | 500T012M09H.....      | STK.....L-10 | 507-146NF100E.....    | STK.....L-18 | M83513/01-EC.....   | STK.....J-4 |
| 500T010M37B09.....    | STK.....L-6 | 500T012M100B.....     | STK.....L-10 | 507-146NF25E.....     | STK.....L-18 | M83513/01-EN.....   | STK.....J-4 |
| 500T010M37B09S.....   | STK.....L-6 | 500T012M100E.....     | STK.....L-10 | 507-146NF51.....      | STK.....L-18 | M83513/01-FC.....   | STK.....J-4 |
| 500T010M37E09.....    | STK.....L-6 | 500T012M100H.....     | STK.....L-10 | 507-175.....          | L-19         | M83513/01-FN.....   | STK.....J-4 |
| 500T010M37H06.....    | STK.....L-6 | 500T012M15B.....      | STK.....L-10 | 507-178.....          | L-21         | M83513/01-FN.....   | STK.....J-4 |
| 500T010M37H08.....    | STK.....L-6 | 500T012M15E.....      | STK.....L-10 | 507-198.....          | L-23         | M83513/01-GC.....   | STK.....J-4 |
| 500T010M37H09.....    | STK.....L-6 | 500T012M15F.....      | STK.....L-10 | 507-198M51.....       | STK.....L-23 | M83513/01-GN.....   | STK.....J-4 |
| 500T010M51B10.....    | STK.....L-6 | 500T012M15H.....      | STK.....L-10 | 507E088.....          | L-14         | M83513/01-HC.....   | STK.....J-4 |
| 500T010M51B10S.....   | STK.....L-6 | 500T012M21B.....      | STK.....L-10 | 507E175.....          | L-19         | M83513/01-HN.....   | STK.....J-4 |
| 500T010M51E10.....    | STK.....L-6 | 500T012M21E.....      | STK.....L-10 | 507S088.....          | L-14         | M83513/02.....      | J-4         |
| 500T010M51F06.....    | STK.....L-6 | 500T012M21H.....      | STK.....L-10 | 507S175.....          | L-19         | M83513/02-AC.....   | STK.....J-4 |
| 500T010M51F10.....    | STK.....L-6 | 500T012M25B.....      | STK.....L-10 | 507T088.....          | L-14         | M83513/02-AN.....   | STK.....J-4 |
| 500T010M51H08.....    | STK.....L-6 | 500T012M25E.....      | STK.....L-10 | 507T088XM09B08SB..... | STK.....L-14 | M83513/02-BC.....   | STK.....J-4 |
| 500T010M51H09.....    | STK.....L-6 | 500T012M25H.....      | STK.....L-10 | 507T088XM09H04.....   | STK.....L-14 | M83513/02-BN.....   | STK.....J-4 |
| 500T010M51H10.....    | STK.....L-6 | 500T012M31B.....      | STK.....L-10 | 507T088XM09H05B.....  | STK.....L-14 | M83513/02-CC.....   | STK.....J-4 |
| 500T010MA25H06.....   | STK.....L-6 | 500T012M31E.....      | STK.....L-10 | 507T088XM15H07.....   | STK.....L-14 | M83513/02-CN.....   | STK.....J-4 |
| 500T010NF09B06.....   | STK.....L-6 | 500T012M31F.....      | STK.....L-10 | 507T088XM25B08.....   | STK.....L-14 | M83513/02-DC.....   | STK.....J-4 |
| 500T010NF09B07.....   | STK.....L-6 | 500T012M31H.....      | STK.....L-10 | 507T088XM25B08.....   | STK.....L-14 | M83513/02-DN.....   | STK.....J-4 |
| 500T010NF09B08.....   | STK.....L-6 | 500T012M37B.....      | STK.....L-10 | 507T088XM25F07.....   | STK.....L-14 | M83513/02-EC.....   | STK.....J-4 |
| 500T010NF09B08B.....  | STK.....L-6 | 500T012M37E.....      | STK.....L-10 | 507T088XM37E09.....   | STK.....L-14 | M83513/02-EN.....   | STK.....J-4 |
| 500T010NF100F11B..... | STK.....L-6 | 500T012M37F.....      | STK.....L-10 | 507T175.....          | L-19         | M83513/02-FN.....   | STK.....J-4 |
| 500T010NF15B06.....   | STK.....L-6 | 500T012M37H.....      | STK.....L-10 | 600-057.....          | L-4          | M83513/02-FN.....   | STK.....J-4 |
| 500T010NF15B08.....   | STK.....L-6 | 500T012M51B.....      | STK.....L-10 | 600-061.....          | L-4          | M83513/02-GC.....   | STK.....J-4 |
| 500T010NF15H06.....   | STK.....L-6 | 500T012M51E.....      | STK.....L-10 | 600-083.....          | L-4          | M83513/02-GN.....   | STK.....J-4 |
| 500T010NF15H07.....   | STK.....L-6 | 500T012M51F.....      | STK.....L-10 | 687-152.....          | M-9          | M83513/02-HC.....   | STK.....J-4 |
| 500T010NF15H08.....   | STK.....L-6 | 500T012M51H.....      | STK.....L-10 | 687-194.....          | M-9          | M83513/02-HN.....   | STK.....J-4 |
| 500T010NF25B08.....   | STK.....L-6 | 500T012NF15B.....     | STK.....L-10 | 687-439.....          | M-9          | M83513/03.....      | J-5         |
| 500T010NF25H06.....   | STK.....L-6 | 500T012NF15H.....     | STK.....L-10 | 890-001.....          | P-6          | M83513/03-A01C..... | STK.....J-5 |
|                       |             | 500T012NF51B.....     | STK.....L-10 | 890-002.....          | P-6          | M83513/03-A01N..... | STK.....J-5 |
|                       |             | 507-035.....          | L-13         | 890-003.....          | P-8          | M83513/03-A02C..... | STK.....J-5 |
|                       |             |                       |              | 890-004.....          | P-8          | M83513/03-A02N..... | STK.....J-5 |
|                       |             |                       |              | 890-005.....          | P-10         | M83513/03-A03C..... | STK.....J-5 |

# PART NUMBER Index Same Day Stock List



(Stocked items are identified with "STK" before the page number)

|                |     |     |                |     |     |                |     |     |                |     |     |
|----------------|-----|-----|----------------|-----|-----|----------------|-----|-----|----------------|-----|-----|
| M83513/03-A03N | STK | J-5 | M83513/03-D02C | STK | J-5 | M83513/03-F16N | STK | J-5 | M83513/04-A14N | STK | J-5 |
| M83513/03-A04C | STK | J-5 | M83513/03-D02N | STK | J-5 | M83513/03-G01C | STK | J-5 | M83513/04-A15C | STK | J-5 |
| M83513/03-A04N | STK | J-5 | M83513/03-D03C | STK | J-5 | M83513/03-G01N | STK | J-5 | M83513/04-A15N | STK | J-5 |
| M83513/03-A09C | STK | J-5 | M83513/03-D03N | STK | J-5 | M83513/03-G02C | STK | J-5 | M83513/04-A16C | STK | J-5 |
| M83513/03-A09N | STK | J-5 | M83513/03-D04C | STK | J-5 | M83513/03-G02N | STK | J-5 | M83513/04-A16N | STK | J-5 |
| M83513/03-A10C | STK | J-5 | M83513/03-D04N | STK | J-5 | M83513/03-G03C | STK | J-5 | M83513/04-B01C | STK | J-5 |
| M83513/03-A10N | STK | J-5 | M83513/03-D09C | STK | J-5 | M83513/03-G03N | STK | J-5 | M83513/04-B01N | STK | J-5 |
| M83513/03-A11C | STK | J-5 | M83513/03-D09N | STK | J-5 | M83513/03-G04C | STK | J-5 | M83513/04-B02C | STK | J-5 |
| M83513/03-A11N | STK | J-5 | M83513/03-D10C | STK | J-5 | M83513/03-G04N | STK | J-5 | M83513/04-B02N | STK | J-5 |
| M83513/03-A12C | STK | J-5 | M83513/03-D10N | STK | J-5 | M83513/03-G09C | STK | J-5 | M83513/04-B03C | STK | J-5 |
| M83513/03-A12N | STK | J-5 | M83513/03-D11C | STK | J-5 | M83513/03-G09N | STK | J-5 | M83513/04-B03N | STK | J-5 |
| M83513/03-A13C | STK | J-5 | M83513/03-D11N | STK | J-5 | M83513/03-G10C | STK | J-5 | M83513/04-B04C | STK | J-5 |
| M83513/03-A13N | STK | J-5 | M83513/03-D12C | STK | J-5 | M83513/03-G10N | STK | J-5 | M83513/04-B04N | STK | J-5 |
| M83513/03-A14C | STK | J-5 | M83513/03-D12N | STK | J-5 | M83513/03-G11C | STK | J-5 | M83513/04-B09C | STK | J-5 |
| M83513/03-A14N | STK | J-5 | M83513/03-D13C | STK | J-5 | M83513/03-G11N | STK | J-5 | M83513/04-B09N | STK | J-5 |
| M83513/03-A15C | STK | J-5 | M83513/03-D13N | STK | J-5 | M83513/03-G12C | STK | J-5 | M83513/04-B10C | STK | J-5 |
| M83513/03-A15N | STK | J-5 | M83513/03-D14C | STK | J-5 | M83513/03-G12N | STK | J-5 | M83513/04-B10N | STK | J-5 |
| M83513/03-A16C | STK | J-5 | M83513/03-D14N | STK | J-5 | M83513/03-G13C | STK | J-5 | M83513/04-B11C | STK | J-5 |
| M83513/03-A16N | STK | J-5 | M83513/03-D15C | STK | J-5 | M83513/03-G13N | STK | J-5 | M83513/04-B11N | STK | J-5 |
| M83513/03-B01C | STK | J-5 | M83513/03-D15N | STK | J-5 | M83513/03-G14C | STK | J-5 | M83513/04-B12C | STK | J-5 |
| M83513/03-B01N | STK | J-5 | M83513/03-D16C | STK | J-5 | M83513/03-G14N | STK | J-5 | M83513/04-B12N | STK | J-5 |
| M83513/03-B02C | STK | J-5 | M83513/03-D16N | STK | J-5 | M83513/03-G15C | STK | J-5 | M83513/04-B13C | STK | J-5 |
| M83513/03-B02N | STK | J-5 | M83513/03-E01C | STK | J-5 | M83513/03-G15N | STK | J-5 | M83513/04-B13N | STK | J-5 |
| M83513/03-B03C | STK | J-5 | M83513/03-E01N | STK | J-5 | M83513/03-G16C | STK | J-5 | M83513/04-B14C | STK | J-5 |
| M83513/03-B03N | STK | J-5 | M83513/03-E02C | STK | J-5 | M83513/03-G16N | STK | J-5 | M83513/04-B14N | STK | J-5 |
| M83513/03-B04C | STK | J-5 | M83513/03-E02N | STK | J-5 | M83513/03-H01C | STK | J-5 | M83513/04-B15C | STK | J-5 |
| M83513/03-B04N | STK | J-5 | M83513/03-E03C | STK | J-5 | M83513/03-H01N | STK | J-5 | M83513/04-B15N | STK | J-5 |
| M83513/03-B09C | STK | J-5 | M83513/03-E03N | STK | J-5 | M83513/03-H02C | STK | J-5 | M83513/04-B16C | STK | J-5 |
| M83513/03-B09N | STK | J-5 | M83513/03-E04C | STK | J-5 | M83513/03-H02N | STK | J-5 | M83513/04-B16N | STK | J-5 |
| M83513/03-B10C | STK | J-5 | M83513/03-E04N | STK | J-5 | M83513/03-H03C | STK | J-5 | M83513/04-C01C | STK | J-5 |
| M83513/03-B10N | STK | J-5 | M83513/03-E09C | STK | J-5 | M83513/03-H03N | STK | J-5 | M83513/04-C01N | STK | J-5 |
| M83513/03-B11C | STK | J-5 | M83513/03-E09N | STK | J-5 | M83513/03-H04C | STK | J-5 | M83513/04-C02C | STK | J-5 |
| M83513/03-B11N | STK | J-5 | M83513/03-E10C | STK | J-5 | M83513/03-H04N | STK | J-5 | M83513/04-C02N | STK | J-5 |
| M83513/03-B12C | STK | J-5 | M83513/03-E10N | STK | J-5 | M83513/03-H09C | STK | J-5 | M83513/04-C03C | STK | J-5 |
| M83513/03-B12N | STK | J-5 | M83513/03-E11C | STK | J-5 | M83513/03-H09N | STK | J-5 | M83513/04-C03N | STK | J-5 |
| M83513/03-B13C | STK | J-5 | M83513/03-E11N | STK | J-5 | M83513/03-H10C | STK | J-5 | M83513/04-C04C | STK | J-5 |
| M83513/03-B13N | STK | J-5 | M83513/03-E12C | STK | J-5 | M83513/03-H10N | STK | J-5 | M83513/04-C04N | STK | J-5 |
| M83513/03-B14C | STK | J-5 | M83513/03-E12N | STK | J-5 | M83513/03-H11C | STK | J-5 | M83513/04-C09C | STK | J-5 |
| M83513/03-B14N | STK | J-5 | M83513/03-E13C | STK | J-5 | M83513/03-H11N | STK | J-5 | M83513/04-C09N | STK | J-5 |
| M83513/03-B15C | STK | J-5 | M83513/03-E13N | STK | J-5 | M83513/03-H12C | STK | J-5 | M83513/04-C10C | STK | J-5 |
| M83513/03-B15N | STK | J-5 | M83513/03-E14C | STK | J-5 | M83513/03-H12N | STK | J-5 | M83513/04-C10N | STK | J-5 |
| M83513/03-B16C | STK | J-5 | M83513/03-E14N | STK | J-5 | M83513/03-H13C | STK | J-5 | M83513/04-C11C | STK | J-5 |
| M83513/03-B16N | STK | J-5 | M83513/03-E15C | STK | J-5 | M83513/03-H13N | STK | J-5 | M83513/04-C11N | STK | J-5 |
| M83513/03-C01C | STK | J-5 | M83513/03-E15N | STK | J-5 | M83513/03-H14C | STK | J-5 | M83513/04-C12C | STK | J-5 |
| M83513/03-C01N | STK | J-5 | M83513/03-E16C | STK | J-5 | M83513/03-H14N | STK | J-5 | M83513/04-C12N | STK | J-5 |
| M83513/03-C02C | STK | J-5 | M83513/03-E16N | STK | J-5 | M83513/03-H15C | STK | J-5 | M83513/04-C13C | STK | J-5 |
| M83513/03-C02N | STK | J-5 | M83513/03-F01C | STK | J-5 | M83513/03-H15N | STK | J-5 | M83513/04-C13N | STK | J-5 |
| M83513/03-C03C | STK | J-5 | M83513/03-F01N | STK | J-5 | M83513/03-H16C | STK | J-5 | M83513/04-C14C | STK | J-5 |
| M83513/03-C03N | STK | J-5 | M83513/03-F02C | STK | J-5 | M83513/03-H16N | STK | J-5 | M83513/04-C14N | STK | J-5 |
| M83513/03-C04C | STK | J-5 | M83513/03-F02N | STK | J-5 | M83513/04      | STK | J-5 | M83513/04-C15C | STK | J-5 |
| M83513/03-C04N | STK | J-5 | M83513/03-F03C | STK | J-5 | M83513/04-A01C | STK | J-5 | M83513/04-C15N | STK | J-5 |
| M83513/03-C09C | STK | J-5 | M83513/03-F03N | STK | J-5 | M83513/04-A01N | STK | J-5 | M83513/04-C16C | STK | J-5 |
| M83513/03-C09N | STK | J-5 | M83513/03-F04C | STK | J-5 | M83513/04-A02C | STK | J-5 | M83513/04-C16N | STK | J-5 |
| M83513/03-C10C | STK | J-5 | M83513/03-F04N | STK | J-5 | M83513/04-A02N | STK | J-5 | M83513/04-D01C | STK | J-5 |
| M83513/03-C10N | STK | J-5 | M83513/03-F09C | STK | J-5 | M83513/04-A03C | STK | J-5 | M83513/04-D01N | STK | J-5 |
| M83513/03-C11C | STK | J-5 | M83513/03-F09N | STK | J-5 | M83513/04-A03N | STK | J-5 | M83513/04-D02C | STK | J-5 |
| M83513/03-C11N | STK | J-5 | M83513/03-F10C | STK | J-5 | M83513/04-A04C | STK | J-5 | M83513/04-D02N | STK | J-5 |
| M83513/03-C12C | STK | J-5 | M83513/03-F10N | STK | J-5 | M83513/04-A04N | STK | J-5 | M83513/04-D03C | STK | J-5 |
| M83513/03-C12N | STK | J-5 | M83513/03-F11C | STK | J-5 | M83513/04-A09C | STK | J-5 | M83513/04-D03N | STK | J-5 |
| M83513/03-C13C | STK | J-5 | M83513/03-F11N | STK | J-5 | M83513/04-A09N | STK | J-5 | M83513/04-D04C | STK | J-5 |
| M83513/03-C13N | STK | J-5 | M83513/03-F12C | STK | J-5 | M83513/04-A10C | STK | J-5 | M83513/04-D04N | STK | J-5 |
| M83513/03-C14C | STK | J-5 | M83513/03-F12N | STK | J-5 | M83513/04-A10N | STK | J-5 | M83513/04-D09C | STK | J-5 |
| M83513/03-C14N | STK | J-5 | M83513/03-F13C | STK | J-5 | M83513/04-A11C | STK | J-5 | M83513/04-D09N | STK | J-5 |
| M83513/03-C15C | STK | J-5 | M83513/03-F13N | STK | J-5 | M83513/04-A11N | STK | J-5 | M83513/04-D10C | STK | J-5 |
| M83513/03-C15N | STK | J-5 | M83513/03-F14C | STK | J-5 | M83513/04-A12C | STK | J-5 | M83513/04-D10N | STK | J-5 |
| M83513/03-C16C | STK | J-5 | M83513/03-F14N | STK | J-5 | M83513/04-A12N | STK | J-5 | M83513/04-D11C | STK | J-5 |
| M83513/03-C16N | STK | J-5 | M83513/03-F15C | STK | J-5 | M83513/04-A13C | STK | J-5 | M83513/04-D11N | STK | J-5 |
| M83513/03-D01C | STK | J-5 | M83513/03-F15N | STK | J-5 | M83513/04-A13N | STK | J-5 | M83513/04-D12C | STK | J-5 |
| M83513/03-D01N | STK | J-5 | M83513/03-F16C | STK | J-5 | M83513/04-A14C | STK | J-5 | M83513/04-D12N | STK | J-5 |









# PART NUMBER Index Same Day Stock List

(Stocked items are identified with "STK" before the page number)

|                      |          |      |                      |          |      |                          |          |      |                           |          |      |
|----------------------|----------|------|----------------------|----------|------|--------------------------|----------|------|---------------------------|----------|------|
| M83513/22-C03NP..... | STK..... | J-19 | M83513/25-A02CP..... | STK..... | J-19 | M83513/26-G01CP.....     | STK..... | J-19 | MWDM1L-100P-6K7-24S1..... | STK..... | B-4  |
| M83513/22-D01CN..... | STK..... | J-19 | M83513/25-A02NN..... | STK..... | J-19 | M83513/26-G01NN.....     | STK..... | J-19 | MWDM1L-100P-6K7-36B.....  | STK..... | B-4  |
| M83513/22-D01CP..... | STK..... | J-19 | M83513/25-A02NP..... | STK..... | J-19 | M83513/26-G01NP.....     | STK..... | J-19 | MWDM1L-100P-6K7-36M.....  | STK..... | B-4  |
| M83513/22-D01NN..... | STK..... | J-19 | M83513/25-A03CN..... | STK..... | J-19 | M83513/26-G02CN.....     | STK..... | J-19 | MWDM1L-100P-6K7-36P.....  | STK..... | B-4  |
| M83513/22-D01NP..... | STK..... | J-19 | M83513/25-A03CP..... | STK..... | J-19 | M83513/26-G02CP.....     | STK..... | J-19 | MWDM1L-100P-6K7-36S.....  | STK..... | B-4  |
| M83513/22-D02CN..... | STK..... | J-19 | M83513/25-A03NN..... | STK..... | J-19 | M83513/26-G02NN.....     | STK..... | J-19 | MWDM1L-100P-6K7-48B.....  | STK..... | B-4  |
| M83513/22-D02CP..... | STK..... | J-19 | M83513/25-A03NP..... | STK..... | J-19 | M83513/26-G02NP.....     | STK..... | J-19 | MWDM1L-100P-6K7-6B.....   | STK..... | B-4  |
| M83513/22-D02NN..... | STK..... | J-19 | M83513/25-B01CN..... | STK..... | J-19 | M83513/26-G03CN.....     | STK..... | J-19 | MWDM1L-100P-6K7-72B.....  | STK..... | B-4  |
| M83513/22-D02NP..... | STK..... | J-19 | M83513/25-B01CP..... | STK..... | J-19 | M83513/26-G03CP.....     | STK..... | J-19 | MWDM1L-100P-6K7-72S.....  | STK..... | B-4  |
| M83513/22-D03CN..... | STK..... | J-19 | M83513/25-B01NN..... | STK..... | J-19 | M83513/26-G03NN.....     | STK..... | J-19 | MWDM1L-100PBR-110.....    | STK..... | C-6  |
| M83513/22-D03CP..... | STK..... | J-19 | M83513/25-B01NP..... | STK..... | J-19 | M83513/26-G03NP.....     | STK..... | J-19 | MWDM1L-100PBRP-110.....   | STK..... | C-6  |
| M83513/22-D03NN..... | STK..... | J-19 | M83513/25-B02CN..... | STK..... | J-19 | M83513/26-G03NN.....     | STK..... | J-19 | MWDM1L-100PBRP-150.....   | STK..... | C-6  |
| M83513/22-D03NP..... | STK..... | J-19 | M83513/25-B02CP..... | STK..... | J-19 | M83513/27-H01CN.....     | STK..... | J-19 | MWDM1L-100PBRP-150.....   | STK..... | C-6  |
| M83513/22-E01CN..... | STK..... | J-19 | M83513/25-B02NN..... | STK..... | J-19 | M83513/27-H01CP.....     | STK..... | J-19 | MWDM1L-100PBRP-150.....   | STK..... | C-6  |
| M83513/22-E01CP..... | STK..... | J-19 | M83513/25-B02NP..... | STK..... | J-19 | M83513/27-H01NN.....     | STK..... | J-19 | MWDM1L-100PBS-110.....    | STK..... | C-10 |
| M83513/22-E01NN..... | STK..... | J-19 | M83513/25-B03CN..... | STK..... | J-19 | M83513/27-H01NP.....     | STK..... | J-19 | MWDM1L-100PBS-150.....    | STK..... | C-10 |
| M83513/22-E01NP..... | STK..... | J-19 | M83513/25-B03CP..... | STK..... | J-19 | M83513/27-H02CN.....     | STK..... | J-19 | MWDM1L-100PBS-172.....    | STK..... | C-10 |
| M83513/22-E02CN..... | STK..... | J-19 | M83513/25-B03NN..... | STK..... | J-19 | M83513/27-H02CP.....     | STK..... | J-19 | MWDM1L-100PBS-190.....    | STK..... | C-10 |
| M83513/22-E02CP..... | STK..... | J-19 | M83513/25-B03NP..... | STK..... | J-19 | M83513/27-H02NP.....     | STK..... | J-19 | MWDM1L-100PBS-190.....    | STK..... | C-10 |
| M83513/22-E02NN..... | STK..... | J-19 | M83513/25-C01CN..... | STK..... | J-19 | M83513/27-H02NN.....     | STK..... | J-19 | MWDM1L-100PBPSP-110.....  | STK..... | C-10 |
| M83513/22-E02NP..... | STK..... | J-19 | M83513/25-C01CP..... | STK..... | J-19 | M83513/27-H02NP.....     | STK..... | J-19 | MWDM1L-100PBPSP-150.....  | STK..... | C-10 |
| M83513/22-E03CN..... | STK..... | J-19 | M83513/25-C01NN..... | STK..... | J-19 | M83513/27-H03CN.....     | STK..... | J-19 | MWDM1L-100PBPSP-150.....  | STK..... | C-10 |
| M83513/22-E03CP..... | STK..... | J-19 | M83513/25-C01NP..... | STK..... | J-19 | M83513/27-H03CP.....     | STK..... | J-19 | MWDM1L-100PBPSP-190.....  | STK..... | C-10 |
| M83513/22-E03NN..... | STK..... | J-19 | M83513/25-C02CN..... | STK..... | J-19 | M83513/27-H03CP.....     | STK..... | J-19 | MWDM1L-100PBPSP-250.....  | STK..... | C-10 |
| M83513/22-E03NP..... | STK..... | J-19 | M83513/25-C02CP..... | STK..... | J-19 | M83513/27-H03NN.....     | STK..... | J-19 | MWDM1L-100PCBR-110.....   | STK..... | C-2  |
| M83513/22-F01CN..... | STK..... | J-19 | M83513/25-C02NP..... | STK..... | J-19 | M83513/27-H03NP.....     | STK..... | J-19 | MWDM1L-100PCBRP-150.....  | STK..... | C-2  |
| M83513/22-F01CP..... | STK..... | J-19 | M83513/25-C03CN..... | STK..... | J-19 | M83513/28.....           | J-23     |      | MWDM1L-100PCBRP-110.....  | STK..... | C-2  |
| M83513/22-F01NN..... | STK..... | J-19 | M83513/25-C03CP..... | STK..... | J-19 | M83513/29.....           | J-23     |      | MWDM1L-100PCBRP-150.....  | STK..... | C-2  |
| M83513/22-F01NP..... | STK..... | J-19 | M83513/25-C03NN..... | STK..... | J-19 | M83513/30.....           | J-23     |      | MWDM1L-100PCBRP-150.....  | STK..... | C-2  |
| M83513/22-F02CN..... | STK..... | J-19 | M83513/25-C03NP..... | STK..... | J-19 | M83513/31.....           | J-23     |      | MWDM1L-100PCBRP-190.....  | STK..... | C-2  |
| M83513/22-F02CP..... | STK..... | J-19 | M83513/25-C04CN..... | STK..... | J-19 | M83513/32.....           | J-23     |      | MWDM1L-100PCBRP-190.....  | STK..... | C-2  |
| M83513/22-F02NN..... | STK..... | J-19 | M83513/25-C04CP..... | STK..... | J-19 | M83513/33.....           | J-23     |      | MWDM1L-100PCBRP-250.....  | STK..... | C-2  |
| M83513/22-F02NP..... | STK..... | J-19 | M83513/25-C04NN..... | STK..... | J-19 | Mod 428.....             | H-5      |      | MWDM1L-100PCBS.....       | STK..... | C-14 |
| M83513/22-F03CN..... | STK..... | J-19 | M83513/25-C04NP..... | STK..... | J-19 | Mod 429.....             | H-6      |      | MWDM1L-100PSS.....        | STK..... | B-2  |
| M83513/22-F03CP..... | STK..... | J-19 | M83513/25-D01CN..... | STK..... | J-19 | Mod 497.....             | H-4      |      | MWDM1L-100PSM.....        | STK..... | B-2  |
| M83513/22-F03NN..... | STK..... | J-19 | M83513/25-D01CP..... | STK..... | J-19 | MWDL.....                | K-1      |      | MWDM1L-100PSM1.....       | STK..... | B-2  |
| M83513/22-F03NP..... | STK..... | J-19 | M83513/25-D01NN..... | STK..... | J-19 | MWDL-15P.....            | K-1      |      | MWDM1L-100PSMR.....       | STK..... | C-36 |
| M83513/22-F04CN..... | STK..... | J-19 | M83513/25-D01NP..... | STK..... | J-19 | MWDL-15PS.....           | K-2      |      | MWDM1L-100PSP.....        | STK..... | B-2  |
| M83513/22-F04CP..... | STK..... | J-19 | M83513/25-D02CN..... | STK..... | J-19 | MWDL-15S.....            | K-1      |      | MWDM1L-100PSS.....        | STK..... | B-2  |
| M83513/22-F04NN..... | STK..... | J-19 | M83513/25-D02CP..... | STK..... | J-19 | MWDL-15SS.....           | K-2      |      | MWDM1L-100PSS1.....       | STK..... | B-2  |
| M83513/22-F04NP..... | STK..... | J-19 | M83513/25-D02NN..... | STK..... | J-19 | MWDL-21P.....            | K-1      |      | MWDM1L-100S6K1-18B.....   | STK..... | B-4  |
| M83513/23.....       | J-19     |      | M83513/25-D02NP..... | STK..... | J-19 | MWDL-21PS.....           | K-2      |      | MWDM1L-100S6K1-2B.....    | STK..... | B-4  |
| M83513/23-G01CN..... | STK..... | J-19 | M83513/25-D03CN..... | STK..... | J-19 | MWDL-21S.....            | K-1      |      | MWDM1L-100S6K1-30P.....   | STK..... | B-4  |
| M83513/23-G01CP..... | STK..... | J-19 | M83513/25-D03CP..... | STK..... | J-19 | MWDL-21SS.....           | K-2      |      | MWDM1L-100S6K1-4S.....    | STK..... | B-4  |
| M83513/23-G01NN..... | STK..... | J-19 | M83513/25-D03NN..... | STK..... | J-19 | MWDL-25P.....            | K-1      |      | MWDM1L-100S6K7-12B.....   | STK..... | B-4  |
| M83513/23-G01NP..... | STK..... | J-19 | M83513/25-D03NP..... | STK..... | J-19 | MWDL-25PS.....           | K-2      |      | MWDM1L-100S6K7-12P.....   | STK..... | B-4  |
| M83513/23-G02CN..... | STK..... | J-19 | M83513/25-D03NN..... | STK..... | J-19 | MWDL-25S.....            | K-1      |      | MWDM1L-100S6K7-18B.....   | STK..... | B-4  |
| M83513/23-G02CP..... | STK..... | J-19 | M83513/25-D03NP..... | STK..... | J-19 | MWDL-25SS.....           | K-2      |      | MWDM1L-100S6K7-18P.....   | STK..... | B-4  |
| M83513/23-G02NN..... | STK..... | J-19 | M83513/25-E01CN..... | STK..... | J-19 | MWDL-31P.....            | K-1      |      | MWDM1L-100S6K7-20P.....   | STK..... | B-4  |
| M83513/23-G02NP..... | STK..... | J-19 | M83513/25-E01CP..... | STK..... | J-19 | MWDL-31PS.....           | K-2      |      | MWDM1L-100S6K7-20P.....   | STK..... | B-4  |
| M83513/23-G02NN..... | STK..... | J-19 | M83513/25-E01NN..... | STK..... | J-19 | MWDL-31S.....            | K-1      |      | MWDM1L-100S6K7-24B.....   | STK..... | B-4  |
| M83513/23-G03CN..... | STK..... | J-19 | M83513/25-E01NP..... | STK..... | J-19 | MWDL-31SS.....           | K-2      |      | MWDM1L-100S6K7-24S1.....  | STK..... | B-4  |
| M83513/23-G03CP..... | STK..... | J-19 | M83513/25-E02CN..... | STK..... | J-19 | MWDL-37P.....            | K-1      |      | MWDM1L-100S6K7-36B.....   | STK..... | B-4  |
| M83513/23-G03NN..... | STK..... | J-19 | M83513/25-E02CP..... | STK..... | J-19 | MWDL-37PS.....           | K-2      |      | MWDM1L-100S6K7-36P.....   | STK..... | B-4  |
| M83513/23-G03NP..... | STK..... | J-19 | M83513/25-E02NN..... | STK..... | J-19 | MWDL-37S.....            | K-1      |      | MWDM1L-100S6K7-48B.....   | STK..... | B-4  |
| M83513/24.....       | J-19     |      | M83513/25-E02NP..... | STK..... | J-19 | MWDL-37SS.....           | K-2      |      | MWDM1L-100S6K7-48B.....   | STK..... | B-4  |
| M83513/24-H01CN..... | STK..... | J-19 | M83513/25-E03CN..... | STK..... | J-19 | MWDL-51P.....            | K-1      |      | MWDM1L-100S6K7-48S1.....  | STK..... | B-4  |
| M83513/24-H01CP..... | STK..... | J-19 | M83513/25-E03CP..... | STK..... | J-19 | MWDL-51PS.....           | K-2      |      | MWDM1L-100S6K7-50M.....   | STK..... | B-4  |
| M83513/24-H01NN..... | STK..... | J-19 | M83513/25-E03CP..... | STK..... | J-19 | MWDL-51S.....            | K-1      |      | MWDM1L-100S6K7-72B.....   | STK..... | B-4  |
| M83513/24-H01NP..... | STK..... | J-19 | M83513/25-E03NN..... | STK..... | J-19 | MWDL-51SS.....           | K-2      |      | MWDM1L-100SBR-110.....    | STK..... | C-6  |
| M83513/24-H02CN..... | STK..... | J-19 | M83513/25-E03NP..... | STK..... | J-19 | MWDL-9P.....             | K-1      |      | MWDM1L-100SBRP-110.....   | STK..... | C-6  |
| M83513/24-H02CP..... | STK..... | J-19 | M83513/25-F01CN..... | STK..... | J-19 | MWDL-9PS.....            | K-2      |      | MWDM1L-100SBRP-150.....   | STK..... | C-6  |
| M83513/24-H02NN..... | STK..... | J-19 | M83513/25-F01CP..... | STK..... | J-19 | MWDL-9S.....             | K-1      |      | MWDM1L-100SBRP-190.....   | STK..... | C-6  |
| M83513/24-H02NP..... | STK..... | J-19 | M83513/25-F01NN..... | STK..... | J-19 | MWDL-9SS.....            | K-2      |      | MWDM1L-100SBRP-250.....   | STK..... | C-6  |
| M83513/24-H03CN..... | STK..... | J-19 | M83513/25-F01NP..... | STK..... | J-19 | MWDM1L-100P-6J7-72B..... | STK..... | B-4  | MWDM1L-100SBS-110.....    | STK..... | C-10 |
| M83513/24-H03CP..... | STK..... | J-19 | M83513/25-F02CN..... | STK..... | J-19 | MWDM1L-100P-6K1-18B..... | STK..... | B-4  | MWDM1L-100SBS-190.....    | STK..... | C-10 |
| M83513/24-H03NN..... | STK..... | J-19 | M83513/25-F02CP..... | STK..... | J-19 | MWDM1L-100P-6K1-30P..... | STK..... | B-4  | MWDM1L-100SBS-250.....    | STK..... | C-10 |
| M83513/24-H03NP..... | STK..... | J-19 | M83513/25-F02NP..... | STK..... | J-19 | MWDM1L-100P-6K7-18B..... | STK..... | B-4  | MWDM1L-100SBS-250.....    | STK..... | C-10 |
| M83513/25.....       | J-19     |      | M83513/25-F02NN..... | STK..... | J-19 | MWDM1L-100P-6K7-18P..... | STK..... | B-4  | MWDM1L-100SBS-140.....    | STK..... | C-10 |
| M83513/25-A01CN..... | STK..... | J-19 | M83513/25-F03CN..... | STK..... | J-19 | MWDM1L-100P-6K7-18S..... | STK..... | B-4  | MWDM1L-100SBS-150.....    | STK..... | C-10 |
| M83513/25-A01CP..... | STK..... | J-19 | M83513/25-F03CP..... | STK..... | J-19 | MWDM1L-100P-6K7-24B..... | STK..... | B-4  | MWDM1L-100SBS-190.....    | STK..... | C-10 |
| M83513/25-A01NN..... | STK..... | J-19 | M83513/25-F03NP..... | STK..... | J-19 |                          |          |      |                           |          |      |
| M83513/25-A01NP..... | STK..... | J-19 | M83513/26-G01CN..... | STK..... | J-19 |                          |          |      |                           |          |      |
| M83513/25-A02CN..... | STK..... | J-19 |                      |          |      |                          |          |      |                           |          |      |

# PART NUMBER Index Same Day Stock List

(Stocked items are identified with "STK" before the page number)



|                          |             |                          |             |                          |             |                          |             |
|--------------------------|-------------|--------------------------|-------------|--------------------------|-------------|--------------------------|-------------|
| MWDM1L-100SCBR-110.....  | STK... C-10 | MWDM1L-15PBSP-250.....   | STK... C-10 | MWDM1L-15SBRP-250.....   | STK... C-6  | MWDM1L-21S-6E5-30P.....  | STK... B-4  |
| MWDM1L-100SCBR-150.....  | STK... C-10 | MWDM1L-15PCBR-110.....   | STK... C-2  | MWDM1L-15SBS-110.....    | STK... C-10 | MWDM1L-21S-6J7-18B.....  | STK... B-4  |
| MWDM1L-100SCBRP-110..... | STK... C-10 | MWDM1L-15PCBR-150.....   | STK... C-2  | MWDM1L-15SBSP-110.....   | STK... C-10 | MWDM1L-21S-6K1-15P.....  | STK... B-4  |
| MWDM1L-100SCBRP-150..... | STK... C-10 | MWDM1L-15PCBRP-110.....  | STK... C-2  | MWDM1L-15SBSP-150.....   | STK... C-10 | MWDM1L-21S-6K1-18B.....  | STK... B-4  |
| MWDM1L-100SCBRP-190..... | STK... C-10 | MWDM1L-15PCBRP-150.....  | STK... C-2  | MWDM1L-15SBSP-190.....   | STK... C-10 | MWDM1L-21S-6K1-36B.....  | STK... B-4  |
| MWDM1L-100SCBRP-250..... | STK... C-10 | MWDM1L-15PCBRP-190.....  | STK... C-2  | MWDM1L-15SCBR-110.....   | STK... C-2  | MWDM1L-21S-6K1-60B.....  | STK... B-4  |
| MWDM1L-100SCBS.....      | C-14        | MWDM1L-15PCBRP-250.....  | STK... C-2  | MWDM1L-15SCBR-150.....   | STK... C-2  | MWDM1L-21S-6K5-12P.....  | STK... B-4  |
| MWDM1L-100SSB.....       | STK... B-2  | MWDM1L-15PCBS.....       | C-14        | MWDM1L-15SCBRP-110.....  | STK... C-2  | MWDM1L-21S-6K5-15P.....  | STK... B-4  |
| MWDM1L-100SSM.....       | STK... B-2  | MWDM1L-15PSB.....        | STK... B-2  | MWDM1L-15SCBRP-150.....  | STK... C-2  | MWDM1L-21S-6K5-18B.....  | STK... B-4  |
| MWDM1L-100SSM1.....      | STK... B-2  | MWDM1L-15PSM.....        | STK... B-2  | MWDM1L-15SCBRP-190.....  | STK... C-2  | MWDM1L-21S-6K5-18M1..... | STK... B-4  |
| MWDM1L-100SSMR.....      | C-36        | MWDM1L-15PSMR.....       | C-36        | MWDM1L-15S-CBRP-190..... | STK... C-2  | MWDM1L-21S-6K5-18P.....  | STK... B-4  |
| MWDM1L-100SSP.....       | STK... B-2  | MWDM1L-15PSP.....        | STK... B-2  | MWDM1L-15SCBRP-250.....  | STK... C-2  | MWDM1L-21S-6K5-24P.....  | STK... B-4  |
| MWDM1L-100SSS.....       | STK... B-2  | MWDM1L-15PSS.....        | STK... B-2  | MWDM1L-15SCBR2-110.....  | STK... C-2  | MWDM1L-21S-6K5-30M.....  | STK... B-4  |
| MWDM1L-100SSS1.....      | STK... B-2  | MWDM1L-15PSS1.....       | STK... B-2  | MWDM1L-15SCBR4-150.....  | STK... C-2  | MWDM1L-21S-6K5-30S1..... | STK... B-4  |
| MWDM1L-15P-6J7-12M.....  | STK... B-4  | MWDM1L-15S-6E5-18S1..... | STK... B-4  | MWDM1L-15SCBS.....       | C-14        | MWDM1L-21S-6K5-36B.....  | STK... B-4  |
| MWDM1L-15P-6J7-24M.....  | STK... B-4  | MWDM1L-15S-6E5-30B.....  | STK... B-4  | MWDM1L-15SCB.....        | STK... B-2  | MWDM1L-21S-6K5-36P.....  | STK... B-4  |
| MWDM1L-15P-6J7-36B.....  | STK... B-4  | MWDM1L-15S-6J7-18B.....  | STK... B-4  | MWDM1L-15SSM.....        | STK... B-2  | MWDM1L-21S-6K5-6P.....   | STK... B-4  |
| MWDM1L-15P-6J7-4P.....   | STK... B-4  | MWDM1L-15S-6J7-24M.....  | STK... B-4  | MWDM1L-15SSMR.....       | C-36        | MWDM1L-21S-6K7-10P.....  | STK... B-4  |
| MWDM1L-15P-6K1-12B.....  | STK... B-4  | MWDM1L-15S-6J7-36B.....  | STK... B-4  | MWDM1L-15SSP.....        | STK... B-2  | MWDM1L-21S-6K7-12B.....  | STK... B-4  |
| MWDM1L-15P-6K1-18B.....  | STK... B-4  | MWDM1L-15S-6K1-12B.....  | STK... B-4  | MWDM1L-15SSS.....        | STK... B-2  | MWDM1L-21S-6K7-18B.....  | STK... B-4  |
| MWDM1L-15P-6K1-18P.....  | STK... B-4  | MWDM1L-15S-6K1-12C.....  | STK... B-4  | MWDM1L-15SSS1.....       | STK... B-2  | MWDM1L-21S-6K7-20B.....  | STK... B-4  |
| MWDM1L-15P-6K1-24B.....  | STK... B-4  | MWDM1L-15S-6K1-12S.....  | STK... B-4  | MWDM1L-21P-6E5-18S1..... | STK... B-4  | MWDM1L-21S-6K7-24B.....  | STK... B-4  |
| MWDM1L-15P-6K1-36M.....  | STK... B-4  | MWDM1L-15S-6K1-18B.....  | STK... B-4  | MWDM1L-21P-6E5-30P.....  | STK... B-4  | MWDM1L-21S-6K7-36B.....  | STK... B-4  |
| MWDM1L-15P-6K1-48S.....  | STK... B-4  | MWDM1L-15S-6K1-18P.....  | STK... B-4  | MWDM1L-21P-6K1-18M.....  | STK... B-4  | MWDM1L-21S-6K7-6P.....   | STK... B-4  |
| MWDM1L-15P-6K1-5P.....   | STK... B-4  | MWDM1L-15S-6K1-18S.....  | STK... B-4  | MWDM1L-21P-6J7-18P.....  | STK... B-4  | MWDM1L-21SBR-110.....    | STK... C-6  |
| MWDM1L-15P-6K1-P.....    | STK... B-4  | MWDM1L-15S-6K1-24B.....  | STK... B-4  | MWDM1L-21P-6J7-36B.....  | STK... B-4  | MWDM1L-21SBRP-110.....   | STK... C-6  |
| MWDM1L-15P-6K5-18B.....  | STK... B-4  | MWDM1L-15S-6K1-36P.....  | STK... B-4  | MWDM1L-21P-6K1-18B.....  | STK... B-4  | MWDM1L-21SBRP-150.....   | STK... C-6  |
| MWDM1L-15P-6K5-18M.....  | STK... B-4  | MWDM1L-15S-6K1-48S.....  | STK... B-4  | MWDM1L-21P-6K1-18M.....  | STK... B-4  | MWDM1L-21SBS-110.....    | STK... C-10 |
| MWDM1L-15P-6K5-18P.....  | STK... B-4  | MWDM1L-15S-6K5-10P.....  | STK... B-4  | MWDM1L-21P-6K1-8B.....   | STK... B-4  | MWDM1L-21SBS-250.....    | STK... C-10 |
| MWDM1L-15P-6K5-18S.....  | STK... B-4  | MWDM1L-15S-6K5-12B.....  | STK... B-4  | MWDM1L-21P-6K5-15B.....  | STK... B-4  | MWDM1L-21SBSP-110.....   | STK... C-10 |
| MWDM1L-15P-6K5-18S1..... | STK... B-4  | MWDM1L-15S-6K5-18B.....  | STK... B-4  | MWDM1L-21P-6K5-18B.....  | STK... B-4  | MWDM1L-21SBSP-150.....   | STK... C-10 |
| MWDM1L-15P-6K5-24B.....  | STK... B-4  | MWDM1L-15S-6K5-18P.....  | STK... B-4  | MWDM1L-21P-6K5-18M.....  | STK... B-4  | MWDM1L-21SBSP-190.....   | STK... C-10 |
| MWDM1L-15P-6K5-24P.....  | STK... B-4  | MWDM1L-15S-6K5-18S.....  | STK... B-4  | MWDM1L-21P-6K5-18M1..... | STK... B-4  | MWDM1L-21SBSP-250.....   | STK... C-10 |
| MWDM1L-15P-6K5-30P.....  | STK... B-4  | MWDM1L-15S-6K5-18S1..... | STK... B-4  | MWDM1L-21P-6K5-18P.....  | STK... B-4  | MWDM1L-21SCBR-110.....   | STK... C-2  |
| MWDM1L-15P-6K5-30S1..... | STK... B-4  | MWDM1L-15S-6K5-20B.....  | STK... B-4  | MWDM1L-21P-6K5-18S.....  | STK... B-4  | MWDM1L-21SCBR-150.....   | STK... C-2  |
| MWDM1L-15P-6K5-36B.....  | STK... B-4  | MWDM1L-15S-6K5-24B.....  | STK... B-4  | MWDM1L-21P-6K7-24P.....  | STK... B-4  | MWDM1L-21SCBRP-110.....  | STK... C-2  |
| MWDM1L-15P-6K5-36S.....  | STK... B-4  | MWDM1L-15S-6K5-24M.....  | STK... B-4  | MWDM1L-21P-6K5-30M.....  | STK... B-4  | MWDM1L-21SCBRP-150.....  | STK... C-2  |
| MWDM1L-15P-6K5-36S1..... | STK... B-4  | MWDM1L-15S-6K5-30B.....  | STK... B-4  | MWDM1L-21P-6K5-36B.....  | STK... B-4  | MWDM1L-21SCBS.....       | C-14        |
| MWDM1L-15P-6K5-6P.....   | STK... B-4  | MWDM1L-15S-6K5-30P.....  | STK... B-4  | MWDM1L-21P-6K5-36M.....  | STK... B-4  | MWDM1L-21SSB.....        | STK... B-2  |
| MWDM1L-15P-6K5-8B.....   | STK... B-4  | MWDM1L-15S-6K5-30S1..... | STK... B-4  | MWDM1L-21P-6K5-36P.....  | STK... B-4  | MWDM1L-21SSMR.....       | C-36        |
| MWDM1L-15P-6K7-10B.....  | STK... B-4  | MWDM1L-15S-6K5-36B.....  | STK... B-4  | MWDM1L-21P-6K5-36S1..... | STK... B-4  | MWDM1L-21SSP.....        | STK... B-2  |
| MWDM1L-15P-6K7-12B.....  | STK... B-4  | MWDM1L-15S-6K5-36P.....  | STK... B-4  | MWDM1L-21P-6K7-12B.....  | STK... B-4  | MWDM1L-21SSS.....        | STK... B-2  |
| MWDM1L-15P-6K7-12P.....  | STK... B-4  | MWDM1L-15S-6K5-36S.....  | STK... B-4  | MWDM1L-21P-6K7-18B.....  | STK... B-4  | MWDM1L-21SSS1.....       | STK... B-2  |
| MWDM1L-15P-6K7-12S.....  | STK... B-4  | MWDM1L-15S-6K5-3P.....   | STK... B-4  | MWDM1L-21P-6K7-18S.....  | STK... B-4  | MWDM1L-25P-6K1-18B.....  | STK... B-4  |
| MWDM1L-15P-6K7-18B.....  | STK... B-4  | MWDM1L-15S-6K5-6B.....   | STK... B-4  | MWDM1L-21P-6K7-20B.....  | STK... B-4  | MWDM1L-25P-6K1-36M.....  | STK... B-4  |
| MWDM1L-15P-6K7-18M.....  | STK... B-4  | MWDM1L-15S-6K5-6P.....   | STK... B-4  | MWDM1L-21P-6K7-36B.....  | STK... B-4  | MWDM1L-25P-6K1-45B.....  | STK... B-4  |
| MWDM1L-15P-6K7-18P.....  | STK... B-4  | MWDM1L-15S-6K5-9B.....   | STK... B-4  | MWDM1L-21P-6K7-6P.....   | STK... B-4  | MWDM1L-25P-6K1-8B.....   | STK... B-4  |
| MWDM1L-15P-6K7-18S.....  | STK... B-4  | MWDM1L-15S-6K7-10B.....  | STK... B-4  | MWDM1L-21P-6K7-6S.....   | STK... B-4  | MWDM1L-25P-6K5-12B.....  | STK... B-4  |
| MWDM1L-15P-6K7-24B.....  | STK... B-4  | MWDM1L-15S-6K7-12B.....  | STK... B-4  | MWDM1L-21P-6K7-72P.....  | STK... B-4  | MWDM1L-25P-6K5-15M.....  | STK... B-4  |
| MWDM1L-15P-6K7-28B.....  | STK... B-4  | MWDM1L-15S-6K7-12P.....  | STK... B-4  | MWDM1L-21P-6K7-72S.....  | STK... B-4  | MWDM1L-25P-6K5-18B.....  | STK... B-4  |
| MWDM1L-15P-6K7-30B.....  | STK... B-4  | MWDM1L-15S-6K7-15S1..... | STK... B-4  | MWDM1L-21PBR-110.....    | STK... C-6  | MWDM1L-25P-6K5-18M.....  | STK... B-4  |
| MWDM1L-15P-6K7-30P.....  | STK... B-4  | MWDM1L-15S-6K7-18B.....  | STK... B-4  | MWDM1L-21PBRP-110.....   | STK... C-6  | MWDM1L-25P-6K5-18M1..... | STK... B-4  |
| MWDM1L-15P-6K7-30P.....  | STK... B-4  | MWDM1L-15S-6K7-18M.....  | STK... B-4  | MWDM1L-21PBRP-150.....   | STK... C-6  | MWDM1L-25P-6K5-18P.....  | STK... B-4  |
| MWDM1L-15P-6K7-36B.....  | STK... B-4  | MWDM1L-15S-6K7-18P.....  | STK... B-4  | MWDM1L-21PBS-110.....    | STK... C-10 | MWDM1L-25P-6K5-18S.....  | STK... B-4  |
| MWDM1L-15P-6K7-36M.....  | STK... B-4  | MWDM1L-15S-6K7-20B.....  | STK... B-4  | MWDM1L-21PBSP-110.....   | STK... C-10 | MWDM1L-25P-6K5-24M.....  | STK... B-4  |
| MWDM1L-15P-6K7-3P.....   | STK... B-4  | MWDM1L-15S-6K7-24B.....  | STK... B-4  | MWDM1L-21PBSP-190.....   | STK... C-10 | MWDM1L-25P-6K5-24B.....  | STK... B-4  |
| MWDM1L-15P-6K7-6P.....   | STK... B-4  | MWDM1L-15S-6K7-24S.....  | STK... B-4  | MWDM1L-21PCBR-110.....   | STK... C-2  | MWDM1L-25P-6K5-30S1..... | STK... B-4  |
| MWDM1L-15P-6K7-6S.....   | STK... B-4  | MWDM1L-15S-6K7-30M.....  | STK... B-4  | MWDM1L-21PCBR-150.....   | STK... C-2  | MWDM1L-25P-6K5-36B.....  | STK... B-4  |
| MWDM1L-15P-6K7-72B.....  | STK... B-4  | MWDM1L-15S-6K7-30S.....  | STK... B-4  | MWDM1L-21PCBRP-110.....  | STK... C-2  | MWDM1L-25P-6K5-36S.....  | STK... B-4  |
| MWDM1L-15P-6K7-72P.....  | STK... B-4  | MWDM1L-15S-6K7-36B.....  | STK... B-4  | MWDM1L-21PCBRP-150.....  | STK... C-2  | MWDM1L-25P-6K5-36S1..... | STK... B-4  |
| MWDM1L-15P-6K7-72S.....  | STK... B-4  | MWDM1L-15S-6K7-36P.....  | STK... B-4  | MWDM1L-21PCBRP-250.....  | STK... C-2  | MWDM1L-25P-6K5-6B.....   | STK... B-4  |
| MWDM1L-15PBR-110.....    | STK... C-6  | MWDM1L-15S-6K7-36S.....  | STK... B-4  | MWDM1L-21PCBS.....       | C-14        | MWDM1L-25P-6K5-6P.....   | STK... B-4  |
| MWDM1L-15PBRP-110.....   | STK... C-6  | MWDM1L-15S-6K7-3P.....   | STK... B-4  | MWDM1L-21PSB.....        | STK... B-2  | MWDM1L-25P-6K7-18B.....  | STK... B-4  |
| MWDM1L-15PBRP-150.....   | STK... C-6  | MWDM1L-15S-6K7-40B.....  | STK... B-4  | MWDM1L-21PSM.....        | STK... B-2  | MWDM1L-25P-6K7-18P.....  | STK... B-4  |
| MWDM1L-15PBRP-250.....   | STK... C-6  | MWDM1L-15S-6K7-6P.....   | STK... B-4  | MWDM1L-21PSM1.....       | STK... B-2  | MWDM1L-25P-6K7-18S.....  | STK... B-4  |
| MWDM1L-15PBS-110.....    | STK... C-10 | MWDM1L-15S-6K7-72B.....  | STK... B-4  | MWDM1L-21PSMR.....       | C-36        | MWDM1L-25P-6K7-24B.....  | STK... B-4  |
| MWDM1L-15PBSP-110.....   | STK... C-10 | MWDM1L-15SBR-110.....    | STK... C-6  | MWDM1L-21PSP.....        | STK... B-2  | MWDM1L-25P-6K7-28B.....  | STK... B-4  |
| MWDM1L-15PBSP-150.....   | STK... C-10 | MWDM1L-15SBRP-110.....   | STK... C-6  | MWDM1L-21PSS.....        | STK... B-2  | MWDM1L-25P-6K7-36B.....  | STK... B-4  |
| MWDM1L-15PBSP-190.....   | STK... C-10 | MWDM1L-15SBRP-150.....   | STK... C-6  | MWDM1L-21PSS1.....       | STK... B-2  |                          |             |



# PART NUMBER Index Same Day Stock List



(Stocked items are identified with "STK" before the page number)

|                          |          |      |                          |          |      |                         |          |      |                         |          |      |
|--------------------------|----------|------|--------------------------|----------|------|-------------------------|----------|------|-------------------------|----------|------|
| MWDM1L-37S-6K7-36S1..... | STK..... | B-4  | MWDM1L-51PBSP-190.....   | STK..... | C-10 | MWDM1L-51SSP.....       | STK..... | B-2  | MWDM1L-9PSB.....        | STK..... | B-2  |
| MWDM1L-37S-6K7-42S.....  | STK..... | B-4  | MWDM1L-51PCBBRP-250..... | STK..... | C-2  | MWDM1L-51SSS.....       | STK..... | B-2  | MWDM1L-9PSM.....        | STK..... | B-2  |
| MWDM1L-37SBR-110.....    | STK..... | C-6  | MWDM1L-51PCBR-110.....   | STK..... | C-2  | MWDM1L-51SSS1.....      | STK..... | B-2  | MWDM1L-9PSM1.....       | STK..... | B-2  |
| MWDM1L-37SBRP-110.....   | STK..... | C-6  | MWDM1L-51PCBR-150.....   | STK..... | C-2  | MWDM1L-5P-6E5-36B.....  | STK..... | B-4  | MWDM1L-9PSMR.....       | STK..... | C-36 |
| MWDM1L-37SBRP-150.....   | STK..... | C-6  | MWDM1L-51PCBRP-110.....  | STK..... | C-2  | MWDM1L-9P-6J7-36B.....  | STK..... | B-4  | MWDM1L-9PSP.....        | STK..... | B-2  |
| MWDM1L-37SBRP-190.....   | STK..... | C-6  | MWDM1L-51PCBRP-140.....  | STK..... | C-2  | MWDM1L-9P-6E5-48P.....  | STK..... | B-4  | MWDM1L-9PSS.....        | STK..... | B-2  |
| MWDM1L-37SBS-110.....    | STK..... | C-10 | MWDM1L-51PCBRP-150.....  | STK..... | C-2  | MWDM1L-9P-6E5-72S.....  | STK..... | B-4  | MWDM1L-9PSS1.....       | STK..... | B-2  |
| MWDM1L-37SBS-150.....    | STK..... | C-10 | MWDM1L-51PCBRP-172.....  | STK..... | C-2  | MWDM1L-9P-6J1-36B.....  | STK..... | B-4  | MWDM1L-9S-6K7-12B.....  | STK..... | B-4  |
| MWDM1L-37SBS-250.....    | STK..... | C-10 | MWDM1L-51PCBRP-190.....  | STK..... | C-2  | MWDM1L-9P-6J7-12B.....  | STK..... | B-4  | MWDM1L-9S-6J7-18B.....  | STK..... | B-4  |
| MWDM1L-37SBS-110.....    | STK..... | C-10 | MWDM1L-51PCBRP-250.....  | STK..... | C-2  | MWDM1L-9P-6J7-18B.....  | STK..... | B-4  | MWDM1L-9S-6J7-24S.....  | STK..... | B-4  |
| MWDM1L-37SBS-150.....    | STK..... | C-10 | MWDM1L-51PCBS.....       | STK..... | C-14 | MWDM1L-9P-6J7-18P.....  | STK..... | B-4  | MWDM1L-9S-6K1-12B.....  | STK..... | B-4  |
| MWDM1L-37SBS-190.....    | STK..... | C-10 | MWDM1L-51PSB.....        | STK..... | B-2  | MWDM1L-9P-6J7-36B.....  | STK..... | B-4  | MWDM1L-9S-6K1-18S.....  | STK..... | B-4  |
| MWDM1L-37SCBR-110.....   | STK..... | C-2  | MWDM1L-51PSM.....        | STK..... | B-2  | MWDM1L-9P-6K1-12B.....  | STK..... | B-4  | MWDM1L-9S-6K1-1P.....   | STK..... | B-4  |
| MWDM1L-37SCBR-150.....   | STK..... | C-2  | MWDM1L-51PSP.....        | STK..... | B-2  | MWDM1L-9P-6K1-18B.....  | STK..... | B-4  | MWDM1L-9S-6K1-36P.....  | STK..... | B-4  |
| MWDM1L-37SCBRP-110.....  | STK..... | C-2  | MWDM1L-51PSS.....        | STK..... | B-2  | MWDM1L-9P-6K1-36B.....  | STK..... | B-4  | MWDM1L-9S-6K1-8B.....   | STK..... | B-4  |
| MWDM1L-37SCBRP-150.....  | STK..... | C-2  | MWDM1L-51PSS1.....       | STK..... | B-2  | MWDM1L-9P-6K1-36M.....  | STK..... | B-4  | MWDM1L-9S-6K5-12B.....  | STK..... | B-4  |
| MWDM1L-37SCBRP-190.....  | STK..... | C-2  | MWDM1L-51S-6J1-36B.....  | STK..... | B-4  | MWDM1L-9P-6K1-5P.....   | STK..... | B-4  | MWDM1L-9S-6K5-12M.....  | STK..... | B-4  |
| MWDM1L-37SCBRP-250.....  | STK..... | C-2  | MWDM1L-51S-6K1-18B.....  | STK..... | B-4  | MWDM1L-9P-6K1-8B.....   | STK..... | B-4  | MWDM1L-9S-6K5-12P.....  | STK..... | B-4  |
| MWDM1L-37SCBRP5-110..... | STK..... | C-2  | MWDM1L-51S-6K1-36B.....  | STK..... | B-4  | MWDM1L-9P-6K5-10S.....  | STK..... | B-4  | MWDM1L-9S-6K5-18B.....  | STK..... | B-4  |
| MWDM1L-37SBR2-110.....   | STK..... | C-2  | MWDM1L-51S-6K1-36M.....  | STK..... | B-4  | MWDM1L-9P-6K5-12P.....  | STK..... | B-4  | MWDM1L-9S-6K5-18M.....  | STK..... | B-4  |
| MWDM1L-37SCBS.....       | STK..... | C-14 | MWDM1L-51S-6K1-36P.....  | STK..... | B-4  | MWDM1L-9P-6K5-18B.....  | STK..... | B-4  | MWDM1L-9S-6K5-18P.....  | STK..... | B-4  |
| MWDM1L-37SSB.....        | STK..... | B-2  | MWDM1L-51S-6K1-3M.....   | STK..... | B-4  | MWDM1L-9P-6K5-18P.....  | STK..... | B-4  | MWDM1L-9S-6K5-18S.....  | STK..... | B-4  |
| MWDM1L-37SSM.....        | STK..... | B-2  | MWDM1L-51S-6K1-50B.....  | STK..... | B-4  | MWDM1L-9P-6K5-18P.....  | STK..... | B-4  | MWDM1L-9S-6K5-24B.....  | STK..... | B-4  |
| MWDM1L-37SSM1.....       | STK..... | B-2  | MWDM1L-51S-6K1-60B.....  | STK..... | B-4  | MWDM1L-9P-6K5-18S.....  | STK..... | B-4  | MWDM1L-9S-6K5-2P.....   | STK..... | B-4  |
| MWDM1L-37SSMR.....       | STK..... | C-36 | MWDM1L-51S-6K5-10S.....  | STK..... | B-4  | MWDM1L-9P-6K5-18S1..... | STK..... | B-4  | MWDM1L-9S-6K5-30B.....  | STK..... | B-4  |
| MWDM1L-37SSP.....        | STK..... | B-2  | MWDM1L-51S-6K5-12M.....  | STK..... | B-4  | MWDM1L-9P-6K5-20P.....  | STK..... | B-4  | MWDM1L-9S-6K5-30S1..... | STK..... | B-4  |
| MWDM1L-37SSS.....        | STK..... | B-2  | MWDM1L-51S-6K5-12S.....  | STK..... | B-4  | MWDM1L-9P-6K5-24B.....  | STK..... | B-4  | MWDM1L-9S-6K5-36B.....  | STK..... | B-4  |
| MWDM1L-37SSS1.....       | STK..... | B-2  | MWDM1L-51S-6K5-18B.....  | STK..... | B-4  | MWDM1L-9P-6K5-24M.....  | STK..... | B-4  | MWDM1L-9S-6K5-36M.....  | STK..... | B-4  |
| MWDM1L-51-2PSMR.....     | STK..... | C-36 | MWDM1L-51S-6K5-18M.....  | STK..... | B-4  | MWDM1L-9P-6K5-30S1..... | STK..... | B-4  | MWDM1L-9S-6K5-36P.....  | STK..... | B-4  |
| MWDM1L-51-2SSMR.....     | STK..... | C-36 | MWDM1L-51S-6K5-18P.....  | STK..... | B-4  | MWDM1L-9P-6K5-36B.....  | STK..... | B-4  | MWDM1L-9S-6K5-36S.....  | STK..... | B-4  |
| MWDM1L-51P-6E5-18S1..... | STK..... | B-4  | MWDM1L-51S-6K5-18S.....  | STK..... | B-4  | MWDM1L-9P-6K5-36M.....  | STK..... | B-4  | MWDM1L-9S-6K5-6B.....   | STK..... | B-4  |
| MWDM1L-51P-6E5-72S.....  | STK..... | B-4  | MWDM1L-51S-6K5-24P.....  | STK..... | B-4  | MWDM1L-9P-6K5-36P.....  | STK..... | B-4  | MWDM1L-9S-6K5-6P.....   | STK..... | B-4  |
| MWDM1L-51P-6J1-18B.....  | STK..... | B-4  | MWDM1L-51S-6K5-30B.....  | STK..... | B-4  | MWDM1L-9P-6K5-36S.....  | STK..... | B-4  | MWDM1L-9S-6K7-12P.....  | STK..... | B-4  |
| MWDM1L-51P-6J7-18P.....  | STK..... | B-4  | MWDM1L-51S-6K5-30M.....  | STK..... | B-4  | MWDM1L-9P-6K5-36S1..... | STK..... | B-4  | MWDM1L-9S-6K7-18B.....  | STK..... | B-4  |
| MWDM1L-51P-6J7-24B.....  | STK..... | B-4  | MWDM1L-51S-6K5-30P.....  | STK..... | B-4  | MWDM1L-9P-6K5-6B.....   | STK..... | B-4  | MWDM1L-9S-6K7-18M.....  | STK..... | B-4  |
| MWDM1L-51P-6J7-2B.....   | STK..... | B-4  | MWDM1L-51S-6K5-36B.....  | STK..... | B-4  | MWDM1L-9P-6K5-6S.....   | STK..... | B-4  | MWDM1L-9S-6K7-18P.....  | STK..... | B-4  |
| MWDM1L-51P-6K1-18B.....  | STK..... | B-4  | MWDM1L-51S-6K5-36S.....  | STK..... | B-4  | MWDM1L-9P-6K7-11P.....  | STK..... | B-4  | MWDM1L-9S-6K7-18S.....  | STK..... | B-4  |
| MWDM1L-51P-6K1-8B.....   | STK..... | B-4  | MWDM1L-51S-6K7-15P.....  | STK..... | B-4  | MWDM1L-9P-6K7-12B.....  | STK..... | B-4  | MWDM1L-9S-6K7-30S.....  | STK..... | B-4  |
| MWDM1L-51P-6K5-18B.....  | STK..... | B-4  | MWDM1L-51S-6K7-18B.....  | STK..... | B-4  | MWDM1L-9P-6K7-12M.....  | STK..... | B-4  | MWDM1L-9S-6K7-36B.....  | STK..... | B-4  |
| MWDM1L-51P-6K5-18M.....  | STK..... | B-4  | MWDM1L-51S-6K7-18M.....  | STK..... | B-4  | MWDM1L-9P-6K7-12P.....  | STK..... | B-4  | MWDM1L-9S-6K7-36P.....  | STK..... | B-4  |
| MWDM1L-51P-6K5-18P.....  | STK..... | B-4  | MWDM1L-51S-6K7-18P.....  | STK..... | B-4  | MWDM1L-9P-6K7-18B.....  | STK..... | B-4  | MWDM1L-9S-6K7-38B.....  | STK..... | B-4  |
| MWDM1L-51P-6K5-18S1..... | STK..... | B-4  | MWDM1L-51S-6K7-36B.....  | STK..... | B-4  | MWDM1L-9P-6K7-18M.....  | STK..... | B-4  | MWDM1L-9S-6K7-5M.....   | STK..... | B-4  |
| MWDM1L-51P-6K5-24P.....  | STK..... | B-4  | MWDM1L-51S-6K7-48B.....  | STK..... | B-4  | MWDM1L-9P-6K7-18P.....  | STK..... | B-4  | MWDM1L-9S-6K7-60B.....  | STK..... | B-4  |
| MWDM1L-51P-6K5-30M.....  | STK..... | B-4  | MWDM1L-51S-6K7-48M.....  | STK..... | B-4  | MWDM1L-9P-6K7-18S.....  | STK..... | B-4  | MWDM1L-9S-6K7-72B.....  | STK..... | B-4  |
| MWDM1L-51P-6K5-30P.....  | STK..... | B-4  | MWDM1L-51S-6K7-72B.....  | STK..... | B-4  | MWDM1L-9P-6K7-24B.....  | STK..... | B-4  | MWDM1L-9S-6K7-72P.....  | STK..... | B-4  |
| MWDM1L-51P-6K5-30S1..... | STK..... | B-4  | MWDM1L-51SBR-110.....    | STK..... | C-6  | MWDM1L-9P-6K7-28B.....  | STK..... | B-4  | MWDM1L-9S-6K7-72S1..... | STK..... | B-4  |
| MWDM1L-51P-6K5-36B.....  | STK..... | B-4  | MWDM1L-51SBR-125.....    | STK..... | C-6  | MWDM1L-9P-6K7-30P.....  | STK..... | B-4  | MWDM1L-9S-6K7-8B.....   | STK..... | B-4  |
| MWDM1L-51P-6K5-36S1..... | STK..... | B-4  | MWDM1L-51SBRP-110.....   | STK..... | C-6  | MWDM1L-9P-6K7-36B.....  | STK..... | B-4  | MWDM1L-9S-6K7-8M.....   | STK..... | B-4  |
| MWDM1L-51P-6K5-6P.....   | STK..... | B-4  | MWDM1L-51SBRP-150.....   | STK..... | C-6  | MWDM1L-9P-6K7-60B.....  | STK..... | B-4  | MWDM1L-9SBR-110.....    | STK..... | C-6  |
| MWDM1L-51P-6K7-12B.....  | STK..... | B-4  | MWDM1L-51SBS-110.....    | STK..... | C-10 | MWDM1L-9P-6K7-6S.....   | STK..... | B-4  | MWDM1L-9SBRP-110.....   | STK..... | C-6  |
| MWDM1L-51P-6K7-12P.....  | STK..... | B-4  | MWDM1L-51SBS-150.....    | STK..... | C-10 | MWDM1L-9P-6K7-72B.....  | STK..... | B-4  | MWDM1L-9SBRP-150.....   | STK..... | C-6  |
| MWDM1L-51P-6K7-18B.....  | STK..... | B-4  | MWDM1L-51SBS-190.....    | STK..... | C-10 | MWDM1L-9P-6K7-72P.....  | STK..... | B-4  | MWDM1L-9SBRP-190.....   | STK..... | C-6  |
| MWDM1L-51P-6K7-18P.....  | STK..... | B-4  | MWDM1L-51SBS-250.....    | STK..... | C-10 | MWDM1L-9P-6K7-72S.....  | STK..... | B-4  | MWDM1L-9SBS-110.....    | STK..... | C-10 |
| MWDM1L-51P-6K7-18S.....  | STK..... | B-4  | MWDM1L-51SBSP-110.....   | STK..... | C-10 | MWDM1L-9PBR-110.....    | STK..... | C-6  | MWDM1L-9SBS-110.....    | STK..... | C-10 |
| MWDM1L-51P-6K7-24B.....  | STK..... | B-4  | MWDM1L-51SBSP-150.....   | STK..... | C-10 | MWDM1L-9PBRP-110.....   | STK..... | C-6  | MWDM1L-9SBS-150.....    | STK..... | C-10 |
| MWDM1L-51P-6K7-36B.....  | STK..... | B-4  | MWDM1L-51SBSP-190.....   | STK..... | C-10 | MWDM1L-9PBS-110.....    | STK..... | C-10 | MWDM1L-9SBS-190.....    | STK..... | C-10 |
| MWDM1L-51P-6K7-48B.....  | STK..... | B-4  | MWDM1L-51SCBR-110.....   | STK..... | C-2  | MWDM1L-9PBS-150.....    | STK..... | C-10 | MWDM1L-9SBRP-190.....   | STK..... | C-2  |
| MWDM1L-51PBR-110.....    | STK..... | C-6  | MWDM1L-51SCBR-150.....   | STK..... | C-2  | MWDM1L-9PBS-250.....    | STK..... | C-10 | MWDM1L-9SBRP-250.....   | STK..... | C-2  |
| MWDM1L-51PBR-125.....    | STK..... | C-6  | MWDM1L-51SCBRP-110.....  | STK..... | C-2  | MWDM1L-9PBS-110.....    | STK..... | C-10 | MWDM1L-9SBRP-190.....   | STK..... | C-2  |
| MWDM1L-51PBRP-110.....   | STK..... | C-6  | MWDM1L-51SCBRP-140.....  | STK..... | C-2  | MWDM1L-9PBRP-190.....   | STK..... | C-10 | MWDM1L-9SBRP-250.....   | STK..... | C-2  |
| MWDM1L-51PBRP-125.....   | STK..... | C-6  | MWDM1L-51SCBRP-150.....  | STK..... | C-2  | MWDM1L-9PCBR-110.....   | STK..... | C-2  | MWDM1L-9SBRP-110.....   | STK..... | C-2  |
| MWDM1L-51PBRP-150.....   | STK..... | C-6  | MWDM1L-51SCBRP-190.....  | STK..... | C-2  | MWDM1L-9PCBR-150.....   | STK..... | C-2  | MWDM1L-9SBRP-190.....   | STK..... | C-2  |
| MWDM1L-51PBS-110.....    | STK..... | C-10 | MWDM1L-51SCBRP-250.....  | STK..... | C-2  | MWDM1L-9PCBR-110.....   | STK..... | C-2  | MWDM1L-9SBRP-150.....   | STK..... | C-2  |
| MWDM1L-51PBS-150.....    | STK..... | C-10 | MWDM1L-51SCBR4-150.....  | STK..... | C-2  | MWDM1L-9PCBR-110.....   | STK..... | C-2  | MWDM1L-9SBRP-110.....   | STK..... | C-2  |
| MWDM1L-51PBS-190.....    | STK..... | C-10 | MWDM1L-51SCBS.....       | STK..... | C-14 | MWDM1L-9PCBRP-110.....  | STK..... | C-2  | MWDM1L-9SBRP-110.....   | STK..... | C-2  |
| MWDM1L-51PBS-250.....    | STK..... | C-10 | MWDM1L-51SSB.....        | STK..... | B-2  | MWDM1L-9PCBRP-150.....  | STK..... | C-2  | MWDM1L-9SBRP-150.....   | STK..... | C-2  |
| MWDM1L-51PBSP-110.....   | STK..... | C-10 | MWDM1L-51SSM.....        | STK..... | B-2  | MWDM1L-9PCBRP-250.....  | STK..... | C-2  | MWDM1L-9SBRP-190.....   | STK..... | C-2  |
| MWDM1L-51PBSP-140.....   | STK..... | C-10 | MWDM1L-51SSM1.....       | STK..... | B-2  | MWDM1L-9PCBR5.....      | STK..... | C-14 | MWDM1L-9SBRP-110.....   | STK..... | C-2  |
| MWDM1L-51PBSP-150.....   | STK..... | C-10 |                          |          |      |                         |          |      | MWDM1L-9SBRP-150.....   | STK..... | C-2  |









# PART NUMBER Index Same Day Stock List

(Stocked items are identified with "STK" before the page number)



|                           |          |      |                         |          |      |                          |          |      |
|---------------------------|----------|------|-------------------------|----------|------|--------------------------|----------|------|
| MWDM2L-51S-6K7-36M.....   | STK..... | B-4  | MWDM2L-9P-6K7-12P.....  | STK..... | B-4  | MWDM2L-9S-6K5-24S.....   | STK..... | B-4  |
| MWDM2L-51S-6K7-40B.....   | STK..... | B-4  | MWDM2L-9P-6K7-18B.....  | STK..... | B-4  | MWDM2L-9S-6K5-36B.....   | STK..... | B-4  |
| MWDM2L-51S-6K7-48M.....   | STK..... | B-4  | MWDM2L-9P-6K7-36B.....  | STK..... | B-4  | MWDM2L-9S-6K5-4M.....    | STK..... | B-4  |
| MWDM2L-51S-6K7-72P.....   | STK..... | B-4  | MWDM2L-9P-6K7-3B.....   | STK..... | B-4  | MWDM2L-9S-6K5-6B.....    | STK..... | B-4  |
| MWDM2L-51SBR-.110.....    | STK..... | C-6  | MWDM2L-9P-6K7-40B.....  | STK..... | B-4  | MWDM2L-9S-6K5-6M.....    | STK..... | B-4  |
| MWDM2L-51SBR-.150.....    | STK..... | C-6  | MWDM2L-9P-6K7-48B.....  | STK..... | B-4  | MWDM2L-9S-6K5-9M.....    | STK..... | B-4  |
| MWDM2L-51SBRP-.110.....   | STK..... | C-6  | MWDM2L-9P-6K7-6B.....   | STK..... | B-4  | MWDM2L-9S-6K7-10B.....   | STK..... | B-4  |
| MWDM2L-51SBRP-.150.....   | STK..... | C-6  | MWDM2L-9P-6K7-6M.....   | STK..... | B-4  | MWDM2L-9S-6K7-10P.....   | STK..... | B-4  |
| MWDM2L-51SBRR5-.110.....  | STK..... | C-6  | MWDM2L-9P-6K7-72B.....  | STK..... | B-4  | MWDM2L-9S-6K7-12B.....   | STK..... | B-4  |
| MWDM2L-51SBRR5-.140.....  | STK..... | C-6  | MWDM2L-9P-6K7-72M.....  | STK..... | B-4  | MWDM2L-9S-6K7-12P.....   | STK..... | B-4  |
| MWDM2L-51SBS-.110.....    | STK..... | C-10 | MWDM2L-9P-6K7-72P.....  | STK..... | B-4  | MWDM2L-9S-6K7-18B.....   | STK..... | B-4  |
| MWDM2L-51SBS-.150.....    | STK..... | C-10 | MWDM2L-9PBR-.110.....   | STK..... | C-6  | MWDM2L-9S-6K7-18M.....   | STK..... | B-4  |
| MWDM2L-51SBS-.190.....    | STK..... | C-10 | MWDM2L-9PBR-.190.....   | STK..... | C-6  | MWDM2L-9S-6K7-24B.....   | STK..... | B-4  |
| MWDM2L-51SBS-.250.....    | STK..... | C-10 | MWDM2L-9PBRP-.110.....  | STK..... | C-6  | MWDM2L-9S-6K7-30B.....   | STK..... | B-4  |
| MWDM2L-51SBS-110.....     | STK..... | C-10 | MWDM2L-9PBRP-.150.....  | STK..... | C-6  | MWDM2L-9S-6K7-36B.....   | STK..... | B-4  |
| MWDM2L-51SBS-150.....     | STK..... | C-10 | MWDM2L-9PBRP-.190.....  | STK..... | C-6  | MWDM2L-9S-6K7-36P.....   | STK..... | B-4  |
| MWDM2L-51SBS-190.....     | STK..... | C-10 | MWDM2L-9PBS-.110.....   | STK..... | C-10 | MWDM2L-9S-6K7-3B.....    | STK..... | B-4  |
| MWDM2L-51SBS-250.....     | STK..... | C-10 | MWDM2L-9PBS-.150.....   | STK..... | C-10 | MWDM2L-9S-6K7-40B.....   | STK..... | B-4  |
| MWDM2L-51SBR3-.150.....   | STK..... | C-10 | MWDM2L-9PBS-.190.....   | STK..... | C-10 | MWDM2L-9S-6K7-40S.....   | STK..... | B-4  |
| MWDM2L-51SBR5-.110.....   | STK..... | C-10 | MWDM2L-9PBS-110.....    | STK..... | C-10 | MWDM2L-9S-6K7-48B.....   | STK..... | B-4  |
| MWDM2L-51SBR5-.140.....   | STK..... | C-10 | MWDM2L-9PBS-140.....    | STK..... | C-10 | MWDM2L-9S-6K7-5S.....    | STK..... | B-4  |
| MWDM2L-51SBR5-.190.....   | STK..... | C-10 | MWDM2L-9PBS-150.....    | STK..... | C-10 | MWDM2L-9S-6K7-60B.....   | STK..... | B-4  |
| MWDM2L-51SBR5-.250.....   | STK..... | C-10 | MWDM2L-9PBS-190.....    | STK..... | C-10 | MWDM2L-9S-6K7-6B.....    | STK..... | B-4  |
| MWDM2L-51SCBR-.110.....   | STK..... | C-2  | MWDM2L-9PCBR-.110.....  | STK..... | C-2  | MWDM2L-9S-6K7-6M.....    | STK..... | B-4  |
| MWDM2L-51SCBR-.150.....   | STK..... | C-2  | MWDM2L-9PCBR-.190.....  | STK..... | C-2  | MWDM2L-9S-6K7-72B.....   | STK..... | B-4  |
| MWDM2L-51SCBR-.190.....   | STK..... | C-2  | MWDM2L-9PCBRP-.110..... | STK..... | C-2  | MWDM2L-9S-6K7-72M.....   | STK..... | B-4  |
| MWDM2L-51SCBRP-.110.....  | STK..... | C-2  | MWDM2L-9PCBRP-.150..... | STK..... | C-2  | MWDM2L-9SBR-.109.....    | STK..... | C-6  |
| MWDM2L-51SCBRP-.140.....  | STK..... | C-2  | MWDM2L-9PCBRP-.190..... | STK..... | C-2  | MWDM2L-9SBR-.110.....    | STK..... | C-6  |
| MWDM2L-51SCBRP-.150.....  | STK..... | C-2  | MWDM2L-9PCBRP-.250..... | STK..... | C-2  | MWDM2L-9SBR-.140.....    | STK..... | C-6  |
| MWDM2L-51SCBRP-.172.....  | STK..... | C-2  | MWDM2L-9PCBR-110.....   | STK..... | C-14 | MWDM2L-9SBR-.172.....    | STK..... | C-6  |
| MWDM2L-51SCBRP-.190.....  | STK..... | C-2  | MWDM2L-9PCBS.....       | STK..... | B-2  | MWDM2L-9SBR-.110.....    | STK..... | C-6  |
| MWDM2L-51SCBRP-.250.....  | STK..... | C-2  | MWDM2L-9PSB.....        | STK..... | B-2  | MWDM2L-9SBR-.150.....    | STK..... | C-6  |
| MWDM2L-51SCBRR3-.110..... | STK..... | C-2  | MWDM2L-9PSM.....        | STK..... | B-2  | MWDM2L-9SBR-.250.....    | STK..... | C-6  |
| MWDM2L-51SCBS.....        | STK..... | C-14 | MWDM2L-9PSM1.....       | STK..... | B-2  | MWDM2L-9SBR-110.....     | STK..... | C-10 |
| MWDM2L-51SSB.....         | STK..... | B-2  | MWDM2L-9PSMR.....       | STK..... | C-36 | MWDM2L-9SBR-150.....     | STK..... | C-10 |
| MWDM2L-51SSM.....         | STK..... | B-2  | MWDM2L-9PSP.....        | STK..... | B-2  | MWDM2L-9SBR-190.....     | STK..... | C-10 |
| MWDM2L-51SSP.....         | STK..... | B-2  | MWDM2L-9PSS.....        | STK..... | B-2  | MWDM2L-9SBR-250.....     | STK..... | C-10 |
| MWDM2L-51SSS.....         | STK..... | B-2  | MWDM2L-9PSS1.....       | STK..... | B-2  | MWDM2L-9SBR-.110.....    | STK..... | C-2  |
| MWDM2L-51SSS1.....        | STK..... | B-2  | MWDM2L-9S-6E5-18B.....  | STK..... | B-4  | MWDM2L-9SBR-.150.....    | STK..... | C-2  |
| MWDM2L-51USP1.....        | STK..... | M-2  | MWDM2L-9S-6E5-48S.....  | STK..... | B-4  | MWDM2L-9SBR-.190.....    | STK..... | C-2  |
| MWDM2L-6P-6E5-48B.....    | STK..... | B-4  | MWDM2L-9S-6J1-10P.....  | STK..... | B-4  | MWDM2L-9SBR-.250.....    | STK..... | C-2  |
| MWDM2L-9P-6J1-18B.....    | STK..... | B-4  | MWDM2L-9S-6J1-18B.....  | STK..... | B-4  | MWDM2L-9SCBR-.110.....   | STK..... | C-2  |
| MWDM2L-9P-6J1-18S.....    | STK..... | B-4  | MWDM2L-9S-6J1-45P.....  | STK..... | B-4  | MWDM2L-9SCBR-.150.....   | STK..... | C-2  |
| MWDM2L-9P-6J1-36B.....    | STK..... | B-4  | MWDM2L-9S-6J1-72B.....  | STK..... | B-4  | MWDM2L-9SCBRP-.110.....  | STK..... | C-2  |
| MWDM2L-9P-6J1-8B.....     | STK..... | B-4  | MWDM2L-9S-6J1-8B.....   | STK..... | B-4  | MWDM2L-9SCBRP-.250.....  | STK..... | C-2  |
| MWDM2L-9P-6J7-18B.....    | STK..... | B-4  | MWDM2L-9S-6J7-10S.....  | STK..... | B-4  | MWDM2L-9SCBRR1-.110..... | STK..... | C-2  |
| MWDM2L-9P-6J7-18P.....    | STK..... | B-4  | MWDM2L-9S-6J7-18B.....  | STK..... | B-4  | MWDM2L-9SCBRR4-.110..... | STK..... | C-2  |
| MWDM2L-9P-6J7-20B.....    | STK..... | B-4  | MWDM2L-9S-6J7-18P.....  | STK..... | B-4  | MWDM2L-9SCBS.....        | STK..... | C-14 |
| MWDM2L-9P-6J7-24B.....    | STK..... | B-4  | MWDM2L-9S-6J7-18S1..... | STK..... | B-4  | MWDM2L-9SCRP-.190.....   | STK..... | C-2  |
| MWDM2L-9P-6J7-24S.....    | STK..... | B-4  | MWDM2L-9S-6J7-20B.....  | STK..... | B-4  | MWDM2L-9SSB.....         | STK..... | B-2  |
| MWDM2L-9P-6J7-36M.....    | STK..... | B-4  | MWDM2L-9S-6J7-24B.....  | STK..... | B-4  | MWDM2L-9SSM.....         | STK..... | B-2  |
| MWDM2L-9P-6J7-3B.....     | STK..... | B-4  | MWDM2L-9S-6J7-36B.....  | STK..... | B-4  | MWDM2L-9SSMR.....        | STK..... | C-36 |
| MWDM2L-9P-6J7-60B.....    | STK..... | B-4  | MWDM2L-9S-6J7-3B.....   | STK..... | B-4  | MWDM2L-9SSP.....         | STK..... | B-2  |
| MWDM2L-9P-6J7-6M.....     | STK..... | B-4  | MWDM2L-9S-6J7-40S.....  | STK..... | B-4  | MWDM2L-9SSS.....         | STK..... | B-2  |
| MWDM2L-9P-6J7-72B.....    | STK..... | B-4  | MWDM2L-9S-6J7-60B.....  | STK..... | B-4  | MWDM2L-9SSS1.....        | STK..... | B-2  |
| MWDM2L-9P-6K1-10P.....    | STK..... | B-4  | MWDM2L-9S-6J7-8P.....   | STK..... | B-4  | MWDM2L-9USP1.....        | STK..... | M-2  |
| MWDM2L-9P-6K1-18B.....    | STK..... | B-4  | MWDM2L-9S-6K1-12B.....  | STK..... | B-4  | MWEB2L-128P(*).....      | STK..... | N-9  |
| MWDM2L-9P-6K1-36P.....    | STK..... | B-4  | MWDM2L-9S-6K1-18B.....  | STK..... | B-4  | MWEB2L-128P5W4.....      | STK..... | N-3  |
| MWDM2L-9P-6K5-10P.....    | STK..... | B-4  | MWDM2L-9S-6K1-32P.....  | STK..... | B-4  | MWEB2L-128S(*).....      | STK..... | N-9  |
| MWDM2L-9P-6K5-18B.....    | STK..... | B-4  | MWDM2L-9S-6K1-36P.....  | STK..... | B-4  | MWEB2L-128S4BS3.....     | STK..... | N-4  |
| MWDM2L-9P-6K5-18M.....    | STK..... | B-4  | MWDM2L-9S-6K1-4B.....   | STK..... | B-4  | MWEB2L-128SBR.....       | STK..... | N-5  |
| MWDM2L-9P-6K5-18P.....    | STK..... | B-4  | MWDM2L-9S-6K5-10P.....  | STK..... | B-4  | MWEB2L-184NP(*).....     | STK..... | N-9  |
| MWDM2L-9P-6K5-20P.....    | STK..... | B-4  | MWDM2L-9S-6K5-10S.....  | STK..... | B-4  | MWEB2L-184NP5W4.....     | STK..... | N-6  |
| MWDM2L-9P-6K5-24B.....    | STK..... | B-4  | MWDM2L-9S-6K5-12B.....  | STK..... | B-4  | MWEB2L-184NS(*).....     | STK..... | N-9  |
| MWDM2L-9P-6K5-24M.....    | STK..... | B-4  | MWDM2L-9S-6K5-12P.....  | STK..... | B-4  | MWEB2L-184NS4BS3.....    | STK..... | N-7  |
| MWDM2L-9P-6K5-24P.....    | STK..... | B-4  | MWDM2L-9S-6K5-12S.....  | STK..... | B-4  | MWEB2L-184NSBR.....      | STK..... | N-8  |
| MWDM2L-9P-6K5-24S.....    | STK..... | B-4  | MWDM2L-9S-6K5-18B.....  | STK..... | B-4  | MWKQ2L.....              | STK..... | N-13 |
| MWDM2L-9P-6K5-36B.....    | STK..... | B-4  | MWDM2L-9S-6K5-18P.....  | STK..... | B-4  | MWSL.....                | STK..... | N-11 |
| MWDM2L-9P-6K5-36P.....    | STK..... | B-4  | MWDM2L-9S-6K5-24B.....  | STK..... | B-4  |                          |          |      |
| MWDM2L-9P-6K5-6M.....     | STK..... | B-4  | MWDM2L-9S-6K5-24M.....  | STK..... | B-4  |                          |          |      |
| MWDM2L-9P-6K7-10P.....    | STK..... | B-4  | MWDM2L-9S-6K5-24P.....  | STK..... | B-4  |                          |          |      |
| MWDM2L-9P-6K7-12B.....    | STK..... | B-4  |                         |          |      |                          |          |      |



## Reference Data

**TABLE 1: MICRO-D STANDARD MATERIALS AND FINISHES**

|                                |   |
|--------------------------------|---|
| Connector Shell, Metal         | Aluminum Alloy 6061 In Accordance With SAE AMS-QQ-A-250/11<br>Plating Code 1: Cadmium W/ Yellow Chromate per SAE-AMS-QQ-P-416, Type II, Class 3<br>Plating Code 2: Electroless Nickel In Accordance With ASTM B733-90 SC2 Type 1 Class 5.<br>Plating Code 4: Black Anodize In Accordance With MIL-A-8625 Type II Class 2<br>Plating Code 5: Gold Plated In Accordance With ASTM B48<br>Plating Code 6: Chem Film In Accordance With MIL-C-5541 Class 3<br>Stainless Steel, 300 Series<br>Plating Code 3: Passivated In Accordance With SAE AMS 2700 |
| Connector Shell, Plastic       | Liquid Crystal Polymer, 30% Glass-Filled, In Accordance With MIL-M-24519  |
| Insulator                      | Liquid Crystal Polymer, 30% Glass-Filled, In Accordance With MIL-M-24519  |
| Interfacial Seal               | Flourosilicone Rubber In Accordance With A-A-59588  |
| Terminal Block, PCB            | Liquid Crystal Polymer, 30% Glass-Filled, In Accordance With MIL-M-24519  |
| Pin Contact (TwistPin)         | Beryllium Copper, Gold Plated In Accordance With ASTM B 488 Type II Class 1.27 (50 Microinches Minimum) Code C, Over Nickel Underplate In Accordance With SAE AMS-QQ-N-290, Class 2, (30-150 Microinches).  |
| Socket Contact                 | Phos Bronze ASTM 139 Gold Plated In Accordance With ASTM B 488 Type II Class 1.27 (50 Microinches Minimum) Code C, Over Nickel Underplate In Accordance With SAE-AMS-QQ-N-290, Class 2, (30-150 Microinches).   |
| Encapsulant (Potting)          | Epoxy Resin, Hysol EE4215/HD3561  |
| Hardware                       | Stainless Steel, Passivated In Accordance With SAE AMS 2700   |
| Pigtail Wire, Insulated Hookup | Wire Type E: 7 Strand Silver-Coated Copper Wire, Extruded PTFE Insulation, 600 Volts RMS, 200°C., In Accordance with NEMA HP3 (Replaces MIL-W-16878/4)<br>Wire Type K: 19 Strand Silver-Coated Copper Wire, Extruded PTFE Insulation, 600 Volts RMS, 200° C., In Accordance with SAE AS 22759/11<br>Wire Type J: 19 Strand High-Strength Silver-Coated Copper Alloy Wire, Crosslinked Modified ETFE Insulation, 600 Volts RMS, 200° C., In Accordance with SAE AS 22759/33  |
| Pigtail Wire, Uninsulated      | Wire Finish Code 3: Solid Copper Wire In Accordance With A-A-59551, Gold-Plated, Solder Dipped in 63/37 tin-lead<br>Wire Finish Code 4: Solid Copper Wire In Accordance With A-A-59551, Gold-Plated   |

**TABLE 2: MICRO-D PERFORMANCE SPECIFICATIONS**



| PROPERTY  | SPECIFICATION  | TEST METHOD                   |
|---|--|-------------------------------|
| Contact Current Rating                                  | 3 Amps continuous from -55° to +150° C.                                  | EIA-364-70                    |
| Dielectric Withstanding Voltage                         | 600 VAC sea level, 150 VAC 70,000 feet                                   | EIA-364-20                    |
| Insulation Resistance                                   | 5000 megohms minimum   | EIA-364-21                    |
| Contact Resistance                                      | 8 milliohms maximum  | EIA-364-06                    |
| Low Level Contact Resistance                            | 32 milliohms maximum   | EIA-364-23                    |
| Operating Temperature                                   | -55° to +150° C.   |                               |
| Salt Spray (Corrosion)                                  | 48 hours   | EIA-364-26, test Condition B  |
| Mechanical Shock  | 50 g.  | EIA-364-27, Test Condition E  |
| Vibration (Sine)  | 20 g.  | EIA-364-28, Test Condition IV |
| Magnetic Permeability                                   | 2 Mu maximum   | EIA-364-54                    |
| Durability  | 500 Cycles   |                               |
| Outgassing  | 1.0% Total Mass Loss max., 0.1% Collected Volatile Condensable Materials | ASTM E595                     |
| Mating and Unmating Force                               | 10 ounces per contact maximum  | EIA-364-13                    |
| Crimp Tensile Strength, #26 AWG                         | 5 pounds min. M22759/11, 10 pounds min. M22759/33                        | EIA-364-08                    |
| Humidity, Metal Shell with Interfacial Seal             | 100 megohms IR following ten 24 hour cycles                              | EIA-364-31, Method IV.        |
| Fluid Immersion   | 20 hours synthetic lubricating oil, 1 hour coolanol                      | MIL-DTL-83513F, para. 4.5.18  |
| Shielding Effectiveness, Metal Shell with Ground Spring | 65 dB minimum  | EIA-364-66                    |

### TABLE 3: STANDARD WIRE SPECIFICATIONS

| Wire Code | Specification | Insulation                          | Conductor                                | Operating Temp. | Voltage Rating | AWG | Strands | Max. Conductor Diameter (Inches) | DC Resistance Ohms/1000 Ft. | Max. Finished Wire Dia. |
|-----------|---------------|-------------------------------------|--|-----------------|----------------|-----|---------|----------------------------------|-----------------------------|-------------------------|
| <b>E</b>  | NEMA HP3-EXB  | Extruded PTFE                       | Silver-coated copper                     | -65° to +200°C  | 600 volts RMS  | #24 | 7/32    | .025                             | 24.5                        | .048                    |
|           |               |                                     |  |                 |                | #26 | 7/34    | .020                             | 39.7                        | .043                    |
|           |               |                                     |  |                 |                | #28 | 7/36    | .016                             | 63.6                        | .039                    |
|           |               |                                     |  |                 |                | #30 | 7/38    | .013                             | 100                         | .036                    |
| <b>J</b>  | M22759/33     | Extruded cross-linked modified ETFE | Silver-coated high-strength copper alloy | -65° to +200°C  | 600 volts RMS  | #24 | 19/36   | .025                             | 28.4                        | .037                    |
|           |               |                                     |  |                 |                | #26 | 19/38   | .020                             | 44.8                        | .034                    |
|           |               |                                     |  |                 |                | #28 | 7/36    | .016                             | 74.4                        | .029                    |
|           |               |                                     |  |                 |                | #30 | 7/38    | .012                             | 117.4                       | .026                    |
| <b>K</b>  | M22759/11     | Extruded PTFE                       | Silver-coated copper                     | -65° to +200°C  | 600 volts RMS  | #24 | 19/36   | .025                             | 24.3                        | .045                    |
|           |               |                                     |  |                 |                | #26 | 19/38   | .020                             | 38.4                        | .040                    |
|           |               |                                     |  |                 |                | #28 | 7/36    | .015                             | 63.8                        | .035                    |

### TABLE 4: STOCKED WIRE SIZES AND COLORS

| Wire Code | Color Code | Wire Insulation Color                | #24 AWG | #26 AWG | #28AWG        | #30 AWG       |
|-----------|------------|--------------------------------------|---------|---------|---------------|---------------|
| <b>E</b>  | 1          | White                                | ✓       | ✓       | ✓             | ✓             |
|           | 2          | Yellow                               | ✓       | ✓       | not available | not available |
|           | 5          | White with MIL-STD-681 color stripes | ⚠       | ⚠       | not available | not available |
|           | 7          | 10 Color Repeat                      | ✓       | ✓       | not available | not available |
| <b>J</b>  | 1          | White                                | ✓       | ✓       | ✓             | ✓             |
|           | 2          | Yellow                               | ✓       | ✓       | ✓             | ✓             |
|           | 5          | White with MIL-STD-681 color stripes | ⚠       | ⚠       | not available | not available |
|           | 7          | 10 Color Repeat                      | ✓       | ✓       | ✓             | ✓             |
| <b>K</b>  | 1          | White                                | ✓       | ✓       | ✓             | not available |
|           | 2          | Yellow                               | ✓       | ✓       | ✓             | not available |
|           | 5          | White with MIL-STD-681 color stripes | ⚠       | ⚠       | not available | not available |
|           | 7          | 10 Color Repeat                      | ✓       | ✓       | ✓             | not available |

 = Stocked wire.  
 = Stocked wire through 51 colors only. Connectors with more than 51 contacts are not available with striped wire. 10 color repeating is the recommended alternate.



## A World of Interconnect Solutions

- Fast Turnaround on Quotes and Custom Orders
- 45,000 Part Number Same-Day Inventory
- No "Minimum Order" Policy
- Abundant Manufacturing Capacity
- Full Spectrum Product Lines

### Micro-D TwistPin Connectors

### Nano Miniature Connectors

### Circular Connector Accessories

### Composite Connector Accessories

### Connector Protectors, Caps and Boots

### D-Subminiature and Micro-D Backshells

### Fiber Optic Connectors and Assemblies

### MIL-DTL-38999 Hermetic Connectors

### MIL-C-28840 Circular Connectors

### Sub-Miniature Circular Connectors

### Sav-Con® Connector Savers

### Geo-Marine® Connectors and Cables

### Convolute Tubing and Conduit Fittings

### Metal-Core Conduit

### Custom-Designed Multi-Conductor Cables

### Braided Cable Harnesses

### Overmolded Cable Assemblies


### Tubular Braided Sleeving

### EMI/RFI Junction Boxes and Assemblies

### Connector Backshell Assembly Tools

### Banding Tools and Accessories

### Mil-Spec Nut Rings and EMI/RFI Gaskets



---

**Glenair, Inc.** Telephone: 818-247-6000  
**Worldwide Headquarters** 818-247-6000  
1211 Air Way Facsimile: 818-500-9912  
Glendale, California E-mail: sales@glenair.com  
United States of America  
91201-2497

---

**Glenair, Inc.** Telephone: 203-741-1115  
**ITS Product Management Team** 203-741-1115  
25 Village Lane Facsimile: 203-741-0053  
Wallingford, CT 06492 E-mail: sales@glenair.com

---

**Glenair Microway Systems** Telephone: 847-679-8833  
7000 North Lawndale Avenue 847-679-8833  
Lincolnwood, Illinois Facsimile: 847-679-8849  
60712

---

**Glenair UK Ltd** Telephone: 44-1623-638100  
40 Lower Oakham Way 44-1623-638100  
Oakham Business Park Facsimile: 44-1623-638111  
P.O. Box 37, Mansfield E-mail: sales@glenair.co.uk  
Notts, NG18 5BY  
England

---

**Glenair Electric GmbH** Telephone: 49-6171-5905-0  
Siemensstrasse 9 49-6171-5905-0  
D-61449 Steinbach Facsimile: 49-6171-5905-90  
Germany E-mail: germany@glenair.com

---

**Glenair France SARL** Telephone: 33-1-49-89-66-33  
Paris Nord 2 33-1-49-89-66-33  
181 Avenue des Nations Facsimile: 33-1-49-89-66-30  
BP 60056 Villepinte E-mail: sales@glenair.fr  
95972 Roissy Charles De Gaulle Cedex  
France

---

**Glenair Connectors Italia S.R.L.** Telephone: +39-02-91082121  
Via Santi, 1-20037 +39-02-91082121  
Paderno Dugnano Facsimile: +39-02-99043565  
Milano E-mail: sales-italia@glenair.com  
Italy

---

**Glenair Nordic AB** Telephone: 46-8-50550000  
Gustav III : S Boulevard 46 46-8-50550000  
S - 16973 Solna Facsimile: 46-8-50550001  
Sweden E-mail: sales@glenair.se

---

**Glenair Spain** Telephone: 34-925 89 29 88  
C/ La Vega, 16 34-925 89 29 88  
45612 Velada Facsimile: 34-925 89 29 87  
Spain