

Thermoplastic distribution boxes – mobile

Information

Page **269**

Anif4

Dimensions: HxWxD = 320x222x114mm

Page **270**



Murau

Dimensions: HxWxD = 189x290x114mm

Page **270**



Schwaz

Dimensions: HxWxD = 189x290x114mm


Page **270**



Horn

Dimensions: HxWxD = 263x246x75mm

Page **271**



Imst

Dimensions: HxWxD = 197x200x197mm

Page **272**



Pegasus

Dimensions: HxWxD = 230x140x140mm

Page **274**



St. Anton

Compact distribution boxes

Page **276**



T-Box

Page **278**

M-Box

Page **279**

Thermoplastic distribution boxes – mobile – Information

Mobile thermoplastic distribution boxes are suitable for **in- and outdoor areas**. The boxes are available in **different sizes and designs**.

Protection degree: IP44, IP54 and IP66/67

The massive and high-quality **enclosure made from PC/ABS** tested and certified according to IEC/EN 62208* provides a wide range of **positive features**. Such as high impact resistance and notched bar impact strength, high thermal stability, dielectric strength, weather, UV and wear resistance, good insulation properties, and resistance against many chemicals. The material used is free from cadmium, red phosphor and halogens (fluorine, chlorine, bromine, iodine and astatine).

Mobile thermoplastic distribution boxes are well suited for all applications. Especially in those areas that depend on high-quality, a robust enclosure and total reliability, such as in industry, trade, workshops, agriculture, household, public buildings, leisure, sport, marinas, camping, etc.

Adjusted to your needs we put together individually tailored and **optimally equipped wall distribution boxes**.




Thermoplastic insulated distribution boxes – mobile

Series ANIF4 / SCHWAZ / MURAU




Series ANIF4

- compact design
- high-quality thermoplastic material
- **dimensions: HxWxD = 320x222x114mm**
- 10 modules
- ready wired for connection
- IP54 splashproof
- for assembly plants, electricians, ...




2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V
2 MCBs 16A 3p-C
4 MCBs 16A 1p-B
2m H07RN-F 5G4 with
CEE-plug 32A 5p 400V



portable reel

9134124

1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
4 sockets (DIN 49440)
16A 250V




1 MCB 16A 3p-C
4 MCBs 16A 1p-B
2m H07RN-F 5G4 with
CEE-plug 32A 5p 400V

carrying handle

9134532

1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
4 sockets (DIN 49440)
16A 250V



1 MCB 16A 3p-C
2 MCBs 16A 1p-B
1 RCD 63/4/0,03A
2m H07RN-F 5G4 with
CEE-plug 32A 5p 400V


carrying handle

9134518




Series MURAU

- compact design
- high-quality thermoplastic material
- **dimensions: HxWxD = 290x189x114 mm**
- 4 modules
- ready wired for connection
- IP54 splashproof
- for assembly plants, electricians, ...




1 CEE-socket 32A 5p 400V
3 sockets (DIN 49440)
16A 250V
1 MCB 16A 1p-B
1 RCD 40/4/0,03A
2m H07RN-F 5G4 with
CEE-plug 32A 5p 400V



carrying handle

9013330

5 sockets (DIN 49440)
16A 250V
1 RCD 40/4/0,03A
2m H07RN-F 5G2,5 with
CEE-plug 16A 5p 400V




carrying handle

9013042




Series SCHWAZ/LOFER4

- compact design
- high-quality thermoplastic material
- **dimensions: HxWxD = 290x189x114 mm**
- ready wired for connection
- IP54 splashproof
- for assembly plants, electricians, ...




2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V
2m H07RN-F 5G2,5 with
CEE-plug 16A 5p 400V



portable frame

9014010


6 sockets (DIN 49440)
16A 250V
2m H07RN-F 5G2,5 with
CEE-plug 16A 5p 400V



carrying handle

9017050

4 CEE-sockets 16A 5p 400V
2m H07RN-F 5G2,5 with
CEE-plug 16A 5p 400V





carrying handle

9017115

Thermoplastic insulated distribution boxes – mobile Series HORN

- compact design, with carrying handle
- high-quality thermoplastic material PC/ABS
- **dimensions: HxWxD = 263x246x75mm**
- up to 12 modules under window
- for wall assembly (4 fixing holes) also possible
- ready wired for connection
- IP44 splashproof
- for construction sites, agriculture, domestic, industry, ...

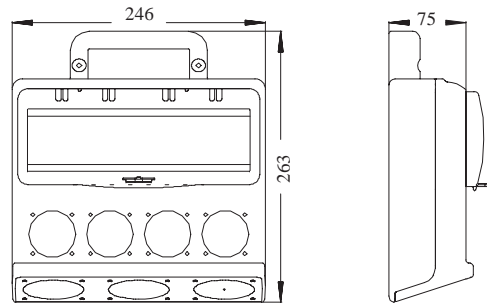


2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

2 MCBs 16A 3p-C
2 MCBs 16A 1p-C
1 RCD 63/4/0,03A

CEE-plug 32A 5p 400V

9004001




1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

1 MCB 16A 3p-C
4 MCBs 16A 1p-C
1 RCD 63/4/0,03A

CEE-plug 32A 5p 400V

9004002

with stand support




2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

2 MCBs 16A 1p-C

CEE-plug 16A 5p 400V

9004004




2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

1 RCD 40/4/0,03A

CEE-plug 16A 5p 400V

9004006



1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

1 MCB 16A 3p-C
2 MCBs 16A 1p-C
1 RCD 63/4/0,03A

CEE-plug 32A 5p 400V

9004012



Accessories:

with stand support
incl. screws



900404



Thermoplastic insulated distribution boxes – mobile Series IMST




- handy, robust distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 200x197x197 mm**
- with carrying-handle made of high-grade steel
- maximum rated current of 32A
- up to 7 sockets
- 8 modules under window
- **IP44 splashproof**, ready wired for connection
- for distributing electricity to powered equipment or lighting systems on building sites
- ideal for craft business, the building trades, farmers, etc.
- housing colours: black or red
- stackable, with take-up device for the connecting cable

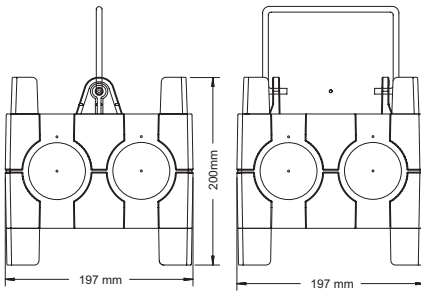

non fused
2 sockets 16A 5p 400V
4 sockets (DIN 49440) 16A 250V

CEE-plug
16A 5p 400V


9030010



non fused
2 sockets 16A 5p 400V
5 sockets (DIN 49440) 16A 250V

2m cable H07RN-F 5G2,5
with CEE-plug 16A 5p 400V


9030020



non fused
7 sockets (DIN 49440) 16A 250V

2m cable H07RN-F 3G2,5
with rubber-plug 16A 250V


9030030



window for 6 modules
2 sockets 16A 5p 400V
4 sockets (DIN 49440) 16A 250V

1 RCD 40/4/0,03A - for all outlets
CEE-plug 16A 5p 400V


9030014



window for 6 modules
2 sockets 16A 5p 400V
4 sockets (DIN 49440) 16A 250V

2 MCBs 16A 1p-C
1 RCD 40/4/0,03A - for all outlets
CEE-plug 16A 5p 400V

9030206




window for 6 modules
2 sockets 16A 5p 400V
5 sockets (DIN 49440) 16A 250V

1 RCD 40/4/0,03A - for all outlets

2m cable H07RN-F 5G2,5
with CEE-plug 16A 5p 400V

9030004


Thermoplastic insulated distribution boxes – mobile Series IMST

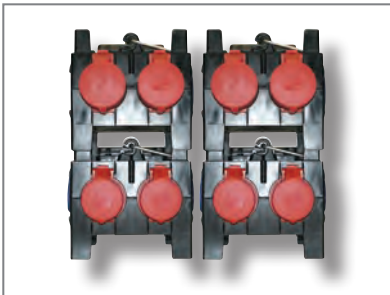

the mobile version can be stacked space-saving storage




the mobile version has a take-up device for the connecting cable




window for 6 modules
 2 CEE-sockets 16A 5p 400V
 5 sockets (DIN 49440) 16A 250V
 2 MCBs 16A 1p-C
 1 RCD 40/4/0,03A - for all outlets
 2m cable H07RN-F 5G2,5
 with CEE-plug 16A 5p 400V

9030204




window for 6 modules
 7 sockets (DIN 49440) 16A 250V
 1 RCD 40/4/0,03A - for all outlets
 2m cable H07RN-F 3G2,5 with
 rubber-plug 16A 250V

9030040




window for 8 modules
 1 CEE-socket 32A 5p 400V
 1 CEE-socket 16A 5p 400V
 2 sockets (DIN 49440) 16A 250V
 1 MCB 16A 3p-C
 1 MCB 16A 1p-C
 1 RCD 40/4/0,03A - for all outlets
 CEE-plug 32A 5p 400V

9030109




window for 8 modules
 1 CEE-socket 32A 5p 400V
 1 CEE-socket 16A 5p 400V
 3 sockets (DIN 49440) 16A 250V
 1 MCB 16A 3p-C
 1 MCB 16A 1p-C
 1 RCD 40/4/0,03A - for all outlets
 2m cable H07RN-F 5G4
 with CEE-plug 32A 5p 400V

9030117



window for 8 modules
 2 CEE-sockets 16A 5p 400V
 2 sockets (DIN 49440) 16A 250V
 2 MCBs 16A 3p-C
 2 MCBs 16A 1p-C
 CEE-plug 32A 5p 400V

9030119



window for 8 modules
 2 CEE-sockets 16A 5p 400V
 2 sockets (DIN 49440) 16A 250V
 2 MCBs 16A 3p-C
 2 MCBs 16A 1p-C
 2m cable H07RN-F 5G4
 with CEE-plug 32A 5p 400V



9030129

Thermoplastic insulated distribution boxes – mobile Series PEGASUS




without fuse

- handy, robust and compact distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 230x140x140 mm**
- maximum rated current of 32A
- max. 6 mounting surfaces
- 4 modules under window
- with plastic carrying handle
- anti-tilt bracket as standard with 4 rubber stoppers, can also be use to coil cables
- ready wired for connection
- housing colours: red (standard), yellow (special version)
- suitable for construction sites, workshops, agriculture, domestic, industrial, commercial and for event
- **IP44 splashproof**




4 CEE-sockets 32A 5p 400V
2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V

9034001



4 CEE-sockets 16A 5p 400V
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034002



2 CEE-sockets 16A 5p 400V
2 sockets (DIN 49440) 16A 250V

2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034003




1 CEE-socket 16A 5p 400V
3 sockets (DIN 49440) 16A 250V



2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V


9034004



8 sockets (DIN 49440) 16A 250V

2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V


9034005



4 sockets (DIN 49440) 16A 250V

2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V


9034006



4 sockets (DIN 49440) 16A 250V

2m cable H07RN-F 3G2,5 with plug (DIN 49440) 16A 250V


9034007



3 CEE-sockets 32A 5p 400V

1 CEE-plug 32A 5p 400V

9034008



3 CEE-sockets 16A 5p 400V

1 CEE-plug 16A 5p 400V

9034009




1 CEE-socket 16A 5p 400V
2 sockets (DIN 49440) 16A 250V



1 CEE-plug 16A 5p 400V

9034010



6 sockets (DIN 49440) 16A 250V



1 CEE-plug 16A 5p 400V

9034011

Thermoplastic insulated distribution boxes – mobile Series PEGASUS


with fuse

- handy, robust and compact distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 230x140x140 mm**
- maximum rated current of 32A
- max. 6 mounting surfaces
- 4 modules under window
- with plastic carrying handle
- anti-tilt bracket as standard with 4 rubber stoppers, can also be used to coil cables
- ready wired for connection
- housing colours: red (standard), yellow (special version)
- suitable for construction sites, workshops, agriculture, domestic, industrial, commercial and for event
- **IP44 splashproof**




1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
2 sockets (DIN 49440)
16A 250V
1 MCB 16A 3p-C
1 MCB 16A 1p-C
2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V

9034030




2 CEE-sockets 16A 5p 400V
2 sockets (DIN 49440)
16A 250V
1 MCB 16A 3p-C
1 MCB 16A 1p-C
2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V

9034031




1 CEE-socket 16A 5p 400V
2 sockets (DIN 49440)
16A 250V
1 MCB 16A 3p-C
1 MCB 16A 1p-C
2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V

9034032




6 sockets (DIN 49440)
16A 250V
3 MCBs 16A 1p-C
2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V

9034033




3 sockets (DIN 49440)
16A 250V
3 MCBs 16A 1p-C
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034034




2 CEE-sockets 32A 5p 400V
1 RCD 63A/4/0,03A all outlets
2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V

9034050




2 CEE-sockets 16A 5p 400V
1 RCD 40A/4/0,03A all outlets
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034051



1 CEE-socket 16A 5p 400V
3 sockets (DIN 49440)
16A 250V
1 RCD 40A/4/0,03A all outlets
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034052



6 sockets (DIN 49440)
16A 250V
1 RCD 40A/4/0,03A all outlets
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034053



3 sockets (DIN 49440)
16A 250V
1 RCD 40A/4/0,03A all outlets
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034054



3 sockets (DIN 49440)
16A 250V
1 RCD 25A/2/0,03A all outlets
2m cable H07RN-F 3G2,5 with plug (DIN 49440) 16A 250V

9034055


Compact distribution boxes – Series ST. ANTON

PCE compact distribution boxes are designed to be safe, reliable and easy-to-use.

Every product has been manufactured to the highest quality standards (ISO 9001) and is available tailor made in size and equipment to your individual specification.

The wide variety of product features guarantees maximum flexibility in use:

- compact shape made of shock-resistant polyamide
- space saving storage - ergonomic design
- with shackle
- ready wired for connection
- IP44 splashproof
- well adapted for industry.





Entry:

M20 cable gland without cable		9430406
1,5m cable H07RN-F 3G1,5 with rubber plug 16A 250V		9430409
1,5m cable H07RN-F 5G1,5 with CEE-plug 16A 5p 400V		9430429
1 CEE-plug 16A 5p 400V		9430412

Outlet:

3 sockets (DIN49440) 16A 250V with self-closing lid




Entry:

1 CEE-plug 16A 5p 400V		9430402
1 CEE-phase inverter 16A 5p 400V		9430452
1,5m cable H07RN-F 5G1,5 with CEE-plug 16A 5p 400V		9430715
1,5m cable H07RN-F 5G1,5 with CEE-phase inverter 16A 5p 400V		9430719

Outlet:

1 CEE-socket 16A 5p 400V
2 sockets (DIN49440) 16A 250V with self-closing lid



Entry:

1 CEE-plug 16A 5p 400V		9430411
1 CEE-phase inverter 16A 5p 400V		9430453
1,5m cable H07RN-F 5G1,5 with CEE-plug 16A 5p 400V		9430718
1,5m cable H07RN-F 5G1,5 with CEE-phase inverter 16A 5p 400V		9430721

Outlet:

3 CEE-sockets 16A 5p 400V



Entry:

- 1 CEE-plug 16A 3p 230V
- 1,5m cable H07RN-F 3G1,5 with CEE-plug 16A 3p 230V
- 1,5m cable H07RN-F 3G1,5 with CEE-plug 16A 3p 230V
- 1,5m cable H07RN-F 5G1,5 with CEE-plug 16A 5p 400V

Outlet:

- 3 CEE-sockets 16A 3p 230V
- 3 CEE-sockets 16A 3p 230V
- 2 CEE-sockets 16A 3p 230V
1 socket (DIN49440) 16A 250V
- 3 CEE-sockets 16A 3p 230V

9430401

9430155

9430455

9430439

Entry:

1 CEE-plug 16A 3p 4h 110V

1 CEE-plug 32A 3p 4h 110V

Outlet:

3 CEE-sockets 16A 3p 4h 110V

3 CEE-sockets 32A 3p 4h 110V

9430301*

9437560*



Entry:

1 CEE-plug 16A 4p 6h 400V

1 CEE-plug 16A 5p 6h 400V

1,5m cable H07RN-F 4x1,5 with CEE-plug 16A 4p 6h 400V

1,5m cable H07RN-F 4x1,5 with CEE-plug 16A 4p 9h 250V

Outlet:

3 CEE-sockets 16A 4p 6h 400V

1 CEE-socket 16A 4p 6h 400V
2 safety sockets 16A 250V belg./french

3 CEE-sockets 16A 4p 6h 400V

3 CEE-sockets 16A 4p 9h 250V

9430311*

9430050*

9430343

9430498



Entry:

1,5m cable H07RN-F 3G1,5 with socket (DIN 49440) belg./french 250V

1 CEE-plug 16A 5p 6h 400V

1 CEE-plug 16A 5p 6h 400V

1,5m cable H07RN-F 5G1,5 with CEE-plug 16A 5p 6h 400V

Outlet:

3 safety sockets 16A 250V belg./french

3 safety sockets 16A 250V belg./french

1 CEE-socket 16A 5p 6h
2 safety sockets 16A 250V belg./french

1 CEE-socket 16A 5p 6h
2 safety sockets 16A 250V belg./french

9430479

9430478

9430477

9430476



Entry:

1,5m cable H07RN-F 2x2,5 with plug 16A 2p 24V

1,5m cable H07RN-F 2x2,5 with plug 16A 2p 42V

Outlet:

3 low voltage sockets 16A 2p 24V

3 low voltage sockets 16A 2p 42V

9430024

9430350



Compact distribution boxes – Series ST. ANTON 4f

Entry:

1,5m cable H07RN-F 5G4 with CEE-plug 32A 5p 6h 400V

1 CEE-plug 32A 5p 6h 400V

1,5m cable H07RN-F 5G4 with CEE-phase inverter 400V

1 CEE-phase inverter 32A 5p

Outlet:

3 CEE-sockets 32A 5p 6h 400V

3 CEE-sockets 32A 5p 6h 400V

3 CEE-sockets 32A 5p 6h 400V

3 CEE-sockets 32A 5p 6h 400V

9437113

9437413

9437114

9437454



* Export version (in Austria and Germany not allowed!)

Thermoplastic insulated empty distribution box – wall mounting **Series T-BOX**



Series T-BOX 4

- dimensions: HxWxD = 217x141x105mm
- windows up to 4 modules
- IP65 watertight

1519004

pack.unit: 32



Series T-BOX 8

- dimensions: HxWxD = 217x235x105mm
- windows up to 8 modules
- IP65 watertight

1519008

pack.unit: 16



Series T-BOX 12

- dimensions: HxWxD = 217x307x105mm
- windows up to 12 modules
- IP65 watertight

1519012

pack.unit: 12



Series T-BOX 26

- dimensions: HxWxD = 409x307x150mm
- windows up to 26 modules
- IP65 watertight

1519026

pack.unit: 5



Series T-BOX 42

- dimensions: HxWxD = 563x326x150mm
- windows up to 42 modules
- IP65 watertight

1519042


pack.unit: 4

Thermoplastic insulated empty distribution box – wall mounting Series M-BOX

Series M-BOX:

- high-quality thermoplastic material
- IP65 watertight
- window up to 6, 8 or 13 modules
- many combination possibilities of housings and sockets without mechanical use
- numerous equipment

Example:

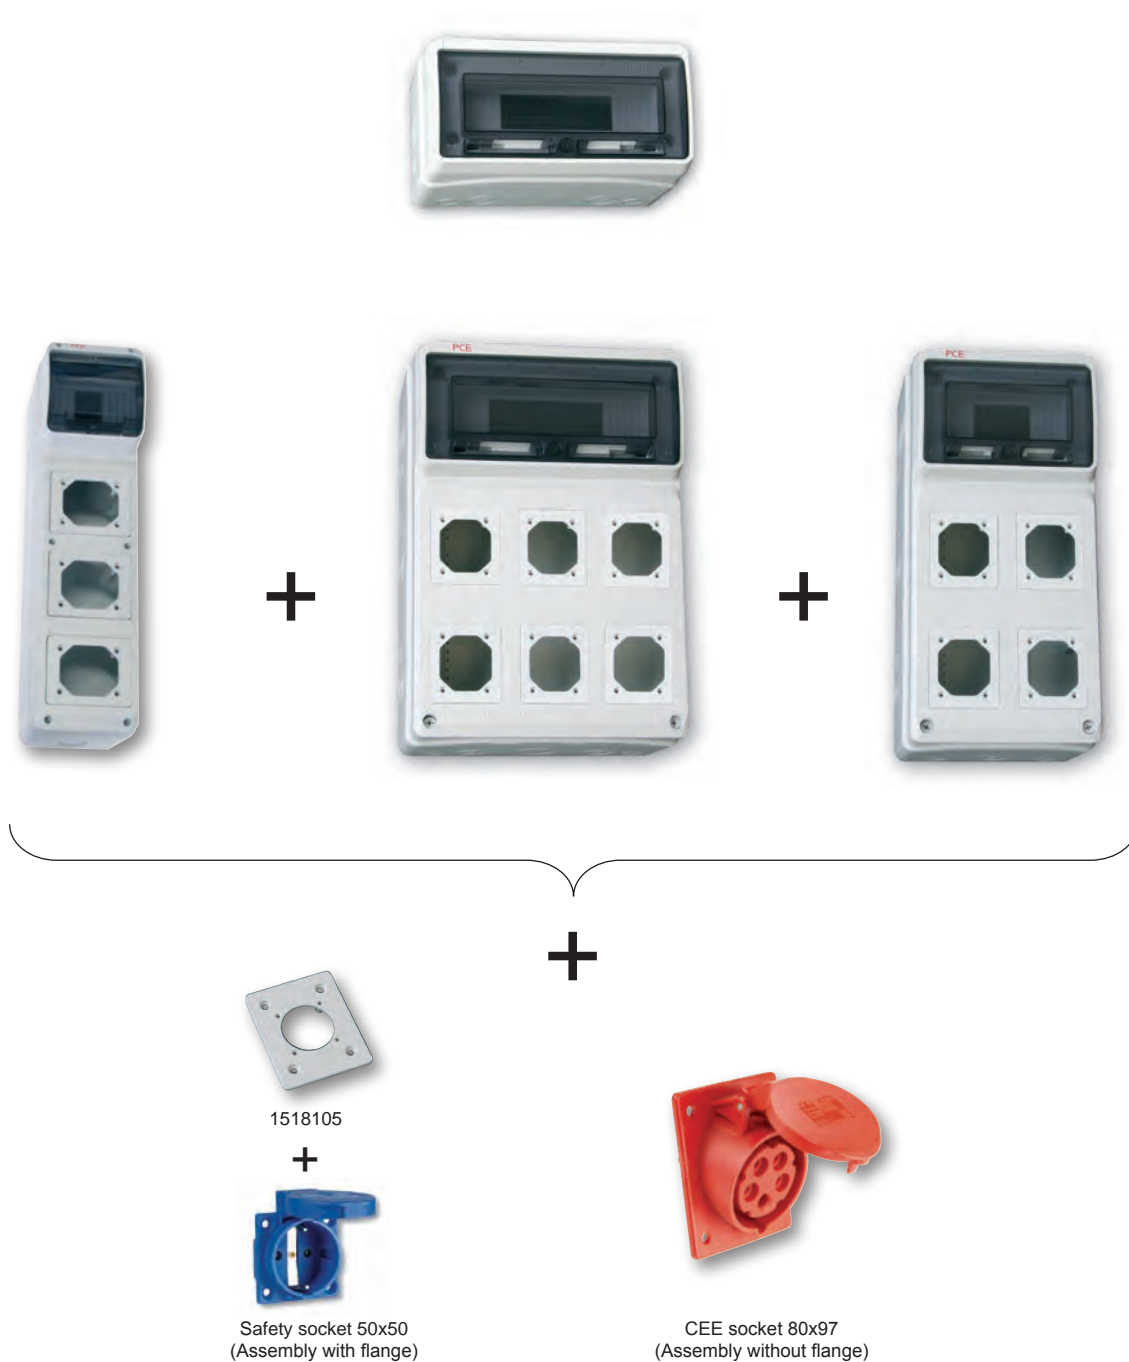

Thermoplastic insulated empty distribution box – wall mounting **Series M-BOX**

■ ■ Included in every box:

- housing with window
- flanges (premounted) for sockets flange 70x85
- 1 blind flange
- instruction manual
- screws for the mounting of the sockets
- 4 caps for wall fixing screws
- **IP65** (depending of the equipped sockets)

Series M-BOX 6S

- **dimensions:** HxWxD=490x125x107mm
- windows up to 6 modules
- 3 perforations only for PCE sockets
- 3 flanges premounted (for assembling sockets 70x85)
- without flange: for assembling sockets 16A 3p up to 32A 5p

For sockets and accessories see page 281!



1518063
pack.unit: 18

Series M-BOX 6E

- **dimensions:** HxWxD=490x125x107mm
- windows up to 6 modules



1518062
pack.unit: 18

Series M-BOX 8S

- **dimensions:** HxWxD=506x230x150mm
- windows up to 8 modules
- 4 perforations only for PCE sockets
- 4 flanges premounted (for assembling sockets 70x85)
- without flange: for assembling sockets 16A 3p up to 32A 5p

For sockets and accessories see page 281!



1518083
pack.unit: 6

Series M-BOX 8E

- **dimensions:** HxWxD=506x230x150mm
- windows up to 8 modules



1518082
pack.unit: 6

Series M-BOX 13S

- **dimensions:** HxWxD=506x330x150mm
- windows up to 13 modules
- 6 perforations only for PCE sockets
- 6 flanges premounted (for assembling sockets 70x85)
- without flange: for assembling sockets 16A 3p up to 32A 5p

For sockets and accessories see page 281!



1518133
pack.unit: 4

Series M-BOX 13E

- **dimensions:** HxWxD=506x330x150mm
- windows up to 13 modules



1518132
pack.unit: 4

Thermoplastic insulated empty distribution box – wall mounting Series M-BOX

	16A 3p=6h 230V~	16A 4p=6h 400V~	16A 5p=6h 400V~	32A 3p=6h 230V~	32A 4p=6h 400V~	32A 5p=6h 400V~
	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
IP44	413-6f8	414-6f8	415-6	423-6	424-6	425-6
IP67	4132-6f8	4142-6f8	4152-6f78	4232-6f78	4242-6f78	4252-6f78

Technical details and other clock positions see page 82-83

	Cat.No.	Cat.No.
rear connection	Austrian/ German system 1050-0b	Belgian/ French system 1040-0b
side connection	1050-0bs	1040-0bs

Special versions see page 150 to 159!



Series M-BOX 13WH


- dimensions:
WxHxD=180x330x150mm
- windows up to 13 modules (6 units are blinded)

1518134
pack.unit: 12




Blind flange

1518000
pack.unit: 6




Flange for sockets 70x85

1518413
pack.unit: 6




Flange for safety sockets 50x50

1518105
pack.unit: 6




Connecting device

1518010
pack.unit: 10




Wall fixing center

1518020
pack.unit: 10



Metal lock for window

1518030
pack.unit: 1




Terminal block 14p

1518040
pack.unit: 1



Terminal block 14p incl. holder (for input of a second terminal block)

1518045
pack.unit: 1





DISTRIBUTION BOXES WITH SUSPENSION HOOK
made of thermoplastic and solid rubber

Distribution boxes with suspension hook

Pegasus

Dimensions: HxWxD = 220x140x140mm

Page **284**



Imst

Dimensions: HxWxD = 197x197x120mm

Page **286**



Freistadt

Page **288**



Kombi

Page **288**




Thermoplastic insulated distribution boxes – with suspension hook **Series PEGASUS**



Series PEGASUS, without fuse


- handy, robust and compact distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 220x140x140 mm**
- with 4 ring bolts for ceiling fastening
- maximum rated current of 32A
- max. 6 mounting surfaces
- 4 modules under window
- ready wired for connection
- housing colours: red (standard), yellow (special version)
- with ergonomic anchor handle on the bottom of the housing
- IP44 splashproof



2 CEE-sockets 32A 5p 400V
2 CEE-sockets 16A 5p 400V
1 VC-terminal for CEE 32A
1 VC-terminal for CEE 16A

1xM32 on top, 1xM25 on top

9033001




1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
2 sockets (DIN 49440)
16A 250V

1 VC-terminal for CEE 32A
1 VC-terminal for CEE 16A + socket (DIN 49440)

1xM32 on top, 1xM25 on top


9033002



4 CEE-sockets 16A 5p 400V
1 VC-terminal 5p

1xM25 on top

9033003




2 CEE-sockets 16A 5p 400V
2 sockets (DIN 49440)
16A 250V

1 VC-terminal 5p for CEE
1 VC-terminal 3p for socket (DIN 49440)

1xM25 on top, 1xM20 on top

9033004




1 CEE-socket 16A 5p 400V
3 sockets (DIN 49440)
16A 250V

1 VC-terminal 5p

1xM25 on top

9033005




8 sockets (DIN 49440)
16A 250V

1 VC-terminal 5p (400V entry)

1xM25 on top

9033006




4 sockets (DIN 49440)
16A 250V

1 VC-terminal 5p (400V entry)

1xM25 on top

9033007



4 sockets (DIN 49440)
16A 250V

1 VC-terminal 3p (230V entry)

1xM20 on top

9033008



Accessories for suspended version:

- Pegasus suspension kit (4x)
- L=300mm

9033-1

Empty distribution box PEGASUS

- housing
- 4 blind covers (side)
- 2 blind covers (top. Bottom) incl. screws
- 4 ring bolts – premounted
- 4 housing screws – loose
- Anchor handle incl. screws
- VC-rail (incl. holder and screws) for entry max. 5p


9033999



Thermoplastic insulated distribution boxes – with suspension hook **Series PEGASUS**


Serie PEGASUS, with fuse

- handy, robust and compact distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 220x140x140 mm**
- with 4 ring bolts for ceiling fastening
- maximum rated current of 32A
- max. 6 mounting surfaces
- 4 modules under window
- ready wired for connection
- housing colours: red (standard), yellow (special version)
- with ergonomic anchor handle on the bottom of the housing
- IP44 splashproof



- 1 CEE-socket 32A 5p 400V
 - 1 CEE-socket 16A 5p 400V
 - 2 sockets (DIN 49440) 16A 250V
 - 1 MCB 16A 3p-C
 - 1 MCB 16A 1p-C
 - 1 VC-terminal 5p
- 1xM32 on top


9033030



- 2 CEE-sockets 16A 5p 400V
- 2 sockets (DIN 49440) 16A 250V
- 1 MCB 16A 3p-C
- 1 MCB 16A 1p-C
- 1 VC-terminal 5p

1xM32 on top


9033031



- 1 CEE-socket 16A 5p 400V
- 2 sockets (DIN 49440) 16A 250V
- 1 MCB 16A 3p-C
- 1 MCB 16A 1p-C
- 1 VC-terminal 5p

1xM32 on top


9033032



- 2 CEE-sockets 16A 5p 400V
- 2 sockets (DIN 49440) 16A 250V
- 1 RCD 40A/4/0,03A all outlets
- 1 VC-terminal 5p

1xM25 on top


9033050



- 1 CEE-socket 16A 5p 400V
- 3 sockets (DIN 49440) 16A 250V
- 1 RCD 40A/4/0,03A all outlets
- 1 VC-terminal 5p

1xM25 on top


9033051



- 3 sockets (DIN 49440) 16A 250V
- 1 RCD 40A/4/0,03A all outlets
- 1 VC-terminal 5p (400V entry)

1xM25 on top

9033052




- 3 sockets (DIN 49440) 16A 250V
- 1 RCD 25A/2/0,03A all outlets
- 1 VC-terminal 3p (230V entry)

1xM20 on top

9033053


Series PEGASUS, without fuse quick-look air version

- handy, robust and compact distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 220x140x140 mm**
- with 4 ring bolts for ceiling fastening
- maximum rated current of 32A
- max. 6 mounting surfaces
- 4 modules under window
- ready wired for connection
- housing colours: red (standard), yellow (special version)
- IP44 splashproof



- 4 CEE-sockets 16A 5p 400V
 - 1 VC-terminal 5p
 - 1 quick-look air coupling 2-fold nominal size 7,2mm
- 1xM25 on top


9033070



- 1 CEE-socket 16A 5p 400V
- 3 sockets (DIN 49440) 16A 250V
- 1 VC-terminal 5p
- 1 quick-look air coupling 2-fold nominal size 7,2mm

1xM25 on top


9033071



- 8 sockets (DIN 49440) 16A 250V
- 1 VC-terminal 5p (400V entry)
- 1 quick-look air coupling 2-fold nominal size 7,2mm

1xM20 on top

9033072



- 4 sockets (DIN 49440) 16A 250V
- 1 VC-terminal 3p (230V entry)
- 1 quick-look air coupling 2-fold nominal size 7,2mm

1xM20 on top

9033073



Thermoplastic insulated distribution boxes – with suspension hook **Series IMST**



electricity

Series IMST



- robust distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 197x197x120 mm**
- with hangers made of high-grade steel
- suitable for combinations of electricity and air
- maximum rated current of 32A
- up to 7 sockets
- window for up to 8 modules
- IP40, ready wired for connection
- for distributing electricity to powered equipment or lighting systems on building sites
- ideal for craft business, the building trades, farmers, etc.



air / electricity

window for 6 modules

- Entry:** 1xM25 cable gland on top
- Outlet:** 6 sockets (DIN 49440) 16A 250V
2 MCBs 16A 1p-C
1 RCD 40A/4/0,03A
1 terminal block 5p 10mm²



window for 8 modules


- Entry:** 1xM25 cable gland on top
1 quick-look air coupling 2-fold NW 7,2mm
- Outlet:** 1 CEE-socket 16A 5p 400V
4 sockets (DIN 49440) 16A 250V
4 MCBs 16A 1p-C
1 RCD 40A/4/0,03A for all outlets
1 compressing air tube nominal size 7,2mm
1 terminal block 5p 10mm²

9031598

9031022

window for 6 modules

- Entry:** 1xM25 cable gland on top
- Outlet:** 2 CEE-sockets 16A 5p 400V non-fused
4 sockets (DIN 49440) 16A 250V
2 MCBs 16A 1p-C
1 RCD 40A/4/0,03A for all outlets
1 terminal block 5p 10mm²



9031003

window for 6 modules

- Entry:** 1xM32 cable gland on top
1 quick-look air coupling
2-fold nominal size 7,2mm
- Outlet:** 1 CEE-socket 32A 5p 400V non-fused
2 CEE-sockets 16A 5p 400V
1 MCB 16A 3p-C
2 sockets (DIN 49440) 16A 250V
2 MCBs 16A 1p-C
1 compressing air tube nominal size 7,2mm
1 terminal block 5p 10mm²



9031132

window for 8 modules

- Entry:** 1xM32 cable gland on top
1 quick-look air coupling
2-fold nominal size 7,2mm
- Outlet:** 1 CEE-socket 32A 5p 400V non-fused
2 CEE-sockets 16A 5p 400V
1 MCB 16A 3p-C
2 sockets (DIN 49440) 16A 250V
1 MCB 16A 1p-C
1 RCD 63A/4/0,03A for all outlets
1 compressing air tube nominal size 7,2mm
1 terminal block 5p 10mm²





9031122

Thermoplastic insulated distribution boxes – with suspension hook **Series IMST**

Series IMST


- robust distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 120x197x197 mm**
- with 4 ring-bolts
- suitable for combinations of electricity and air
- maximum rated current of 32A
- up to 7 sockets
- window for up to 8 modules
- IP40, ready wired for connection
- for distributing electricity to powered equipment or lighting systems on building sites
- ideal for craft business, the building trades, farmers, etc.

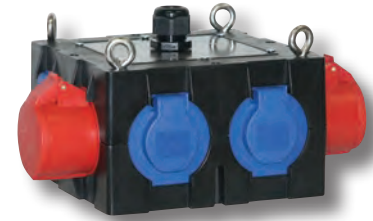

non-fused

Entry:
1xM25 cable gland on top

Outlet:
8 sockets (DIN 49440) 16A 250V
1 terminal block 5p 10mm²




non-fused

Entry:
1xM25 cable gland on top

Outlet:
2 CEE-sockets 16A 5p 400V
6 sockets (DIN 49440) 16A 250V
1 terminal block 5p 10mm²

9032009

9032010




without window, with 4 ring-bolts

Entry:
1xM25 cable gland on top
1 quick-lock air coupling
2-fold nominal size 7,2mm

Outlet:
2 CEE-sockets 16A 5p 400V
non-fused
6 sockets (DIN 49440) 16A 250V
non-fused
1 compressing air tube nominal size 7,2mm
1 terminal block 5p 10mm²

9032011

Variations

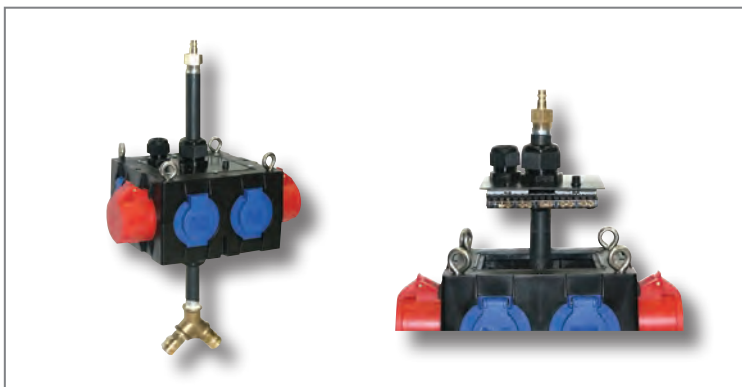

Solid rubber distribution boxes – with suspension hook



Freistadt

Solid-rubber distribution box with hook handles an mounting mechanism

Entry: 1xM20 cable gland on top
Outlet: 1 CEE-socket 16A 5p 400V
3 sockets (DIN 49440) 16A 250V

9848251

Solid-rubber distribution box with hook handles an mounting mechanism

Entry: 1xM20 cable gland on top
Outlet: 2 CEE-sockets 16A 5p 400V
2 sockets (DIN 49440) 16A 250V

9848250

