
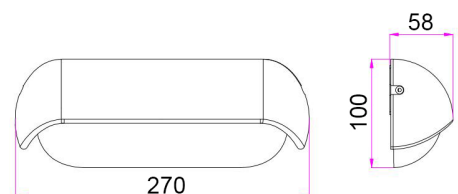
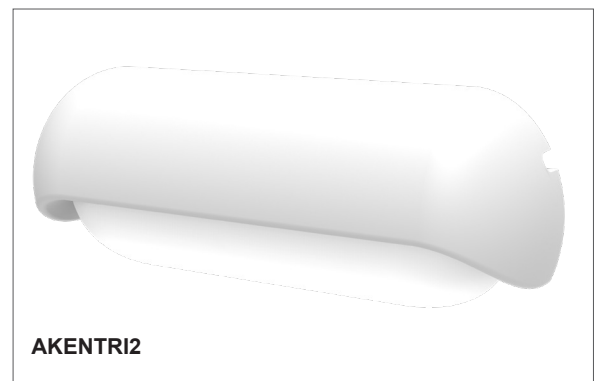


## AKENTRI

### LED Tri-CCT Exterior Surface Mounted Eyelid Wall Lights

#### Product Features

- Input voltage: 100-240V AC 50/60Hz
- Inbuilt constant current driver included
- Housing & heatsink: powder coated aluminium
- Diffuser: PC
- Back plate: PC
- Tri-CCT (3000K/4000K/6500K) in one fitting
- CCT switch inside of the fitting
- LED chips: 24pcs SMD2835
- Power factor: >0.5
- CRI: >80
- Ambient Temperature: -20 to 50°C
- Not suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors

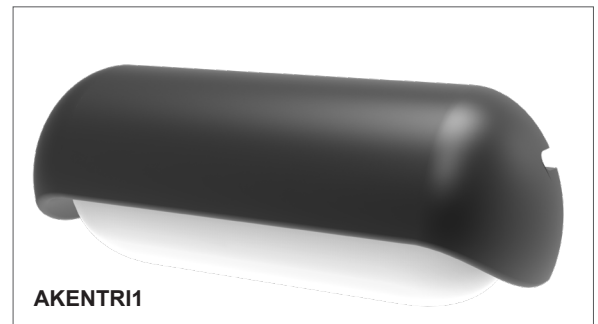

PART NO.	DESCRIPTION	LUMENS			WATT	CRI	WEIGHT	BOX	CARTON QTY
		3000K	4000K	6500K					
AKENTRI1	WALL S/M RECT LED TRI Eyelid Opal Diff Dark Grey	759lm	908lm	875lm	13	>80	0.90kg	28x11x7cm	1/8
AKENTRI2	WALL S/M RECT LED TRI Eyelid Opal Diff WH	759lm	908lm	875lm	13	>80	0.90kg	28x11x7cm	1/8